



■ BLOCK DIAGRAM

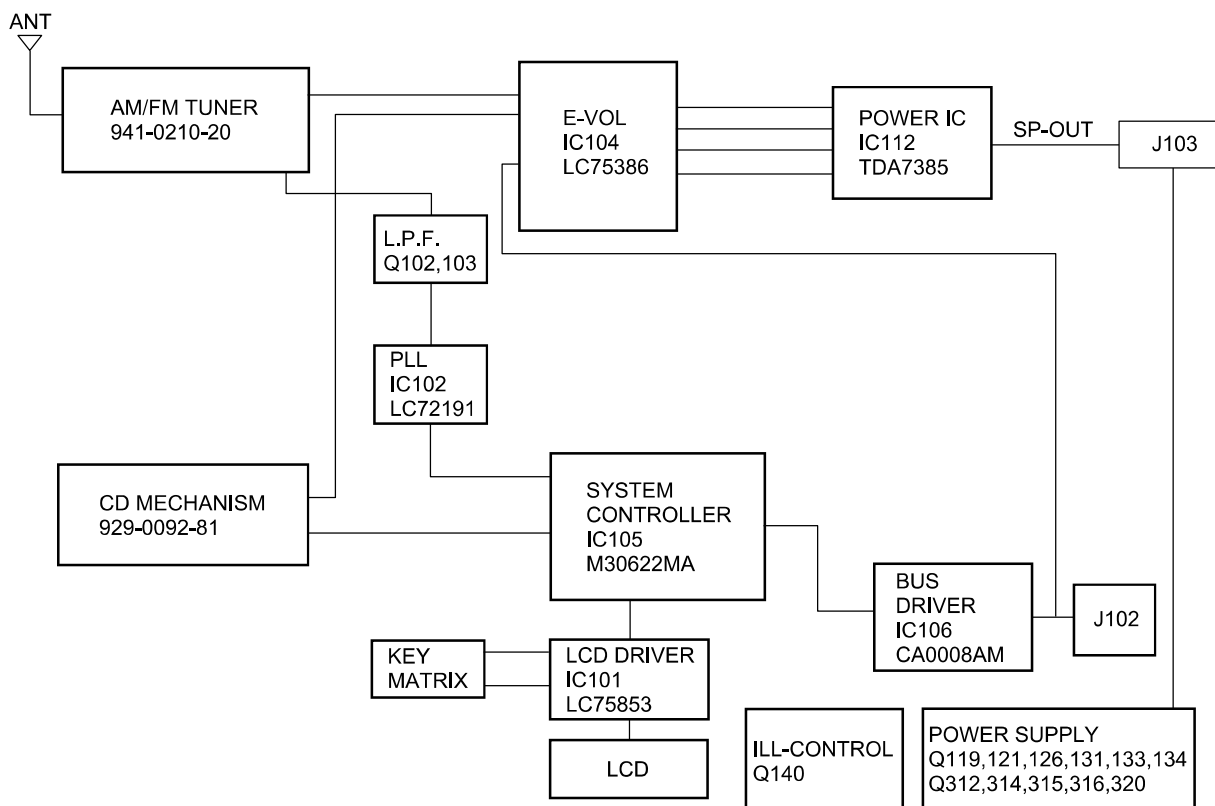


■ EXPLODED VIEW • PARTS LIST

Main section

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	373-0950-00	DIAL COVER	1	26	013-6302-51	SWITCH	14
2	940-7950-01	ESCUTCHEON ASSY	1	27	017-0433-26	PILOT LAMP(14V40mA)	4
3	347-2022-02	PAPER	1	28	017-0447-22	PILOT LAMP(8V105mA)	2
4	345-4138-00	SPACER	1	29	380-5508-00	KNOB	1
5	290-5010-63	LABEL(S10)	1	30	346-0126-00	LEATHER SHEET	1
6	286-9542-00	SET PLATE	1	31	335-6477-00	DISC GUIDE	1
7	714-2606-81	MACHINE SCREW(M2.6×6)	9	32	716-0872-01	PAD SCREW	4
8	714-2303-81	MACHINE SCREW(M2.3×3)	5	33	331-3110-00	REAR PLATE	1
9	816-2490-00 816-2488-01	FLAT WIRE FLAT WIRE	1	34	331-3109-00	REAR PLATE	1
10	929-0092-81	CD MECHANISM	1	35	309-0769-00	FRONT PLATE	1
11	303-0481-00	UPPER COVER	1	36	309-0770-00	FRONT PLATE	1
12	304-0474-00	LOWER COVER	1	37	076-0648-12	PLUG(12P)	1
13	331-3108-00	MECHANISM BRACKET	1	38	074-1186-26	OUTLET SOCKET(26P)	1
14	331-3107-00	ES PLATE	1	39	076-0648-08	PLUG(8P)	1
15	305-0306-00	SIDE COVER(RH)	1	40	074-1194-00	OUTLET SOCKET(13P)	1
16	305-0305-00	SIDE COVER(LH)	1	41	074-1010-10	OUTLET SOCKET	1
17	716-1494-00	IT SCREW(M2.6×6)	1	42	092-0702-00	ANT RECEPTACLE	1
18	016-0014-04	ROTARY ENCODER	1	43	313-1807-00	HEAT SINK	1
19	335-6478-00	ILLUMI HOLDER	1	44	714-2606-81	MACHINE SCREW(M2.6×6)	3
20	335-6479-00	LCD ILLUMI	1	45	714-2612-80	MACHINE SCREW(M2.6×12)	2
21	335-6480-00	COLOR FILTER	1	46	941-0210-20 941-0210-70	AM/FM TUNER AM/FM TUNER	1
22	379-1194-30	INDICATOR(LCD)	1	47	039-1873-00	MAIN PWB (WITHOUT COMPONENT)	1
23	331-3111-00	LCD COVER	1	48	051-2013-00	IC(TDA7385)	1
24	074-1279-08	OUTLET SOCKET(8P)	1	49	039-1874-00	SWITCH PWB (WITHOUT COMPONENT)	1
25	074-1279-12	OUTLET SOCKET(12P)	1				

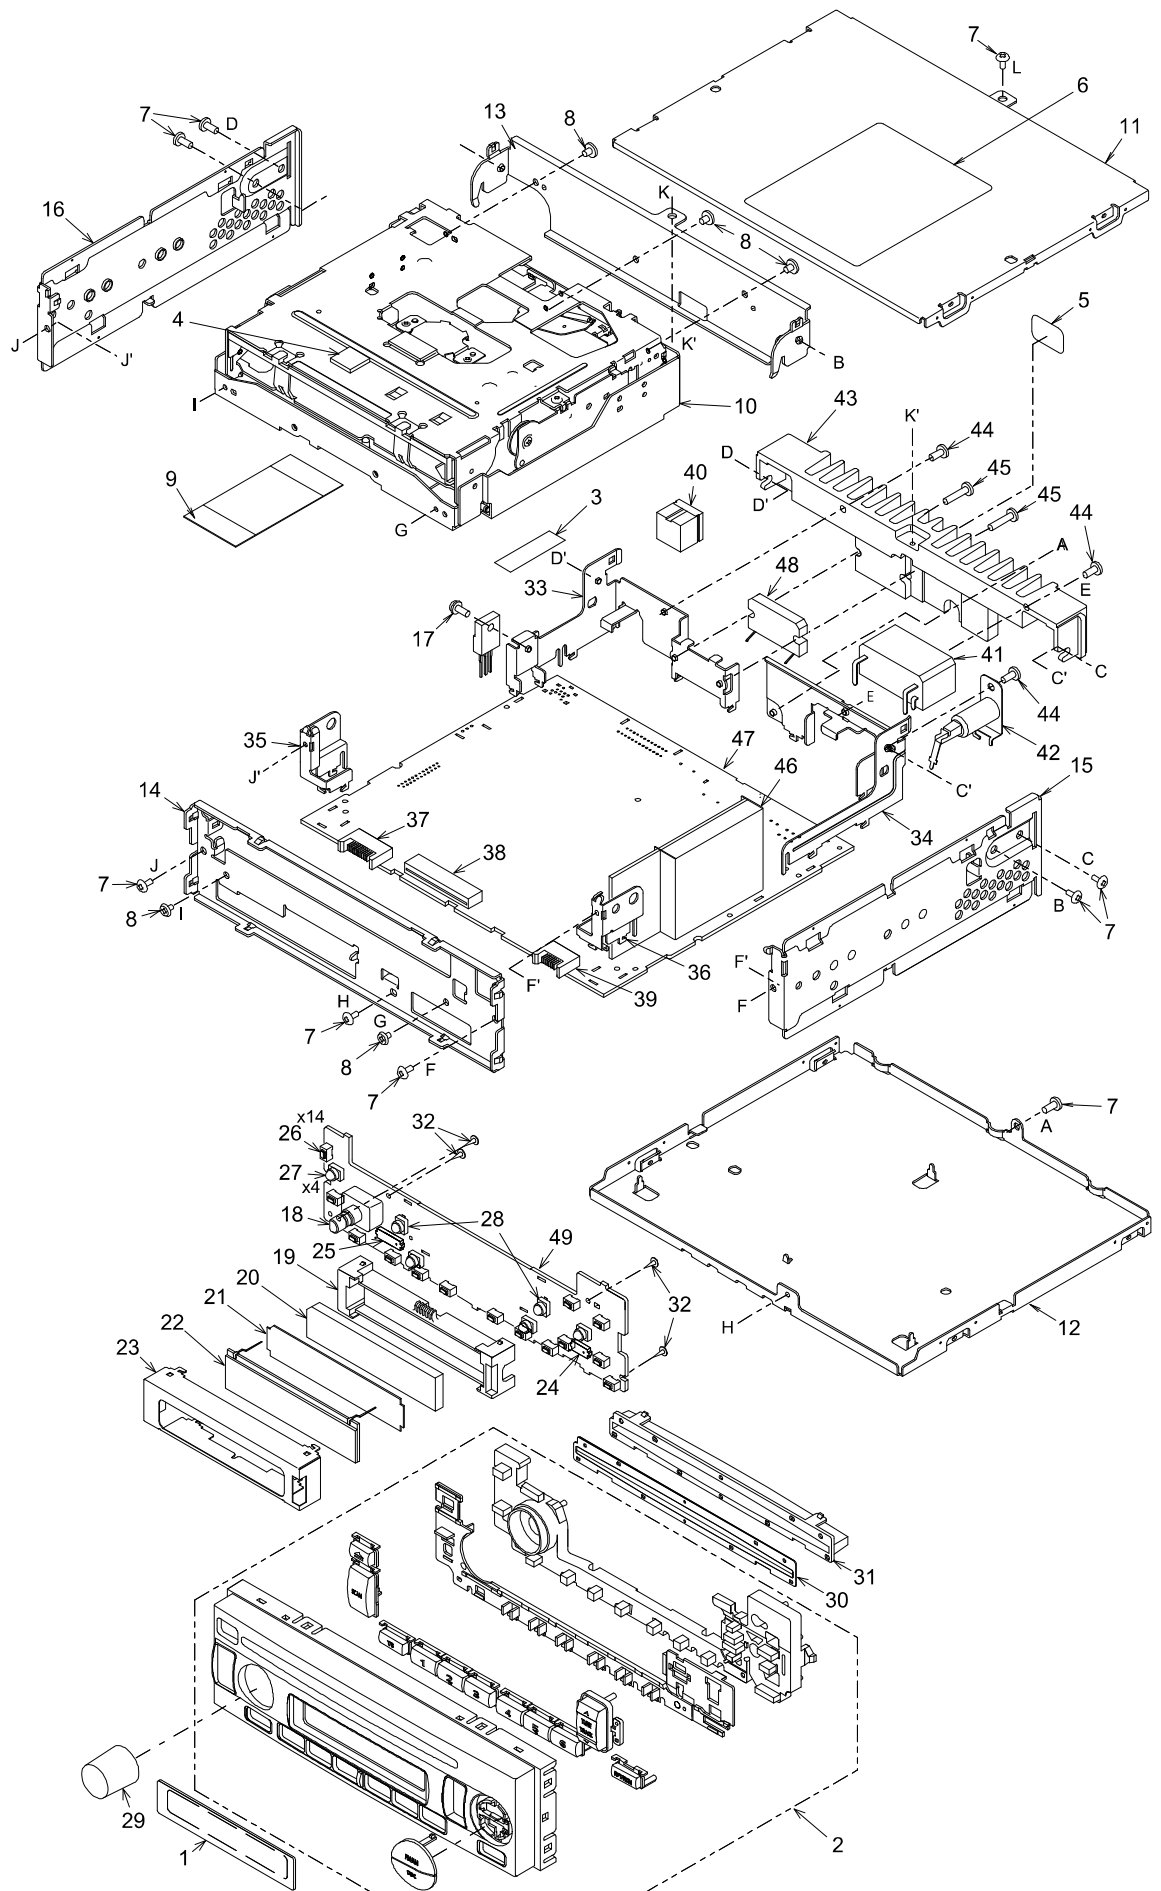


CD mechanism section(929-0092-81) : Drive unit

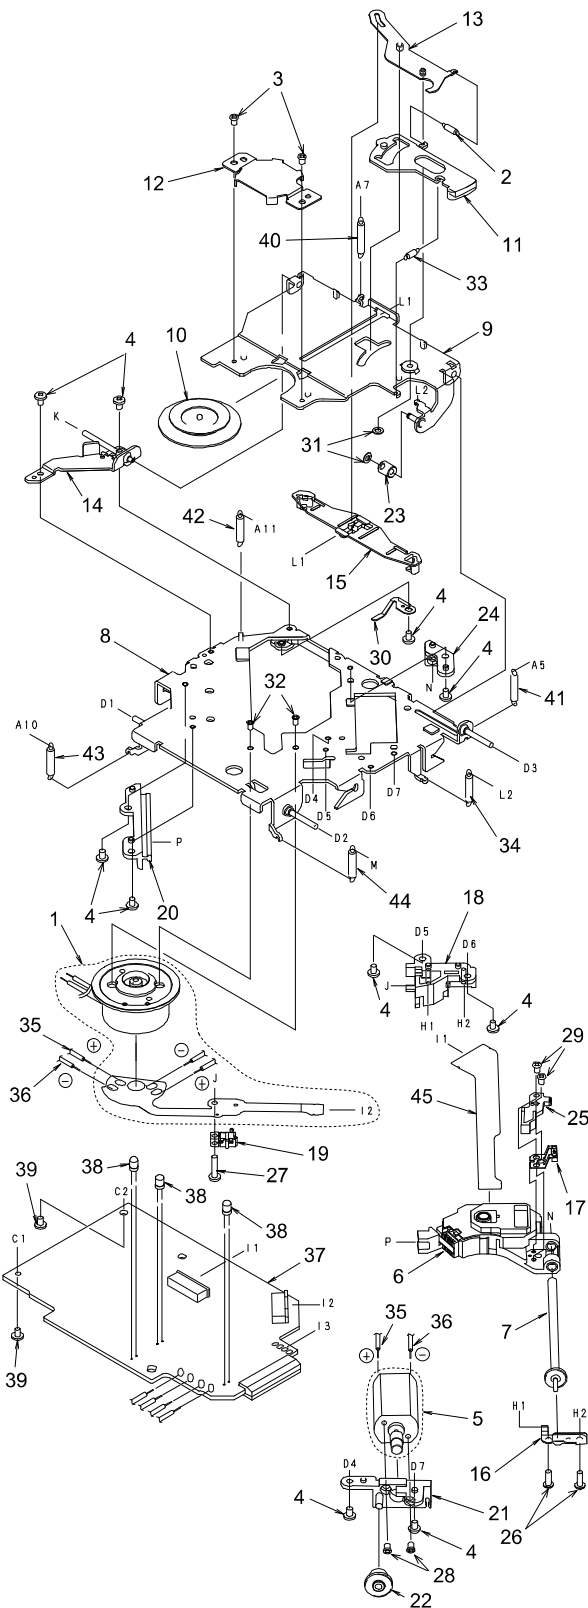

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY(SPINDLE)	1
2	750-3098-00	L-LINK SPRING	1
3	716-1468-00	SCREW(M2×2.5)	2
4	716-2003-81	SCREW(M2×3)	10
5	SMA-146-100	MOTOR ASSY(SLED)	1
6	969-0008-00	PICK UP UNIT	1
7	HBS-432-100	LS-GEAR ASSY	1
8	966-0447-07	DR-PLATE-ASSY	1
9	966-0449-04	CLAMP-LINK-ASSY	1
10	621-0205-02	CLAMPER RING	1
11	621-0251-03	LOCK LINK	1
12	620-0198-03	CLAMPER PLATE	1
13	966-0314-01	STOP LINK-ASSY	1
14	966-0448-01	SIDE PLATE-ASSY	1
15	621-0252-03	DISC STOPPER	1
16	620-0491-03	SPRING PLATE	1
17	966-0454-00	SCREW H-RACK-ASSY	1
18	621-0358-02	LS-HOLDER-F	1
19	013-7100-00	SWITCH(LIMIT)	1
20	621-0357-03	PICK UP GUIDE	1
21	621-0253-02	MOTOR HOLDER	1
22	621-0255-02	SECOND GEAR	1
23	622-1073-02	CLAMPER ROLLER	1
24	621-0359-02	LS-HOLDER-R	1
25	621-0375-00	SH-BASE	1
26	716-0675-00	SCREW(M2×5.5)	2
27	716-1555-00	WAVE SCREW(Φ2×8)	1
28	732-2004-11	SEMS SCREW(M2×4)	2
29	739-1735-17	PRECISION SCREW (M1.7×3.5)	2
30	620-0690-01	RATTLE PLATE	1
31	746-0761-00	WASHER	2
32	716-1733-00	SCREW(M1.7×2.3)	2
33	750-3099-00	ES-SPRING	1
34	750-3097-03	CLAMPER SPRING	1
35	816-2373-00	LEAD WIRE(WHT)	1
36	816-2372-00	LEAD WIRE(BLU)	1
37	039-1576-01	CD PWB (WITHOUT COMPONENT)	1
38	001-0563-00	LED	3
39	716-1670-00	SCREW(M2×4)	2
40	750-3202-00	CENTER SPRING-B	1
41	750-3096-01	DR-SPRING R	1
42	750-3164-00	DR-SPRING LR	1
43	750-3188-00	DR-SPRING F-B	1
44	750-3201-00	DR-SPRING F-R	1
45	039-1768-00	FPC (WITHOUT COMPONENT)	1

Main chassis

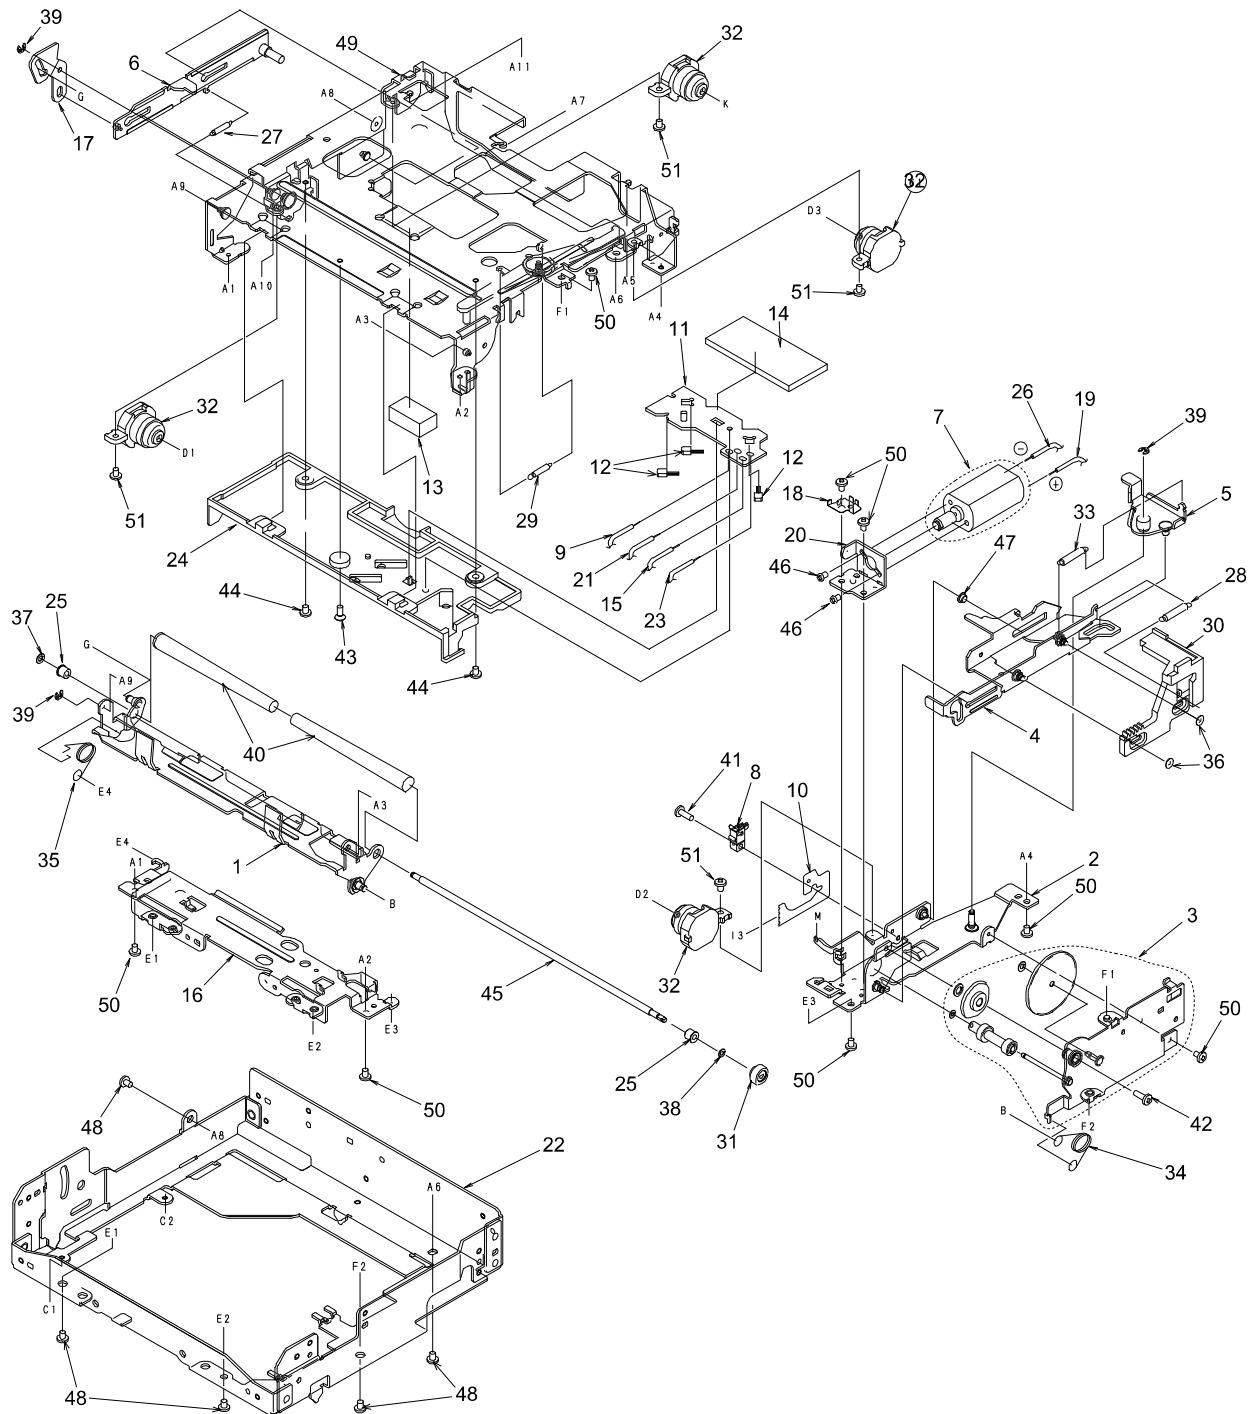

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0309-05	L-DISC-G-ASSY	1
2	966-0310-06	SHIFT-P-CH-ASSY	1
3	HBS-430-100	GEAR PLATE ASSY	1
4	966-0312-06	SHIFT-PLATE-ASSY	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1
7	SMA-147-100	MOTOR ASSY(LOADING)	1
8	013-3879-01	CHUCKING SWITCH	1
9	804-4910-60	VINYL-COAT-WIRE(YEL)	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1
12	060-0252-01	PHOTO-TR	3
13	345-7513-01	CLAMPER SHEET	1
14	345-7514-00	SENSOR PWB SHEET	1
15	802-4910-60	VINYL-COAT-WIRE(RED)	1
16	620-0485-04	FRONT PLATE	1
17	620-0488-01	S-L-LINK PLATE	1
18	620-0489-02	MOTOR PLATE	1
19	802-4904-60	VINYL-COAT-WIRE(RED)	1
20	620-0492-01	MOTOR BRACKET	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
21	801-4910-60	VINYL-COAT-WIRE(BRN)	1	37	746-0762-00	WASHER	1
22	620-0773-01	CD-MECH-BRKT	1	38	746-0712-03	WASHER	1
23	800-4910-60	VINYL-COAT-WIRE(BLK)	1	39	743-1500-10	E-RING	3
24	621-0402-01	U-DISC GUIDE-F	1	40	621-0258-03	LOADING ROLLER	2
25	621-0243-02	ROLLER SLEEVE	2	41	716-1742-00	SCREW(M2×5)	1
26	800-4904-60	VINYL-COAT-WIRE(BLK)	1	42	716-1704-00	SCREW(M2×7)	1
27	750-3189-00	SIDE-L-SPRING	1	43	716-1677-00	SCREW(M2×5)	1
28	750-3098-00	L-LINK SPRING	1	44	716-1507-00	SCREW(M2×3)	2
29	750-3094-00	S-ARM SPRING	1	45	622-1072-05	ROLLER SHAFT	1
30	621-0248-07	RACK GEAR	1	46	716-1468-00	SCREW(M2×2.5)	2
31	621-0249-02	ROLLER GEAR	1	47	622-1219-01	SHIFT ROLLER	1
32	629-0074-00	DAMPER	4	48	714-2603-81	SCREW(M2.6×3)	5
33	750-3092-03	SHIFT SPRING	1	49	966-0308-11	CHASSIS ASSY	1
34	750-3091-03	ROADING-SPRING-R	1	50	714-2003-81	SCREW(M2×3)	8
35	750-3090-02	ROADING-SPRING-L	1	51	716-1670-00	SCREW(M2×4)	4
36	746-0877-02	WASHER	2				

■ ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	941-0210-20	AM/FM TUNER	C185	042-0443-19	50V1 μ F	C286	042-0443-03	50V4.7 μ F
C102	168-1032-05	0.01 μ F	C186	042-0443-05	16V10 μ F	C287	042-0443-02	16V 47 μ F
C103	168-2232-05	0.022 μ F	C187	042-0443-05	16V10 μ F	C288	168-3922-05	3900pF
C104	042-0443-02	16V 47 μ F	C188	042-0443-05	16V10 μ F	C289	172-1041-11	0.1 μ F
C105	042-0443-02	16V 47 μ F	C189	042-0443-05	16V10 μ F	C290	042-0576-00	5.5V0.1F
C111	042-0458-00	50V1 μ F	C190	178-4742-78	0.47 μ F	C295	168-1042-78	16V 0.1 μ F
C112	168-1022-05	1000pF	C191	178-4742-78	0.47 μ F	C296	183-4756-51	35V4.7 μ F NP
C113	168-2232-05	0.022 μ F	C193	178-1542-78	0.15 μ F	C300	166-1011-00	100pF CH
C114	166-4701-00	47pF CH	C194	178-1542-78	0.15 μ F	C301	166-1011-00	100pF CH
C115	166-1011-00	100pF CH	C195	166-8097-00	8pF CH	C303	168-2232-05	0.022 μ F
C116	166-1011-00	100pF CH	C196	166-8097-00	8pF CH	C307	178-5642-78	0.56 μ F
C117	166-1011-00	100pF CH	C197	168-1032-05	0.01 μ F	C308	168-2245-79	0.22 μ F
C118	166-1011-00	100pF CH	C198	168-4722-05	4700pF	C310	168-1042-78	16V 0.1 μ F
C120	168-4722-05	4700pF	C199	168-4722-05	4700pF	C311	168-1042-78	16V 0.1 μ F
C122	166-1801-00	18pF CH	C200	042-0443-02	16V 47 μ F	C314	168-2232-05	0.022 μ F
C125	168-1042-78	16V 0.1 μ F	C201	168-1042-78	16V 0.1 μ F	C316	042-0443-05	16V10 μ F
C129	166-5601-00	56pF CH	C203	168-1022-05	1000pF	C317	183-1073-21	10V100 μ F
C130	183-1073-21	10V100 μ F	C204	168-1022-05	1000pF	C318	042-0452-01	10V220 μ F
C131	166-1801-00	18pF CH	C208	183-1066-31	16V10 μ F NP	D104	001-0330-00	1SS119
C135	166-1011-00	100pF CH	C209	183-1066-31	16V10 μ F NP	D108	001-0377-22	MA4043L
C137	166-1011-00	100pF CH	C210	168-1032-05	0.01 μ F	D110	001-0377-48	MA4091H
C138	168-1042-78	16V 0.1 μ F	C211	168-3332-78	0.033 μ F	D111	001-0330-00	1SS119
C143	183-1073-21	10V100 μ F	C213	168-1032-05	0.01 μ F	D112	001-0330-00	1SS119
C147	042-0472-00	10V47 μ F	C214	168-1032-05	0.01 μ F	D113	001-0503-36	HZS7 A1L
C159	168-2732-05	16V 0.027 μ F	C227	042-0443-19	50V1 μ F	D114	001-2015-00	RL253
C162	168-2732-05	16V 0.027 μ F	C234	168-1042-78	16V 0.1 μ F	D115	001-0377-39	MA4068H
C165	178-2232-78	0.022 μ F	C237	168-1022-05	1000pF	D116	001-0466-00	S5688B
C166	168-1022-05	1000pF	C244	042-0443-02	16V 47 μ F	D117	001-0377-43	MA4082L
C167	168-3932-78	0.039 μ F	C248	183-1073-21	10V100 μ F	D118	001-0423-31	MA4180
C168	042-0443-01	6.3V47 μ F	C263	182-2273-13	6.3V220 μ F	D119	001-0377-22	MA4043L
C169	042-0443-02	16V 47 μ F	C264	168-1042-78	16V 0.1 μ F	D120	001-0423-31	MA4180
C170	168-6832-78	0.068 μ F	C265	172-1041-11	0.1 μ F	D121	001-0423-31	MA4180
C171	042-0443-05	16V10 μ F	C266	172-1041-11	0.1 μ F	D122	001-0466-00	S5688B
C172	042-0443-05	16V10 μ F	C267	172-1041-11	0.1 μ F	D123	001-0330-00	1SS119
C173	042-0443-10	50V2.2 μ F	C268	172-1041-11	0.1 μ F	D124	001-0466-00	S5688B
C174	172-2731-11	0.027 μ F	C269	042-0443-02	16V 47 μ F	D125	001-0466-00	S5688B
C175	168-1232-05	0.012 μ F	C272	172-1041-11	0.1 μ F	D128	001-0330-00	1SS119
C176	168-1232-05	0.012 μ F	C274	042-0586-00	16V4700 μ F	D306	001-0377-33	MA4056H
C177	172-2731-11	0.027 μ F	C278	042-0443-19	50V1 μ F	D308	001-0377-48	MA4091H
C178	042-0443-10	50V2.2 μ F	C279	042-0443-19	50V1 μ F	IC102	051-6212-08	LC72191JM-TLM
C179	042-0443-05	16V10 μ F	C280	042-0443-05	16V10 μ F	IC104	051-5012-10	LC75386NE-L
C180	042-0443-05	16V10 μ F	C281	172-1041-11	0.1 μ F	IC105	052-3155-11	M30622MA-E68FP
C181	168-6832-78	0.068 μ F	C282	042-0443-05	16V10 μ F	IC106	051-6600-38	CA0008AM
C182	168-4712-05	470pF	C283	042-0443-02	16V 47 μ F	IC108	051-0869-55	NJM2103M
C183	168-4712-05	470pF	C284	172-1041-11	0.1 μ F	IC112	051-2013-00	TDA7385
C184	042-0443-19	50V1 μ F	C285	042-0443-05	16V10 μ F	J102	074-1194-00	13P CE-NET

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J103	074-1010-10	14P	R133	119-1021-10	1/16W 1kΩ	R244	119-2221-10	1/16W 2.2kΩ
J104	074-1186-26	26P	R136	119-1031-10	1/16W 10kΩ	R245	119-2221-10	1/16W 2.2kΩ
L101	010-6009-76	22μH	R137	119-5631-10	1/16W 56kΩ	R246	119-2221-10	1/16W 2.2kΩ
L102	010-2003-04	COIL	R138	119-1031-10	1/16W 10kΩ	R247	119-1031-10	1/16W 10kΩ
L105	010-6009-76	22μH	R140	119-1021-10	1/16W 1kΩ	R254	119-3321-10	1/16W 3.3kΩ
L107	010-6009-76	22μH	R143	119-4731-10	1/16W 47kΩ	R256	119-1031-10	1/16W 10kΩ
L108	010-6009-76	22μH	R145	119-1011-10	1/16W 100Ω	R257	119-1031-10	1/16W 10kΩ
P101	076-0648-12	12P	R148	119-1021-10	1/16W 1kΩ	R258	111-1021-91	1/4WS 1kΩ
P102	076-0648-08	8P	R150	119-1031-10	1/16W 10kΩ	R259	119-2231-10	1/16W 22kΩ
Q102	102-2458-51	2SC2458Y.GR.BL	R151	119-1021-10	1/16W 1kΩ	R260	111-1521-81	1/2WS 1.5kΩ
Q103	102-2458-51	2SC2458Y.GR.BL	R152	119-1021-10	1/16W 1kΩ	R262	119-1031-10	1/16W 10kΩ
Q104	101-1240-00	2SB1240	R154	119-1031-10	1/16W 10kΩ	R264	111-1211-91	1/4WS 120Ω
Q107	101-1240-00	2SB1240	R155	119-1031-10	1/16W 10kΩ	R265	111-6801-91	1/4WS 68Ω
Q116	102-2458-00	2SC2458	R156	119-4731-10	1/16W 47kΩ	R266	119-4721-10	1/16W 4.7kΩ
Q118	102-2458-00	2SC2458	R157	119-4731-10	1/16W 47kΩ	R267	111-1021-91	1/4WS 1kΩ
Q119	103-2118-00	2SD2118	R159	119-0000-00	1/16W 0Ω JW	R268	111-5621-91	1/4WS 5.6kΩ
Q121	101-1240-00	2SB1240	R161	119-0000-00	1/16W 0Ω JW	R269	119-2291-15	1/16W2.2Ω
Q122	125-2003-02	RN1202	R163	119-0000-00	1/16W 0Ω JW	R270	119-2291-15	1/16W2.2Ω
Q124	125-0003-02	RN2202	R164	119-4721-10	1/16W 4.7kΩ	R271	119-2291-15	1/16W2.2Ω
Q125	125-2003-02	RN1202	R165	119-3331-10	1/16W 33kΩ	R272	119-2231-10	1/16W 22kΩ
Q126	103-2118-00	2SD2118	R166	119-3331-10	1/16W 33kΩ	R273	119-2231-10	1/16W 22kΩ
Q127	125-0003-02	RN2202	R167	119-2231-10	1/16W 22kΩ	R274	119-2231-10	1/16W 22kΩ
Q128	125-2003-02	RN1202	R168	119-1021-10	1/16W 1kΩ	R275	119-8221-10	1/16W 8.2kΩ
Q129	101-1240-00	2SB1240	R169	119-1021-10	1/16W 1kΩ	R276	114-2291-11	1W 2.2Ω
Q130	102-2458-00	2SC2458	R170	119-1021-10	1/16W 1kΩ	R277	119-2221-10	1/16W 2.2kΩ
Q131	103-1858-00	2SD1858	R171	119-1021-10	1/16W 1kΩ	R283	119-0000-00	1/16W 0Ω JW
Q133	103-1858-00	2SD1858	R172	119-2231-10	1/16W 22kΩ	R284	119-0000-00	1/16W 0Ω JW
Q134	103-1858-00	2SD1858	R173	119-3331-10	1/16W 33kΩ	R285	119-4721-10	1/16W 4.7kΩ
Q135	102-2458-00	2SC2458	R174	119-3331-10	1/16W 33kΩ	R286	119-4721-10	1/16W 4.7kΩ
Q136	125-2003-02	RN1202	R175	119-4721-10	1/16W 4.7kΩ	R287	111-1501-81	1/2WS 15Ω
Q137	125-2003-02	RN1202	R176	119-1021-10	1/16W 1kΩ	R289	119-1031-10	1/16W 10kΩ
Q140	102-2458-00	2SC2458	R177	119-1021-10	1/16W 1kΩ	R290	119-4721-10	1/16W 4.7kΩ
Q141	102-2458-00	2SC2458	R178	119-4731-10	1/16W 47kΩ	R291	119-1831-10	1/16W 18kΩ
Q305	102-2458-00	2SC2458	R179	119-4731-10	1/16W 47kΩ	R292	111-5611-91	1/4WS 560Ω
Q312	100-1428-00	2SA1428	R180	119-1021-10	1/16W 1kΩ	R293	111-4721-91	1/4WS 4.7kΩ
Q313	125-2003-02	RN1202	R181	119-0000-00	1/16W 0Ω JW	R301	119-1041-10	1/16W 100kΩ
Q314	103-1858-00	2SD1858	R182	119-1021-10	1/16W 1kΩ	R302	119-1041-10	1/16W 100kΩ
Q315	103-1858-00	2SD1858	R183	119-1021-10	1/16W 1kΩ	R303	119-1041-10	1/16W 100kΩ
Q316	100-1428-00	2SA1428	R184	119-1021-10	1/16W 1kΩ	R304	119-4731-10	1/16W 47kΩ
Q317	102-2458-00	2SC2458	R186	119-4721-10	1/16W 4.7kΩ	R315	119-2231-10	1/16W 22kΩ
Q320	103-2012-00	2SD2012	R187	119-4721-10	1/16W 4.7kΩ	R319	119-0000-00	1/16W 0Ω JW
Q321	125-0003-02	RN2202	R188	119-4731-10	1/16W 47kΩ	R324	119-0000-00	1/16W 0Ω JW
Q322	125-2003-02	RN1202	R189	119-4731-10	1/16W 47kΩ	R327	119-0000-00	1/16W 0Ω JW
R105	119-4721-10	1/16W 4.7kΩ	R190	119-4731-10	1/16W 47kΩ	R332	119-5611-10	1/16W 560Ω
R108	119-0000-00	1/16W 0Ω JW	R196	119-1051-10	1/16W 1MΩ	R333	119-2221-10	1/16W 2.2kΩ
R110	119-3321-10	1/16W 3.3kΩ	R198	119-0000-00	1/16W 0Ω JW	R334	119-2291-15	1/16W2.2Ω
R112	119-2221-10	1/16W 2.2kΩ	R201	119-1031-10	1/16W 10kΩ	R335	119-2291-15	1/16W2.2Ω
R115	119-2221-10	1/16W 2.2kΩ	R204	111-1001-91	1/4WS 10Ω	R336	119-3611-15	1/16W 360Ω
R116	119-2221-10	1/16W 2.2kΩ	R205	119-4731-10	1/16W 47kΩ	R337	111-2211-81	1/2WS 220Ω
R117	119-1031-10	1/16W 10kΩ	R208	119-6831-10	1/16W 68kΩ	R338	119-2231-10	1/16W 22kΩ
R118	119-0000-00	1/16W 0Ω JW	R209	119-5621-10	1/16W 5.6kΩ	R339	119-4721-10	1/16W 4.7kΩ
R119	119-4721-10	1/16W 4.7kΩ	R214	119-1021-10	1/16W 1kΩ	R340	119-3321-10	1/16W 3.3kΩ
R121	119-1041-10	1/16W 100kΩ	R215	119-6831-10	1/16W 68kΩ	R346	111-1511-81	1/2WS 150Ω
R122	119-1031-10	1/16W 10kΩ	R216	119-5631-10	1/16W 56kΩ	R403	119-0000-00	1/16W 0Ω JW
R123	119-2221-10	1/16W 2.2kΩ	R220	119-3341-10	1/16W 330kΩ	SUP101	060-0122-20	DSP-141N-S00B
R124	111-1001-91	1/4WS 10Ω	R227	119-2231-10	1/16W 22kΩ	T101	009-0670-00	
R125	119-1041-10	1/16W 100kΩ	R228	119-2231-10	1/16W 22kΩ	TH101	002-0222-00	PTH61G30BD
R126	119-4731-10	1/16W 47kΩ	R231	111-4711-91	1/4WS 470Ω	X101	061-1066-00	7.2MHz
R127	119-5601-10	1/16W 560Ω	R237	119-4721-10	1/16W 4.7kΩ	X102	061-3504-90	CX-5F 10MHz
R129	119-6831-10	1/16W 68kΩ	R239	119-1031-10	1/16W 10kΩ			
R132	119-1021-10	1/16W 1kΩ	R243	119-2221-10	1/16W 2.2kΩ			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-4735-06	0.047μF	LCD101	379-1194-30	LUC 761A	S101	013-6302-01	SKQMAL
C102	168-4735-06	0.047μF	PL101	017-0447-22	8V105mA	S102	013-6302-01	SKQMAL
C103	168-8212-05	820pF	PL102	017-0447-22	8V105mA	S103	013-6302-01	SKQMAL
C104	168-1045-06	0.1μF	PL103	017-0433-26	14V40mA	S104	013-6302-01	SKQMAL
C105	168-1045-06	0.1μF	PL104	017-0433-26	14V40mA	S105	013-6302-01	SKQMAL
C106	168-1032-05	0.01μF	PL105	017-0433-26	14V40mA	S106	013-6302-01	SKQMAL
IC101	051-6000-10	LC75853NE	PL106	017-0433-26	14V40mA	S107	013-6302-01	SKQMAL
J101	074-1279-12	12P	R101	119-6831-10	1/16W 68kΩ	S108	013-6302-01	SKQMAL
J102	074-1279-08	8P	R102	119-0000-00	1/16W 0Ω JW	S109	013-6302-01	SKQMAL
L101	010-2199-78	22μH J	R103	119-1021-10	1/16W 1kΩ	S110	013-6302-01	SKQMAL

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
S111	013-6302-01	SKQMAL	S113	013-6302-01	SKQMAL	VR101	016-0014-04	VR W/SHAFT
S112	013-6302-01	SKQMAL	S114	013-6302-01	SKQMAL			

CD mechanism/CD PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V100 μ F	C36	176-6801-00	68pF CH	R9	117-1031-10	1/10W 10k Ω
C3	178-1042-78	0.1 μ F	C37	176-2201-00	22pF CH	R10	117-4731-10	1/10W 47k Ω
C4	178-2222-78	2200pF	C38	178-1042-78	0.1 μ F	R12	117-4741-10	1/10W 470k Ω
C5	178-1042-78	0.1 μ F	C39	163-4763-05	4V47 μ F	R13	117-3331-10	1/10W 33k Ω
C6	178-1042-78	0.1 μ F	C44	178-2242-78	0.22 μ F	R14	117-3321-10	1/10W 3.3k Ω
C7	178-1042-78	0.1 μ F	C45	178-2242-78	0.22 μ F	R15	117-1031-10	1/10W 10k Ω
C8	176-1501-00	15pF CH	C46	163-4763-10	6.3V47 μ F	R16	117-3321-10	1/10W 3.3k Ω
C9	176-1501-00	15pF CH	C47	178-8222-78	8200pF	R17	117-3321-10	1/10W 3.3k Ω
C10	176-1201-00	12pF CH	C48	178-1042-78	0.1 μ F	R18	117-3321-10	1/10W 3.3k Ω
C11	178-1042-78	0.1 μ F	C50	163-1073-10	6.3V100 μ F	R19	117-3321-10	1/10W 3.3k Ω
C13	178-1042-78	0.1 μ F	C51	178-1042-78	0.1 μ F	R20	117-3321-10	1/10W 3.3k Ω
C14	178-1042-78	0.1 μ F	C52	178-2232-78	0.022 μ F	R21	117-2221-10	1/10W 2.2k Ω
C15	178-1042-78	0.1 μ F	C54	176-2201-00	22pF CH	R22	117-8211-10	1/10W 820 Ω
C16	178-1042-78	0.1 μ F	C61	178-1042-78	0.1 μ F	R23	117-9131-10	1/10W 91k Ω
C17	163-1073-31	16V100 μ F	C63	178-1042-78	0.1 μ F	R24	117-1041-10	1/10W 100k Ω
C18	176-4701-00	47pF CH	C64	178-1042-78	0.1 μ F	R25	117-1041-10	1/10W 100k Ω
C19	178-1532-78	0.015 μ F	C65	178-1042-78	0.1 μ F	R26	117-1841-10	1/10W 180k Ω
C20	178-1032-78	0.01 μ F	D4	001-0516-00	MA111	R27	117-1841-10	1/10W 180k Ω
C21	178-2722-78	2700pF	IC1	051-5704-00	TA2096FN	R28	117-2211-10	1/10W 220 Ω
C22	178-4722-78	4700pF	IC2	051-6342-00	TC9462F	R29	117-2201-10	1/10W 22 Ω
C23	178-1042-78	0.1 μ F	IC3	051-6045-08	BA5984FP	R30	117-1041-10	1/10W 100k Ω
C24	178-1042-78	0.1 μ F	J1	074-1138-66	16P	R31	117-1041-10	1/10W 100k Ω
C25	178-1042-78	0.1 μ F	J2	074-1138-06	6P	R32	117-1041-10	1/10W 100k Ω
C26	178-4712-78	470pF	L1	010-3050-93	10 μ H	R33	117-1041-10	1/10W 100k Ω
C27	178-4712-78	470pF	Q1	101-1188-50	2SB1188PQR	R34	117-1041-10	1/10W 100k Ω
C28	178-4732-78	0.047 μ F	R1	117-2211-10	1/10W 220 Ω	R35	117-2241-10	1/10W 220k Ω
C29	178-4732-78	0.047 μ F	R2	117-2211-10	1/10W 220 Ω	R36	117-1041-10	1/10W 100k Ω
C30	178-4732-78	0.047 μ F	R3	117-5611-10	1/10W 560 Ω	R37	117-1041-10	1/10W 100k Ω
C31	178-4732-78	0.047 μ F	R4	117-5611-10	1/10W 560 Ω	R38	117-8231-10	1/10W 82k Ω
C32	163-4763-05	4V47 μ F	R5	117-4711-10	1/10W 470 Ω	R39	117-1841-10	1/10W 180k Ω
C33	163-4763-05	4V47 μ F	R6	117-3311-10	1/10W 330 Ω	X1	061-3500-90	16.920MHz
C34	176-1801-00	18pF CH	R7	117-4721-10	1/10W 4.7k Ω			
C35	176-6097-00	6pF CH	R8	117-1041-10	1/10W 100k Ω			

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F	Q102	060-0252-01	PT4850F	Q103	060-0252-01	PT4850F

Chuckling SW PWB(B5) section

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB(B6) section

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11