EXPLODED VIEW (UNIT)

Block No.M1MM

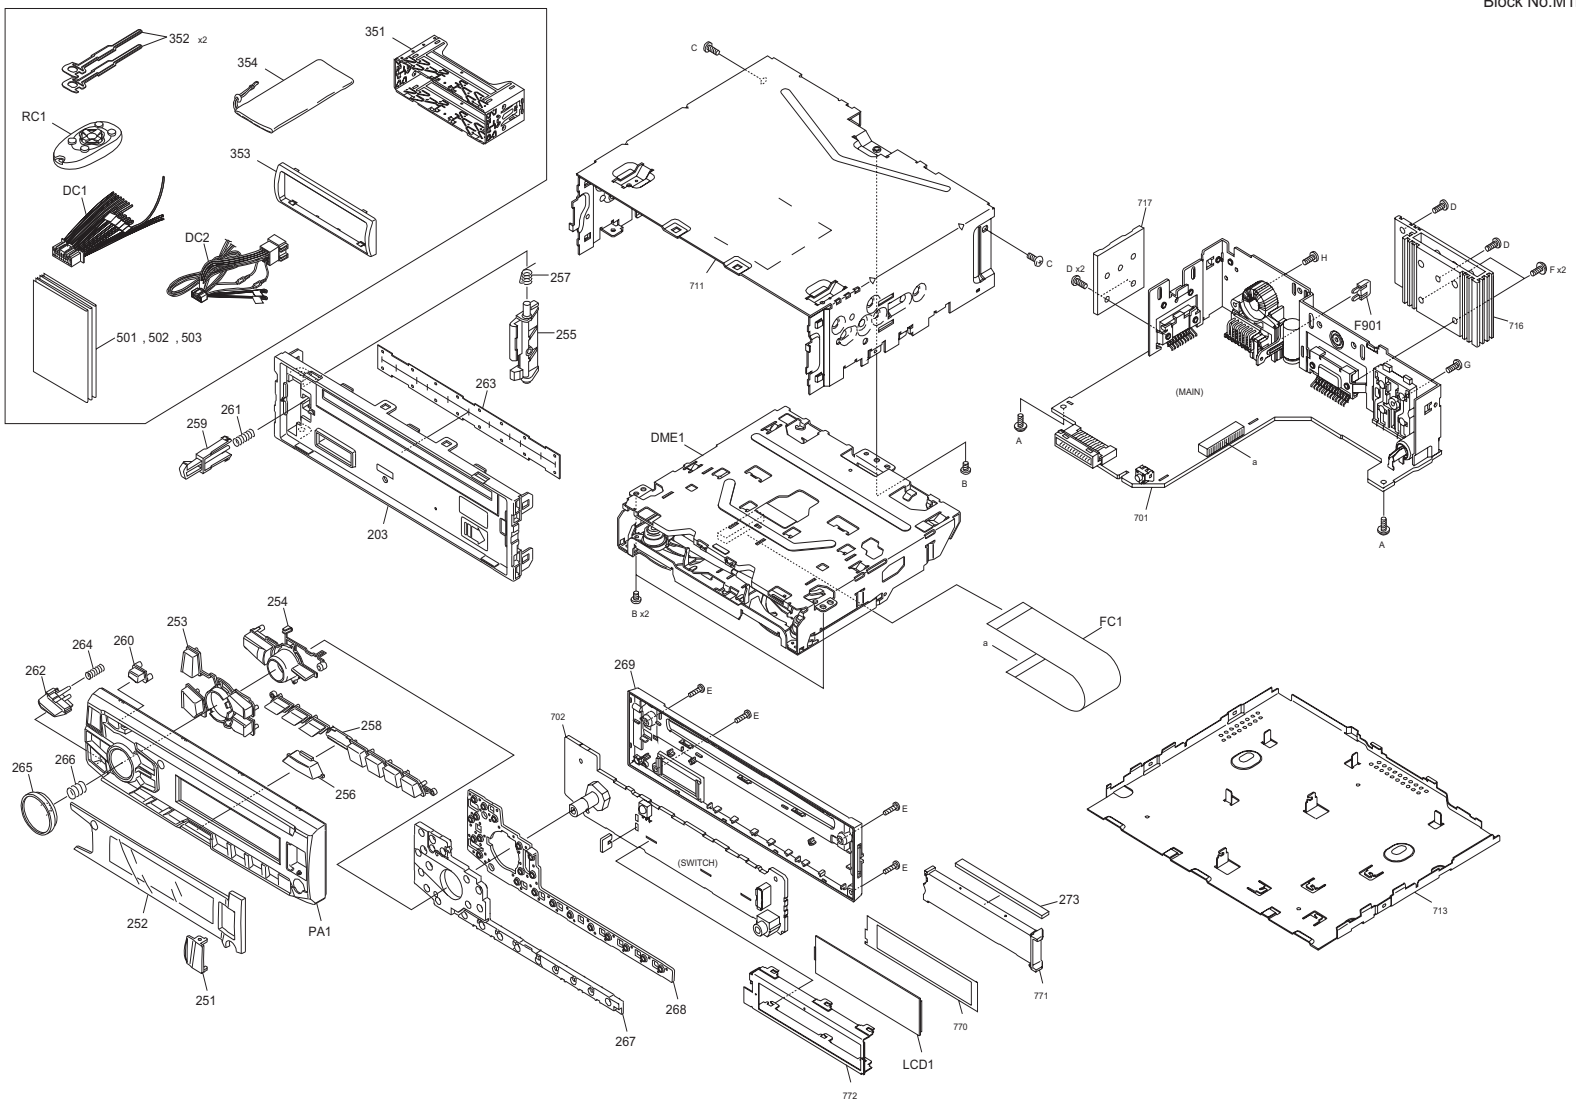

Parts with the exploded numbers larger than 700 are not supplied.

No.MA596

created date:2015-03-05

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

EXPLODED VIEW (UNIT) <M1MM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
⚠	DC1	QAM1329-001	DC CORD		1	A,E,F,J,M,R,V,W,X,Y
⚠	DC2	QAM1345-003	DC CORD		1	B,C,D,G,H,I,K,L,N,O,P,S,T,U
⚠	DC2	QAM1378-001	DC CORD		1	Q
	DME1	FC2-2A00NXN	CD MECHANISM(Made at JEIN)		1	
	DME1 or	X92-6820-01	CD MECHANISM(Made at JKEM)		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	WJT0335-001A-E	E-CARD WIRE		1	
	LCD1	B3H-0006-00	LCD		1	
	PA1	A6D-0019-00	PANEL		1	A,B,C,D,E,F,G,H,I,J,K,L,N,O,P,R,S,T,U,V,W,X,Y
	PA1	A6D-0019-01	PANEL		1	M
	PA1	A6D-0019-03	PANEL		1	Q
	RC1	RM-RK52M	REMOTE CONTROL UNIT		1	A,E,F,M,Q,R,V,W,X,Y
	A	GE40377-002A	SCREW		2	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,Q,R,S,T,U,V,W
	H	QYSDSG3008ZA	TAP SCREW	M3 x 8mm	1	X,Y
	203	A2C-0003-00	SUB PANEL		1	A,B,C,D,G,H,I,K,L,N,O,P,R,S,T,U
	203	A2C-0003-01	SUB PANEL		1	E,F,J,M,V,W
	203	A2C-0003-02	SUB PANEL		1	Q
	203	A2C-0003-10	SUB PANEL		1	X,Y
	251	F0G-0011-00	COVER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	251	F0G-0011-01	COVER		1	Q
	252	B1A-0013-00	FRONT GLASS		1	A
	252	B1A-0013-06	FRONT GLASS		1	B,C,D
	252	B1A-0013-04	FRONT GLASS		1	E,F
	252	B1A-0013-07	FRONT GLASS		1	G,H,I
	252	B1A-0013-08	FRONT GLASS		1	J
	252	B1A-0015-03	FRONT GLASS		1	K,L
	252	B1A-0013-03	FRONT GLASS		1	M
	252	B1A-0013-09	FRONT GLASS		1	N
	252	B1A-0015-02	FRONT GLASS		1	O,P
	252	B1A-0013-02	FRONT GLASS		1	Q
	252	B1A-0013-0F	FRONT GLASS		1	R
	252	B1A-0013-0J	FRONT GLASS		1	S,T,U
	252	B1A-0013-0H	FRONT GLASS		1	V,W
	252	B1A-0013-01	FRONT GLASS		1	X
	252	B1A-0013-0G	FRONT GLASS		1	Y
	253	K2F-0012-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	253	K2F-0012-01	PUSH KNOB		1	Q
	254	K2F-0014-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,X
	254	K2F-0014-03	PUSH KNOB		1	Q
	254	K2F-0014-01	PUSH KNOB		1	R,S,T,U,V,W,Y
	255	GE35609-001A	LOCK LEVER		1	
	256	K2E-0008-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	256	K2E-0008-01	PUSH KNOB		1	Q
	257	GE40514-004A	TORSION SPRING		1	
	258	K2F-0013-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	258	K2F-0013-01	PUSH KNOB		1	Q
	259	GE35611-001A	RELEASE LEVER		1	
	260	K2E-0007-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	260	K2E-0007-01	PUSH KNOB		1	Q
	261	GE30999-014A	COMP.SPRING		1	
	262	K2E-0009-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,N,O,P,R,S,T,U,V,W,X,Y
	262	K2E-0009-01	PUSH KNOB		1	M
	262	K2E-0009-02	PUSH KNOB		1	Q
	263	GE40630-003A	BLIND		1	
	264	GE30999-012A	COMP.SPRING		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	265	K2K-0102-00	KNOB		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	265	K2K-0102-05	KNOB		1	Q
	266	GE40127-006A	KNOB SPRING		1	
	267	B1K-0015-00	LIGHTING BOARD		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	267	B1K-0015-01	LIGHTING BOARD		1	Q
	268	E2K-0010-00	CONDUCT RUBBER		1	
	269	A4G-0009-00	REAR COVER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	269	A4G-0009-01	REAR COVER		1	Q
	273	E2K-0013-00	CONDUCT RUBBER		1	
	351	GE20362-002A	MOUNTING SLEEVE		1	
	352	GE40685-001A	HOOK		2	
	353	GE20363-001A	TRIM PLATE		1	A,B,C,D,E,F,G,H,I,J,K,L,N,O,P,Q,R,S,T,U,V,W,X,Y
	353	GE20363-002A	TRIM PLATE		1	M
	354	GE40521-001A	CARRYING CASE		1	E,F,J,M,N,Q,V,W
	501	B5A-0105-00	INST BOOK	ENG FRE SPA	1	A,R
	501	B5A-0107-00	INST BOOK	ENG FRE	1	B,C,G,H,O,S,T
	501	B5A-0107-05	INST BOOK	RUS UKR	1	D,I,N,P,U
	501	B5A-0106-00	INST BOOK	ENG	1	E,M,V
	501	B5A-0107-06	INST BOOK	ENG FRE RUS PER TUR ARA	1	J
	501	B5A-0107-10	INST BOOK	ENG FRE	1	K,L
	501	B5A-0109-00	INST BOOK	POR(LATIN AMERICA)	1	Q
	501	B5A-0190-00	INST.MANUAL	ENG FRE SPA	1	X,Y
	502	B5A-0107-02	INST BOOK	GER	1	B,C,D,G,H,I,O,P,S,T,U
	502	B5A-0106-02	INST BOOK	CHI(TAIWAN)	1	E,F,V,W
	502	B5A-0107-11	INST BOOK	SPA ITA POR(EUROPE) DUT GRE	1	K
	502	B5A-0106-01	INST BOOK	RUS PER THA ARA	1	M
	503	B5A-0107-01	INST BOOK	SPA ITA POR(EUROPE) DUT GRE	1	B,G,O,S
	503	B5A-0107-03	INST BOOK	DUT SWE FIN	1	C,H,T
	503	B5A-0107-04	INST BOOK	POL HUN CZE ROM BUL	1	D,I,P,U
	503	B5A-0106-01	INST BOOK	RUS PER THA ARA	1	E,V
	503	B5A-0106-03	INST BOOK	KOR	1	F,W
	503	B5A-0107-12	INST BOOK	GER	1	K,L
	503	B5A-0107-13	INST BOOK	DAN SWE FIN	1	L
	503	B5A-0106-02	INST BOOK	CHI(TAIWAN)	1	M

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN)

Block No.MBMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease
★JVS-1003
● W01-2067-08

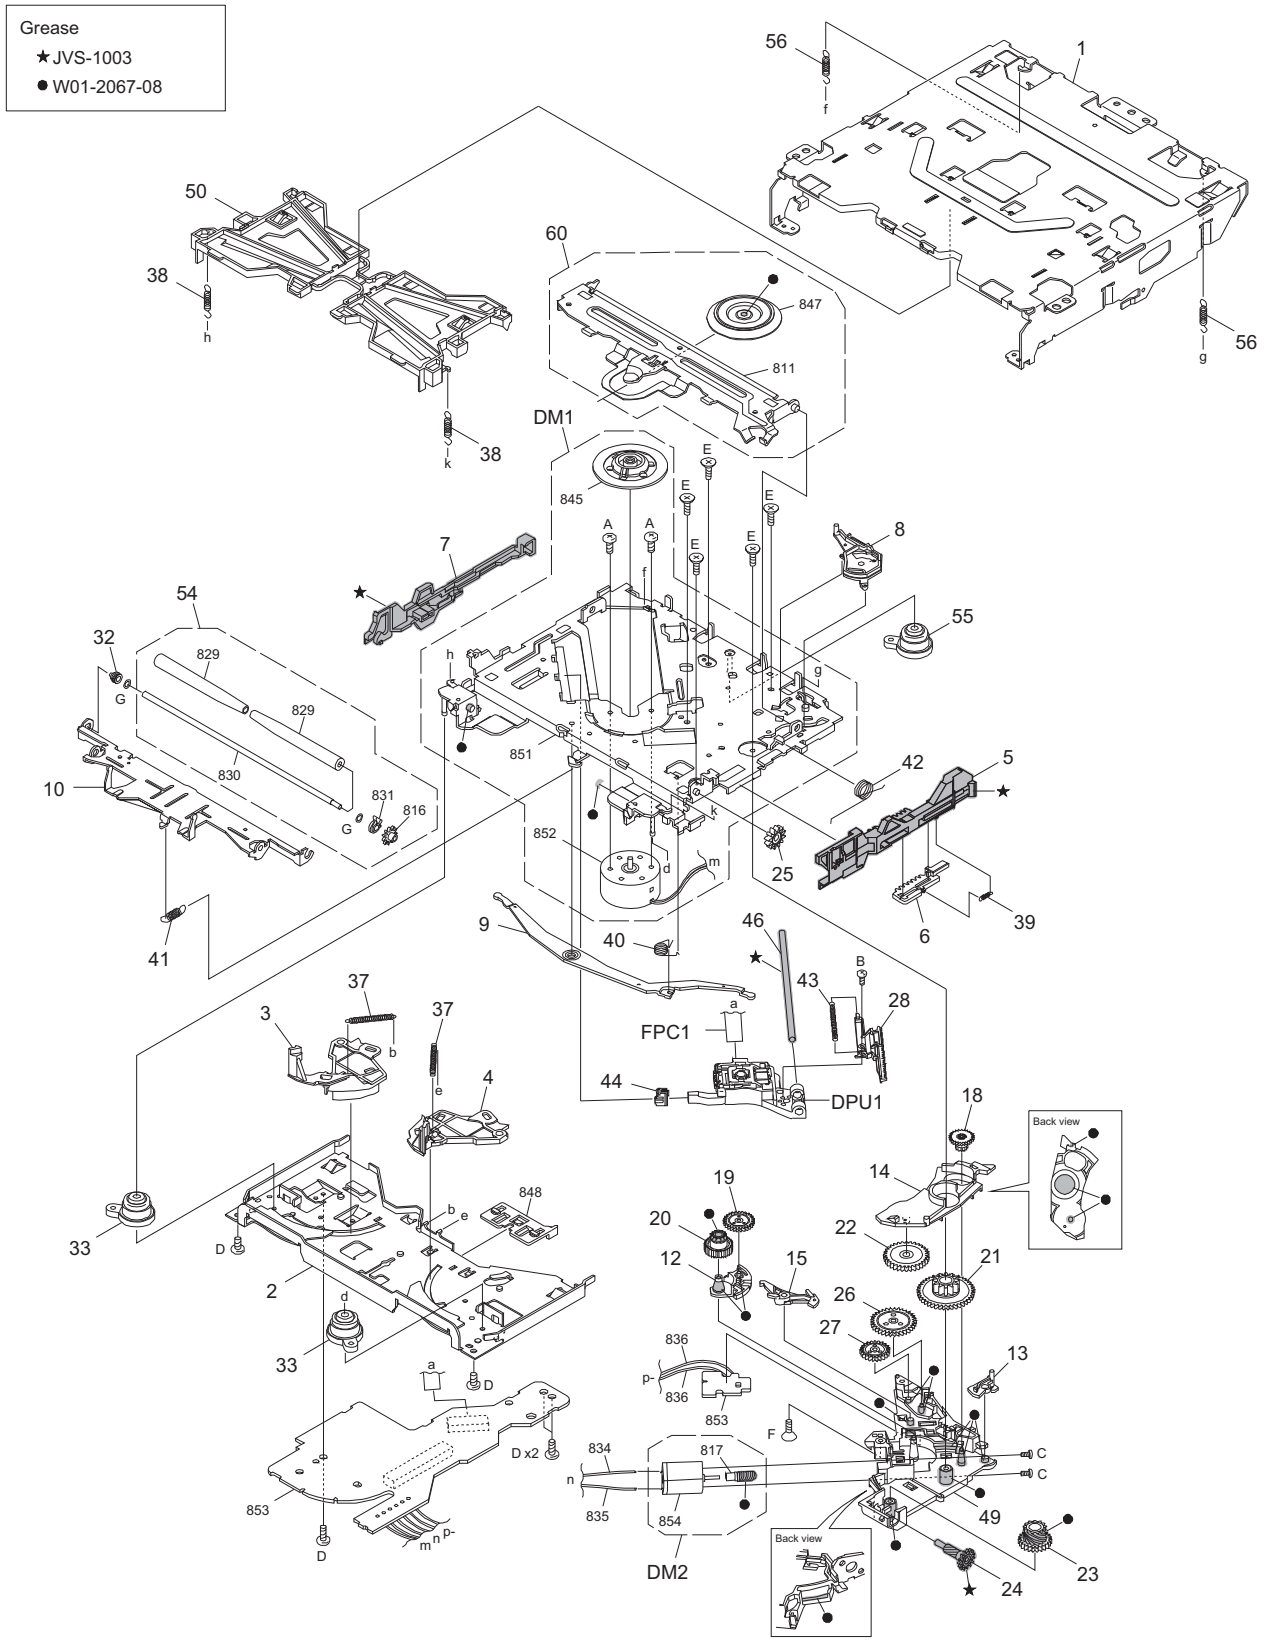

Parts with the exploded numbers larger than 800 are not supplied.

No.MA596

created date:2015-03-05

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
⚠	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-003A	LOWER CHASSIS		1	
	3	LV3A174-002A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-002A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

EXPLODED VIEW (CD MECHANISM: X92-6820-01)

Block No.MCMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease
★JVS-1003
● W01-2067-08

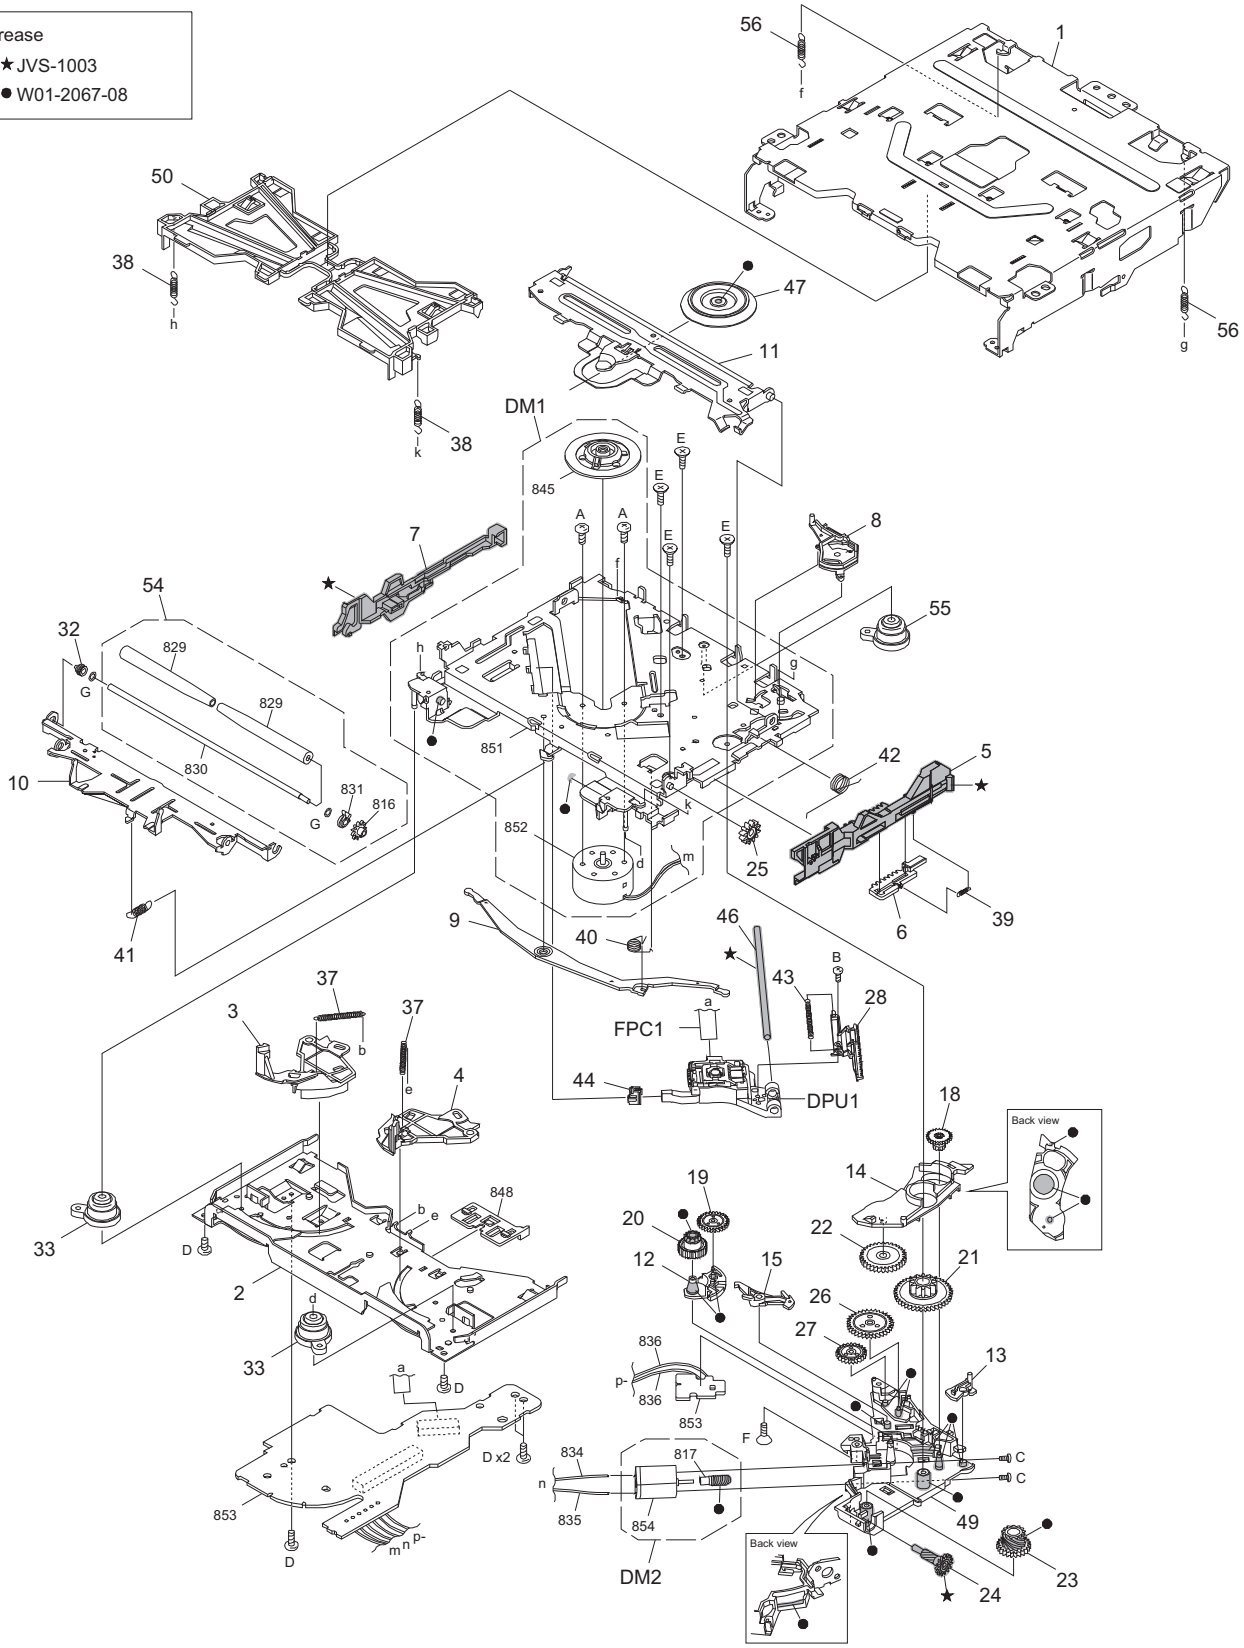

Parts with the exploded numbers larger than 800 are not supplied.

No.MA596

created date:2015-03-05

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

EXPLODED VIEW (CD MECHANISM: X92-6820-01) <MCMM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	DPU1	QAL1521-001	PICK UP		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	FPC1	QAL1465-001	FPC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	A	LV45568-001A	MINI SCREW		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D	N09-6108-15	TAPTITE SCREW		5	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	E	N09-6738-15	TAPTITE SCREW		4	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	F	N09-6921-05	TAPTITE SCREW		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	G	N19-2356-04	FLAT WASHER		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	1	A10-5625-21	OUTER CHASSIS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	2	A10-5626-01	LOWER CHASSIS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	3	D10-7174-03	DISC ARM L		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	4	D10-7175-03	DISC ARM R		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	5	D10-7177-02	SLIDER R		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	6	D10-7178-03	TRIGGER SLIDER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	7	D10-7179-02	SLIDER L		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	8	D10-7180-03	TRIGGER ARM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	9	D10-7181-13	JOINT LEVER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	10	D10-7182-12	ROLLER LEVER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	11	D10-7183-02	CLAMP ARM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	12	D10-7184-03	TRANSFER ARM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	13	D10-7185-04	SL LOCK CAM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	14	D10-7186-03	SL LOCK ARM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	15	D10-7187-13	PICK LOCK ARM		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	18	D13-3104-04	HELICAL GEAR 1		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	19	D13-3105-04	TRANSFER GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	20	D13-3106-04	LOAD GEAR H		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	21	D13-3107-04	DRIVE GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	22	D13-3108-04	JOINT GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	23	D13-3109-04	WORM GEAR 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	24	D13-3110-04	HELICAL GEAR 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	25	D13-3111-04	LOAD GEAR V		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	26	D13-3112-04	PICK GEAR 1		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	27	D13-3113-04	PICK GEAR 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	28	D13-3114-03	RACK GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	32	D23-0974-14	R.RETAINER L		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	33	D39-0403-05	DAMPER F		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	37	G01-4810-04	DISC ARM SPRING		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	38	G01-4829-04	FLOAT SPRING(F)		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	39	G01-4813-04	TRIGGER SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	40	G01-4814-04	LOAD SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	41	G01-4815-04	ROLLER SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	42	G01-4816-04	CLAMP SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	43	G01-4817-04	PICK SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	44	LV36813-501A	SUB GUIDE CAP		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	46	LV44555-001A	MAIN SHAFT		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	47	J11-0692-03	CLAMPER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	49	J19-7360-21	GEAR HOLDER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	50	J90-1209-21	DISC GUIDE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	54	CM-FC2-R	ROLLER ASSY		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	55	D39-0404-05	DAMPER R		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	56	G01-4812-04	FLOAT SPRING(R)		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-033x-xx) <01>						
	IC161	TDA7718C	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	IC301	JCV8034	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC411	MFI337S3959-X	IC		1	R,S,T,U,V,W,Y
⚠	IC540	MN6627553APA	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	IC601	TEF6657HN-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	IC701	R5S726A0D216FP	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	IC821	W3F-0003-00	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC831	BU4228F-W	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC841	BR24T02FJ-W-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC851	BU1CTD3WG-W	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC861	MP9942GJ	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC891	NCP380HSNAJAA-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	IC901	LV5685PV-H	ANALOG IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC941	BU33TD3WG-W	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q260	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q271	LSAR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	R,S,T,U,Y
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	R,S,T,U,Y
	Q360	LSCR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q540	2SA2188/E/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D100	RSB6.8SM-X	BP Z DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D101	RSB6.8SM-X	BP Z DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D270	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D271	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D273	DA2J101	DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D360	DZ2J068M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D370	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D390	MBRX130	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D391	MBR0530-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D400	RB521SM-30-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D401	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D861	DB22306	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D902	SK34A-L-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D903	SK34A-L-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	D990	1N5401-BPC04	SI DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C251	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C261	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C321	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	R,S,T,U,Y
	C331	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	R,S,T,U,Y
	C360	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C368	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	R,S,T,U,V,W,Y
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C561	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
⚠	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C608	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
⚠	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C618	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C624	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C722	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C723	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C724	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C861	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C862	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C864	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C867	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C868	QEZ0850-157Z	E CAPACITOR	150uF	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C869	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C870	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	C941	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K,L,X,Y
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C990	QEZ0981-228	E CAPACITOR	2200uF	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1000	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E,F,M,V,W
	C1022	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1023	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1028	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1033	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1034	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1035	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1320	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1605	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R170	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	R,S,T,U,Y
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	R,S,T,U,Y
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	R,S,T,U,Y
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	R,S,T,U,Y
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	R,S,T,U,Y
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	R,S,T,U,Y
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R365	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R381	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	E,F,M,V,W
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R403	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	R,S,T,U,V,W,Y
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	R,S,T,U,V,W,Y
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R421	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R718	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						V,W,X,Y
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R732	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	O,P
	R732	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R733	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,X
	R733	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	O,P
	R733	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	R,S,T,U,V,W,Y
	R734	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	B,C,D,G,H,I,J,K,L,O, P,S,T,U
	R734	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	E,F,M,V,W
	R734	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	N
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,R,X,Y
	R735	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,G,H,I,J,K,L,O, P,S,T,U
	R735	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	E,F,M,V,W
	R735	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	N
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R745	RK73EB2E222J	MG RESISTOR	2.2kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R748	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R754	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R820	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R830	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R850	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R862	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R864	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R868	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R892	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1007	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1017	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1029	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1036	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1045	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1047	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1049	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	V,W,X,Y A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1091	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1300	NRZ0084-0R0X	MG RESISTOR	0Ω	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1600	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1715	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1717	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R1861	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L540	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L574	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L601	NQLM93K-4R7X	INDUCTOR	4.7uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	K,L,X,Y
	L602	NQLM93K-R47X	INDUCTOR	0.47uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	K,L,X,Y
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L604	NQLM93K-1R0X	INDUCTOR	1uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	K,L,X,Y
	L605	NQLM93K-R22X	INDUCTOR	0.22uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	K,L,X,Y
	L606	NQLM93K-R12X	INDUCTOR	0.12uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	K,L,X,Y
	L607	NQLM93K-R15X	INDUCTOR	0.15uH K	1	A,B,C,D,E,F,G,H,I,J, M,N,O,P,R,S,T,U,V,W
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	K,L,X,Y
	L700	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L701	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L709	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L710	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L777	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L778	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	L820	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L821	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L822	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L823	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L824	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L825	LB73G0CA-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L826	NQR0403-003X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L827	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	L990	QQR1927-001	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	CN990	QNZ0607-001	CAR CONNECTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	J321	QNN0874-001	PIN JACK		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,V,W,X
	J321	QNN0868-001	PIN JACK		1	R,S,T,U,Y
	J600	QNB0356-001	ANT TERMINAL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	S830	QSW0648-001Z	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	VA600	F0K-0014-00	SURGE ABSORBER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	X540	NAX1224-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	X600	QAX0969-001Z	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	X701	NAX1251-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

MAIN PWB ASSY (XJ1-0463-20) <04>

	IC161	TDA7718C	ANALOG IC	1	Q
⚠	IC301	JCV8034	IC	1	Q
⚠	IC540	MN6627553APA	IC	1	Q
⚠	IC601	TEF6657HN-X	IC	1	Q
⚠	IC701	R5S726A0D216FP	IC	1	Q
⚠	IC821	W3F-0003-00	IC	1	Q
	IC831	BU4228F-W	IC	1	Q
	IC841	BR24T02FJ-W-X	IC	1	Q
	IC851	BU1CTD3WG-W	IC	1	Q
	IC861	MP9942GJ	ANALOG IC	1	Q
	IC891	NCP380HSNAJAA-X	IC	1	Q
⚠	IC901	LV5685PV-H	ANALOG IC	1	Q
	IC941	BU33TD3WG-W	IC	1	Q
	Q250	LTC043TEB-X	DIGI TRANSISTOR	1	Q
	Q260	LTC043TEB-X	DIGI TRANSISTOR	1	Q
	Q270	LTA024EEB-X	DIGI TRANSISTOR	1	Q
	Q271	LSAR523UBFS8	TRANSISTOR	1	Q
	Q272	LTC024EEB-X	DIGI TRANSISTOR	1	Q
	Q273	LTA024EEB-X	DIGI TRANSISTOR	1	Q
	Q360	LSCR523UBFS8	TRANSISTOR	1	Q
	Q540	2SA2188/E/-X	TRANSISTOR	1	Q
	Q701	LTA014YEB-X	DIGI TRANSISTOR	1	Q
	D100	RSB6.8SM-X	BP Z DIODE	1	Q
	D101	RSB6.8SM-X	BP Z DIODE	1	Q
	D270	BAW56-TP-X	SI DIODE	1	Q
	D271	BAW56-TP-X	SI DIODE	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D273	DA2J101	DIODE		1	Q
	D360	DZ2J068M	ZENER DIODE		1	Q
	D390	MBRX130	SCHOTTKY DIODE		1	Q
	D391	MBR0530-X	SB DIODE		1	Q
	D400	RB521SM-30-X	SB DIODE		1	Q
	D401	DZ2J051M	ZENER DIODE		1	Q
	D861	DB22306	SCHOTTKY DIODE		1	Q
	D902	SK34A-L-X	SB DIODE		1	Q
	D903	SK34A-L-X	SB DIODE		1	Q
⚠	D990	1N5401-BPC04	SI DIODE		1	Q
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	Q
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	Q
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	Q
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C251	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C261	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	Q
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	Q
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	Q
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C360	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C368	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	Q
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	Q
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	Q
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	Q
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	Q
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	Q
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	Q
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	Q
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	Q
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C561	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	Q
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	Q
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	Q
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	Q
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	Q
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	Q
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	Q
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	Q
	C600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	Q
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	Q
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
⚠	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	Q
	C608	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	1	Q
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	Q
⚠	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	Q
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	Q
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	Q
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C618	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C624	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	Q
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C722	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C723	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C724	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	Q
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	Q
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	Q
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	Q
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	Q
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C861	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C862	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C864	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C867	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	Q
	C868	QEZ0850-157Z	E CAPACITOR	150uF	1	Q
	C869	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	Q
	C870	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	Q
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	Q
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	Q
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	Q
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C941	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	Q
	C990	QEZ0981-228	E CAPACITOR	2200uF	1	Q
	C1000	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C1022	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1023	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1028	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1033	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1034	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1035	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C1320	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1605	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	Q
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	Q
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	Q
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R170	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	Q
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	Q
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	Q
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	Q
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R365	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	Q
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	Q
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R403	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	Q
	R421	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	Q
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	Q
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	Q
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	Q
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	Q
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	Q
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	Q
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	Q
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	Q
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	Q
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	Q
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	Q
	R600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1	Q
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	Q
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	Q
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	Q
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	Q
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	Q
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R718	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	Q
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	Q
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	Q
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	Q
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R733	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R734	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	Q
	R735	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	Q
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R745	RK73EB2E222J	MG RESISTOR	2.2kΩ 1/4W J	1	Q
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R748	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	Q
	R754	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	Q
	R820	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	Q
	R830	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	Q
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R850	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	Q
	R862	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	Q
	R864	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	Q
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	Q
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	Q
	R868	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	Q
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	Q
	R892	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	Q
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	Q
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	Q
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	Q
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	Q
	R1007	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	Q
	R1017	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1029	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1036	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1045	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	R1047	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1049	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	Q
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1091	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	R1160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1300	NRZ0084-0R0X	MG RESISTOR	0Ω	1	Q
	R1600	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1715	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1717	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1861	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	Q
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	Q
	L540	NQR0713-001X	FERRITE BEADS		1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L574	NQR0713-001X	FERRITE BEADS		1	Q
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	Q
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	Q
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	Q
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	Q
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	Q
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	Q
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	Q
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	Q
	L700	NQR0713-001X	FERRITE BEADS		1	Q
	L701	LB73G0BK-006	CHIP FERRITE		1	Q
	L709	NQR0713-001X	FERRITE BEADS		1	Q
	L710	NQR0713-001X	FERRITE BEADS		1	Q
	L777	NQR0713-001X	FERRITE BEADS		1	Q
	L778	NQR0713-001X	FERRITE BEADS		1	Q
	L820	NQR0713-001X	FERRITE BEADS		1	Q
	L821	NQR0713-001X	FERRITE BEADS		1	Q
	L822	NQR0713-001X	FERRITE BEADS		1	Q
	L823	NQR0713-001X	FERRITE BEADS		1	Q
	L824	NQR0713-001X	FERRITE BEADS		1	Q
	L825	LB73G0CA-002	CHIP FERRITE		1	Q
	L826	NQR0403-003X	FERRITE BEADS		1	Q
	L827	LB73G0BK-006	CHIP FERRITE		1	Q
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	Q
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	Q
	L990	QQR1927-001	CHOKE COIL		1	Q
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	Q
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	Q
	CN990	QNZ0607-001	CAR CONNECTOR		1	Q
	J321	QNN0874-001	PIN JACK		1	Q
	J600	QNB0356-001	ANT TERMINAL		1	Q
	S830	QSW0648-001Z	TACT SWITCH		1	Q
	VA600	F0K-0014-00	SURGE ABSORBER		1	Q
	X540	NAX1224-001X	CRYSTAL		1	Q
	X600	QAX0969-001Z	CRYSTAL		1	Q
	X701	NAX1251-001X	CRYSTAL		1	Q
SWITCH PWB ASSY (XJ6-024x-xx) <02>						
	IC1	BU97520AKV-M	MOS IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	IC90	SIR8630B6T	IR DETECT UNIT		1	A,E,F,J,M,N,R,V,W,X,Y
	Q1	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q50	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	Q51	2SC4097P/R/	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K,L,M,O,P,R,S,T,U,V,W,X,Y
	Q53	2SC4097P/R/	TRANSISTOR		1	J,N,O,P
	D1	DZ2J056M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D2	MBRX130	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	D20	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D20	QSMR-C13SBCMN	LED		1	G,H,I
	D20	SML-311WT/JK/X	LED		1	M
	D22	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D22	QSMR-C13SBCMN	LED		1	G,H,I
	D22	SML-311WT/JK/X	LED		1	M
	D24	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D24	QSMR-C13SBCMN	LED		1	G,H,I
	D24	SML-311WT/JK/X	LED		1	M
	D25	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D25	QSMR-C13SBCMN	LED		1	G,H,I
	D25	SML-311WT/JK/X	LED		1	M
	D26	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D26	QSMR-C13SBCMN	LED		1	G,H,I
	D26	SML-311WT/JK/X	LED		1	M
	D27	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D27	QSMR-C13SBCMN	LED		1	G,H,I
	D27	SML-311WT/JK/X	LED		1	M
	D28	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,R,S,T,U,V,W,X,Y
	D28	QSMR-C13SBCMN	LED		1	G,H,I
	D28	SML-311WT/JK/X	LED		1	M
	D29	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						R,S,T,U,V,W,X,Y
	D29	QSMR-C13SBCMN	LED		1	G,H,I
	D29	SML-311WT/JK/X	LED		1	M
	D30	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D30	QSMR-C13SBCMN	LED		1	G,H,I
	D30	SML-311WT/JK/X	LED		1	M
	D31	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D31	QSMR-C13SBCMN	LED		1	G,H,I
	D31	SML-311WT/JK/X	LED		1	M
	D33	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D33	QSMR-C13SBCMN	LED		1	G,H,I
	D33	SML-311WT/JK/X	LED		1	M
	D34	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D34	QSMR-C13SBCMN	LED		1	G,H,I
	D34	SML-311WT/JK/X	LED		1	M
	D35	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D35	QSMR-C13SBCMN	LED		1	G,H,I
	D35	SML-311WT/JK/X	LED		1	M
	D36	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D36	QSMR-C13SBCMN	LED		1	G,H,I
	D36	SML-311WT/JK/X	LED		1	M
	D37	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D37	QSMR-C13SBCMN	LED		1	G,H,I
	D37	SML-311WT/JK/X	LED		1	M
	D38	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D38	QSMR-C13SBCMN	LED		1	G,H,I
	D38	SML-311WT/JK/X	LED		1	M
	D39	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D39	QSMR-C13SBCMN	LED		1	G,H,I
	D39	SML-311WT/JK/X	LED		1	M
	D40	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D40	QSMR-C13SBCMN	LED		1	G,H,I
	D40	SML-311WT/JK/X	LED		1	M
	D41	SML-D12V8WT	LED		1	A,B,C,D,E,F,K,L,O,P, R,S,T,U,V,W,X,Y
	D41	QSMR-C13SBCMN	LED		1	G,H,I
	D41	SML-311WT/JK/X	LED		1	M
	D49	LUWJNSH.PC//0	LED		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D50	SML-D12P8WT	LED		1	J,N,O,P
	D52	SML-D12P8WT	LED		1	J,N,O,P
	D54	SML-D12P8WT	LED		1	J,N,O,P
	D55	SML-D12P8WT	LED		1	J,N,O,P
	D56	SML-D12P8WT	LED		1	J,N,O,P
	D57	SML-D12P8WT	LED		1	J,N,O,P
	D58	SML-D12P8WT	LED		1	J,N,O,P
	D59	SML-D12P8WT	LED		1	J,N,O,P
	D60	SML-D12P8WT	LED		1	J,N,O,P
	D61	SML-D12P8WT	LED		1	J,N,O,P
	D63	SML-D12P8WT	LED		1	J,N,O,P
	D64	SML-D12P8WT	LED		1	J,N,O,P
	D65	SML-D12P8WT	LED		1	J,N,O,P
	D66	SML-D12P8WT	LED		1	J,N,O,P
	D67	SML-D12P8WT	LED		1	J,N,O,P
	D68	SML-D12P8WT	LED		1	J,N,O,P
	D69	SML-D12P8WT	LED		1	J,N,O,P
	D70	SML-D12P8WT	LED		1	J,N,O,P
	D71	SML-D12P8WT	LED		1	J,N,O,P
	D80	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	D81	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C3	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,E,F,J,M,N,R,V,W,X,Y
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R18	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	J,N,O,P
	R19	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R19	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R20	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R20	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R21	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R21	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R22	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R22	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R23	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R23	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R24	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R24	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R25	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R25	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R26	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R26	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R27	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R27	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R28	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R28	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R29	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R29	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	G,H,I
	R30	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	A,B,C,D,E,F,K,L,M,O,P,R,S,T,U,V,W,X,Y
	R30	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	G,H,I
	R31	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	J,N,O,P
	R32	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	J,N,O,P
	R33	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R34	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R35	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	J,N,O,P
	R36	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R37	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	J,N,O,P
	R38	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R39	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P
	R40	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	J,N,O,P

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R41	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	J,N,O,P
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R51	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R53	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	O,P
	R55	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R91	RK73GB2A623J	MG RESISTOR	62kΩ 1/10W J	1	B,C,D,G,H,I,K,L,O,P,S,T,U
	R1000	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,E,F,J,M,N,R,V,W,X,Y
	R1009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J,N
	R1010	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J,N,O,P
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	CN1	QGZ2006K1-20X	CONNECTOR	(1-20)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	FL80	NQR0704-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	J60	QNS0279-001	3.5 JACK		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
	J80	QNZ1076-001	USB CONNECTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W
	J80	E5J-0069-00	USB TERMINAL		1	X,Y
	S20	T9K-0007-00	ROTARY ENCODER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y

SWITCH PWB ASSY (XJ6-0363-20) <05>

	IC1	BU97520AKV-M	MOS IC	1	Q
	IC90	SIR8630B6T	IR DETECT UNIT	1	Q
	Q1	LSCR523EBFS8	TRANSISTOR	1	Q
	Q50	LSCR523EBFS8	TRANSISTOR	1	Q
	Q51	2SC4097P/R/	TRANSISTOR	1	Q
	D1	DZ2J056M	ZENER DIODE	1	Q
	D2	MBRX130	SCHOTTKY DIODE	1	Q
	D20	SML-D12V8WT	LED	1	Q
	D22	SML-D12V8WT	LED	1	Q
	D24	SML-D12V8WT	LED	1	Q
	D25	SML-D12V8WT	LED	1	Q
	D26	SML-D12V8WT	LED	1	Q
	D27	SML-D12V8WT	LED	1	Q
	D28	SML-D12V8WT	LED	1	Q
	D29	SML-D12V8WT	LED	1	Q
	D30	SML-D12V8WT	LED	1	Q
	D31	SML-D12V8WT	LED	1	Q
	D33	SML-D12V8WT	LED	1	Q
	D34	SML-D12V8WT	LED	1	Q
	D35	SML-D12V8WT	LED	1	Q
	D36	SML-D12V8WT	LED	1	Q
	D37	SML-D12V8WT	LED	1	Q
	D38	SML-D12V8WT	LED	1	Q
	D39	SML-D12V8WT	LED	1	Q
	D40	SML-D12V8WT	LED	1	Q
	D41	SML-D12V8WT	LED	1	Q
	D49	LUWJNSH.PC//0	LED	1	Q
	D80	DZ2J051M	ZENER DIODE	1	Q

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D81	DZ2J051M	ZENER DIODE		1	Q
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C3	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	Q
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	Q
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	Q
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	Q
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	Q
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	Q
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	Q
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	Q
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	Q
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	Q
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	Q
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	Q
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	Q
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	Q
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R19	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R20	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R21	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R22	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R23	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R24	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R25	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R26	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R27	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R28	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R29	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	Q
	R30	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	Q
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	Q
	R51	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	Q
	R55	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	Q
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	Q
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	Q
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	Q
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	Q
	R1000	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	Q
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	Q
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	Q
	CN1	QGZ2006K1-20X	CONNECTOR	(1-20)	1	Q
	FL80	NQR0704-001X	CHOKE COIL		1	Q
	J60	QNS0279-001	3.5 JACK		1	Q
	J80	QNZ1076-001	USB CONNECTOR		1	Q
	S20	T9K-0007-00	ROTARY ENCODER		1	Q

CD MECHA PWB ASSY (LVA20106-01A) <03>

IC1	BD8266EFV-M-X	IC		1	
C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	
CN2	QGF0522F6-15W	FFC/FPC CONNE	FFC/FPC (1-15)	1	
SW1	NSW0291-001X	DETECT SWITCH		1	
SW2	NSW0291-001X	DETECT SWITCH		1	
SW3	NSW0313-001X	DETECT SWITCH		1	

CD MECHA PWB ASSY (X32-6680-00) <06>

IC1	BD8266EFV-M-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
C54	CK73GB1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P,R,S,T,U,V,W,X,Y
C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,I,J,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R460J	A	KD-R461E	B	KD-R461EN	C	KD-R461EY	D
KD-R461U	E	KD-R461UT	F	KD-R462E	G	KD-R462EN	H
KD-R462EY	I	KD-R463EU	J	KD-R464E	K	KD-R464EN	L
KD-R466U	M	KD-R467EE	N	KD-R469E	O	KD-R469EY	P
KD-R469UR	Q	KD-R660J	R	KD-R661E	S	KD-R661EN	T
KD-R661EY	U	KD-R661U	V	KD-R661UT	W	KD-SR41J	X
KD-SR61J	Y						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	CN2	E41-3488-05	F.C.CONNECTOR		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S1	S6J-0001-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S2	S6J-0001-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y
	S3	S6J-0002-00	PUSH SWITCH		1	A,B,C,D,E,F,G,H,I,J, K,L,M,N,O,P,R,S,T,U, V,W,X,Y