



KDC-225/225MR/2025

EXPLODED VIEW (CD MECHANISM)

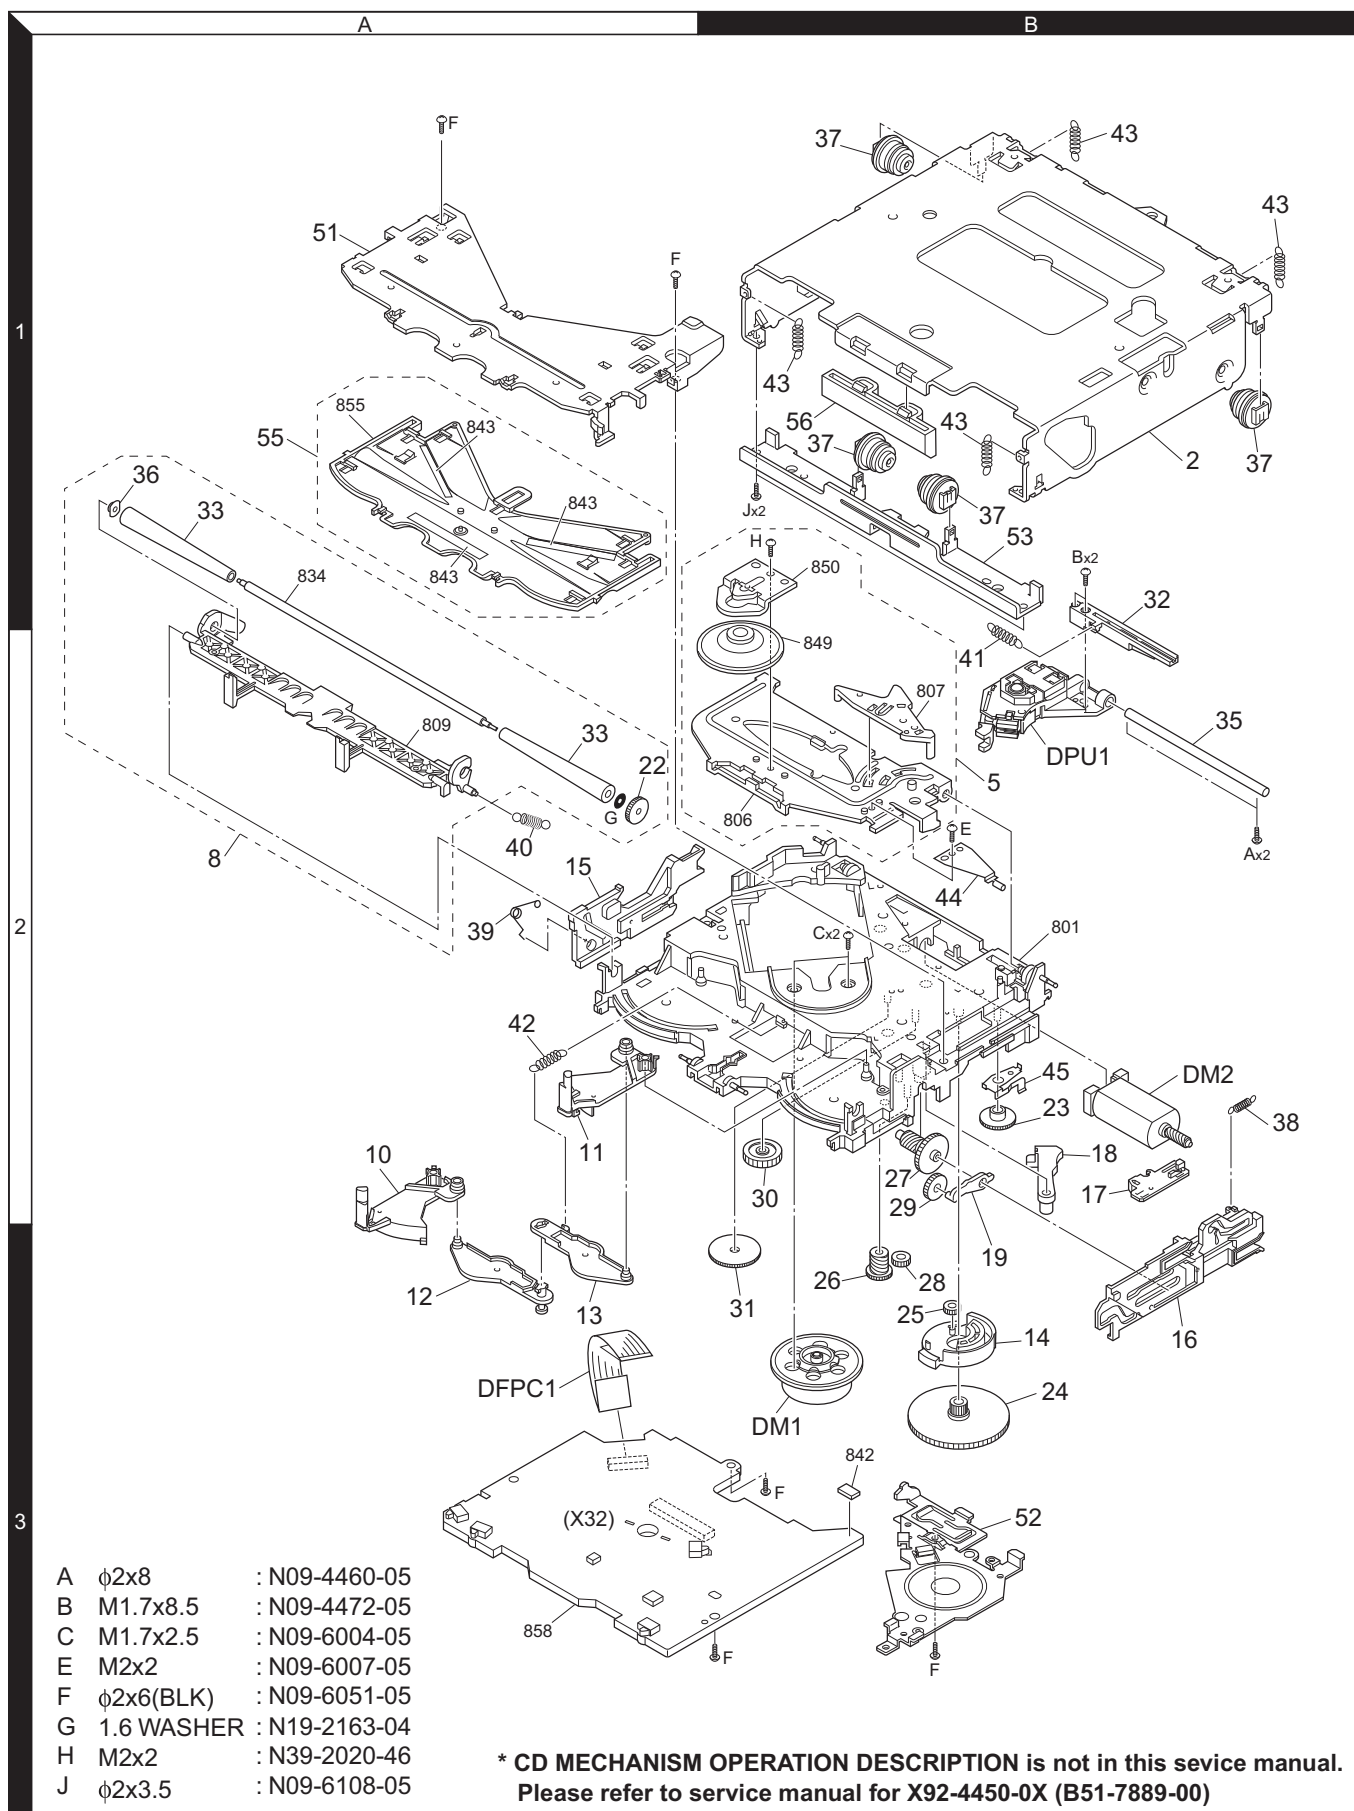

EXPLODED VIEW (UNIT)

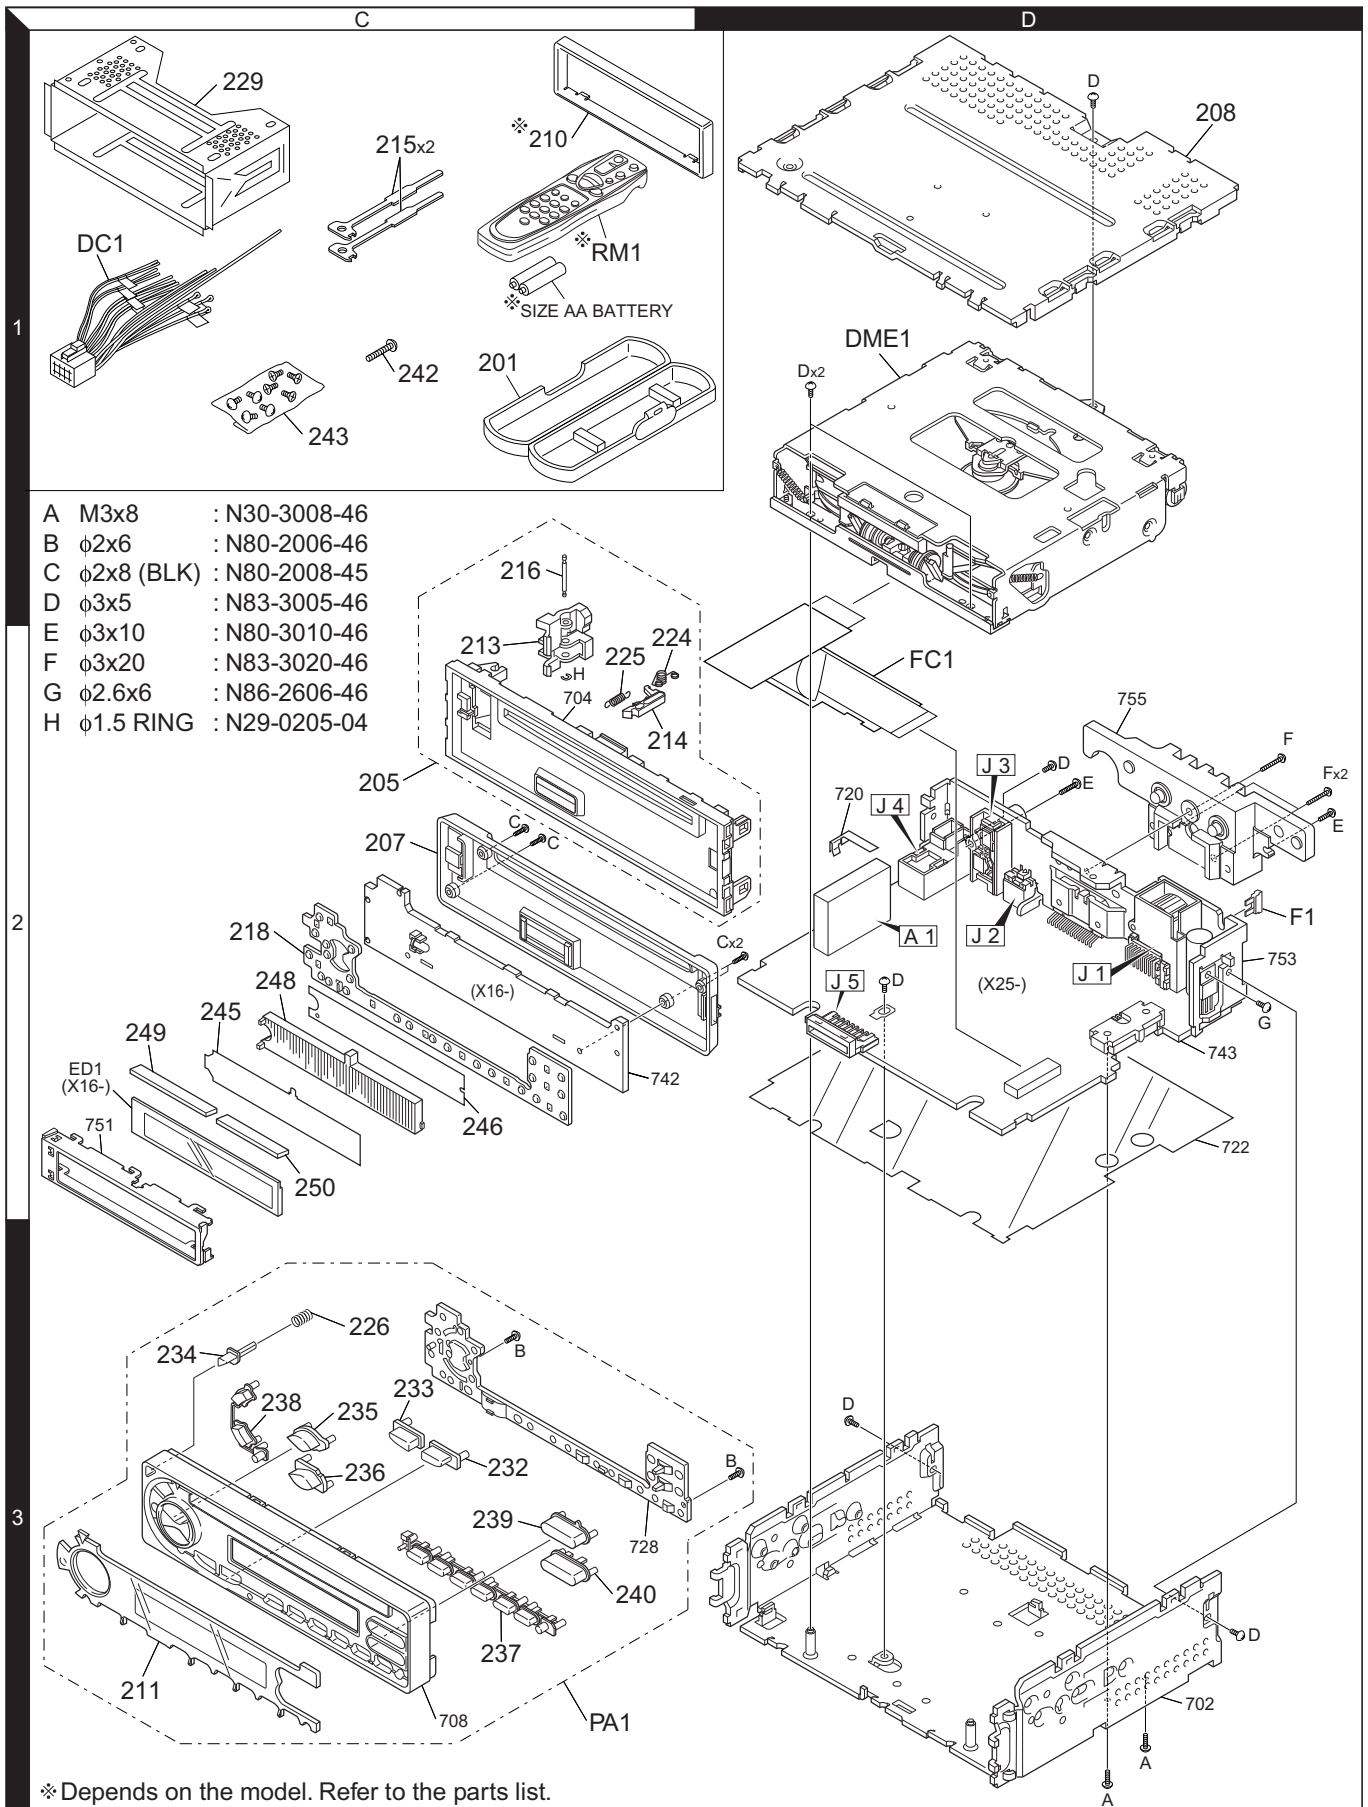

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KDC-225/225MR/2025					
201	1C		A02-1486-13	PLASTIC CABINET ASSY	K1
205	2C		A22-2863-03	SUB PANEL ASSY	
207	2C		A46-1796-01	REAR COVER	
208	1D		A52-0804-02	TOP PLATE	
PA1	3C	*	A64-3171-02	PANEL ASSY	
PA1	3C	*	A64-3305-02	PANEL ASSY	K2
PA1	3C	*	A64-3361-02	PANEL ASSY	K3
RM1	1C		A70-2040-05	REMOTE CONTROLLER ASSY (RC-505)	K1K2
-			B46-0100-50	WARRANTY CARD	K2
-			B46-0606-04	ID CARD	
-			B46-0653-03	USER CARD	
-			B58-1365-04	CAUTION CARD	
-		*	B64-2681-00	INST. MANUAL (ENG,FRE,SPA)	
210	1C		B07-3097-02	ESCUTCHEON	K2
210	1C		B07-3098-02	ESCUTCHEON	K1K3
211	3C	*	B10-4465-01	FRONT GLASS	K1
211	3C	*	B10-4548-01	FRONT GLASS	K2
211	3C	*	B10-4559-01	FRONT GLASS	K3
213	1C		D10-4446-03	LEVER	K2
214	1C		D10-4447-03	LEVER	
215	1C		D10-4589-04	LEVER	
216	1C		D21-2329-04	SHAFT	
218	1C		E29-1964-02	CONDUCTIVE RUBBER	
DC1	1C		E30-6322-05	DC CORD	K1
DC1	1C		E30-6323-05	DC CORD	
FC1	2D	*	E39-0622-05	FLAT CABLE (24PIN)	
F1	2D		F52-0006-05	FUSE (MINI BLADE TYPE 10A)	
F1	2D		F52-0023-05	FUSE (MINI BLADE TYPE 10A)	
224	1C		G01-2987-04	TORSION COIL SPRING	K1
225	1C		G01-3096-04	EXTENSION SPRING	
226	3C		G01-3149-04	COMPRESSION SPRING	
-			H10-4856-12	POLYSTYRENE FOAMED FIXTURE	
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	K2
-		*	H54-2994-03	ITEM CARTON CASE	
-		*	H54-2995-03	ITEM CARTON CASE	
-		*	H54-3142-03	ITEM CARTON CASE	
229	1C		J21-9716-03	MOUNTING HARDWARE ASSY	
232	3C		K24-4098-04	KNOB (SRC)	K3
233	3C		K24-4099-04	KNOB (Q-AUDIO)	
234	3C		K24-4101-04	KNOB (RELESE)	
235	3C		K24-4096-04	KNOB (VOL. UP)	
236	3C		K24-4097-04	KNOB (VOL. DOWN)	
237	3C		K25-1589-03	KNOB (PRESET1-6)	K1
238	3C		K25-1590-03	KNOB (EJECT/ATT)	
239	3C		K25-1613-03	KNOB (FM/AM)	
240	3C		K25-1614-03	KNOB (SEEK)	
242	1C		N84-4016-46	PAN HEAD TAPTITE SCREW	
243	1C		N99-1719-05	SCREW SET	K2
A	2D		N30-3008-46	PAN HEAD MACHINE SCREW	

K1 : KDC-225 K2 : KDC-2025 K3 : KDC-225MR

Ref. No.	Added	New	Parts No.	Description	Destination
B	2D		N80-2006-46	PAN HEAD TAPTITE SCREW	
C	2D		N80-2008-45	PAN HEAD TAPTITE SCREW	
D	2D		N83-3005-46	PAN HEAD TAPTITE SCREW	
H	2D		N29-0205-04	RETAINING RING	
DME1	1D		X92-4660-00	MECHANISM ASSY (DXM-6060W)	
SWITCH UNIT (X16-2640-11/12)					
245	2C	*	B11-1436-04	OPTICAL DIFFUSER	K1 K2K3
246	2C		B11-1442-04	REFLECTION SHEET	
248	2C		B19-2242-03	LIGHTING BOARD	
D1			B30-1633-05	LED (WHITE)	
D1			B30-1641-05	LED	
D2			B30-1566-05	LED (1608,RED)	K2K3 K1
D3,4			B30-1564-05	LED (1608,BLUE)	
D21-29			B30-1566-05	LED (1608,RED)	
ED1	2C		B38-1137-05	LIQUID CRYSTAL	
ED1	2C		B38-1145-05	LIQUID CRYSTAL	
C1			CK73GB1H102K	CHIP C 1000PF K	
C2			CK73GB1H103K	CHIP C 0.010UF K	
C3,4			CK73GB1E473K	CHIP C 0.047UF K	
C5			CK73FB1A225K	CHIP C 2.2UF K	
C11-13			CK73GB1H103K	CHIP C 0.010UF K	
249	2C	*	E29-1965-04	CONDUCTIVE RUBBER	K2K3 K1
249	2C		E29-1993-04	CONDUCTIVE RUBBER	
250	2C		E29-1966-04	CONDUCTIVE RUBBER	K2K3
250	2C	*	E29-1994-04	CONDUCTIVE RUBBER	K1
J1			E59-0828-05	RECTANGULAR PLUG	
R1			RK73GB2A563J	CHIP R 56K J 1/10W	
R2			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R3			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R4			RK73GB2A473J	CHIP R 47K J 1/10W	
R5			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R6-8			RK73GB2A471J	CHIP R 470 J 1/10W	
R9			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R10			RK73GB2A470J	CHIP R 47 J 1/10W	
R11			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R21,22			RK73FB2B221J	CHIP R 220 J 1/8W	
R23			RK73FB2B431J	CHIP R 430 J 1/8W	
R24,25			RK73FB2B271J	CHIP R 270 J 1/8W	
R31-33			RK73FB2B391J	CHIP R 390 J 1/8W	
W1,2			R92-1252-05	CHIP R 0 OHM J 1/16W	
D31-35			UDZS5.6B	ZENER DIODE	
IC1			LC75883E-E	MOS-IC	
IC2			RS-171	ANALOGUE IC	
Q1			DTA114EE	DIGITAL TRANSISTOR	
ELECTRIC UNIT (X25-9980-11/12/21)					
C1			C90-5683-05	ELECTRO 3300UF 16WV	
C3			CK73GB1H102K	CHIP C 1000PF K	
C4-6			CK73GB1H103K	CHIP C 0.010UF K	
C19			CK73GB1A474K	CHIP C 0.47UF K	
C20			C90-2962-05	ELECTRO 100UF 16WV	
C21			CD04AS1C470M	ELECTRO 47UF 16WV	
C22			CD04AS1E100M	ELECTRO 10UF 25WV	
C24,25			CD04AS1C100M	ELECTRO 10UF 16WV	
C26			CD04AS1E100M	ELECTRO 10UF 25WV	

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9980-11/12/21)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
C27			CD04AT1H100M	ELECTRO 10UF 50WV		R1			RK73FB2B683J	CHIP R 68K J 1/8W	
C28			CD04BF1C221M	ELECTRO 220UF 16WV		R2			RK73GB2A393J	CHIP R 39K J 1/10W	
C29			CD04AS1C100M	ELECTRO 10UF 16WV		R3			RK73GB2A104J	CHIP R 100K J 1/10W	
C30			CD04BF1C221M	ELECTRO 220UF 16WV		R4			RK73FB2B203J	CHIP R 20K J 1/8W	
C32			CK73GB1H103K	CHIP C 0.010UF K		R5,6			RK73GB2A103J	CHIP R 10K J 1/10W	
C104-106			CK73GB1H103K	CHIP C 0.010UF K		R7			RK73GB2A104J	CHIP R 100K J 1/10W	
C108			CK73GB1H103K	CHIP C 0.010UF K		R8			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
C111			CK73GB1H102K	CHIP C 1000PF K		R9			RD14BB2C333J	RD 33K J 1/6W	
C201,202			CD04AS1HR47M	ELECTRO 0.47UF 50WV		R10			RK73GB2A103J	CHIP R 10K J 1/10W	
C203			CK73GB1E223K	CHIP C 0.022UF K		R11			RK73GB2A223J	CHIP R 22K J 1/10W	
C203			CK73GB1H223K	CHIP C 0.022UF K		R12			RK73GB2A473J	CHIP R 47K J 1/10W	
C204			CK73GB1H103K	CHIP C 0.010UF K		R13			RK73GB2A562J	CHIP R 5.6K J 1/10W	
C205			CK73GB1A474K	CHIP C 0.47UF K		R21			RD14BB2C152J	RD 1.5K J 1/6W	
C206			CC73GCH1H151J	CHIP C 150PF J		R22			RD14BB2C472J	RD 4.7K J 1/6W	
C209			CD04AS1H2R2M	ELECTRO 2.2UF 50WV		R25-28			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C210			CK73GB1H103K	CHIP C 0.010UF K		R32			RK73GB2A223J	CHIP R 22K J 1/10W	
C211			CD04AS1A470M	ELECTRO 47UF 10WV		R33			RK73GB2A473J	CHIP R 47K J 1/10W	
C212,213			CK73GB1C104K	CHIP C 0.10UF K		R51,52			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C212,213			CK73GB1H104K	CHIP C 0.10UF K		R53-56			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C251-254			CD04AX1HR22M	ELECTRO 0.22UF 50WV		R58			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C251-254			C90-5684-05	ELECTRO 0.22UF 50WV		R59			RK73GB2A101J	CHIP R 100 J 1/10W	
C255			CD04AS1H010M	ELECTRO 1UF 50WV		R60			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C256			CD04AS1A330M	ELECTRO 33UF 10WV		R61,62			RK73GB2A104J	CHIP R 100K J 1/10W	
C257			CD04AT1H010M	ELECTRO 1UF 50WV		R63			RD14BB2C222J	RD 2.2K J 1/6W	
C258			CD04AS1H010M	ELECTRO 1UF 50WV		R65			RK73EB2E472J	CHIP R 4.7K J 1/4W	
C301,302			CK73FB1C474K	CHIP C 0.47UF K		R66			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C303			CD04AS1A470M	ELECTRO 47UF 10WV		R101			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C351,352			CD04AS1C100M	ELECTRO 10UF 16WV		R102			RK73GB2A471J	CHIP R 470 J 1/10W	
C356			CK73FB1H104K	CHIP C 0.10UF K		R103			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C406			CK73GB1A224K	CHIP C 0.22UF K		R104			RK73GB2A471J	CHIP R 470 J 1/10W	
C407,408			CC73GCH1H220J	CHIP C 22PF J		R105			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C409			CD04AS0J470M	ELECTRO 47UF 6.3WV		R106			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C410			CK73GB1H103K	CHIP C 0.010UF K		R152-154			RK73GB2A471J	CHIP R 470 J 1/10W	
CN2			E41-0168-05	FLAT CABLE CONNECTOR (24PIN)		R160			RK73GB2A222J	CHIP R 2.2K J 1/10W	
CN3			E41-0927-05	PIN ASSY	K3	R161			RK73GB2A225J	CHIP R 2.2M J 1/10W	
△ J1			E58-0863-15	RECTANGULAR RECEPTACLE	K1K2	R162			RK73GB2A104J	CHIP R 100K J 1/10W	
△ J1			E58-0991-05	RECTANGULAR RECEPTACLE	K3	R171			RD14BB2C102J	RD 1.0K J 1/6W	
J2			E56-0855-05	CYLINDRICAL RECEPTACLE		R172			RD14BB2C470J	RD 47 J 1/6W	
J3			E63-0898-05	PIN JACK		R173			RD14BB2C471J	RD 470 J 1/6W	
J4			E04-0326-05	RF COAXIAL CABLE RECEPTACLE		R174			RD14BB2C101J	RD 100 J 1/6W	
J5			E58-0879-05	RECTANGULAR RECEPTACLE	K1K2	R175			RD14BB2C471J	RD 470 J 1/6W	
J5			E58-0992-05	RECTANGULAR RECEPTACLE	K3	R176			RD14BB2C102J	RD 1.0K J 1/6W	
P1			E23-0745-05	TERMINAL		R180			RD14BB2C102J	RD 1.0K J 1/6W	
L1			L33-1988-05	CHOKE COIL ASSY		R181			RD14BB2C100J	RD 10 J 1/6W	
L2			L33-1983-05	CHOKE COIL		R182,183			RD14BB2C102J	RD 1.0K J 1/6W	
L3			L33-1977-05	CHOKE COIL		R201			RK73GB2A103J	CHIP R 10K J 1/10W	
L6-8			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)		R202-204			RK73GB2A472J	CHIP R 4.7K J 1/10W	
L10,11			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)		R205			RK73GB2A222J	CHIP R 2.2K J 1/10W	
X1			L78-0879-05	RESONATOR (10.0MHZ)		R207,208			RK73GB2A471J	CHIP R 470 J 1/10W	
X2			L77-2793-05	CRYSTAL RESONATOR (32.768KHZ)		R209,210			RK73GB2A472J	CHIP R 4.7K J 1/10W	
D	2D		N83-3005-46	PAN HEAD TAPTITE SCREW		R251			RK73GB2A333J	CHIP R 33K J 1/10W	
E	2D		N80-3010-46	PAN HEAD TAPTITE SCREW		R252			RK73GB2A473J	CHIP R 47K J 1/10W	
F	2D		N83-3020-46	PAN HEAD TAPTITE SCREW		R253			RK73GB2A432J	CHIP R 4.3K J 1/10W	
G	2D		N86-2606-46	BINDING HEAD TAPTITE SCREW		R254			RK73GB2A100J	CHIP R 10 J 1/10W	
						R255			RK73GB2A221J	CHIP R 220 J 1/10W	

K1 : KDC-225

K2 : KDC-2025

K3 : KDC-225MR

△ Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9980-11/12/21)

Ref. No.	A d d	N e w	Parts No.	Description			Desti- nation
R256			RK73GB2A223J	CHIP R	22K	J 1/10W	
R257			RK73GB2A432J	CHIP R	4.3K	J 1/10W	
R271			RK73GB2A101J	CHIP R	100	J 1/10W	
R272			RK73GB2A103J	CHIP R	10K	J 1/10W	
R273			RK73GB2A474J	CHIP R	470K	J 1/10W	
R301,302			RD14BB2C100J	RD	10	J 1/6W	
R303			RD14BB2C101J	RD	100	J 1/6W	
R304,305			RD14BB2C472J	RD	4.7K	J 1/6W	
R306			RD14BB2C4R7J	RD	4.7	J 1/6W	
R307-309			RD14BB2C472J	RD	4.7K	J 1/6W	
R310,311			RD14BB2C101J	RD	100	J 1/6W	
R312-315			RK73GB2A104J	CHIP R	100K	J 1/10W	
R351,352			RK73GB2A271J	CHIP R	270	J 1/10W	
R355,356			RK73GB2A303J	CHIP R	30K	J 1/10W	
R357,358			RD14BB2C101J	RD	100	J 1/6W	
R374			RD14BB2C102J	RD	1.0K	J 1/6W	K3
R407			RK73GB2A241J	CHIP R	240	J 1/10W	
R410			RK73GB2A473J	CHIP R	47K	J 1/10W	
R412			RK73GB2A223J	CHIP R	22K	J 1/10W	
R415			RK73GB2A223J	CHIP R	22K	J 1/10W	
R417			RK73GB2A223J	CHIP R	22K	J 1/10W	
R419			RK73GB2A223J	CHIP R	22K	J 1/10W	
R420			RK73GB2A103J	CHIP R	10K	J 1/10W	
R421			RK73GB2A223J	CHIP R	22K	J 1/10W	K3
R422			RK73GB2A223J	CHIP R	22K	J 1/10W	K1K2
R425			RK73GB2A102J	CHIP R	1.0K	J 1/10W	
R430,431			RK73GB2A473J	CHIP R	47K	J 1/10W	
R432			RK73GB2A4R7J	CHIP R	4.7	J 1/10W	
W9-12			R92-2053-05	CHIP R	0	J 1/8W	
W13,14			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W15-20			R92-2053-05	CHIP R	0	J 1/8W	
W22			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W24			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W25			R92-2053-05	CHIP R	0	J 1/8W	
W27			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W28,29			R92-2053-05	CHIP R	0	J 1/8W	
W30			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W32,33			R92-2053-05	CHIP R	0	J 1/8W	
W35			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W37			R92-1252-05	CHIP R	0 OHM	J 1/16W	
W38			R92-2053-05	CHIP R	0	J 1/8W	
W40,41			R92-2053-05	CHIP R	0	J 1/8W	
D1			S2V60*A	DIODE			
D2-4			MAZ4068N-M	ZENER DIODE			
D5			1SS133	DIODE			
D21			MAZ4082N-L	ZENER DIODE			
D22			D1F60-5063	DIODE			
D24			AM01ZNF	DIODE			
D26			DAN202U	DIODE			
D151			MAZ4062-L	ZENER DIODE			
D156			MAZ4120-L	ZENER DIODE			
D157-159			MAZ4062-L	ZENER DIODE			
D162			MAZ4062-L	ZENER DIODE			
D201,202			ED26.2B	ZENER DIODE			

Ref. No.	A d d	N e w	Parts No.	Description			Desti- nation
D203			DAN202U	DIODE			
D251			D1F60-5063	DIODE			
D252			AM01ZNF	DIODE			
D253			D1F60-5063	DIODE			
D254			AM01ZNF	DIODE			
D255-258			D1F60-5063	DIODE			
D269-271			1SS133	DIODE			
D301			MAZ4062-L	ZENER DIODE			
D307,308			MAZ4062-L	ZENER DIODE			
D309,310			MAZ4068N-M	ZENER DIODE			
D311			MAZ4062-L	ZENER DIODE			
D401			DAN202U	DIODE			
D402			B30-1567-05	LED (1608,RED)			
IC1			784225GC233A	MICROCONTROLLER IC			
IC2			E-TDA7407D	ANALOGUE IC			
IC3			BA4911-V4	ANALOGUE IC			
IC4			E-TDA7560	ANALOGUE IC			
IC6			SN74HC02NSR	MOS-IC			
IC8			PST3436UL-E	MOS-IC			
Q1-3			2SC4081	TRANSISTOR			
Q4			2SA1036K	TRANSISTOR			
Q21			2SB1565(E,F)	TRANSISTOR			
Q22			UMC2N	TRANSISTOR			
Q24			2SD1858	TRANSISTOR			
Q151			DTA114YUA	DIGITAL TRANSISTOR			
Q201			DTC143TUA	DIGITAL TRANSISTOR			
Q252			2SA1576A	TRANSISTOR			
Q350			DTA124EUA	DIGITAL TRANSISTOR			
Q351,352			DTC143TUA	DIGITAL TRANSISTOR			
Q401			2SC4081	TRANSISTOR			
TH1			PRF21BE471QB2	POSITIVE RESISTOR			
A1			X86-3760-11	FRONT-END UNIT			
CD PLAYER UNIT (X32-5400-00)							
C1			C92-0566-05	CHIP-TAN	10UF	6.3WV	
C2			CK73FB1A225K	CHIP C	2.2UF	K	
C3			CK73GB0J105K	CHIP C	1.0UF	K	
C5			CC73GCH1H020C	CHIP C	2.0PF	C	
C6			CC73GCH1H390J	CHIP C	39PF	J	
C7			CK73GB1C104K	CHIP C	0.10UF	K	
C8			CK73GB0J105K	CHIP C	1.0UF	K	
C9			CK73GB1H472K	CHIP C	4700PF	K	
C10			CK73GB1C333K	CHIP C	0.033UF	K	
C11			CK73GB1H682K	CHIP C	6800PF	K	
C12			CK73GB1H332K	CHIP C	3300PF	K	
C13			CC73GCH1H271J	CHIP C	270PF	J	
C14			CK73GB1H472K	CHIP C	4700PF	K	
C15			CK73GB1H222K	CHIP C	2200PF	K	
C16			CC73GCH1H331J	CHIP C	330PF	J	
C17,18			CK73GB1C104K	CHIP C	0.10UF	K	
C31-34			CK73GB1C104K	CHIP C	0.10UF	K	
C36			CK73FB1A225K	CHIP C	2.2UF	K	
C37-39			CK73GB1H103K	CHIP C	0.010UF	K	
C40			CK73GB1H153K	CHIP C	0.015UF	K	

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5400-00)

Ref. No.	Added	New	Parts No.	Description	Destination	Ref. No.	Added	New	Parts No.	Description	Destination
C41			CK73GB1H102K	CHIP C 1000PF K		R44,45			RK73GB2A103J	CHIP R 10K J 1/10W	
C42			CK73GB1E473K	CHIP C 0.047UF K		R46			RK73GB2A273J	CHIP R 27K J 1/10W	
C43			CK73GB1H222K	CHIP C 2200PF K		R47			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C44			CK73GB1H102K	CHIP C 1000PF K		R48			RK73GB2A103J	CHIP R 10K J 1/10W	
C45-47			CK73GB1C104K	CHIP C 0.10UF K		R49			RK73GB2A473J	CHIP R 47K J 1/10W	
C48			CK73GB1H682K	CHIP C 6800PF K		R50			RK73GB2A392J	CHIP R 3.9K J 1/10W	
C49			CK73GB1H152K	CHIP C 1500PF K		R51			RK73GB2A103J	CHIP R 10K J 1/10W	
C50			CK73GB1H472K	CHIP C 4700PF K		R52,53			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C51			CK73GB1H681K	CHIP C 680PF K		R71			RK73GB2A133J	CHIP R 13K J 1/10W	
C52			CK73GB1C104K	CHIP C 0.10UF K		R72			RK73FB2B201J	CHIP R 200 J 1/8W	
C61			CK73FB1A225K	CHIP C 2.2UF K		R81-86			RK73FB2B203J	CHIP R 20K J 1/8W	
C62			CK73GB1C104K	CHIP C 0.10UF K		R87,88			RK73FB2B331J	CHIP R 330 J 1/8W	
C71,72			CK73GB1H471K	CHIP C 470PF K		R89,90			RK73GB2A332J	CHIP R 3.3K J 1/10W	
C73,74			CC73GCH1H680J	CHIP C 68PF J		R91,92			RK73GB2A562J	CHIP R 5.6K J 1/10W	
C75,76			CK73GB1H222K	CHIP C 2200PF K		R100			RK73GB2A100J	CHIP R 10 J 1/10W	
C77,78			CK73GB1C104K	CHIP C 0.10UF K		S1,2			S68-0863-05	PUSH SWITCH	
C100-102			CK73GB1H102K	CHIP C 1000PF K		S3			S68-0862-05	PUSH SWITCH	
CN1			E40-9536-05	FLAT CABLE CONNECTOR (24PIN)		D1			DAN202U	DIODE	
CN1			E41-0193-05	FLAT CABLE CONNECTOR (24PIN)		D1			MA142WK	DIODE	
CN2			E40-9527-05	FLAT CABLE CONNECTOR (16PIN)		D2			MA8051-L	ZENER DIODE	
CN2			E41-0213-05	FLAT CABLE CONNECTOR (16PIN)		D3			DA204U	DIODE	
X1			L78-0851-05	RESONATOR (16.934MHZ)		IC1			AN22002AA	ANALOGUE IC	
CP1			R90-1019-05	MULTI-COMP 100 X2		IC2			MN6627771KP	MOS-IC	
CP2			R90-1014-05	MULTI-COMP 100 X4		IC3			BA5824FP	ANALOGUE IC	
CP3			R90-0974-05	MULT R 1.8K X4		IC4			NJM4580M1	ANALOGUE IC	
CP4			R90-0718-05	MULTI-COMP 4.7K X4		Q1			MCH6101	TRANSISTOR	
CP5			R90-0720-05	MULTI-COMP 100K X4		Q2			2SA1362(Y)	TRANSISTOR	
R1			RK73GB2A910J	CHIP R 91 J 1/10W		Q3			DTC124EUA	DIGITAL TRANSISTOR	
R2,3			RK73GB2A562J	CHIP R 5.6K J 1/10W		Q3			UN5212	DIGITAL TRANSISTOR	
R4			RK73FB2B100J	CHIP R 10 J 1/8W		Q4			DTA143XUA	DIGITAL TRANSISTOR	
R5,6			RK73GB2A332J	CHIP R 3.3K J 1/10W		Q5			2SC4081	TRANSISTOR	
R7			RK73GB2A362J	CHIP R 3.6K J 1/10W		Q6			2SA1576A	TRANSISTOR	
R8			RK73GB2A273J	CHIP R 27K J 1/10W		MECHANISM ASSY (X92-4660-00)					
R9			RK73GB2A392J	CHIP R 3.9K J 1/10W		2	1B		A10-4827-22	CHASSIS	
R10			RK73GB2A104J	CHIP R 100K J 1/10W		5	1B	*	D10-4576-63	ARM ASS'Y	
R11			RK73GB2A333J	CHIP R 33K J 1/10W		8	2A		D10-4579-13	LEVER ASS'Y	
R12			RK73GB2A244J	CHIP R 240K J 1/10W		10	3A		D10-4581-13	ARM	
R13			RK73GB2A914J	CHIP R 910K J 1/10W		11	2A		D10-4582-13	ARM	
R14			RK73GB2A104J	CHIP R 100K J 1/10W		12	3A		D10-4583-03	ARM	
R15			RK73GB2A472J	CHIP R 4.7K J 1/10W		13	3A		D10-4584-03	ARM	
R31			RK73GB2A273J	CHIP R 27K J 1/10W		14	3B		D10-4585-03	ARM	
R32			RK73GB2A103J	CHIP R 10K J 1/10W		15	2A		D10-4586-13	SLIDER	
R33			RK73GB2A183J	CHIP R 18K J 1/10W		16	3B		D10-4587-32	SLIDER	
R34			RK73GB2A103J	CHIP R 10K J 1/10W		17	3B		D10-4588-13	SLIDER	
R35			RK73GB2A393J	CHIP R 39K J 1/10W		18	3B		D10-4595-04	ARM	
R36			RK73GB2A103J	CHIP R 10K J 1/10W		19	3B		D10-4596-14	ARM	
R37			RK73GB2A622J	CHIP R 6.2K J 1/10W		22	2A		D13-2151-04	GEAR	
R38			RK73GB2A224J	CHIP R 220K J 1/10W		23	2B		D13-2152-04	GEAR	
R39			RK73GB2A104J	CHIP R 100K J 1/10W		24	3B		D13-2153-04	GEAR	
R40			RK73GB2A821J	CHIP R 820 J 1/10W		25	3B		D13-2154-04	GEAR	
R41			RK73GB2A473J	CHIP R 47K J 1/10W		26	3B		D13-2155-04	WORM	
R42			RK73GB2A472J	CHIP R 4.7K J 1/10W		27	3B		D13-2156-14	GEAR	
R43			RK73GB2A102J	CHIP R 1.0K J 1/10W		28	3B		D13-2157-04	GEAR	
						29	3B		D13-2158-04	GEAR	

K1 : KDC-225

K2 : KDC-2025

K3 : KDC-225MR

△ Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MECHANISM ASSY (X92-4660-00)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
30	3B		D13-2168-04	GEAR							
31	3B		D13-2171-04	GEAR							
32	2B		D13-2172-03	RACK (GEAR)							
33	2A		D14-0759-04	ROLLER							
35	2B		D21-2382-04	SHAFT							
36	1A		D23-0954-04	RETAINER							
37	1B		D39-0246-05	DAMPER							
38	2B		G01-3072-04	EXTENSION SPRING							
39	2A		G01-3073-04	TORSION COIL SPRING							
40	2A		G01-3074-04	EXTENSION SPRING							
41	1B		G01-3075-14	EXTENSION SPRING							
42	2A		G01-3076-04	EXTENSION SPRING							
43	1B		G01-3077-14	EXTENSION SPRING							
44	2B		G02-1399-04	FLAT SPRING							
45	2B		G02-1408-04	FLAT SPRING							
51	1A		J21-9676-22	MOUNTING HARDWARE							
52	3B		J21-9677-12	MOUNTING HARDWARE							
53	1B		J21-9678-13	MOUNTING HARDWARE							
55	1A		J90-1001-11	GUIDE							
56	1B		J90-1023-03	GUIDE							
DFPC1	3A		J84-0141-05	FLEXIBLE PRINTED WIRING BOARD							
A	2B		N09-4460-05	TAPTITE SCREW							
B	1B		N09-4472-15	MACHINE SCREW							
C	2B		N09-6004-05	MACHINE SCREW							
E	2B		N09-6007-05	MACHINE SCREW							
F	1A		N09-6051-05	TAPTITE SCREW							
G	2A		N19-2163-04	FLAT WASHER							
H	1B		N39-2020-46	PAN HEAD MACHIN SCREW							
J	1B		N09-6108-05	MACHINE SCREW							
DM1	3B		T42-1066-04	DC MOTOR ASSY (SPINDLE)							
DM2	3B		T42-1067-04	DC MOTOR ASSY (LOADING)							
DPU1	2B		X93-2010-00	OPTICAL PICKUP ASS'Y							