


EXPLANATION OF UNITS COMPOSITION

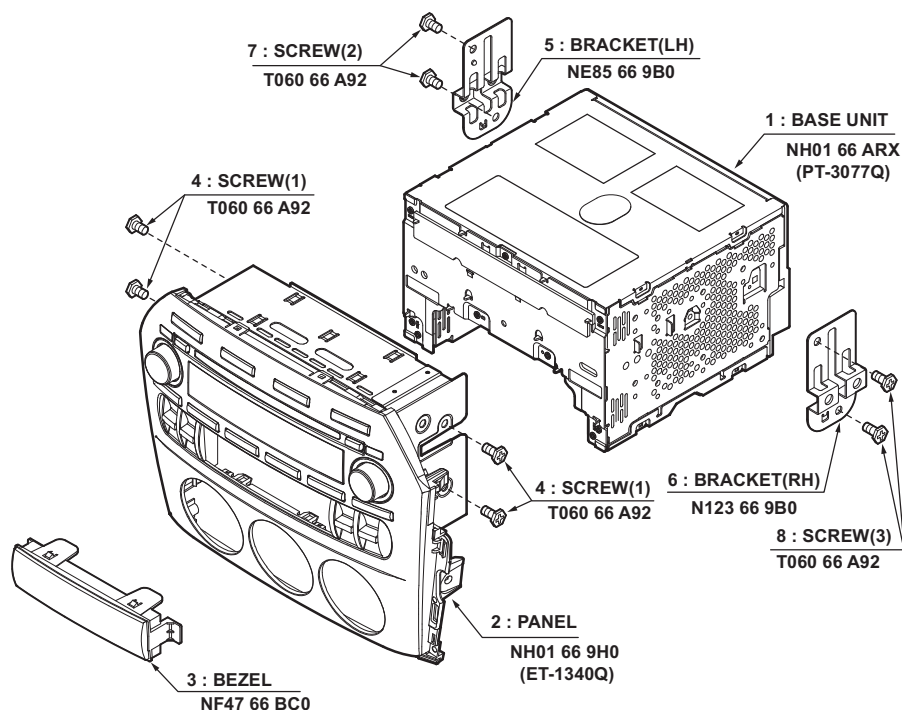


* This model is not repaired excluding BASE UNIT section.
Please other parts trouble is found and correspond by the
part exchange by Mazda Diller.


EXPLODED VIEW / PARTS LIST

BASE UNIT section (NH01 66 ARX)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1	21	313-1935-02	HEAT SINK	1
2	880-2091M	TUNER	1	22	331-4015-00	MECH-BRKT-L	1
3	074-1259-00	OUTLET SOCKET(16P)	1	23	331-4016-01	MECH-BRKT-R	1
4	074-1260-00	OUTLET SOCKET(24P)	1	24	345-8494-00	REAR RUBBER	1
5	076-0642-50	PLUG(15P)	1	25	346-0178-01	LEATHER SHEET	1
6	092-4000-51	ANT-RECEPT	1	26	347-3072-00	PAPER PART	1
7	313-1936-00	HEAT SINK	1	27	335-7615-02	DISC GUIDE	1
8	331-4012-00	REAR PLATE	1	28	039-2688-00	FPC	1
9	331-4013-00	TR-HOLDER	1	29	929-0370-83	6CD-MECHANISM	1
10	331-4031-00	EARTH BRKT	1	30	716-3552-00	MACHINE SCREW(M2.6x3)	6
11	345-5828-00	GASKET	1	31	714-2606-8B	MACHINE SCREW(M2.6X6)	19
12	347-6465-00	PROTECTOR	1	32	714-2612-89	MACHINE SCREW(M2.6x12)	3
13	714-2606-8B	MACHINE SCREW(M2.6x6)	3	33	716-0821-53	IT SCREW(M3x5)	1
14	714-3006-8B	MACHINE SCREW(M3x6)	1	34	716-1494-50	IT SCREW(M2.6x6)	5
15	778-3005-00	TAP-SCREW(3x5)	4	35	716-1888-01	REAR BOLT	1
16	305-0338-02	SIDE-CVR-L	1	36	286-6750-45	SETPLATE	1
17	305-0339-02	SIDE-CVR-R	1	37	076-3009-64	PLUG(14P)	2
18	309-0811-04	ES PLATE	1	38	074-1237-69	OUTLET SOCKET(19P)	1
19	310-1811-11	UPPER CASE	1	39	347-6465-00	PROTECTOR	1
20	311-1903-01	LOWER CASE	1				

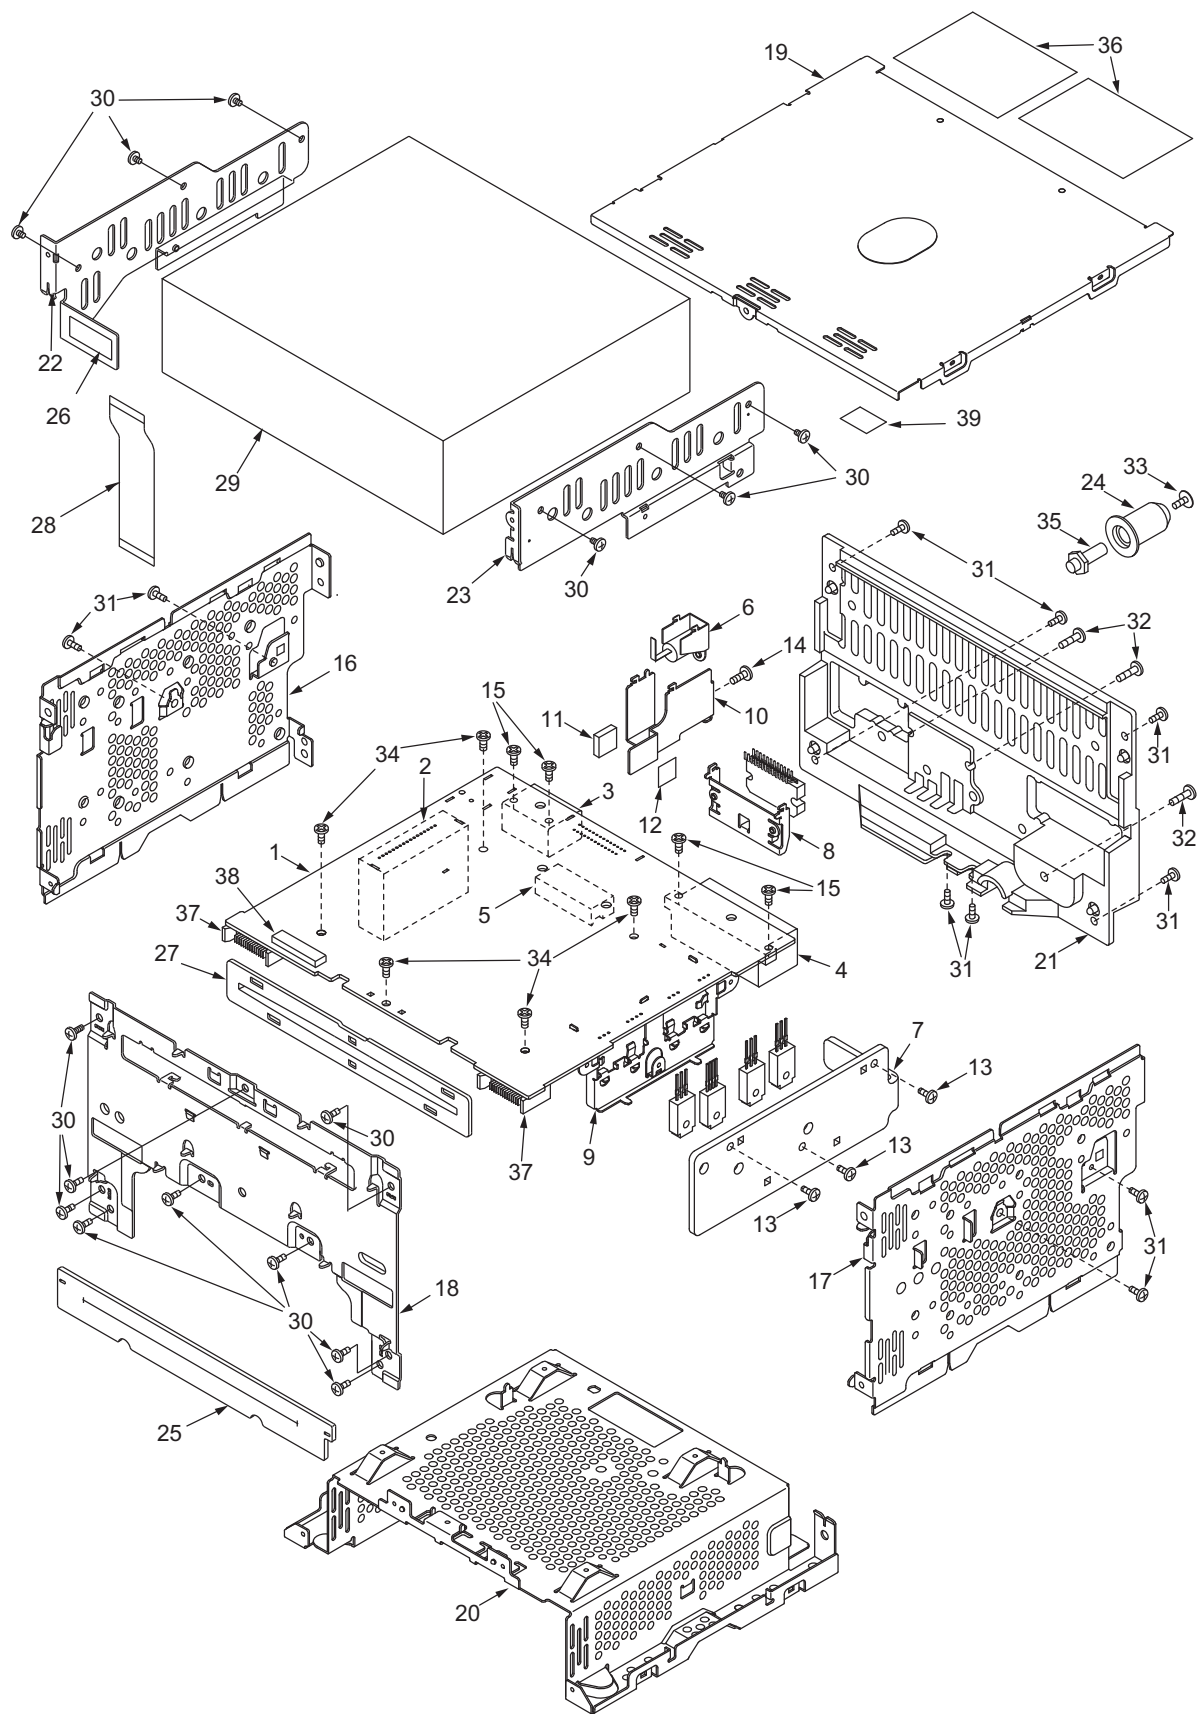

PANEL section(NH01 66 9H0)

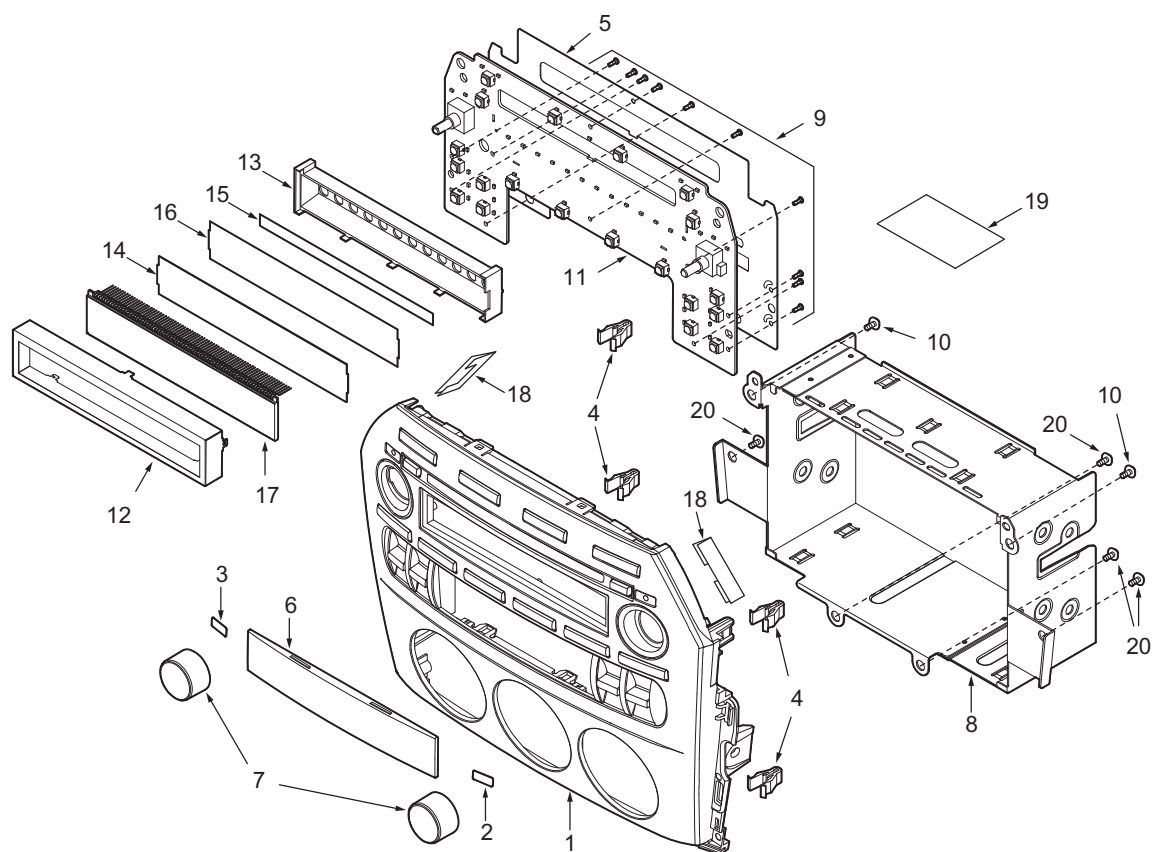

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8096-10	ESCUTCHEON-ASSY	1	11	-----	SWITCH PWB	1
2	335-7423-01	CAP(CD LOGO)	1	12	331-4014-00	LCD COVER	1
3	335-7423-21	CAP(R)	1	13	335-7429-01	LCD HOLDER	1
4	335-7583-01	CLIP	4	14	335-7430-00	COLOR FILTER	1
5	347-8126-00	PROTECTOR	1	15	347-7749-00	DOT FILM	1
6	373-1057-10	DIAL COVER	1	16	347-7750-00	FILTER	1
7	380-5622-20	KNOB	2	17	379-1336-50	LCD	1
8	300-8049-01	MTG-BRKT	1	18	347-7823-00	SPACER	2
9	716-0778-51	WAVE SCREW(2x6)	10	19	286-6750-45	SETPLATE	1
10	716-3558-00	SPECIAL SCREW(M5x6)	2	20	714-5006-8B	MACHINE SCREW(M5x6)	4

ELECTRICAL PARTS LIST

BASE UNIT : Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-4000-51	ANT-RECEPT	C419	168-1022-55	1000pF K	C537	163-1073-15	6.3V 100uF
BL101	880-2091M	TUNER	C420	168-1022-55	1000pF K	C538	168-1042-78	16V 0.1uF
C101	166-1511-50	150pF CH	C421	168-1022-55	1000pF K	C539	168-1042-78	16V 0.1uF
C102	166-2201-50	22pF CH	C424	166-1011-50	100pF CH	C540	168-1042-78	16V 0.1uF
C103	163-1073-35	16V 100uF	C425	168-1022-55	1000pF K	C541	163-1063-35	16V 10uF
C104	168-1022-55	1000pF K	C426	168-1022-55	1000pF K	C603	163-4763-35	16V 47uF
C105	163-1073-35	16V 100uF	C427	168-1042-78	16V 0.1uF	C605	163-4763-35	16V 47uF
C106	168-1022-55	1000pF K	C428	163-4753-55	35V 4.7uF	C608	178-1052-78	1uF
C107	168-1022-55	1000pF K	C429	168-1042-78	16V 0.1uF	C609	163-2273-25	10V 220uF
C108	168-1022-55	1000pF K	C430	163-4753-55	35V 4.7uF	C610	178-1042-78	0.1uF
C109	168-1022-55	1000pF K	C434	168-2232-55	0.022uF K	C611	178-1042-78	0.1uF
C110	168-1022-55	1000pF K	C435	163-1073-15	6.3V 100uF	C612	163-1063-35	16V 10uF
C111	168-1022-55	1000pF K	C437	168-4732-78	0.047uF K	C613	168-1042-78	16V 0.1uF
C112	163-4763-15	6.3V 47uF	C438	042-0423-94	10V 4.7uF	C614	042-0416-56	10V 22uF M TAN
C113	168-1042-78	16V 0.1uF	C439	163-2263-35	16V 22uF	C615	178-1052-78	1uF
C114	166-1801-50	18pF CH	C440	168-1022-55	1000pF K	C616	163-2273-25	10V 220uF
C201	168-2212-55	220pF K	C442	168-1042-78	16V 0.1uF	C617	042-0416-56	10V 22uF M TAN
C202	163-1063-35	16V 10uF	C444	168-2232-55	0.022uF K	C618	168-1042-78	16V 0.1uF
C203	168-1042-78	16V 0.1uF	C445	163-4763-15	6.3V 47uF	C619	178-1042-78	0.1uF
C204	168-1022-55	1000pF K	C446	163-1063-35	16V 10uF	C620	168-1042-78	16V 0.1uF
C205	168-1022-55	1000pF K	C447	178-1052-78	1uF	C621	163-1063-35	16V 10uF
C207	166-1011-50	100pF CH	C449	168-3332-78	0.033uF K	C622	042-0406-93	16V 22uF TAN
C209	163-2273-25	10V 220uF	C450	168-1022-55	1000pF K	C623	168-1042-78	16V 0.1uF
C210	168-1042-78	16V 0.1uF	C451	168-1022-55	1000pF K	C624	178-1042-78	0.1uF
C213	168-1042-78	16V 0.1uF	C452	168-1022-55	1000pF K	C625	163-1073-35	16V 100uF
C301	168-2212-55	220pF K	C453	168-1022-55	1000pF K	C626	168-6822-55	6800pF K
C302	168-2212-55	220pF K	C454	168-2232-55	0.022uF K	C627	163-1063-35	16V 10uF
C303	168-2212-55	220pF K	C457	178-1052-78	1uF	C628	168-1042-78	16V 0.1uF
C304	168-2212-55	220pF K	C458	168-4712-55	470pF K	C701	166-4701-50	47pF CH
C305	168-2212-55	220pF K	C459	168-1022-55	1000pF K	C702	042-1624-00	16V 4700uF
C306	168-2212-55	220pF K	C460	163-2263-35	16V 22uF	C703	172-1041-11	0.1uF
C307	168-2212-55	220pF K	C461	168-1042-78	16V 0.1uF	C704	178-1042-78	0.1uF
C308	168-2212-55	220pF K	C462	163-3373-15	6.3V 330uF	C705	168-2212-55	220pF K
C309	168-1032-55	0.01uF K	C464	163-2273-25	10V 220uF	C706	163-1053-65	50V 1uF
C310	168-2212-55	220pF K	C465	168-1042-78	16V 0.1uF	C707	168-2245-79	0.22uF Z
C311	168-2212-55	220pF K	C466	168-1042-78	16V 0.1uF	C708	168-2222-55	2200pF K
C312	166-1011-50	100pF CH	C467	168-1042-78	16V 0.1uF	C709	168-2222-55	2200pF K
C313	168-1042-78	16V 0.1uF	C469	168-1032-55	0.01uF K	C710	168-2222-55	2200pF K
C314	168-1042-78	16V 0.1uF	C470	168-5622-55	5600pF K	C711	168-2222-55	2200pF K
C315	166-1011-50	100pF CH	C471	168-5622-55	5600pF K	C712	168-2222-55	2200pF K
C317	166-1011-50	100pF CH	C472	168-3322-55	3300pF K	C713	168-2222-55	2200pF K
C318	166-1201-50	12pF CH	C473	168-3322-55	3300pF K	C714	168-2222-55	2200pF K
C319	168-2212-55	220pF K	C474	166-1011-50	100pF CH	C715	168-2222-55	2200pF K
C320	168-1042-78	16V 0.1uF	C475	166-1011-50	100pF CH	C716	168-2222-55	2200pF K
C321	163-4763-15	6.3V 47uF	C501	168-1022-55	1000pF K	C717	168-2222-55	2200pF K
C322	166-1201-50	12pF CH	C502	168-1022-55	1000pF K	C718	168-2222-55	2200pF K
C323	168-1042-78	16V 0.1uF	C503	168-1022-55	1000pF K	C719	168-2222-55	2200pF K
C324	178-1042-78	0.1uF	C504	168-1022-55	1000pF K	C720	178-1042-78	0.1uF
C325	166-1011-50	100pF CH	C505	178-2255-79	2.2uF	C721	163-1053-65	50V 1uF
C326	166-1011-50	100pF CH	C506	178-2255-79	2.2uF	C722	166-3301-50	33pF CH
C327	166-1011-50	100pF CH	C507	178-2255-79	2.2uF	C723	168-2212-55	220pF K
C328	166-1011-50	100pF CH	C508	178-2255-79	2.2uF	D201	001-0580-90	1SS352
C329	166-1011-50	100pF CH	C509	168-1042-78	16V 0.1uF	D202	001-0580-90	1SS352
C330	168-1042-78	16V 0.1uF	C510	166-5611-50	560pF CH	D203	001-0516-90	MA111
C331	163-4763-15	6.3V 47uF	C511	166-5611-50	560pF CH	D204	001-0516-90	MA111
C332	168-1032-55	0.01uF K	C512	166-2711-50	270pF	D301	001-0529-28	MA8051-L
C401	178-2255-79	2.2uF	C513	166-2711-50	270pF	D502	001-0516-90	MA111
C403	178-2255-79	2.2uF	C514	166-2201-50	22pF CH	D602	001-0580-90	1SS352
C404	178-2255-79	2.2uF	C515	166-2201-50	22pF CH	D603	001-0529-47	MA8091-M
C405	178-2255-79	2.2uF	C516	166-2201-50	22pF CH	D604	001-0529-28	MA8051-L
C406	178-2255-79	2.2uF	C517	166-2201-50	22pF CH	D605	001-0580-90	1SS352
C407	178-2255-79	2.2uF	C518	166-5611-50	560pF CH	D606	001-0516-90	MA111
C409	166-1811-50	180pF CH	C519	166-5611-50	560pF CH	D607	001-0516-90	MA111
C411	163-4753-55	35V 4.7uF	C520	166-2711-50	270pF	D608	001-2614-90	1SR-154-400
C412	166-1007-50	10pF CH	C521	166-2711-50	270pF	D610	001-0580-90	1SS352
C413	166-1007-50	10pF CH	C522	178-4742-78	0.47uF	D611	001-2614-90	1SR-154-400
C414	166-1011-50	100pF CH	C523	178-4742-78	0.47uF	D614	001-2614-90	1SR-154-400
C415	166-1011-50	100pF CH	C524	178-4742-78	0.47uF	D615	001-0584-24	MA8082
C416	168-1042-78	16V 0.1uF	C525	178-4742-78	0.47uF	D617	001-2614-90	1SR-154-400
C417	168-1022-55	1000pF K	C527	163-2263-35	16V 22uF	D618	001-2614-90	1SR-154-400
C418	168-1022-55	1000pF K	C528	163-2253-65	50V 2.2uF	D619	001-2614-90	1SR-154-400

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D620	001-2614-90	1SR-154-400	L424	010-3105-62	1k ohm/100MHz	R107	119-1011-15	1/10W 100 ohm
D622	001-2614-90	1SR-154-400	L505	010-3406-66	22uH J	R108	119-1011-15	1/10W 100 ohm
D623	001-2614-90	1SR-154-400	L703	010-8026-00	210uH	R109	119-1011-15	1/10W 100 ohm
D624	001-0598-24	MA5180	L704	010-3105-62	1k ohm/100MHz	R110	119-1011-15	1/10W 100 ohm
D625	001-2614-90	1SR-154-400	L705	010-3105-62	1k ohm/100MHz	R111	116-5691-15	1/4W 5.6 ohm
D626	001-0529-32	MA8056-M	L706	010-3105-62	1k ohm/100MHz	R112	119-4731-15	1/10W 47k ohm
D701	001-0516-90	MA111	L707	010-3105-62	1k ohm/100MHz	R201	119-1031-15	1/10W 10k ohm
D702	001-0516-90	MA111	L708	010-3105-62	1k ohm/100MHz	R202	119-1031-15	1/10W 10k ohm
D703	001-0580-90	1SS352	L709	010-3105-62	1k ohm/100MHz	R203	119-4731-15	1/10W 47k ohm
D704	001-0580-90	1SS352	L710	010-3105-62	1k ohm/100MHz	R204	119-1011-15	1/10W 100 ohm
D705	001-0580-90	1SS352	L711	010-3105-62	1k ohm/100MHz	R205	119-0000-05	1/10W 0 ohm JW
D706	001-0580-90	1SS352	L717	010-3105-62	1k ohm/100MHz	R213	119-2231-15	1/10W 22k ohm
D707	001-0529-31	MA8056-L	P201	076-3009-64	14 PIN	R214	119-2231-15	1/10W 22k ohm
D709	001-0580-90	1SS352	P202	076-3009-64	14 PIN	R215	119-3331-15	1/10W 33k ohm
D710	001-0580-90	1SS352	P701	076-0642-50	15PIN	R301	119-1031-15	1/10W 10k ohm
D711	001-0529-34	MA8062-L	Q201	125-2026-91	UN5211	R302	119-3931-15	1/10W 39k ohm
D712	001-0529-31	MA8056-L	Q202	125-0020-93	UN511300L	R303	119-4731-15	1/10W 47k ohm
D713	001-2015-00	RL253	Q203	198-3018-00	2SK3018	R304	116-5611-15	1/4W 560 ohm
D715	001-0580-90	1SS352	Q204	125-2026-95	UN521N	R305	119-1021-15	1/10W 1k ohm
D716	001-0598-24	MA5180	Q205	198-3018-00	2SK3018	R306	119-1021-15	1/10W 1k ohm
D717	001-0580-90	1SS352	Q206	125-2026-95	UN521N	R307	119-1021-15	1/10W 1k ohm
D718	001-0608-90	D1FS4	Q301	125-2026-91	UN5211	R308	119-1021-15	1/10W 1k ohm
D719	001-0580-90	1SS352	Q401	125-7005-90	PHK04P02T	R309	119-1021-15	1/10W 1k ohm
D720	001-0580-90	1SS352	Q402	125-2026-91	UN5211	R310	119-1011-15	1/10W 100 ohm
D721	001-0580-90	1SS352	Q404	125-2026-91	UN5211	R311	119-1021-15	1/10W 1k ohm
D723	001-0580-90	1SS352	Q406	125-2026-91	UN5211	R312	119-1021-15	1/10W 1k ohm
D724	001-0529-34	MA8062-L	Q407	125-2026-91	UN5211	R313	119-1021-15	1/10W 1k ohm
D725	001-0516-90	MA111	Q408	125-2026-91	UN5211	R314	119-4721-15	1/10W 4.7k ohm
D750	001-0516-90	MA111	Q409	125-2026-91	UN5211	R315	119-1011-15	1/10W 10k ohm
IC101	051-6212-08	LC72191JM-TLM	Q604	190-1736-00	2SA1736	R316	119-4721-15	1/10W 4.7k ohm
IC301	051-5440-08	S-80931CNMC-G81	Q605	125-2026-91	UN5211	R317	119-1011-15	1/10W 100 ohm
IC302	051-9419-08	BR24L02FVM-WTR	Q606	133-1766-00	2SD1766	R318	119-1011-15	1/10W 100 ohm
IC303	052-3195-05	M30853FHGP	Q607	125-2026-91	UN5211	R319	119-1021-15	1/10W 1k ohm
IC401	051-6706-20	impossible of exchange	Q608	192-2712-50	2SC2712 Y,G,L	R320	119-4731-15	1/10W 47k ohm
IC501	051-3019-90	NJM2060V	Q609	125-0020-91	UN5111	R321	119-1021-15	1/10W 1k ohm
IC502	051-2055-00	TDA8593J/N3	Q610	192-2712-50	2SC2712 Y,G,L	R322	119-4731-15	1/10W 47k ohm
IC602	051-3340-00	LD1085P	Q611	101-1274-00	2SB1274	R323	119-1011-15	1/10W 100 ohm
IC603	051-3343-00	NJM2396F3	Q612	191-1197-50	2SB1197K Q,R	R324	119-1011-15	1/10W 100 ohm
IC604	051-3340-00	LD1085P	Q613	125-2026-91	UN5211	R325	119-4731-15	1/10W 47k ohm
IC605	051-3263-90	NJU7200U33	Q614	191-1205-65	2SB1205 S,T	R326	119-4731-15	1/10W 47k ohm
IC606	051-3341-90	BD3931FP	Q615	192-2712-50	2SC2712 Y,G,L	R327	119-4721-15	1/10W 4.7k ohm
IC607	051-5441-08	BD4828G-TR	Q616	192-2712-50	2SC2712 Y,G,L	R328	119-4721-15	1/10W 4.7k ohm
J202	074-1237-69	19PIN	Q617	191-1197-50	2SB1197K Q,R	R329	119-4731-15	1/10W 47k ohm
J701	074-1260-00	24PIN	Q618	125-2026-91	UN5211	R337	119-1031-15	1/10W 10k ohm
J702	074-1259-00	16PIN	Q619	191-1205-65	2SB1205 S,T	R338	119-1031-15	1/10W 10k ohm
L101	010-2003-04	76uH	Q620	192-2712-50	2SC2712 Y,G,L	R339	119-2231-15	1/10W 22k ohm
L102	010-4044-00	27mH	Q621	190-1162-00	2SA1162	R340	119-1021-15	1/10W 1k ohm
L103	010-3105-62	1k ohm/100MHz	Q622	125-2026-91	UN5211	R342	119-4731-15	1/10W 47k ohm
L201	010-2198-59	4.7uH	Q623	190-1736-00	2SA1736	R344	119-4731-15	1/10W 47k ohm
L202	010-3406-66	22uH J	Q624	125-2026-91	UN5211	R346	119-1021-15	1/10W 1k ohm
L301	010-3406-66	22uH J	Q625	190-1736-00	2SA1736	R348	119-1021-15	1/10W 1k ohm
L302	010-3406-66	22uH J	Q626	125-2026-91	UN5211	R351	119-4731-15	1/10W 47k ohm
L401	010-3105-62	1k ohm/100MHz	Q627	190-1736-00	2SA1736	R352	119-1021-15	1/10W 1k ohm
L402	010-3105-62	1k ohm/100MHz	Q628	125-2026-91	UN5211	R353	119-4731-15	1/10W 47k ohm
L403	010-3105-62	1k ohm/100MHz	Q629	125-0020-93	UN511300L	R354	119-1021-15	1/10W 1k ohm
L404	010-3105-62	1k ohm/100MHz	Q631	193-1758-00	2SD1758TK P,Q,R	R355	119-1011-15	1/10W 100 ohm
L405	010-3105-62	1k ohm/100MHz	Q632	191-0709-50	2SB709AR,SL	R356	119-1011-15	1/10W 100 ohm
L406	010-3105-62	1k ohm/100MHz	Q633	191-0709-50	2SB709AR,SL	R357	119-1011-15	1/10W 100 ohm
L407	010-3104-54	600 ohm/100MHz	Q635	191-0709-50	2SB709AR,SL	R358	119-1011-15	1/10W 100 ohm
L409	010-3105-62	1k ohm/100MHz	Q701	192-2712-50	2SC2712 Y,G,L	R359	119-1021-15	1/10W 1k ohm
L410	010-3105-62	1k ohm/100MHz	Q702	125-2026-91	UN5211	R360	119-1021-15	1/10W 1k ohm
L411	010-3105-62	1k ohm/100MHz	Q703	192-2712-50	2SC2712 Y,G,L	R361	119-1031-15	1/10W 10k ohm
L412	010-3105-62	1k ohm/100MHz	Q704	192-2712-50	2SC2712 Y,G,L	R362	119-1031-15	1/10W 10k ohm
L413	010-3105-62	1k ohm/100MHz	Q705	192-2712-50	2SC2712 Y,G,L	R363	119-4731-15	1/10W 47k ohm
L414	010-3105-62	1k ohm/100MHz	Q706	192-2712-50	2SC2712 Y,G,L	R364	119-4731-15	1/10W 47k ohm
L415	010-3105-62	1k ohm/100MHz	Q707	192-2712-50	2SC2712 Y,G,L	R365	119-4731-15	1/10W 47k ohm
L416	010-3105-62	1k ohm/100MHz	Q708	192-2712-50	2SC2712 Y,G,L	R366	119-4731-15	1/10W 47k ohm
L417	010-3105-62	1k ohm/100MHz	Q709	192-2712-50	2SC2712 Y,G,L	R367	119-2231-15	1/10W 22k ohm
L418	010-3105-62	1k ohm/100MHz	Q710	191-1197-50	2SB1197K Q,R	R368	119-4731-15	1/10W 47k ohm
L420	010-3105-62	1k ohm/100MHz	R102	119-2741-15	1/10W 270k ohm	R369	119-4731-15	1/10W 47k ohm
L421	010-3104-54	600 ohm/100MHz	R103	119-1041-15	1/10W 100k ohm	R370	119-4731-15	1/10W 47k ohm
L422	010-3105-62	1k ohm/100MHz	R104	119-1011-15	1/10W 100 ohm	R371	119-4721-15	1/10W 4.7k ohm
L423	010-2198-51	0.22uH	R105	119-6821-15	1/10W 6.8k ohm	R372	119-4721-15	1/10W 4.7k ohm
			R106	119-6821-15	1/10W 6.8k ohm	R373	119-4721-15	1/10W 4.7k ohm


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R374	119-1031-15	1/10W 10k ohm	R528	119-4721-15	1/10W 4.7k ohm	R658	116-4711-15	1/4W 470 ohm
R375	119-4721-15	1/10W 4.7k ohm	R529	119-4721-15	1/10W 4.7k ohm	R659	119-1021-15	1/10W 1k ohm
R376	119-4721-15	1/10W 4.7k ohm	R535	119-1011-15	1/10W 100 ohm	R661	116-4791-15	1/4W 4.7 ohm
R377	119-4731-15	1/10W 47k ohm	R536	119-1011-15	1/10W 100 ohm	R662	116-4791-15	1/4W 4.7 ohm
R401	032-0140-63	1/10W 27k ohm F	R537	117-0000-05	1/8W 0 ohm JW	R663	116-5691-15	1/4W 5.6 ohm
R402	032-0140-63	1/10W 27k ohm F	R538	117-0000-05	1/8W 0 ohm JW	R664	116-5691-15	1/4W 5.6 ohm
R403	119-2731-15	1/10W 27k ohm	R539	117-0000-05	1/8W 0 ohm JW	R665	116-5691-15	1/4W 5.6 ohm
R404	119-2731-15	1/10W 27k ohm	R540	117-0000-05	1/8W 0 ohm JW	R666	116-5691-15	1/4W 5.6 ohm
R406	032-0140-50	1/10W 10k ohm F	R541	117-0000-05	1/8W 0 ohm JW	R667	116-5691-15	1/4W 5.6 ohm
R407	032-0140-50	1/10W 10k ohm F	R542	117-0000-05	1/8W 0 ohm JW	R701	119-2231-15	1/10W 22k ohm
R408	032-0140-50	1/10W 10k ohm F	R543	117-0000-05	1/8W 0 ohm JW	R702	119-2231-15	1/10W 22k ohm
R409	032-0140-50	1/10W 10k ohm F	R544	117-0000-05	1/8W 0 ohm JW	R703	119-2231-15	1/10W 22k ohm
R410	119-2201-15	1/10W 22 ohm	R553	119-0000-05	1/10W 0 ohm JW	R704	119-2231-15	1/10W 22k ohm
R412	119-0000-05	1/10W 0 ohm JW	R554	119-0000-05	1/10W 0 ohm JW	R705	119-2231-15	1/10W 22k ohm
R413	119-1031-15	1/10W 10k ohm	R555	119-0000-05	1/10W 0 ohm JW	R706	119-2231-15	1/10W 22k ohm
R414	119-1021-15	1/10W 1k ohm	R556	119-0000-05	1/10W 0 ohm JW	R707	119-4731-15	1/10W 47k ohm
R416	119-1031-15	1/10W 10k ohm	R602	119-1031-15	1/10W 10k ohm	R708	116-1021-15	1/4W 1k ohm
R417	119-0000-05	1/10W 0 ohm JW	R605	119-1031-15	1/10W 10k ohm	R709	119-2231-15	1/10W 22k ohm
R418	119-1031-15	1/10W 10k ohm	R606	116-4711-15	1/4W 470 ohm	R710	116-1021-15	1/4W 1k ohm
R419	119-0000-05	1/10W 0 ohm JW	R607	119-1031-15	1/10W 10k ohm	R711	119-2231-15	1/10W 22k ohm
R420	119-1031-15	1/10W 10k ohm	R608	119-3311-15	1/10W 330 ohm	R712	116-2211-15	1/4W 220 ohm
R421	119-1031-15	1/10W 10k ohm	R609	032-0140-93	1/10W 2k ohm F	R713	119-2231-15	1/10W 22k ohm
R423	119-1001-15	1/10W 10 ohm	R610	032-0140-98	1/10W 330 ohm F	R714	116-2211-15	1/4W 220 ohm
R425	119-0000-05	1/10W 0 ohm JW	R612	116-1011-15	1/4W 100 ohm	R715	116-1021-15	1/4W 1k ohm
R426	032-0140-50	1/10W 10k ohm F	R613	117-1021-15	1/8W 1k ohm	R716	116-1021-15	1/4W 1k ohm
R427	032-0140-50	1/10W 10k ohm F	R614	119-1031-15	1/10W 10k ohm	R717	119-1041-15	1/10W 100k ohm
R429	032-0140-50	1/10W 10k ohm F	R615	116-1821-15	1/4W 1.8k ohm	R718	116-2211-15	1/4W 220 ohm
R430	032-0140-50	1/10W 10k ohm F	R616	119-1531-15	1/10W 15k ohm	R719	116-2211-15	1/4W 220 ohm
R431	119-0000-05	1/10W 0 ohm JW	R617	116-1821-15	1/4W 1.8k ohm	R720	116-1021-15	1/4W 1k ohm
R436	119-0000-05	1/10W 0 ohm JW	R618	116-2291-15	1/4W 2.2 ohm	R721	119-2231-15	1/10W 22k ohm
R440	119-1031-15	1/10W 10k ohm	R619	119-1021-15	1/10W 1k ohm	R722	119-1021-15	1/10W 1k ohm
R441	119-1031-15	1/10W 10k ohm	R620	116-1821-15	1/4W 1.8k ohm	R723	119-4721-15	1/10W 4.7k ohm
R442	119-1011-15	1/10W 100 ohm	R621	119-1031-15	1/10W 10k ohm	R725	119-1031-15	1/10W 10k ohm
R443	119-1011-15	1/10W 100 ohm	R622	119-1031-15	1/10W 10k ohm	R726	119-6821-15	1/10W 6.8k ohm
R446	119-1031-15	1/10W 10k ohm	R623	116-1821-15	1/4W 1.8k ohm	R727	119-5611-15	1/10W 560 ohm
R449	119-1031-15	1/10W 10k ohm	R624	119-4721-15	1/10W 4.7k ohm	R728	116-1011-15	1/4W 100 ohm
R451	119-8221-15	1/10W 8.2k ohm	R625	119-1031-15	1/10W 10k ohm	R729	116-1531-15	1/4W 15k ohm
R452	119-1011-15	1/10W 100 ohm	R626	119-2221-15	1/10W 2.2k ohm	R730	116-1021-15	1/4W 1k ohm
R453	119-1001-15	1/10W 10 ohm	R627	119-1031-15	1/10W 10k ohm	R731	116-1021-15	1/4W 1k ohm
R457	119-0000-05	1/10W 0 ohm JW	R628	119-1031-15	1/10W 10k ohm	R732	116-1011-15	1/4W 100 ohm
R460	119-0000-05	1/10W 0 ohm JW	R629	119-4731-15	1/10W 47k ohm	R733	116-1021-15	1/4W 1k ohm
R501	119-1021-15	1/10W 1k ohm	R630	032-0140-93	1/10W 2k ohm F	R734	116-1021-15	1/4W 1k ohm
R502	119-1021-15	1/10W 1k ohm	R631	032-0140-98	1/10W 330 ohm F	R735	119-5611-15	1/10W 560 ohm
R503	119-1021-15	1/10W 1k ohm	R632	119-1031-15	1/10W 10k ohm	R736	116-2291-15	1/4W 2.2 ohm
R504	119-1021-15	1/10W 1k ohm	R633	116-2221-15	1/4W 2.2k ohm	R737	119-1031-15	1/10W 10k ohm
R505	119-1031-15	1/10W 10k ohm	R634	116-2221-15	1/4W 2.2k ohm	R738	119-1031-15	1/10W 10k ohm
R506	119-1031-15	1/10W 10k ohm	R635	116-2221-15	1/4W 2.2k ohm	R739	116-1021-15	1/4W 1k ohm
R507	119-1031-15	1/10W 10k ohm	R636	119-4731-15	1/10W 47k ohm	R740	119-0000-05	1/10W 0 ohm JW
R508	119-1031-15	1/10W 10k ohm	R637	119-1031-15	1/10W 10k ohm	R741	117-4721-15	1/8W 4.7k ohm
R509	119-1031-15	1/10W 10k ohm	R638	116-2221-15	1/4W 2.2k ohm	R743	119-0000-05	1/10W 0 ohm JW
R510	119-1031-15	1/10W 10k ohm	R639	119-4721-15	1/10W 4.7k ohm	R744	119-0000-05	1/10W 0 ohm JW
R511	119-0000-05	1/10W 0 ohm JW	R640	119-1031-15	1/10W 10k ohm	R745	119-0000-05	1/10W 0 ohm JW
R512	119-0000-05	1/10W 0 ohm JW	R641	119-4721-15	1/10W 4.7k ohm	R746	119-0000-05	1/10W 0 ohm JW
R513	119-1031-15	1/10W 10k ohm	R642	116-1221-15	1/4W 1.2k ohm	R747	119-0000-05	1/10W 0 ohm JW
R514	119-1031-15	1/10W 10k ohm	R643	116-4721-15	1/4W 4.7k ohm	R750	119-2731-15	1/10W 27k ohm
R515	119-1051-15	1/10W 1M ohm	R644	116-5691-15	1/4W 5.6 ohm	SUP101	060-0122-91	DSP-141N-S00B
R516	119-1051-15	1/10W 1M ohm	R645	116-4721-15	1/4W 4.7k ohm	TC101	004-1580-10	30pF TRIMMER
R517	119-1051-15	1/10W 1M ohm	R646	119-1241-15	1/10W 120k ohm	TM101	073-0762-90	TERMINAL
R518	119-1051-15	1/10W 1M ohm	R647	119-7531-15	1/10W 75k ohm	TM301	073-0762-90	TERMINAL
R519	119-1031-15	1/10W 10k ohm	R648	116-1221-15	1/4W 1.2k ohm	TM401	073-0762-90	TERMINAL
R520	119-1031-15	1/10W 10k ohm	R649	116-2291-15	1/4W 2.2 ohm	TM701	073-0762-90	TERMINAL
R521	119-0000-05	1/10W 0 ohm JW	R650	116-2291-15	1/4W 2.2 ohm	X101	061-3515-90	7.2MHz
R522	119-0000-05	1/10W 0 ohm JW	R651	116-2291-15	1/4W 2.2 ohm	X301	061-3541-90	CRYSTAL 10MHz
R523	119-1031-15	1/10W 10k ohm	R655	116-4721-15	1/4W 4.7k ohm	X401	061-3537-90	41.6MHz
R524	119-1031-15	1/10W 10k ohm	R656	116-1221-15	1/4W 1.2k ohm	PWB	039-3013-20	PWB(WITHOUT COMPONENT)
R525	119-1021-15	1/10W 1k ohm	R657	116-4711-15	1/4W 470 ohm			

PANEL : Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	168-1032-55	0.01uF K	D911	001-0529-38	MA8068-M	R850	119-4721-15	1/10W 4.7k ohm
C802	163-4763-35	16V47uF	D912	001-0529-38	MA8068-M	R851	119-4721-15	1/10W 4.7k ohm
C803	168-2212-55	220pF K	D913	001-0529-38	MA8068-M	R852	119-1041-15	1/10W 100k ohm
C804	168-1042-78	16V 0.1uF	D914	001-0529-38	MA8068-M	R853	119-1041-15	1/10W 100k ohm
C805	168-1032-55	0.01uF K	D915	001-0529-38	MA8068-M	R854	119-4731-15	1/10W 47k ohm
C810	168-1042-78	16V 0.1uF	D916	001-0529-38	MA8068-M	R855	119-4721-15	1/10W 4.7k ohm
C815	168-1042-78	16V 0.1uF	IC801	052-7077-00	MB89475PFV-G-115	R856	119-4721-15	1/10W 4.7k ohm
C911	168-1042-78	16V 0.1uF	IC911	051-6081-00	LC75810T	R857	119-1041-15	1/10W 100k ohm
C912	168-1042-78	16V 0.1uF	J301	076-6000-54	4P	R858	119-1041-15	1/10W 100k ohm
C913	168-1042-78	16V 0.1uF	J302	076-6000-54	4P	R859	119-4731-15	1/10W 47k ohm
C914	168-1042-78	16V 0.1uF	J801	074-3012-64	14P	R860	119-4731-15	1/10W 47k ohm
C915	168-1042-78	16V 0.1uF	J901	074-3012-64	14P	R861	119-1021-15	1/10W 1k ohm
C916	168-4712-55	470pF K	LCD901	379-1336-50	INDICATOR(LCD)	R862	119-1021-15	1/10W 1k ohm
C920	168-4722-55	4700pF K	Q801	190-1736-00	2SA1736	R863	119-4731-15	1/10W 47k ohm
D800	001-0529-32	MA8056-M	Q802	192-2712-50	2SC2712Y.G.L	R864	119-1021-15	1/10W 1k ohm
D801	001-7089-90	FV1112H-740-TR	Q803	190-1736-00	2SA1736	R865	119-1021-15	1/10W 1k ohm
D802	001-7089-90	FV1112H-740-TR	Q804	125-2004-92	RN1402	R866	119-4731-15	1/10W 47k ohm
D804	001-7089-90	FV1112H-740-TR	Q805	190-1736-00	2SA1736	R867	119-4731-15	1/10W 47k ohm
D805	001-7089-90	FV1112H-740-TR	Q806	125-2004-92	RN1402	R868	119-1021-15	1/10W 1k ohm
D806	001-7089-90	FV1112H-740-TR	Q807	125-2004-92	RN1402	R869	119-1021-15	1/10W 1k ohm
D807	001-7089-90	FV1112H-740-TR	Q808	192-2712-50	2SC2712Y.G.L	R871	119-1031-15	1/10W 10k ohm
D809	001-7089-90	FV1112H-740-TR	Q811	192-3265-00	2SC3265OY	R872	119-1031-15	1/10W 10k ohm
D810	001-7089-90	FV1112H-740-TR	Q812	192-2712-50	2SC2712Y.G.L	R873	119-4731-15	1/10W 47k ohm
D811	001-7089-90	FV1112H-740-TR	Q813	192-3265-00	2SC3265OY	R874	119-1031-15	1/10W 10k ohm
D812	001-7089-90	FV1112H-740-TR	Q815	192-2712-50	2SC2712Y.G.L	R876	119-1031-15	1/10W 10k ohm
D813	001-7089-90	FV1112H-740-TR	Q816	125-9003-92	IMD3	R878	119-1031-15	1/10W 10k ohm
D814	001-7089-90	FV1112H-740-TR	Q818	192-2712-50	2SC2712Y.G.L	R879	116-1231-15	1/4W 12k ohm
D815	001-7089-90	FV1112H-740-TR	R801	119-2231-15	1/10W 22k ohm	R880	119-4721-15	1/10W 4.7k ohm
D816	001-7089-90	FV1112H-740-TR	R802	119-2231-15	1/10W 22k ohm	R881	119-1031-15	1/10W 10k ohm
D817	001-7089-90	FV1112H-740-TR	R803	119-3331-15	1/10W 33k ohm	R883	119-4721-15	1/10W 4.7k ohm
D818	001-7089-90	FV1112H-740-TR	R804	119-3331-15	1/10W 33k ohm	R885	119-0000-05	1/10W 0 ohm JW
D819	001-7089-90	FV1112H-740-TR	R805	117-6811-15	1/8W 680 ohm	R901	119-1021-15	1/10W 1k ohm
D820	001-7089-90	FV1112H-740-TR	R806	119-2221-15	1/10W 2.2k ohm	R902	119-1021-15	1/10W 1k ohm
D821	001-7089-90	FV1112H-740-TR	R807	119-1031-15	1/10W 10k ohm	R903	119-1021-15	1/10W 1k ohm
D822	001-7089-90	FV1112H-740-TR	R808	116-5621-15	1/4W 5.6k ohm	R904	119-1021-15	1/10W 1k ohm
D823	001-7089-90	FV1112H-740-TR	R809	119-1031-15	1/10W 10k ohm	R905	119-1011-15	1/10W 100 ohm
D824	001-7089-90	FV1112H-740-TR	R810	116-2421-15	1/4W 2.4k ohm	R906	119-1011-15	1/10W 100 ohm
D825	001-7089-90	FV1112H-740-TR	R811	119-2221-15	1/10W 2.2k ohm	R907	119-4731-15	1/10W 47k ohm
D826	001-7089-90	FV1112H-740-TR	R812	116-5621-15	1/4W 5.6k ohm	R908	119-1031-15	1/10W 10k ohm
D827	001-7089-90	FV1112H-740-TR	R813	116-3921-15	1/4W 3.9k ohm	R909	119-1021-15	1/10W 1k ohm
D828	001-7089-90	FV1112H-740-TR	R814	116-2721-15	1/4W 2.7k ohm	R910	119-1021-15	1/10W 1k ohm
D829	001-7089-90	FV1112H-740-TR	R815	116-2221-15	1/4W 2.2k ohm	R911	119-1021-15	1/10W 1k ohm
D830	001-7089-90	FV1112H-740-TR	R816	119-1031-15	1/10W 10k ohm	R912	119-4721-15	1/10W 4.7k ohm
D831	001-7089-90	FV1112H-740-TR	R817	116-2221-15	1/4W 2.2k ohm	R913	119-4721-15	1/10W 4.7k ohm
D832	001-7089-90	FV1112H-740-TR	R818	116-2221-15	1/4W 2.2k ohm	R914	119-4721-15	1/10W 4.7k ohm
D833	001-7089-90	FV1112H-740-TR	R819	116-1821-15	1/4W 1.8k ohm	R915	119-4721-15	1/10W 4.7k ohm
D834	001-7089-90	FV1112H-740-TR	R820	116-3921-15	1/4W 3.9k ohm	R916	119-1021-15	1/10W 1k ohm
D837	001-7089-90	FV1112H-740-TR	R821	116-3321-15	1/4W 3.3k ohm	S801	013-6202-52	SKPMBJE010
D845	001-7089-90	FV1112H-740-TR	R822	116-3921-15	1/4W 3.9k ohm	S802	013-6202-52	SKPMBJE010
D846	001-7089-90	FV1112H-740-TR	R823	116-3921-15	1/4W 3.9k ohm	S803	013-6202-52	SKPMBJE010
D851	001-7089-90	FV1112H-740-TR	R824	116-3921-15	1/4W 3.9k ohm	S804	013-6202-52	SKPMBJE010
D852	001-7089-90	FV1112H-740-TR	R825	116-1031-15	1/4W 10k ohm	S805	013-6202-52	SKPMBJE010
D853	001-7089-90	FV1112H-740-TR	R826	116-3921-15	1/4W 3.9k ohm	S806	013-6205-51	SKPMAME010
D854	001-7089-90	FV1112H-740-TR	R827	116-1031-15	1/4W 10k ohm	S807	013-6205-51	SKPMAME010
D855	001-7089-90	FV1112H-740-TR	R828	116-3921-15	1/4W 3.9k ohm	S808	013-6202-52	SKPMBJE010
D856	001-7089-90	FV1112H-740-TR	R829	116-1231-15	1/4W 12k ohm	S809	013-6202-52	SKPMBJE010
D857	001-7089-90	FV1112H-740-TR	R830	116-6821-15	1/4W 6.8k ohm	S810	013-6202-52	SKPMBJE010
D858	001-7089-90	FV1112H-740-TR	R831	119-1031-15	1/10W 10k ohm	S811	013-6202-52	SKPMBJE010
D859	001-7089-90	FV1112H-740-TR	R832	119-4721-15	1/10W 4.7k ohm	S812	013-6202-52	SKPMBJE010
D860	001-7089-90	FV1112H-740-TR	R833	116-8221-15	1/4W 8.2k ohm	S813	013-6202-52	SKPMBJE010
D861	001-0516-90	MA111	R834	119-4721-15	1/10W 4.7k ohm	S814	013-6205-51	SKPMAME010
D862	001-0516-90	MA111	R835	119-2221-15	1/10W 2.2k ohm	S815	013-6205-51	SKPMAME010
D863	001-0516-90	MA111	R836	116-8221-15	1/4W 8.2k ohm	S816	013-6205-51	SKPMAME010
D864	001-0516-90	MA111	R837	116-3321-15	1/4W 3.3k ohm	S817	013-6205-51	SKPMAME010
D865	001-0516-90	MA111	R838	116-6821-15	1/4W 6.8k ohm	S818	013-6205-51	SKPMAME010
D867	001-0516-90	MA111	R839	119-1031-15	1/10W 10k ohm	S819	013-6205-51	SKPMAME010
D868	001-0516-90	MA111	R840	119-1031-15	1/10W 10k ohm	S820	013-6202-52	SKPMBJE010
D869	001-0516-90	MA111	R842	116-8221-15	1/4W 8.2k ohm	VR801	016-0014-05	VR W-SHAFT
D870	001-0516-90	MA111	R844	116-8221-15	1/4W 8.2k ohm	VR802	016-0014-05	VR W-SHAFT
D871	001-0516-90	MA111	R845	116-1031-15	1/4W 10k ohm	X801	060-1537-90	CSTCE12M5G52
D872	001-0516-90	MA111	R846	116-1031-15	1/4W 10k ohm	PWB	039-2687-20	PWB(WITHOUT COMPONENT)
D873	001-0516-90	MA111	R848	119-1021-15	1/10W 1k ohm			
D874	001-0516-90	MA111	R849	119-4731-15	1/10W 47k ohm			

EXPLODED VIEW / PARTS LIST

Main section

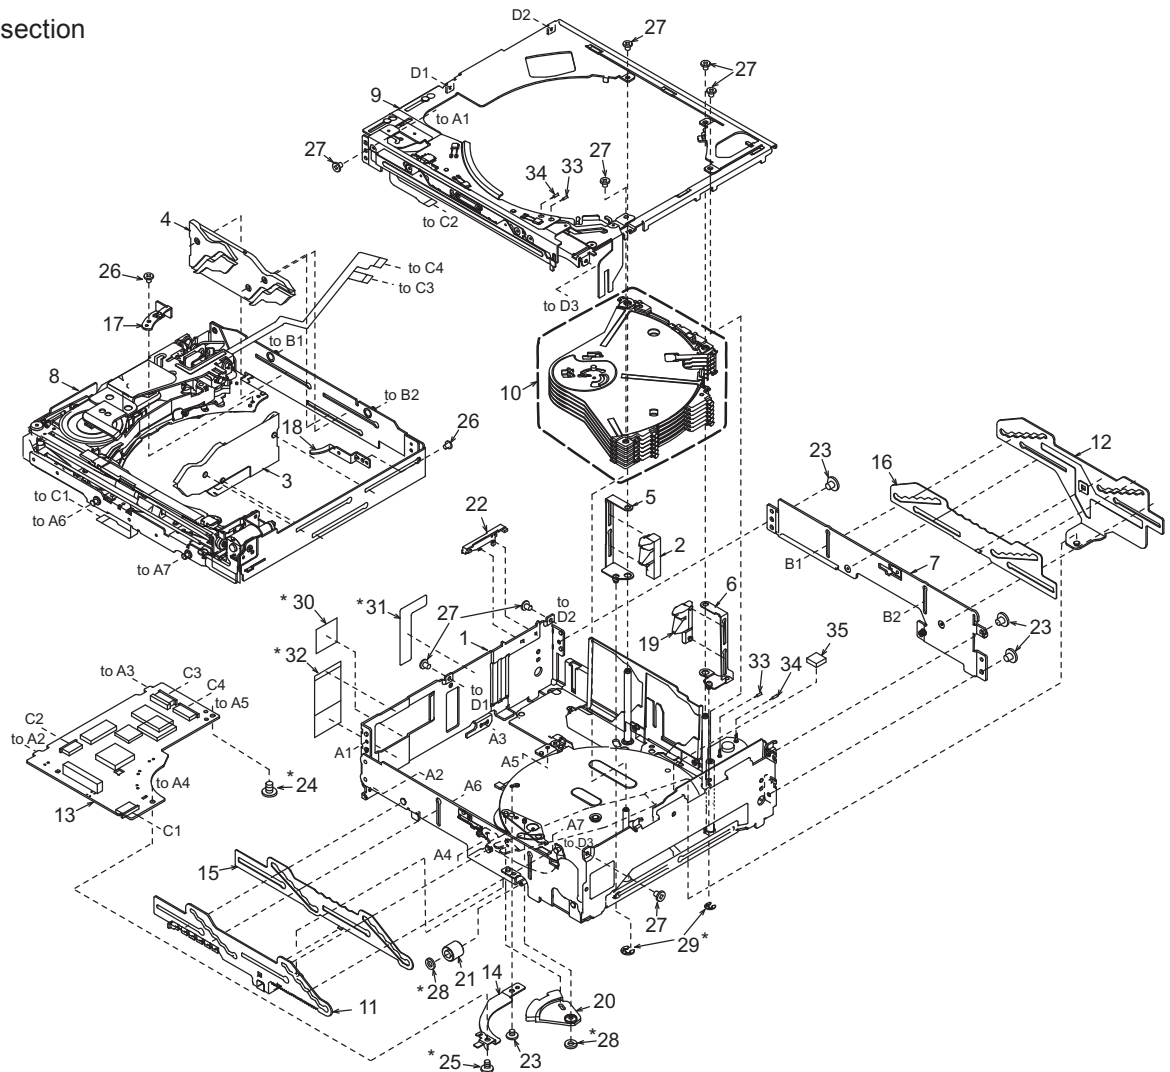


Note) When removed these parts(No.*24,*25,*28,*29,*30,*31,*32), please do not reuse the parts.

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1792-27	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	966-1806-20	DH-SEL-ASSY S	1
4	966-1807-20	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-0671-23	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1785-22	V-DRIVE-CH UNIT	1
9	966-1748-27	UPPER UNIT ASSY	1
10	HBS-602-100	DISCHOLDER UNIT	1
11	966-1725-23	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY	1
13	HBS-559-100	CD-PWB-ASSY(2787-20)	1
14	620-1640-20	SW-H-PLATE	1
15	620-1661-22	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	621-1634-23	DISC STOPPER R	1
20	621-1636-24	SW LINK	1
21	621-1738-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW(M2.0x2.0)	4
24	716-1850-02	SCREW(M2.0x2.0)	1
25	716-1851-02	SCREW(M2.0x3.0)	1
26	716-3450-00	SCREW(M1.7x2.0)	2
27	716-3451-01	SCREW(M1.7x2.5)	8
28	746-0761-00	WASHER	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT-WIRE	1
34	802-4921-60	VINYL-COAT-WIRE	1
35	345-5824-00	RUBBER PART	1


Lower unit assy section

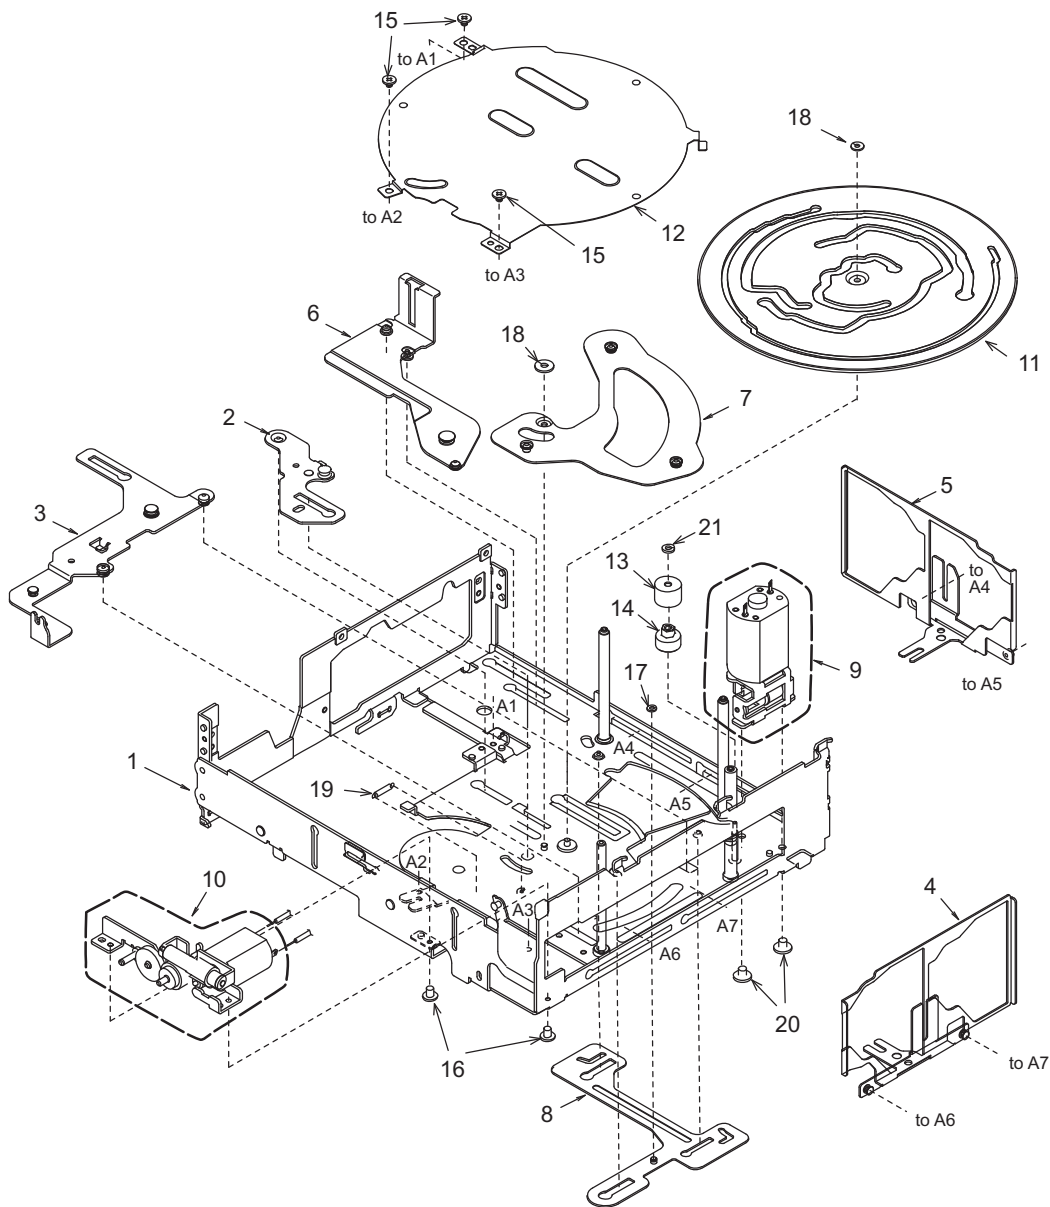

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1793-21	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-0662-22	DS-SP-ASSY A	1
4	966-0660-22	DH-SP-ASSY S	1
5	966-0661-22	DH-SP-ASSY R	1
6	966-0677-23	D-SHT PL-B-ASSY	1
7	966-0659-21	DH-SP-ASSY B	1
8	966-0666-22	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-603-100	UD-MOTOR-ASSY	1
11	620-1623-24	CAM GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	3
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	1
18	746-0768-00	WASHER	2
19	750-6756-00	SW-L-SPRING	1
20	716-1851-03	SCREW(M2.0x3.0)	2
21	746-0941-00	WASHER	1

V-Drive-CH unit section

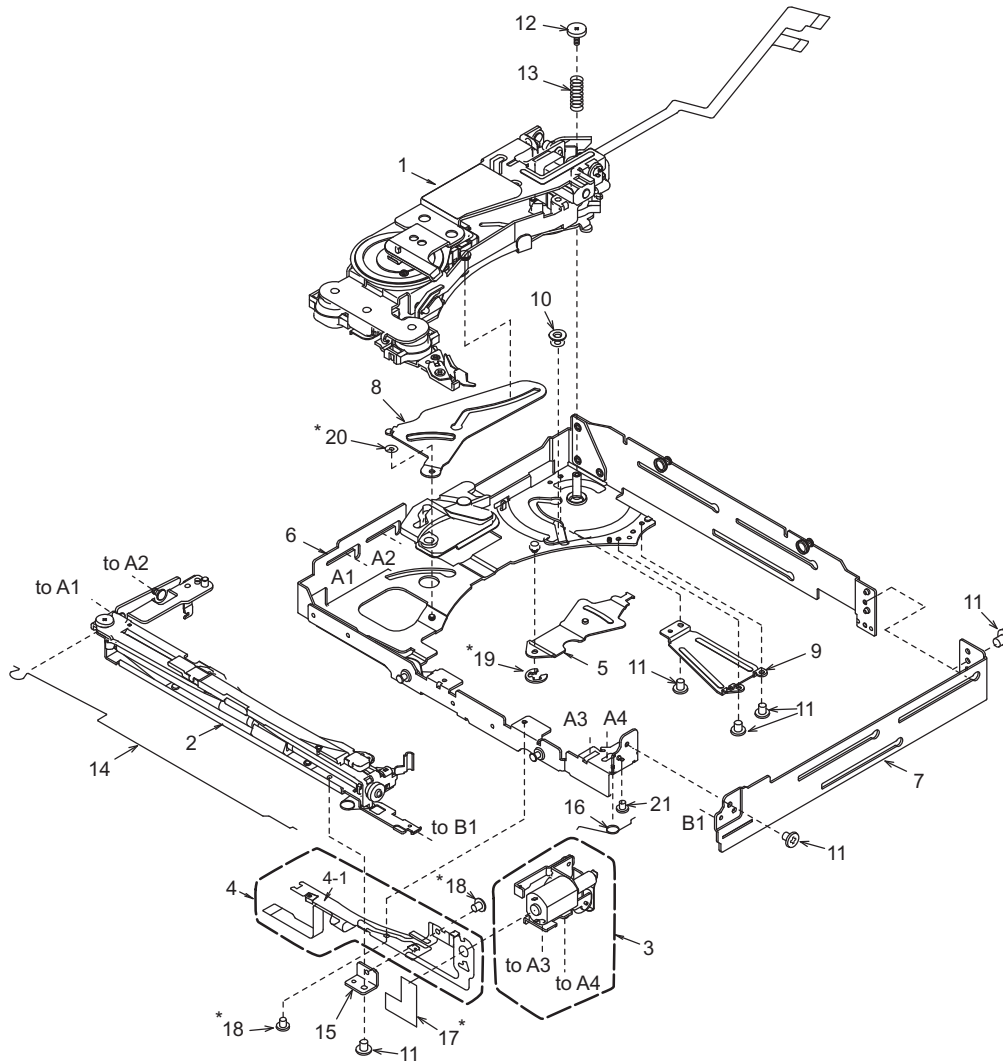


Note) When removed these parts(No.*17,*18,*19,*20), please do not reuse the parts.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-595-200	V-DRIVE UNIT	1	11	716-3450-00	SCREW(M1.7x2.0)	6
2	HBS-549-200	LOADING-U-ASSY	1	12	716-3459-01	SCREW(M1.7x2.0)	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1	13	750-6761-20	DRIVE SPRING A	1
4	HBS-552-100	L-SENSOR-S-ASSY	1	14	750-6764-21	GUIDE ARM	1
4-1	-----	SENSOR-L-FPC	1	15	620-1651-21	S-PWB-PLATE	1
5	966-0676-21	D-SHT LK-A-ASSY	1	16	750-6754-20	LO-ES-SPRING B	1
6	966-0675-22	DRIVE-CH A ASSY	1	17	345-5424-01	SEN-FPC GUIDE	1
7	620-1681-21	DRIVE CHASSIS B	1	18	716-1859-01	SCREW(M1.7x2.0)	2
8	620-1672-21	DR-SUPPORT-PL	1	19	744-0039-00	E-RING	1
9	620-1680-20	D-SHIFT COVER	1	20	746-0870-00	WASHER	1
10	622-1743-21	D-SHIFT ROLLER B	1	21	716-3538-00	SCREW(M1.7x2.0)	1

Upper unit assy section

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1883-21	UPPER-CHA-ASSY	1
2	966-0699-24	LO-SHIFT A ASSY	1
3	966-1791-20	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-0702-22	SHUTTER-PL-ASSY	1
6	966-0703-21	SHUTTER ASSY	1
7	HBS-553-100	U-SENSOR-S-ASSY	1
7-1	-----	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

Note) When removed these parts(No.*7,*8,*10), please do not reuse the parts.


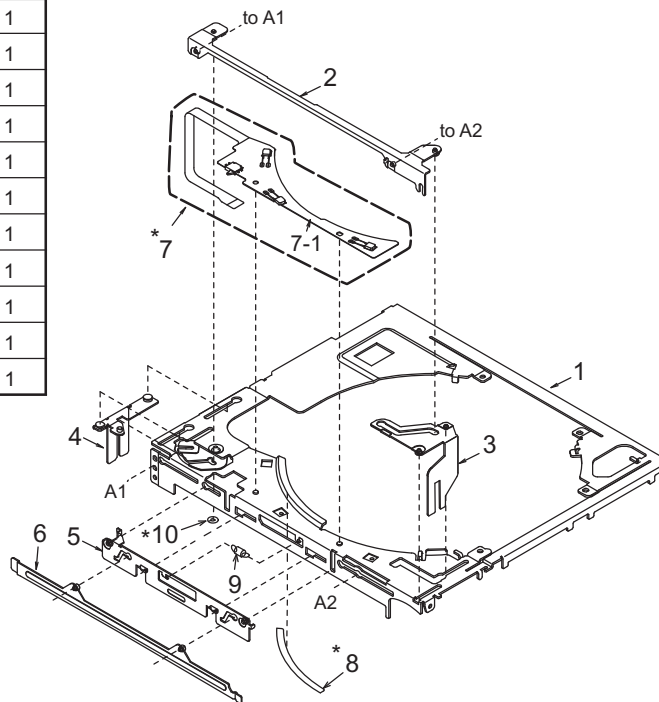


[Grease Point]

* Grease: SANKOL FG-87HSR

	Put grease on the surface	
	Put grease on the reverse side	
	Put grease on the both sides	
	Put grease on the edge	

①

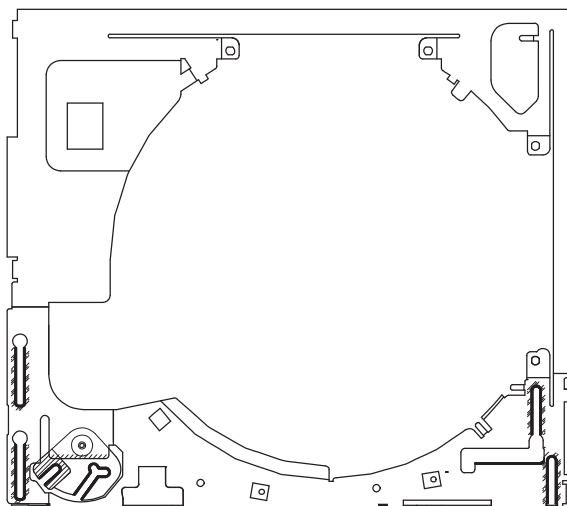


②




③



④



⑤



⑥



ELECTRICAL PARTS LIST

CD PWB section(BM1)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	042-0672-00	25V 47uF TA	C60	178-1052-78	1uF	R20	119-1041-15	1/10W 100k ohm
C2	166-1011-50	100pF CH	C61	166-1201-50	12pF CH	R22	119-1041-15	1/10W 100k ohm
C3	168-1045-56	0.1uF Z	CCT1	050-0145-61	1/16W 0 ohm x4	R23	119-1041-15	1/10W 100k ohm
C4	178-1052-78	1uF	CCT2	050-0145-54	1/16W 47k ohm x4	R24	050-0145-58	1/16W 2.2k ohm x4
C5	042-0671-01	10V 47uF TA	CCT3	050-0145-54	1/16W 47k ohm x4	R25	119-2221-15	1/10W 2.2k ohm
C7	168-1032-55	0.01uF K	D1	001-0529-14	MA8030-L	R26	119-0000-05	1/10W 0 ohm JW
C9	178-1052-78	1uF	D2	001-0367-91	1SS226	R27	117-1021-15	1/8W 1k ohm
C10	168-1045-56	0.1uF Z	D3	001-0529-13	MA8027-H	R28	116-3391-15	1/4W 3.3 ohm
C12	178-1052-78	1uF	D4	001-0529-18	MA8036-L	R30	032-0145-73	1/2W 6.8 ohm
C13	178-1052-78	1uF	IC1	051-6399-00	TC94A15F	R31	119-6811-15	1/10W 680 ohm
C14	042-0671-01	10V 47uF TA	IC2	051-6701-00	BU9423BKS	R33	119-6811-15	1/10W 680 ohm
C15	166-1007-50	10pF CH	IC3	051-9320-80	GLT5160L16E-7TC	R34	119-1041-15	1/10W 100k ohm
C16	166-1007-50	10pF CH	IC4	051-6060-08	BD7961FM-E2	R35	117-5611-15	1/8W 560 ohm
C17	168-2222-55	2200pF K	IC5	051-5445-08	BD5227G-TR	R36	119-1041-15	1/10W 100k ohm
C18	178-1052-78	1uF	IC7	052-5060-11	M30621MCM-AG4GP	R37	119-0000-05	1/10W 0 ohm JW
C20	178-1052-78	1uF				R38	119-2221-15	1/10W 2.2k ohm
C21	178-1052-78	1uF	IC8	051-9402-78	BR93L56RFVM-W	R39	119-1051-15	1/10W 1M ohm
C22	178-1052-78	1uF	IC9	051-6072-08	BD7931FE2	R40	119-0000-05	1/10W 0 ohm JW
C23	168-1045-56	0.1uF Z	IC10	051-5833-00	GP1S093HCZ	R41	119-1041-15	1/10W 100k ohm
C25	178-1052-78	1uF	J1	074-1237-69	SOCKET 19PIN	R42	119-5621-15	1/10W 5.6k ohm
C26	168-1045-56	0.1uF Z	J2	074-1201-65	SOCKET 15P	R43	119-4731-15	1/10W 47k ohm
C27	168-4732-78	0.047uF K	J3	074-1138-56	SOCKET 6P	R44	119-2231-15	1/10W 22k ohm
C28	166-4701-50	47pF CH	J4	074-1100-61	SOCKET 11P	R45	119-8231-15	1/10W 82k ohm
C29	168-4732-78	0.047uF K	J5	074-1201-61	SOCKET 11P	R46	119-3341-15	1/10W 330k ohm
C30	166-4711-50	470pF CH	Q1	060-0252-01	PT4850F	R48	119-2231-15	1/10W 22k ohm
C31	168-1532-55	0.015uF K	Q6	131-1188-50	2SB1188PQR	R49	116-1001-15	1/4W 10 ohm
C32	166-4711-50	470pF CH	Q7	125-2004-92	RN1402	R50	119-1011-15	1/10W 0 ohm
C33	168-1045-56	0.1uF Z	Q8	131-1188-50	2SB1188PQR	R51	119-6811-15	1/10W 680 ohm
C34	168-6822-55	6800pF K	Q9	131-1188-50	2SB1188PQR	R52	117-1021-15	1/8W 1k ohm
C35	168-1032-55	0.01uF K	Q10	125-2004-92	RN1402	R53	117-5611-15	1/8W 560 ohm
C38	168-3332-78	0.033uF K	Q11	125-0002-92	RN2402	R54	119-1041-15	1/10W 100k ohm
C39	168-4722-55	4700pF K	Q12	131-1188-50	2SB1188PQR	R55	119-1041-15	1/10W 100k ohm
C40	168-1045-56	0.1uF Z	R1	119-1041-15	1/10W 100k ohm	R56	119-1041-15	1/10W 100k ohm
C42	168-1045-56	0.1uF Z	R2	119-2211-15	1/10W 220 ohm	R57	119-1041-15	1/10W 100k ohm
C43	168-1532-55	0.015uF K	R3	119-2211-15	1/10W 220 ohm	R58	119-1041-15	1/10W 100k ohm
C44	168-1045-56	0.1uF Z	R4	119-1041-15	1/10W 100k ohm	R59	117-5611-15	1/8W 560 ohm
C45	168-1522-55	1500pF K	R5	119-2211-15	1/10W 220 ohm	R60	119-4731-15	1/10W 47k ohm
C46	168-1045-56	0.1uF Z	R6	119-2211-15	1/10W 220 ohm	R61	119-2211-15	1/10W 220 ohm
C47	166-6811-50	680pF	R7	119-2211-15	1/10W 220 ohm	R62	119-1041-15	1/10W 100k ohm
C48	166-6801-50	68pF CH	R8	119-2211-15	1/10W 220 ohm	R63	119-4731-15	1/10W 47k ohm
C49	178-1052-78	1uF	R10	119-3941-15	1/10W 390k ohm	R64	119-4731-15	1/10W 47k ohm
C50	042-0671-01	10V 47uF TA	R11	119-2241-15	1/10W 220k ohm	R65	119-1041-15	1/10W 100k ohm
C51	042-0671-01	10V 47uF TA	R12	119-2231-15	1/10W 22k ohm	S1	013-7416-50	SW SPVL110200
C52	178-1052-78	1uF	R13	119-4711-15	1/10W 470 ohm	S2	013-7416-50	SW SPVL110200
C53	168-1045-56	0.1uF Z	R14	119-4721-15	1/10W 4.7k ohm	S3	013-7416-50	SW SPVL110200
C54	178-1052-78	1uF	R15	119-1041-15	1/10W 100k ohm	S4	013-7415-50	SPVG110400
C55	178-1052-78	1uF	R16	119-6811-15	1/10W 680 ohm	X1	060-1533-90	CSTCE10M0G52-RO
C56	042-0671-01	10V 47uF TA	R17	119-4731-15	1/10W 47k ohm	X2	061-3534-90	16.92MHz
C57	168-1045-56	0.1uF Z	R18	119-2231-15	1/10W 22k ohm			
C59	168-1045-56	0.1uF Z	R19	119-2231-15	1/10W 22k ohm			

Sensor-L-PFC section(BM2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F	PT2	060-0252-01	PT14850F	PT3	051-5833-00	GP1S093HCZ

Sensor-U-PFC section(BM3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804	LED3	001-7077-00	GL4804
LED2	001-7077-00	GL4804	S5	013-7417-50	ABC1122P161