EXPLODED VIEW / PARTS LIST

PANEL section (NF47 66 9H0)

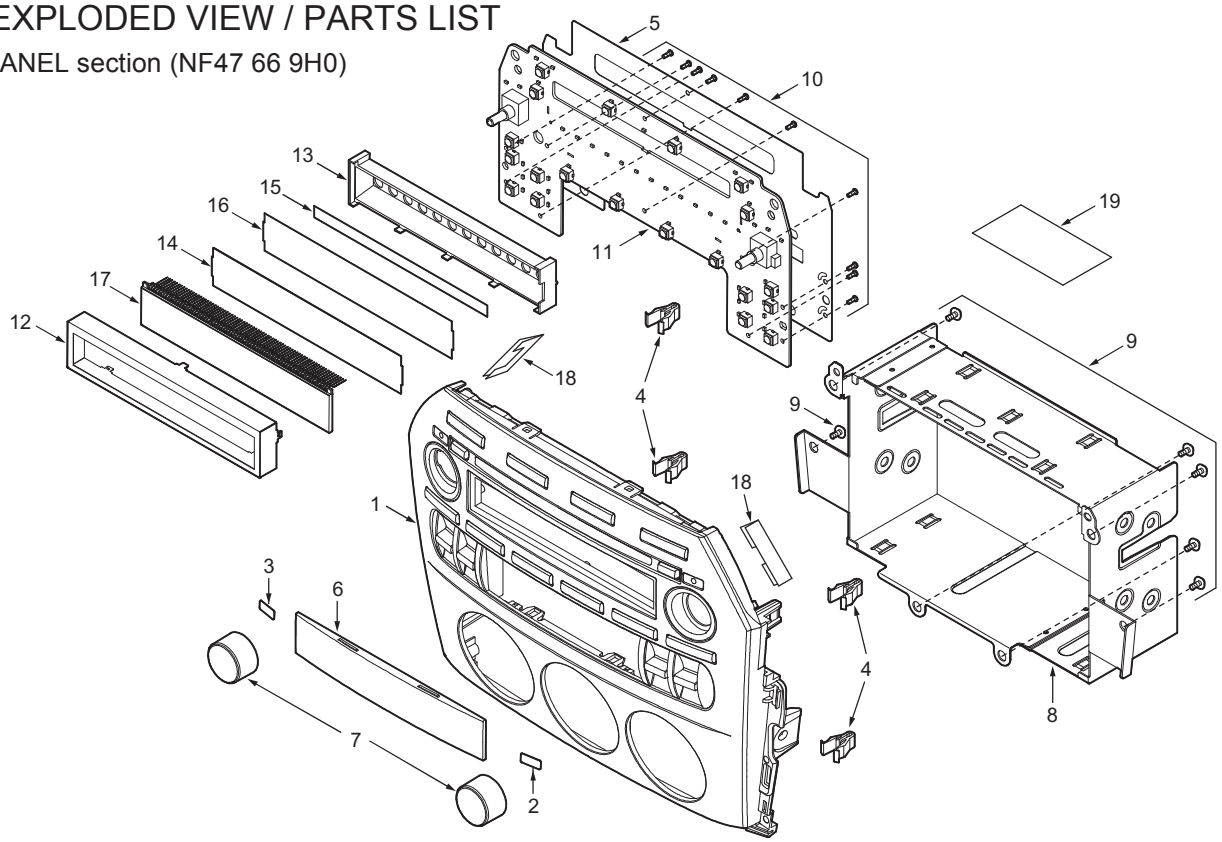

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8096-00	ESCUTCHEON-ASSY	1
2	335-7423-01	CAP(CD LOGO)	1
3	335-7423-10	CAP(R)	1
4	335-7583-01	CLIP	4
5	347-7616-00	PROTECTOR	1
6	373-1057-00	DIAL COVER	1
7	380-5622-00	KNOB	2
8	300-8049-01	MTG-BRKT	1
9	716-0778-10	WAVE SCREW(2x6)	10
10	716-3558-00	SPECIAL SCREW(M5x6)	6

NO.	PART NO.	DESCRIPTION	Q'TY
11	----------	SWITCH PWB	1
12	331-4014-00	LCD COVER	1
13	335-7429-01	LCD HOLDER	1
14	335-7430-00	COLOR FILTER	1
15	347-7749-00	DOT FILM	1
16	347-7750-00	FILTER	1
17	379-1336-50	LCD	1
18	347-7823-00	SPACER	2
19	286-6750-15 286-6750-16	SETPLATE(PT2678QA) SETPLATE(PT2678QB)	1

Note) No.19 SETPLATE depend on each model.
The model name is specified in the description.

BASE UNIT section (NE61 66 AR0)

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	MAIN PWB	1
2	880-2091M	AM/FM TUNER	1
3	074-1259-00	OUTLET SOCKET(16P)	1
4	074-1260-00	OUTLET SOCKET(24P)	1
5	076-0642-50	PLUG(15P)	1
6	092-4000-51	ANT-RECEPT	1
7	313-1936-00	HEAT SINK	1
8	331-4012-00	REAR PLATE	1
9	331-4013-00	TR-HOLDER	1
10	331-4031-00	EARTH BRKT	1
11	345-5828-00	GASKET	1
12	347-6465-00	PROTECTOR	1
13	714-2606-81	MACHINE SCREW(M2.6x6)	3
14	714-3006-81	MACHINE SCREW(M3x6)	1
15	778-3006-00	TAP-SCREW(3x6)	4
16	305-0338-02	SIDE-CVR-L	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	305-0339-02	SIDE-CVR-R	1
18	309-0810-01	ES PLATE	1
19	310-1811-01	UPPER CASE	1
20	311-1903-01	LOWER CASE	1
21	313-1935-01	HEAT SINK	1
22	331-4010-01	MECH-BRKT-L	1
23	331-4011-01	MECH-BRKT-R	1
24	345-8494-00	REAR RUBBER	1
25	346-0178-01	LEATHER SHEET	1
26	347-7615-00	SHADE	1
27	347-7617-00	WIRE SUPPORT	1
28	816-4011-50	FLAT WIRE(26P)	1
29	929-0291-84	CD-MECHANISM	1
30	714-2603-80	MACHINE SCREW(M2.6x3)	9
31	714-2606-81	MACHINE SCREW(M2.6X6)	21
32	714-2612-89	MACHINE SCREW(M2.6x12)	3

NO.	PART NO.	DESCRIPTION	Q'TY
33	716-0821-03	IT SCREW(M3x5)	1
34	716-1494-00	IT SCREW(M2.6x6)	5
35	716-1888-01	REAR BOLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
36	331-4131-00	MECH-BRKT-C	1
37	286-6750-15 286-6750-16	SETPLATE(PT2678QA) SETPLATE(PT2678QB)	1

Note) No.30 SETPLATE depend on each model.
The model name is specified in the description.

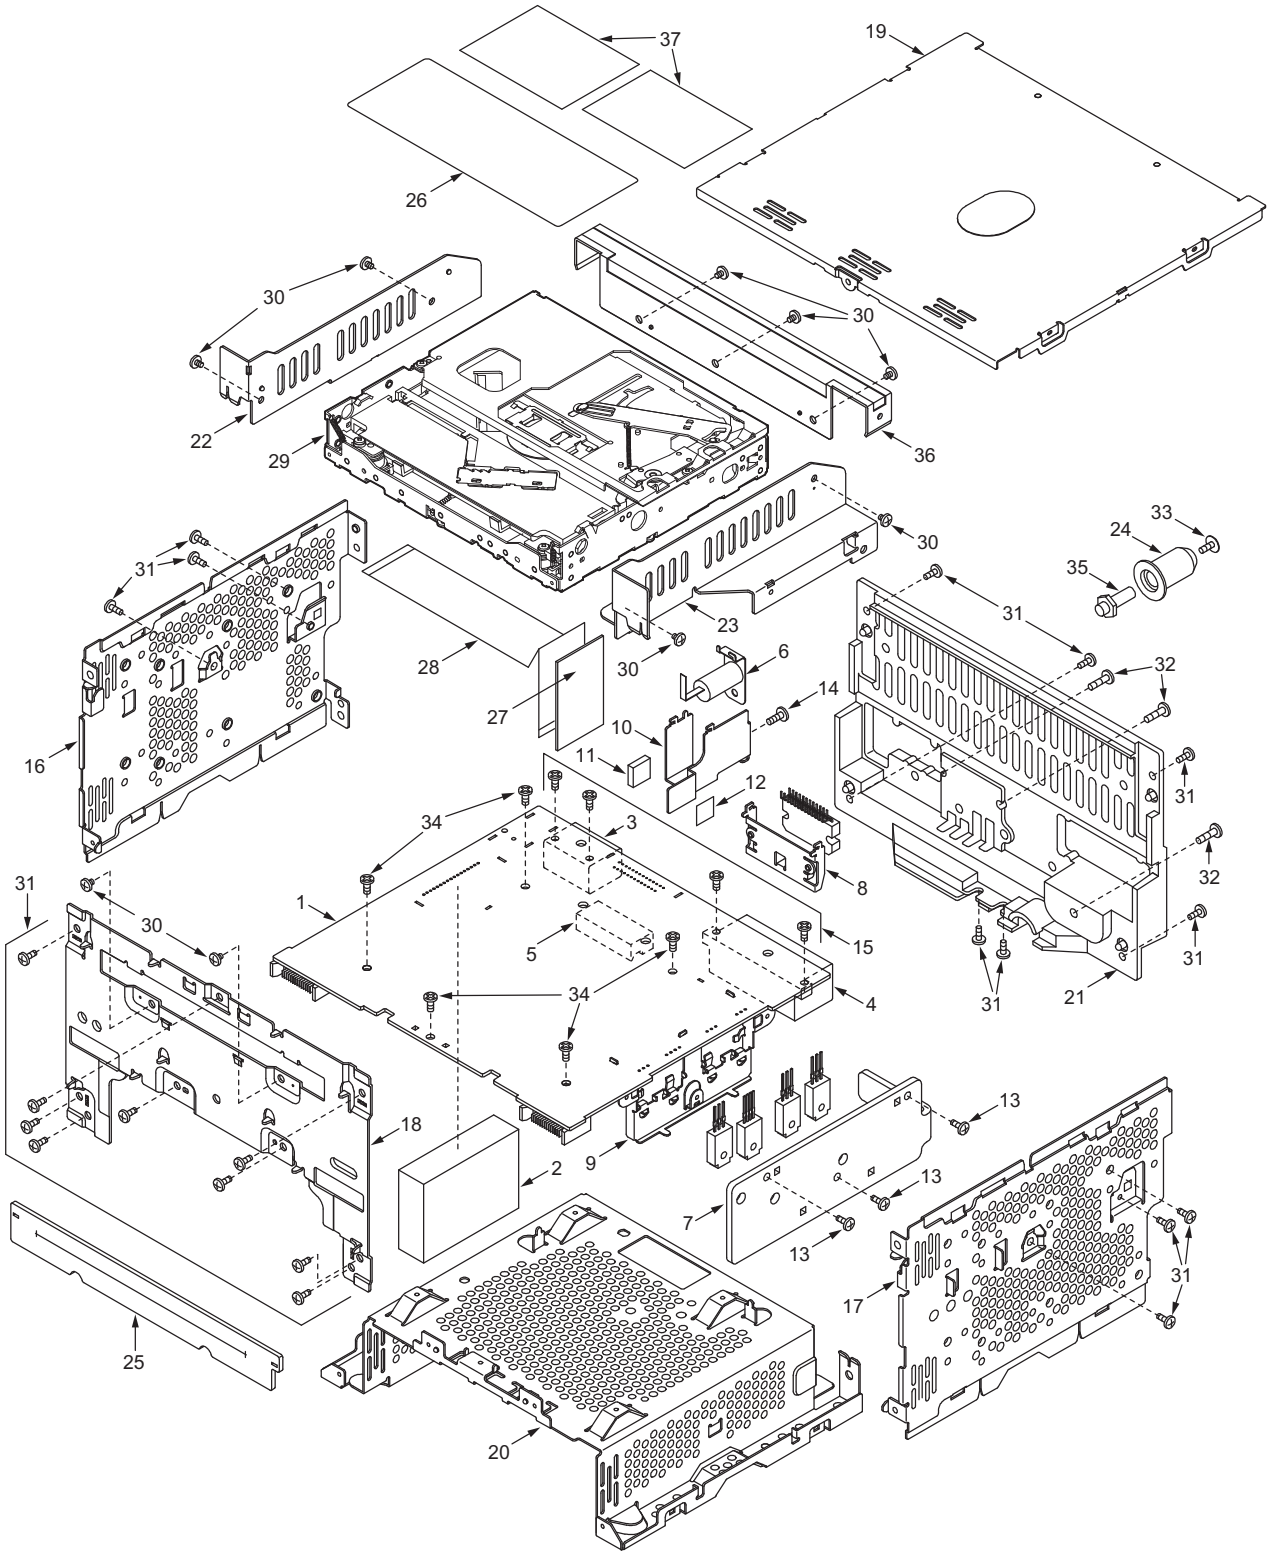

ELECTRICAL PARTS LIST

BASE UNIT : Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT101	092-4000-51	ANT-RECEPT

REF No.	PART No.	DESCRIPTION
BL101	880-2091M	AM/FM TUNER

REF No.	PART No.	DESCRIPTION
C101	166-1511-50	150pF CH

REF No.	PART No.	DESCRIPTION
C102	166-2201-50	22pF CH
C103	163-1073-35	16V100uF
C104	168-1022-55	1000pF K
C105	163-1073-35	16V100uF
C106	168-1022-55	1000pF K
C107	168-1022-55	1000pF K
C108	168-1022-55	1000pF K
C109	168-1022-55	1000pF K
C110	168-1022-55	1000pF K
C111	168-1022-55	1000pF K
C112	163-4763-15	6.3V47uF
C113	168-1042-78	16V 0.1uF
C114	166-1801-50	18pF CH
C201	168-2212-55	220pF K
C202	163-1063-35	16V10uF
C203	168-1042-78	16V 0.1uF
C204	168-1022-55	1000pF K
C205	168-1022-55	1000pF K
C206	166-1011-50	100pF CH
C208	168-1042-78	16V 0.1uF
C209	163-2273-25	10V 220uF
C211	168-1042-78	16V 0.1uF
C212	163-2273-25	10V 220uF
C213	168-1042-78	16V 0.1uF
C301	168-2212-55	220pF K
C302	168-2212-55	220pF K
C303	168-2212-55	220pF K
C304	168-2212-55	220pF K
C305	168-2212-55	220pF K
C306	168-2212-55	220pF K
C307	168-2212-55	220pF K
C308	168-2212-55	220pF K
C309	168-1032-55	0.01uF K
C310	168-2212-55	220pF K
C311	168-2212-55	220pF K
C312	166-1011-50	100pF CH
C313	168-1042-78	16V 0.1uF
C314	168-1042-78	16V 0.1uF
C316	168-4732-78	0.047uF K
C318	166-1201-50	12pF CH
C319	168-2212-55	220pF K
C320	168-1042-78	16V 0.1uF
C321	163-4763-15	6.3V47uF
C322	166-1201-50	12pF CH
C323	168-1042-78	16V 0.1uF
C324	178-1042-78	0.1uF
C325	166-1011-50	100pF CH
C326	166-1011-50	100pF CH
C327	166-1011-50	100pF CH
C328	166-1011-50	100pF CH
C329	166-1011-50	100pF CH
C330	168-1042-78	16V 0.1uF
C331	163-4763-15	6.3V47uF
C332	168-1032-55	0.01uF K
C401	178-2255-79	2.2uF
C403	178-2255-79	2.2uF
C404	178-2255-79	2.2uF
C405	178-2255-79	2.2uF
C406	178-2255-79	2.2uF
C407	178-2255-79	2.2uF
C408	168-1042-78	16V 0.1uF
C409	166-1811-50	180pF CH
C411	163-4753-55	35V4.7uF
C412	166-1007-50	10pF CH
C413	166-1007-50	10pF CH
C414	166-1011-50	100pF CH
C415	166-1011-50	100pF CH
C417	168-1022-55	1000pF K
C418	168-1022-55	1000pF K
C419	168-1022-55	1000pF K
C420	168-1022-55	1000pF K
C421	168-1022-55	1000pF K
C424	166-1011-50	100pF CH
C425	168-1022-55	1000pF K

REF No.	PART No.	DESCRIPTION
C426	168-1022-55	1000pF K
C427	168-1042-78	16V 0.1uF
C428	163-4753-55	35V4.7uF
C429	168-1042-78	16V 0.1uF
C430	163-4753-55	35V4.7uF
C434	168-2232-55	0.022uF K
C435	163-1073-15	6.3V100uF
C437	168-4732-78	0.047uF K
C438	042-0423-94	10V 4.7uF
C439	163-2263-35	16V22uF
C440	168-1022-55	1000pF K
C442	168-1042-78	16V 0.1uF
C444	168-2232-55	0.022uF K
C445	163-4763-15	6.3V47uF
C446	163-1063-35	16V10uF
C447	178-1052-78	1uF
C449	168-3332-78	0.033uF K
C450	168-1022-55	1000pF K
C451	168-1022-55	1000pF K
C452	168-1022-55	1000pF K
C453	168-1022-55	1000pF K
C454	168-2232-55	0.022uF K
C457	178-1052-78	1uF
C458	168-4712-55	470pF K
C459	168-1022-55	1000pF K
C460	163-2263-35	16V22uF
C461	168-1042-78	16V 0.1uF
C462	163-3373-15	6.3V330uF
C464	163-2273-25	10V 220uF
C465	168-1042-78	16V 0.1uF
C466	168-1042-78	16V 0.1uF
C468	168-1042-78	16V 0.1uF
C469	168-1032-55	0.01uF K
C470	168-5622-55	5600pF K
C471	168-5622-55	5600pF K
C472	168-3322-55	3300pF K
C473	168-3322-55	3300pF K
C474	166-1011-50	100pF CH
C475	166-1011-50	100pF CH
C501	168-1022-55	1000pF K
C502	168-1022-55	1000pF K
C503	168-1022-55	1000pF K
C504	168-1022-55	1000pF K
C505	178-2255-79	2.2uF
C506	178-2255-79	2.2uF
C507	178-2255-79	2.2uF
C508	178-2255-79	2.2uF
C509	168-1042-78	16V 0.1uF
C510	166-5611-50	560pF CH
C511	166-5611-50	560pF CH
C512	168-3912-55	390pF K
C513	168-3912-55	390pF K
C514	166-2201-50	22pF CH
C515	166-2201-50	22pF CH
C516	166-2201-50	22pF CH
C517	166-2201-50	22pF CH
C518	166-5611-50	560pF CH
C519	166-5611-50	560pF CH
C520	168-3912-55	390pF K
C521	168-3912-55	390pF K
C522	178-1052-78	1uF
C523	178-1052-78	1uF
C524	178-1052-78	1uF
C525	178-1052-78	1uF
C526	163-1063-35	16V 10uF
C527	163-2263-35	16V 22uF
C528	163-2253-65	50V 2.2uF
C537	163-1073-15	6.3V 100uF
C538	168-1042-78	16V 0.1uF
C539	168-1042-78	16V 0.1uF
C540	168-1042-78	16V 0.1uF
C541	163-1063-35	16V 10uF
C550	178-4742-78	0.47uF
C551	178-4742-78	0.47uF

REF No.	PART No.	DESCRIPTION
C552	178-4742-78	0.47uf
C553	178-4742-78	0.47uF
C601	168-1042-78	16V 0.1uF
C603	163-4763-35	16V 47uF
C605	163-4763-35	16V 47uF
C608	178-1052-78	1uF
C609	163-2273-25	10V 220uF
C610	178-1042-78	0.1uF
C611	178-1042-78	0.1uF
C612	163-1063-35	16V 10uF
C613	168-1042-78	16V 0.1uF
C614	042-0416-56	10V 22uF M TAN
C615	178-1052-78	1uF
C616	163-2273-25	10V 220uF
C619	178-1042-78	0.1uF
C621	163-1063-35	16V 10uF
C622	042-0406-93	16V 22uF TAN
C623	168-1042-78	16V 0.1uF
C624	178-1042-78	0.1uF
C625	163-1073-35	16V 100uF
C626	168-6822-55	6800pF K
C627	163-1063-35	16V 10uF
C628	168-1042-78	16V 0.1uF
C701	166-4701-50	47pF CH
C702	042-1698-00	16V 4700uF
C703	172-1041-11	0.1uF
C704	178-1042-78	0.1uF
C705	168-2212-55	220pF K
C706	163-1053-65	50V 1uF
C707	168-2245-79	0.22uF Z
C708	168-2222-55	2200pF K
C709	168-2222-55	2200pF K
C710	168-2222-55	2200pF K
C711	168-2222-55	2200pF K
C712	168-2222-55	2200pF K
C713	168-2222-55	2200pF K
C714	168-2222-55	2200pF K
C715	168-2222-55	2200pF K
C716	168-2222-55	2200pF K
C717	168-2222-55	2200pF K
C718	168-2222-55	2200pF K
C719	168-2222-55	2200pF K
C720	178-1042-78	0.1uF
C721	163-1053-65	50V 1uF
C722	166-3301-50	33pF CH
C723	168-2212-55	220pF K
D201	001-0580-90	1SS352
D202	001-0580-90	1SS352
D301	001-0529-28	MA8051-L
D502	001-0516-90	MA111
D516	001-0516-90	MA111
D601	001-0529-32	MA8056-M
D602	001-0580-90	1SS352
D603	001-0529-47	MA8091-M
D604	001-0529-28	MA8051-L
D605	001-0580-90	1SS352
D606	001-0516-90	MA111
D607	001-0516-90	MA111
D608	001-2614-90	1SR-154-400TE25
D610	001-0580-90	1SS352
D611	001-2614-90	1SR-154-400TE25
D614	001-2614-90	1SR-154-400TE25
D615	001-0584-24	MA8082
D617	001-2614-90	1SR-154-400TE25
D618	001-2614-90	1SR-154-400TE25
D619	001-2614-90	1SR-154-400TE25
D620	001-2614-90	1SR-154-400TE25
D622	001-2614-90	1SR-154-400TE25
D623	001-2614-90	1SR-154-400TE25
D624	001-0598-24	MA5180
D625	001-2614-90	1SR-154-400TE25
D626	001-0529-32	MA8056-M
D701	001-0516-90	MA111
D702	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION
D703	001-0580-90	1SS352
D704	001-0580-90	1SS352
D705	001-0580-90	1SS352
D706	001-0580-90	1SS352
D707	001-0529-31	MA8056-L
D709	001-0580-90	1SS352
D710	001-0580-90	1SS352
D711	001-0529-34	MA8062-L
D712	001-0529-31	MA8056-L
D713	001-2015-00	RL253
D715	001-0580-90	1SS352
D716	001-0598-24	MA5180
D717	001-0580-90	1SS352
D718	001-0608-90	D1FS4
D719	001-0580-90	1SS352
D720	001-0580-90	1SS352
D721	001-0580-90	1SS352
D723	001-0580-90	1SS352
D724	001-0529-34	MA8062-L
D725	001-0516-90	MA111
IC101	051-6212-08	LC72191JM-TLM
IC301	051-5440-08	S-80931ANMP-DDV
IC302	051-9419-08	BR24L02FVM-WE2
IC303	052-3195-00	M30843MW-061GP
IC401	051-6706-20	SAF7730HV/N217
IC501	051-3053-90	NJM2058V
IC502	051-2055-00	TDA8593J/N3
IC602	051-3340-00	LD1085P
IC603	051-3343-00	NJM2396F33
IC604	051-3340-00	LD1085P
IC606	051-3341-90	BD3931FP
IC607	051-5441-08	BD4828G-TR
J201	074-2003-76	26P
J701	074-1260-00	24P
J702	074-1259-00	16P
L101	010-2003-04	30uH
L102	010-4044-00	27uH
L103	010-3105-62	1k ohm/100MHz
L201	010-2198-59	4.7uH
L202	010-3406-66	22uH
L301	010-3406-66	22uH
L302	010-3406-66	22uH
L401	010-3105-62	1k ohm/100MHz
L402	010-3105-62	1k ohm/100MHz
L403	010-3105-62	1k ohm/100MHz
L404	010-3105-62	1k ohm/100MHz
L405	010-3105-62	1k ohm/100MHz
L406	010-3105-62	1k ohm/100MHz
L407	010-3104-54	600 ohm/100MHz
L409	010-3105-62	1k ohm/100MHz
L410	010-3105-62	1k ohm/100MHz
L411	010-3105-62	1k ohm/100MHz
L412	010-3105-62	1k ohm/100MHz
L413	010-3105-62	1k ohm/100MHz
L414	010-3105-62	1k ohm/100MHz
L415	010-3105-62	1k ohm/100MHz
L416	010-3105-62	1k ohm/100MHz
L417	010-3105-62	1k ohm/100MHz
L418	010-3105-62	1k ohm/100MHz
L420	010-3105-62	1k ohm/100MHz
L421	010-3104-54	600 ohm/100MHz
L422	010-3105-62	1k ohm/100MHz
L423	010-2198-51	0.22uH
L424	010-3105-62	1k ohm/100MHz
L505	010-3406-66	22uH
L702	010-3105-62	1k ohm/100MHz
L703	010-8026-00	210uH(TOROIDAL)
L704	010-3105-62	1k ohm/100MHz
L705	010-3105-62	1k ohm/100MHz
L706	010-3105-62	1k ohm/100MHz
L707	010-3105-62	1k ohm/100MHz
L708	010-3105-62	1k ohm/100MHz
L709	010-3105-62	1k ohm/100MHz
L710	010-3105-62	1k ohm/100MHz

REF No.	PART No.	DESCRIPTION
L711	010-3105-62	1k ohm/100MHz
L717	010-3105-62	1k ohm/100MHz
P201	076-3009-64	14P
P202	076-3009-64	14P
P701	076-0642-50	15P
Q301	125-2026-91	UN5211
Q401	125-7005-90	PHK04P02T
Q402	125-2026-91	UN5211
Q404	125-2026-91	UN5211
Q406	125-2026-91	UN5211
Q407	125-2026-91	UN5211
Q408	125-2026-91	UN5211
Q409	125-2026-91	UN5211
Q510	193-1306-00	2SD1306-DE-TL
Q511	193-1306-00	2SD1306-DE-TL
Q512	193-1306-00	2SD1306-DE-TL
Q513	193-1306-00	2SD1306-DE-TL
Q514	190-1298-00	2SA1298
Q515	125-2026-91	UN5211
Q601	193-1758-00	2SD1758TK-P,Q,R
Q602	125-0020-91	UN5111
Q603	125-2026-91	UN5211
Q604	190-1736-00	2SA1736
Q605	125-2026-91	UN5211
Q606	133-1766-00	2SD1766
Q607	125-2026-91	UN5211
Q608	192-2712-50	2SC2712Y.G.L
Q609	125-0020-91	UN5111
Q610	192-2712-50	2SC2712Y.G.L
Q611	101-1274-00	2SB1274
Q612	191-1197-50	2SB1197K Q,R
Q613	125-2026-91	UN5211
Q614	191-1205-65	2SB1205S,T
Q615	192-2712-50	2SC2712Y.G.L
Q616	192-2712-50	2SC2712Y.G.L
Q617	191-1197-50	2SB1197K Q,R
Q618	125-2026-91	UN5211
Q619	191-1205-65	2SB1205S,T
Q620	192-2712-50	2SC2712Y.G.L
Q621	190-1162-00	2SA1162
Q622	125-2026-91	UN5211
Q623	190-1736-00	2SA1736
Q624	125-2026-91	UN5211
Q625	190-1736-00	2SA1736
Q626	125-2026-91	UN5211
Q627	190-1736-00	2SA1736
Q628	125-2026-91	UN5211
Q629	125-0020-93	UN5113
Q631	193-1758-00	2SD1758TK-P,Q,R
Q632	191-0709-50	2SB709A
Q633	191-0709-50	2SB709A
Q635	191-0709-50	2SB709A
Q701	192-2712-50	2SC2712Y.G.L
Q702	125-2026-91	UN5211
Q703	192-2712-50	2SC2712Y.G.L
Q704	192-2712-50	2SC2712Y.G.L
Q705	192-2712-50	2SC2712Y.G.L
Q706	192-2712-50	2SC2712Y.G.L
Q707	192-2712-50	2SC2712Y.G.L
Q708	192-2712-50	2SC2712Y.G.L
Q709	192-2712-50	2SC2712Y.G.L
Q710	191-1197-50	2SB1197K Q,R
R102	119-2741-15	1/10W 270k ohm
R103	119-1041-15	1/10W 100k ohm
R104	119-1011-15	1/10W 100 ohm
R105	119-6821-15	1/10W 6.8k ohm
R106	119-6821-15	1/10W 6.8k ohm
R107	119-1011-15	1/10W 100 ohm
R108	119-1011-15	1/10W 100 ohm
R109	119-1011-15	1/10W 100 ohm
R110	119-1011-15	1/10W 100 ohm
R111	116-5691-15	1/4W 5.6 ohm
R112	119-4731-15	1/10W 47k ohm
R201	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R202	119-1031-15	1/10W 10k ohm
R204	119-1011-15	1/10W 100 ohm
R205	119-0000-05	1/10W 0 ohm JW
R301	119-1031-15	1/10W 10k ohm
R302	119-3931-15	1/10W 39k ohm
R303	119-4731-15	1/10W 47k ohm
R304	116-5611-15	1/4W 560 ohm
R305	119-1021-15	1/10W 1k ohm
R306	119-1021-15	1/10W 1k ohm
R307	119-1021-15	1/10W 1k ohm
R308	119-1021-15	1/10W 1k ohm
R309	119-1021-15	1/10W 1k ohm
R310	119-1011-15	1/10W 100 ohm
R311	119-1021-15	1/10W 1k ohm
R312	119-1021-15	1/10W 1k ohm
R313	119-1021-15	1/10W 1k ohm
R314	119-4721-15	1/10W 4.7k ohm
R315	119-1011-15	1/10W 100 ohm
R316	119-4721-15	1/10W 4.7k ohm
R317	119-1011-15	1/10W 100 ohm
R318	119-1011-15	1/10W 100 ohm
R319	119-1021-15	1/10W 1k ohm
R320	119-4731-15	1/10W 47k ohm
R321	119-1021-15	1/10W 1k ohm
R322	119-4731-15	1/10W 47k ohm
R325	119-4731-15	1/10W 47k ohm
R326	119-4731-15	1/10W 47k ohm
R329	119-4731-15	1/10W 47k ohm
R330	119-1021-15	1/10W 1k ohm
R331	119-1021-15	1/10W 1k ohm
R332	119-1021-15	1/10W 1k ohm
R334	119-1021-15	1/10W 1k ohm
R335	119-1021-15	1/10W 1k ohm
R336	119-1021-15	1/10W 1k ohm
R337	119-1031-15	1/10W 10k ohm
R338	119-1031-15	1/10W 10k ohm
R339	119-2231-15	1/10W 22k ohm
R340	119-1021-15	1/10W 1k ohm
R341	119-4731-15	1/10W 47k ohm
R342	119-4731-15	1/10W 47k ohm
R343	119-4731-15	1/10W 47k ohm
R344	119-4731-15	1/10W 47k ohm
R345	119-4731-15	1/10W 47k ohm
R346	119-1021-15	1/10W 1k ohm
R347	119-4731-15	1/10W 47k ohm
R348	119-1021-15	1/10W 1k ohm
R349	119-1021-15	1/10W 1k ohm
R350	119-1021-15	1/10W 1k ohm
R352	119-1021-15	1/10W 1k ohm
R354	119-1021-15	1/10W 1k ohm
R355	119-1011-15	1/10W 100 ohm
R356	119-1011-15	1/10W 100 ohm
R357	119-1011-15	1/10W 100 ohm
R358	119-1011-15	1/10W 100 ohm
R359	119-1021-15	1/10W 1k ohm
R360	119-1021-15	1/10W 1k ohm
R361	119-1031-15	1/10W 10k ohm
R362	119-1031-15	1/10W 10k ohm
R363	119-4731-15	1/10W 47k ohm
R364	119-4731-15	1/10W 47k ohm
R365	119-4731-15	1/10W 47k ohm
R366	119-4731-15	1/10W 47k ohm
R367	119-2231-15	1/10W 22k ohm
R368	119-4731-15	1/10W 47k ohm
R369	119-4731-15	1/10W 47k ohm
R370	119-4731-15	1/10W 47k ohm
R371	119-4721-15	1/10W 4.7k ohm
R372	119-4721-15	1/10W 4.7k ohm
R373	119-4721-15	1/10W 4.7k ohm
R374	119-1031-15	1/10W 10k ohm
R375	119-4721-15	1/10W 4.7k ohm
R376	119-4721-15	1/10W 4.7k ohm
R377	119-4731-15	1/10W 47k ohm
R401	032-0140-63	1/10W 2.7k ohm F

REF No.	PART No.	DESCRIPTION
R402	032-0140-63	1/10W 2.7k ohm F
R403	119-2731-15	1/10W 27k ohm
R404	119-2731-15	1/10W 27k ohm
R405	119-8221-15	1/10W 8.2k ohm
R406	032-0140-50	1/10W 10k ohm F
R407	032-0140-50	1/10W 10k ohm F
R408	032-0140-50	1/10W 10k ohm F
R409	032-0140-50	1/10W 10k ohm F
R410	119-2201-15	1/10W 22 ohm
R412	119-0000-05	1/10W 0 ohm JW
R413	119-1031-15	1/10W 10k ohm
R414	119-1021-15	1/10W 1k ohm
R416	119-1031-15	1/10W 10k ohm
R417	119-0000-05	1/10W 0 ohm JW
R418	119-1031-15	1/10W 10k ohm
R419	119-0000-05	1/10W 0 ohm JW
R420	119-1031-15	1/10W 10k ohm
R421	119-1031-15	1/10W 10k ohm
R423	119-1001-15	1/10W 10 ohm
R425	119-0000-05	1/10W 0 ohm JW
R426	032-0140-50	1/10W 10k ohm F
R427	032-0140-50	1/10W 10k ohm F
R429	032-0140-50	1/10W 10k ohm F
R430	032-0140-50	1/10W 10k ohm F
R431	119-0000-05	1/10W 0 ohm JW
R435	119-0000-05	1/10W 0 ohm JW
R436	119-0000-05	1/10W 0 ohm JW
R440	119-1031-15	1/10W 10k ohm
R441	119-1031-15	1/10W 10k ohm
R442	119-1011-15	1/10W 100 ohm
R443	119-1011-15	1/10W 100 ohm
R446	119-1031-15	1/10W 10k ohm
R449	119-1031-15	1/10W 10k ohm
R452	119-1011-15	1/10W 100 ohm
R453	119-1001-15	1/10W 10 ohm
R457	119-0000-05	1/10W 0 ohm JW
R460	119-0000-05	1/10W 0 ohm JW
R501	119-1021-15	1/10W 1k ohm
R502	119-1021-15	1/10W 1k ohm
R503	119-1021-15	1/10W 1k ohm
R504	119-1021-15	1/10W 1k ohm
R505	119-1031-15	1/10W 10k ohm
R506	119-1031-15	1/10W 10k ohm
R507	119-1031-15	1/10W 10k ohm
R508	119-1031-15	1/10W 10k ohm
R509	119-1031-15	1/10W 10k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-3321-15	1/10W 3.3k ohm
R512	119-3321-15	1/10W 3.3k ohm
R513	119-1031-15	1/10W 10k ohm
R514	119-1031-15	1/10W 10k ohm
R515	119-1051-15	1/10W 1M ohm
R516	119-1051-15	1/10W 1M ohm
R517	119-1051-15	1/10W 1M ohm
R518	119-1051-15	1/10W 1M ohm
R519	119-1031-15	1/10W 10k ohm
R520	119-1031-15	1/10W 10k ohm
R521	119-3321-15	1/10W 3.3k ohm
R522	119-3321-15	1/10W 3.3k ohm
R523	119-1031-15	1/10W 10k ohm
R524	119-1031-15	1/10W 10k ohm
R525	119-1021-15	1/10W 1k ohm
R528	119-4721-15	1/10W 4.7k ohm
R529	119-4721-15	1/10W 4.7k ohm
R535	119-1011-15	1/10W 100 ohm
R536	119-1011-15	1/10W 100 ohm
R537	117-3901-15	1/8W 390 ohm
R538	117-3901-15	1/8W 390 ohm
R539	117-3901-15	1/8W 390 ohm
R540	117-3901-15	1/8W 390 ohm
R541	117-3901-15	1/8W 390 ohm
R542	117-3901-15	1/8W 390 ohm
R543	117-3901-15	1/8W 390 ohm

REF No.	PART No.	DESCRIPTION
R544	117-3901-15	1/8W 390 ohm
R545	117-8201-15	1/8W 820 ohm
R546	117-8201-15	1/8W 820 ohm
R547	117-8201-15	1/8W 820 ohm
R548	117-8201-15	1/8W 820 ohm
R553	119-0000-05	1/10W 0 ohm JW
R554	119-0000-05	1/10W 0 ohm JW
R555	119-0000-05	1/10W 0 ohm JW
R556	119-0000-05	1/10W 0 ohm JW
R560	119-0000-05	1/10W 0 ohm JW
R561	119-0000-05	1/10W 0 ohm JW
R562	119-0000-05	1/10W 0 ohm JW
R563	119-0000-05	1/10W 0 ohm JW
R564	119-1011-15	1/10W 100 ohm
R565	119-1011-15	1/10W 100 ohm
R566	119-1011-15	1/10W 100 ohm
R567	119-1011-15	1/10W 100 ohm
R568	119-4731-15	1/10W 47k ohm
R569	119-4731-15	1/10W 47k ohm
R570	119-4731-15	1/10W 47k ohm
R571	119-4731-15	1/10W 47k ohm
R574	119-2231-15	1/10W 22k ohm
R575	119-2231-15	1/10W 22k ohm
R578	119-2231-15	1/10W 22k ohm
R579	119-2231-15	1/10W 22k ohm
R580	119-1031-15	1/10W 10k ohm
R581	119-1521-15	1/10W 1.5k ohm
R582	119-3331-15	1/10W 33k ohm
R583	119-7521-15	1/10W 7.5k ohm
R584	119-0000-05	1/10W 0 ohm JW
R601	119-3311-15	1/10W 330 ohm
R602	119-1031-15	1/10W 10k ohm
R605	119-1031-15	1/10W 10k ohm
R606	116-4711-15	1/4W 470 ohm
R607	119-1031-15	1/10W 10k ohm
R608	119-3311-15	1/10W 330 ohm
R609	032-0140-81	1/10W 3.9k ohm
R610	032-0140-68	1/10W 680 ohm F
R612	116-1011-15	1/4W 100 ohm
R613	117-1021-15	1/8W 1k ohm
R614	119-1031-15	1/10W 10k ohm
R615	116-1821-15	1/4W 1.8k ohm
R616	119-1531-15	1/10W 15k ohm
R617	116-1821-15	1/4W 1.8k ohm
R618	116-2291-15	1/4W 2.2 ohm
R619	119-1021-15	1/10W 1k ohm
R620	116-1821-15	1/4W 1.8k ohm
R621	119-1031-15	1/10W 10k ohm
R622	119-1031-15	1/10W 10k ohm
R623	116-1821-15	1/4W 1.8k ohm
R624	119-4721-15	1/10W 4.7k ohm
R625	119-1031-15	1/10W 10k ohm
R626	119-2221-15	1/10W 2.2k ohm
R627	119-1031-15	1/10W 10k ohm
R628	119-1031-15	1/10W 10k ohm
R629	119-4731-15	1/10W 47k ohm
R630	032-0140-93	1/10W 2k ohm F
R631	032-0140-98	1/10W 330 ohm F
R632	119-1031-15	1/10W 10k ohm
R633	116-2221-15	1/4W 2.2k ohm
R634	116-2221-15	1/4W 2.2k ohm
R635	116-2221-15	1/4W 2.2k ohm
R636	119-4731-15	1/10W 47k ohm
R637	119-1031-15	1/10W 10k ohm
R638	116-2221-15	1/4W 2.2k ohm
R639	119-4721-15	1/10W 4.7k ohm
R640	119-1031-15	1/10W 10k ohm
R641	119-4721-15	1/10W 4.7k ohm
R642	116-1221-15	1/4W 1.2k ohm
R643	116-4721-15	1/4W 4.7k ohm
R644	116-5691-15	1/4W 5.6 ohm
R645	116-4721-15	1/4W 4.7k ohm
R646	119-1241-15	1/10W 120k ohm

REF No.	PART No.	DESCRIPTION
R647	119-7531-15	1/10W 75k ohm
R648	116-1221-15	1/4W 1.2k ohm
R649	116-2291-15	1/4W 2.2 ohm
R650	116-2291-15	1/4W 2.2 ohm
R651	116-2291-15	1/4W 2.2 ohm
R655	116-4721-15	1/4W 4.7k ohm
R656	116-1221-15	1/4W 1.2k ohm
R657	116-4711-15	1/4W 470 ohm
R658	116-4711-15	1/4W 470 ohm
R659	119-1021-15	1/10W 1k ohm
R661	116-4791-15	1/4W4.7 ohm
R662	116-4791-15	1/4W4.7 ohm
R663	116-5691-15	1/4W 5.6 ohm
R664	116-5691-15	1/4W 5.6 ohm
R665	116-5691-15	1/4W 5.6 ohm
R666	116-5691-15	1/4W 5.6 ohm
R667	116-5691-15	1/4W 5.6 ohm
R701	119-2231-15	1/10W 22k ohm
R702	119-2231-15	1/10W 22k ohm
R703	119-2231-15	1/10W 22k ohm
R704	119-2231-15	1/10W 22k ohm
R705	119-2231-15	1/10W 22k ohm
R706	119-2231-15	1/10W 22k ohm
R707	119-4731-15	1/10W 47k ohm
R708	116-1021-15	1/4W 1k ohm
R709	119-2231-15	1/10W 22k ohm
R710	116-1021-15	1/4W 1k ohm
R711	119-2231-15	1/10W 22k ohm
R712	116-2211-15	1/4W 220 ohm
R713	119-2231-15	1/10W 22k ohm
R714	116-2211-15	1/4W 220 ohm
R715	116-1021-15	1/4W 1k ohm
R716	116-1021-15	1/4W 1k ohm
R717	119-1041-15	1/10W 100k ohm
R718	116-2211-15	1/4W 220 ohm
R719	116-2211-15	1/4W 220 ohm
R720	116-1021-15	1/4W 1k ohm
R721	119-2231-15	1/10W 22k ohm
R722	119-1021-15	1/10W 1k ohm
R723	119-4721-15	1/10W 4.7k ohm
R725	119-1031-15	1/10W 10k ohm
R726	119-6821-15	1/10W 6.8k ohm
R727	119-5611-15	1/10W 560 ohm
R728	116-1011-15	1/4W 100 ohm
R729	116-1531-15	1/4W 15k ohm
R730	116-1021-15	1/4W 1k ohm
R731	116-1021-15	1/4W 1k ohm
R732	116-1011-15	1/4W 100 ohm
R733	116-1021-15	1/4W 1k ohm
R734	116-1021-15	1/4W 1k ohm
R735	119-5611-15	1/10W 560 ohm
R736	116-2291-15	1/4W 2.2 ohm
R737	119-1031-15	1/10W 10k ohm
R738	119-5621-15	1/10W 5.6k ohm
R739	116-1021-15	1/4W 1k ohm
R740	119-0000-05	1/10W 0 ohm JW
R741	117-4721-15	1/8W 4.7k ohm
R743	119-0000-05	1/10W 0 ohm JW
R744	119-0000-05	1/10W 0 ohm JW
R745	119-0000-05	1/10W 0 ohm JW
R746	119-0000-05	1/10W 0 ohm JW
R747	119-0000-05	1/10W 0 ohm JW
SUP101	060-0122-91	DSP-141N-A21F
TC101	004-1580-10	TZ03R300FR169
TM101	073-0762-90	TERMINAL
TM301	073-0762-90	TERMINAL
TM401	073-0762-90	TERMINAL
TM701	073-0762-90	TERMINAL
X101	061-3515-90	7.2MHz
X301	061-3541-90	10MHz
X401	061-3537-90	41.6MHz
PWB	039-2712-20	PWB(WITHOUT COMPONENT)

PANEL : Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C801	168-1032-55	0.01uF K
C802	163-4763-35	16V47uF
C803	168-2212-55	220pF K
C804	168-1042-78	16V 0.1uF
C805	168-1032-55	0.01uF K
C810	168-1042-78	16V 0.1uF
C815	168-1042-78	16V 0.1uF
C911	168-1042-78	16V 0.1uF
C912	168-1042-78	16V 0.1uF
C913	168-1042-78	16V 0.1uF
C914	168-1042-78	16V 0.1uF
C915	168-1042-78	16V 0.1uF
C916	168-4712-55	470pF K
C920	168-4722-55	4700pF K
D800	001-0529-32	MA8056-M
D801	001-7089-90	FV1112H-740-TR
D802	001-7089-90	FV1112H-740-TR
D804	001-7089-90	FV1112H-740-TR
D805	001-7089-90	FV1112H-740-TR
D806	001-7089-90	FV1112H-740-TR
D807	001-7089-90	FV1112H-740-TR
D809	001-7089-90	FV1112H-740-TR
D810	001-7089-90	FV1112H-740-TR
D811	001-7089-90	FV1112H-740-TR
D812	001-7089-90	FV1112H-740-TR
D813	001-7089-90	FV1112H-740-TR
D814	001-7089-90	FV1112H-740-TR
D815	001-7089-90	FV1112H-740-TR
D816	001-7089-90	FV1112H-740-TR
D817	001-7089-90	FV1112H-740-TR
D818	001-7089-90	FV1112H-740-TR
D819	001-7089-90	FV1112H-740-TR
D820	001-7089-90	FV1112H-740-TR
D821	001-7089-90	FV1112H-740-TR
D822	001-7089-90	FV1112H-740-TR
D823	001-7089-90	FV1112H-740-TR
D824	001-7089-90	FV1112H-740-TR
D825	001-7089-90	FV1112H-740-TR
D826	001-7089-90	FV1112H-740-TR
D827	001-7089-90	FV1112H-740-TR
D828	001-7089-90	FV1112H-740-TR
D829	001-7089-90	FV1112H-740-TR
D830	001-7089-90	FV1112H-740-TR
D831	001-7089-90	FV1112H-740-TR
D832	001-7089-90	FV1112H-740-TR
D833	001-7089-90	FV1112H-740-TR
D834	001-7089-90	FV1112H-740-TR
D837	001-7089-90	FV1112H-740-TR
D845	001-7089-90	FV1112H-740-TR
D846	001-7089-90	FV1112H-740-TR
D851	001-7089-90	FV1112H-740-TR
D852	001-7089-90	FV1112H-740-TR
D853	001-7089-90	FV1112H-740-TR
D854	001-7089-90	FV1112H-740-TR
D855	001-7089-90	FV1112H-740-TR
D856	001-7089-90	FV1112H-740-TR
D857	001-7089-90	FV1112H-740-TR
D858	001-7089-90	FV1112H-740-TR
D859	001-7089-90	FV1112H-740-TR
D860	001-7089-90	FV1112H-740-TR
D861	001-0516-90	MA111
D862	001-0516-90	MA111
D863	001-0516-90	MA111
D864	001-0516-90	MA111
D865	001-0516-90	MA111
D867	001-0516-90	MA111
D868	001-0516-90	MA111
D869	001-0516-90	MA111
D870	001-0516-90	MA111
D871	001-0516-90	MA111
D872	001-0516-90	MA111
D873	001-0516-90	MA111
D874	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION
D911	001-0529-38	MA8068-M
D912	001-0529-38	MA8068-M
D913	001-0529-38	MA8068-M
D914	001-0529-38	MA8068-M
D915	001-0529-38	MA8068-M
D916	001-0529-38	MA8068-M
IC801	052-7077-00	MB89475PFV-G-115
IC911	051-6081-00	LC75810T
J301	076-6000-54	4P
J302	076-6000-54	4P
J801	074-3009-64	14P
J901	074-3009-64	14P
LCD901	379-1336-50	INDICATOR(LCD)
Q801	190-1736-00	2SA1736
Q802	192-2712-50	2SC2712Y.G.L
Q803	190-1736-00	2SA1736
Q804	125-2004-92	RN1402
Q805	190-1736-00	2SA1736
Q806	125-2004-92	RN1402
Q807	125-2004-92	RN1402
Q808	192-2712-50	2SC2712Y.G.L
Q811	192-3265-00	2SC3265OY
Q812	192-2712-50	2SC2712Y.G.L
Q813	192-3265-00	2SC3265OY
Q815	192-2712-50	2SC2712Y.G.L
Q816	125-9003-92	IMD3
Q818	192-2712-50	2SC2712Y.G.L
R801	119-2231-15	1/10W 22k ohm
R802	119-2231-15	1/10W 22k ohm
R803	119-3331-15	1/10W 33k ohm
R804	119-3331-15	1/10W 33k ohm
R805	117-6811-15	1/8W 680 ohm
R806	119-2221-15	1/10W 2.2k ohm
R807	119-1031-15	1/10W 10k ohm
R808	116-5621-15	1/4W 5.6k ohm
R809	119-1031-15	1/10W 10k ohm
R810	116-2421-15	1/4W 2.4k ohm
R811	119-2221-15	1/10W 2.2k ohm
R812	116-5621-15	1/4W 5.6k ohm
R813	116-3921-15	1/4W 3.9k ohm
R814	116-2721-15	1/4W 2.7k ohm
R815	116-2221-15	1/4W 2.2k ohm
R816	119-1031-15	1/10W 10k ohm
R817	116-2221-15	1/4W 2.2k ohm
R818	116-2221-15	1/4W 2.2k ohm
R819	116-1821-15	1/4W 1.8k ohm
R820	116-3921-15	1/4W 3.9k ohm
R821	116-3321-15	1/4W 3.3k ohm
R822	116-3921-15	1/4W 3.9k ohm
R823	116-3921-15	1/4W 3.9k ohm
R824	116-3921-15	1/4W 3.9k ohm
R825	116-1031-15	1/4W 10k ohm
R826	116-3921-15	1/4W 3.9k ohm
R827	116-1031-15	1/4W 10k ohm
R828	116-3921-15	1/4W 3.9k ohm
R829	116-1231-15	1/4W 12k ohm
R830	116-6821-15	1/4W 6.8k ohm
R831	119-1031-15	1/10W 10k ohm
R832	119-4721-15	1/10W 4.7k ohm
R833	116-8221-15	1/4W 8.2k ohm
R834	119-4721-15	1/10W 4.7k ohm
R835	119-2221-15	1/10W 2.2k ohm
R836	116-8221-15	1/4W 8.2k ohm
R837	116-3321-15	1/4W 3.3k ohm
R838	116-6821-15	1/4W 6.8k ohm
R839	119-1031-15	1/10W 10k ohm
R840	119-1031-15	1/10W 10k ohm
R842	116-8221-15	1/4W 8.2k ohm
R844	116-8221-15	1/4W 8.2k ohm
R845	116-1031-15	1/4W 10k ohm
R846	116-1031-15	1/4W 10k ohm
R848	119-1021-15	1/10W 1k ohm
R849	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R850	119-4721-15	1/10W 4.7k ohm
R851	119-4721-15	1/10W 4.7k ohm
R852	119-1041-15	1/10W 100k ohm
R853	119-1041-15	1/10W 100k ohm
R854	119-4731-15	1/10W 47k ohm
R855	119-4721-15	1/10W 4.7k ohm
R856	119-4721-15	1/10W 4.7k ohm
R857	119-1041-15	1/10W 100k ohm
R858	119-1041-15	1/10W 100k ohm
R859	119-4731-15	1/10W 47k ohm
R860	119-4731-15	1/10W 47k ohm
R861	119-1021-15	1/10W 1k ohm
R862	119-1021-15	1/10W 1k ohm
R863	119-4731-15	1/10W 47k ohm
R864	119-1021-15	1/10W 1k ohm
R865	119-1021-15	1/10W 1k ohm
R866	119-4731-15	1/10W 47k ohm
R867	119-4731-15	1/10W 47k ohm
R868	119-1021-15	1/10W 1k ohm
R869	119-1021-15	1/10W 1k ohm
R871	119-1031-15	1/10W 10k ohm
R872	119-1031-15	1/10W 10k ohm
R873	119-4731-15	1/10W 47k ohm
R874	119-1031-15	1/10W 10k ohm
R876	119-1031-15	1/10W 10k ohm
R878	119-1031-15	1/10W 10k ohm
R879	116-1231-15	1/4W 12k ohm
R880	119-4721-15	1/10W 4.7k ohm
R881	119-1031-15	1/10W 10k ohm
R883	119-4721-15	1/10W 4.7k ohm
R885	119-0000-05	1/10W 0 ohm JW
R901	119-1021-15	1/10W 1k ohm
R902	119-1021-15	1/10W 1k ohm
R903	119-1021-15	1/10W 1k ohm
R904	119-1021-15	1/10W 1k ohm
R905	119-1011-15	1/10W 100 ohm
R906	119-1011-15	1/10W 100 ohm
R907	119-4731-15	1/10W 47k ohm
R908	119-1031-15	1/10W 10k ohm
R909	119-1021-15	1/10W 1k ohm
R910	119-1021-15	1/10W 1k ohm
R911	119-1021-15	1/10W 1k ohm
R912	119-4721-15	1/10W 4.7k ohm
R913	119-4721-15	1/10W 4.7k ohm
R914	119-4721-15	1/10W 4.7k ohm
R915	119-4721-15	1/10W 4.7k ohm
R916	119-1021-15	1/10W 1k ohm
S801	013-6202-51	SKPMBJE010
S802	013-6202-51	SKPMBJE010
S803	013-6202-51	SKPMBJE010
S804	013-6202-51	SKPMBJE010
S805	013-6202-51	SKPMBJE010
S806	013-6205-50	SKPMAME010
S807	013-6205-50	SKPMAME010
S808	013-6202-51	SKPMBJE010
S809	013-6202-51	SKPMBJE010
S810	013-6202-51	SKPMBJE010
S811	013-6202-51	SKPMBJE010
S812	013-6202-51	SKPMBJE010
S813	013-6202-51	SKPMBJE010
S814	013-6205-50	SKPMAME010
S815	013-6205-50	SKPMAME010
S816	013-6205-50	SKPMAME010
S817	013-6205-50	SKPMAME010
S818	013-6205-50	SKPMAME010
S819	013-6205-50	SKPMAME010
S820	013-6202-51	SKPMBJE010
VR801	016-0014-05	VR W-SHAFT
VR802	016-0014-05	VR W-SHAFT
X801	060-1537-90	CSTCE12M5G52
PWB	039-2687-20	PWB(WITHOUT COMPONENT)