


1 2 3 4

EXPLODED VIEWS AND PARTS LIST

NOTES :

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to ▽ mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

PACKING

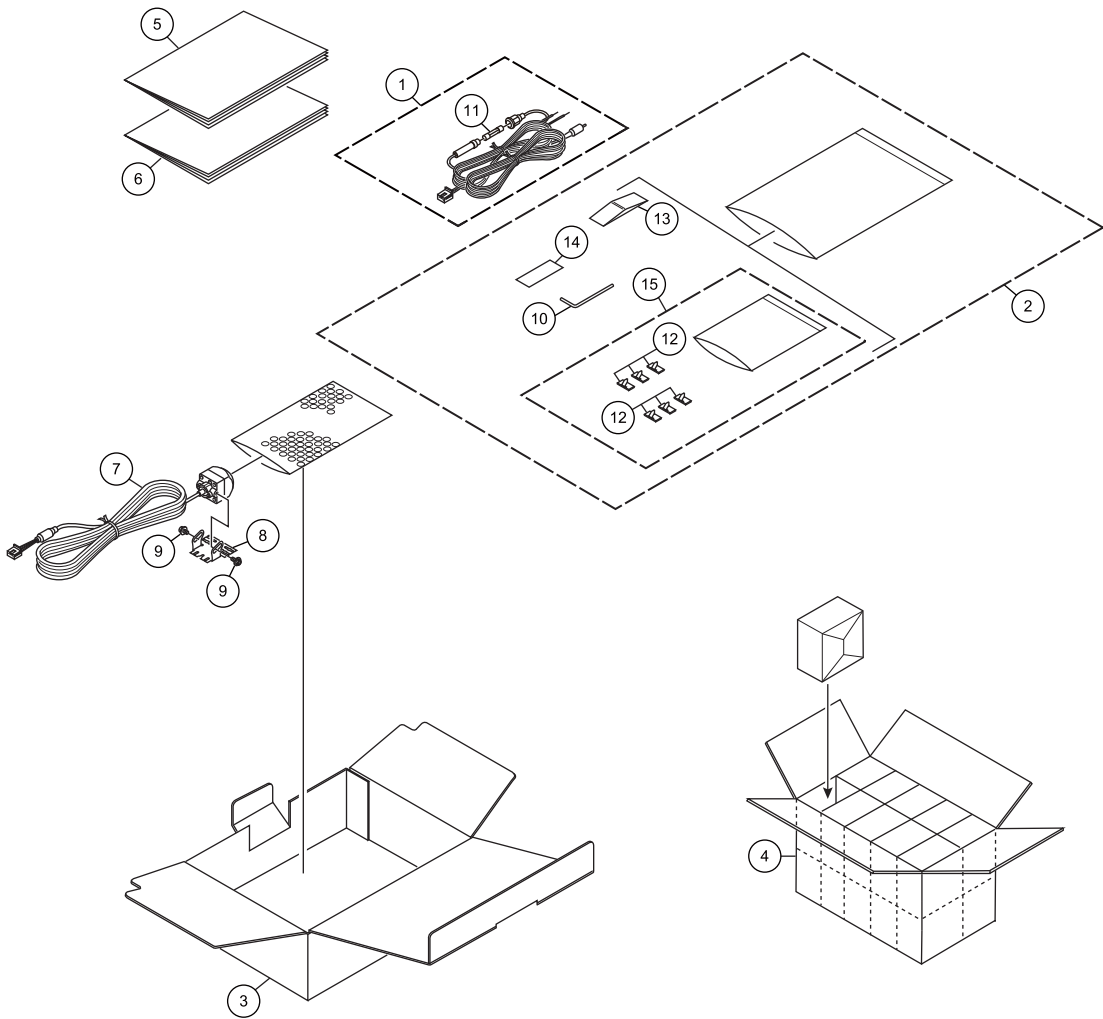

PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Cord Assy	CJ-E09S24R	⚠	11	Fuse(2 A)	CJ-E08S14R
	2	Accessory Assy	CJ-E09S02R	*	12	Clamper	CJ-E08S15R
	3	Unit Box	CJ-E09S06R		13	Packing	CJ-E08S13R
	4	Contain Box	CJ-E09S07R		14	Double Faced Tape	CJ-E08S03R
	5	Owner's Manual	CJ-E09S08R		15	Attachment Assy	CJ-E08S04R
	6	Owner's Manual	CJ-E09S09R				
	7	Camera Module	CJ-E09S10R				
	8	Strap	CJ-E08S11R				
	9	Screw	CJ-E08S12R				
*	10	Hexagon Wrench	CJ-E08S16R				


Owner's Manual

Part No.	Language
CJ-E09S08R	English, French, Italian ,Spanish(Espanol), German
CJ-E09S09R	Traditional Chinese, Russian, Portuguese(B), Arabic

9. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 • The ⚠ mark found on some component parts indicates the importance of the safety factor of the part.
 Therefore, when replacing, be sure to use parts of identical designation.
 • Screw adjacent to ▽ mark on the product are used for disassembly.
 • For the applying amount of lubricants or glue, follow the instructions in this manual.
 (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

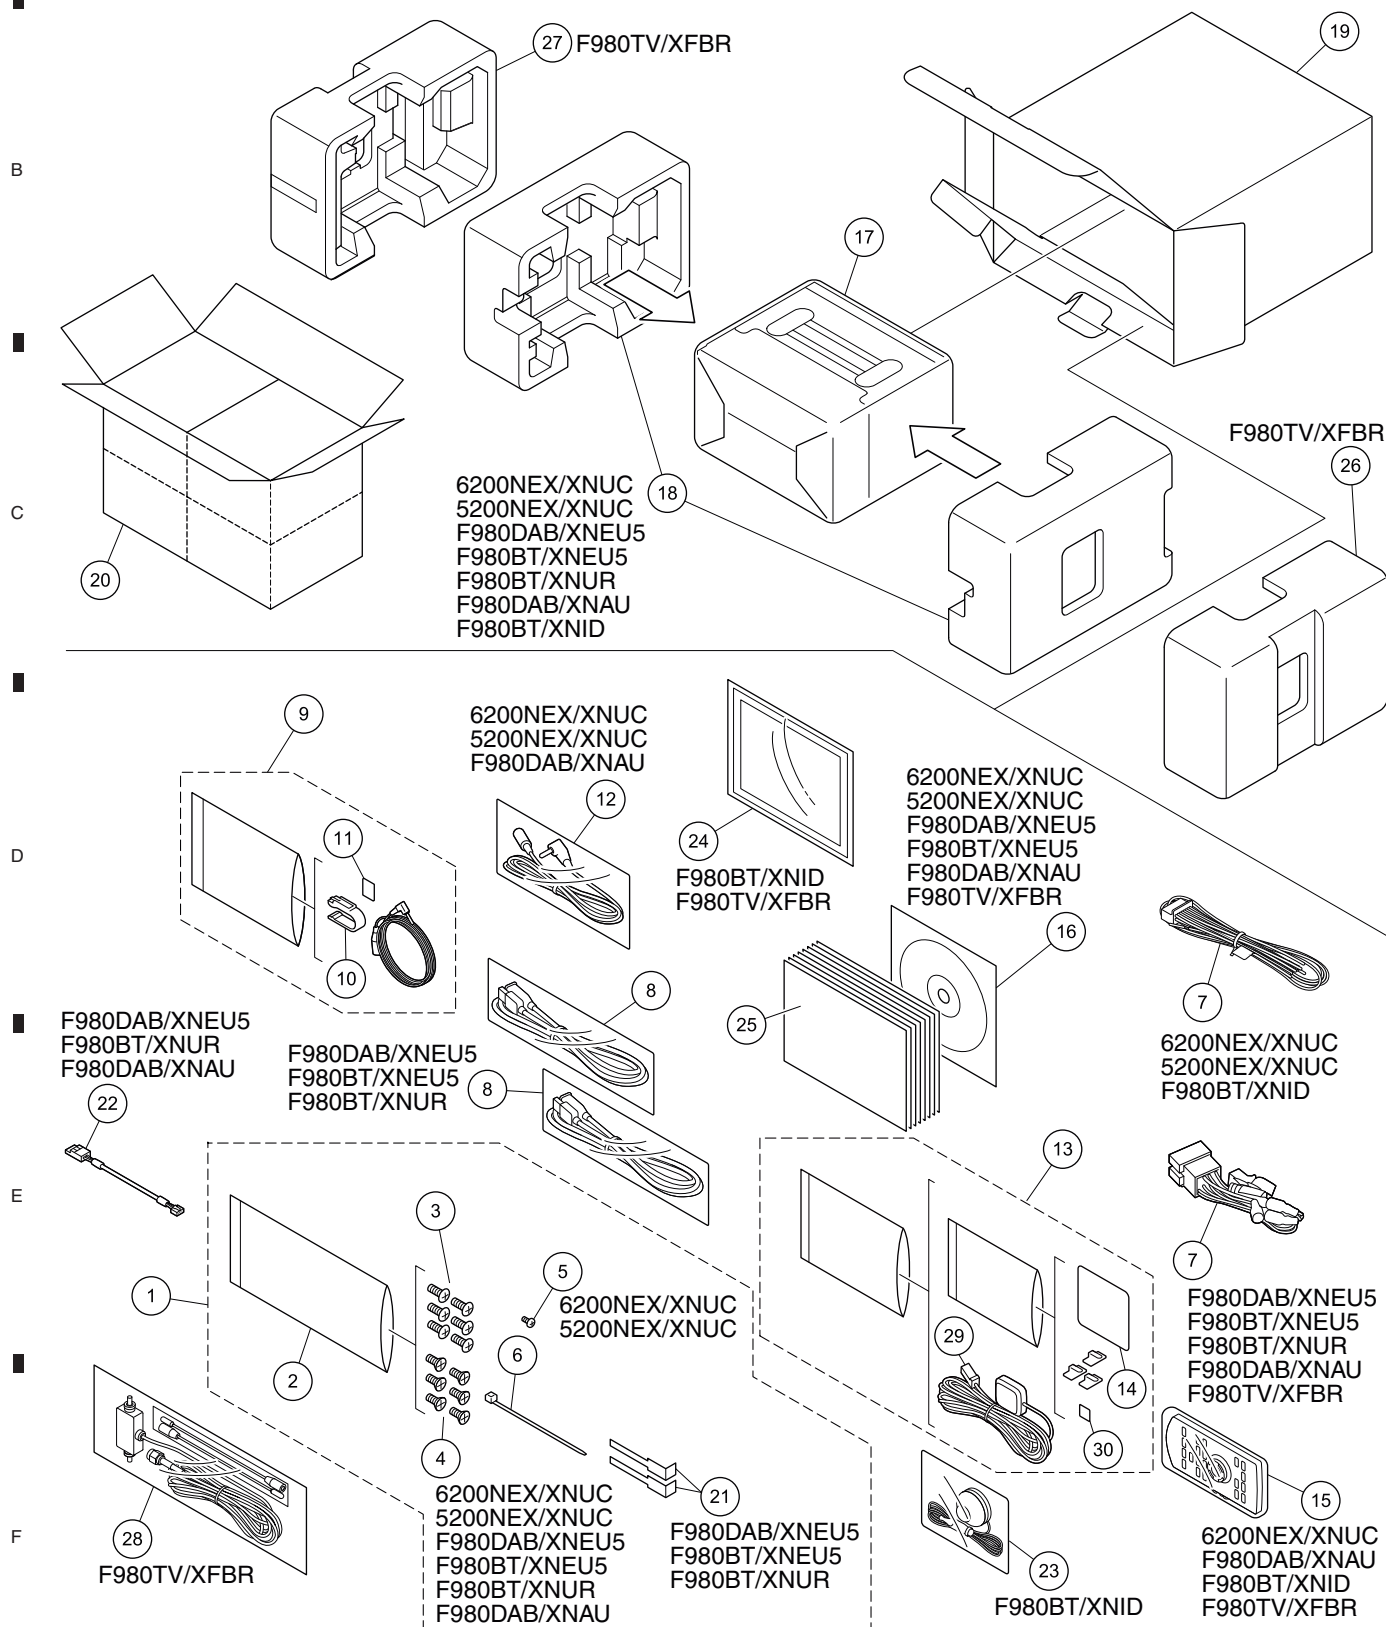

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Attachment Assy	See Contrast table (2)	24	Panel	See Contrast table (2)
* 2	Polyethylene Bag	CEG1160	25-1	Quick Start Guide	See Contrast table (2)
3	Screw	CBA2384			
4	Screw	See Contrast table (2)	25-2	Quick Start Guide	See Contrast table (2)
5	Screw	See Contrast table (2)	25-3	Quick Start Guide	See Contrast table (2)
			25-4	Owner's Manual	See Contrast table (2)
* 6	Lock Tie	CNW2429	25-5	Owner's Manual	See Contrast table (2)
7	Cord Assy	See Contrast table (2)	25-6	Installation Manual	See Contrast table (2)
8	USB Extended Cable	See Contrast table (2)			
9	Microphone Assy	CPM1109	* 25-7	Registration Card	See Contrast table (2)
10	Holder	CZN7192	* 25-8	Warranty Card	See Contrast table (2)
			* 25-9	Tag	See Contrast table (2)
11	Cushion	CZN7193	* 25-10	Caution Card	See Contrast table (2)
12	Cable Assy	See Contrast table (2)	* 25-11	Service Network	See Contrast table (2)
13	GPS Antenna Assy	CXE5736			
14	Sheet	CZN7151	25-12	Quick Start Guide	See Contrast table (2)
15	Card Remote Control Unit	See Contrast table (2)	25-13	Important Information for the User	See Contrast table (2)
			(2)		
16	IM CD-ROM	See Contrast table (2)	* 25-14	Caution Card	CRP1510
17	Cover	See Contrast table (2)	* 25-15	Caution Card	CRP1514
18	Protector	See Contrast table (2)	* 25-16	Caution Card	See Contrast table (2)
19	Unit Box	See Contrast table (2)			
20	Contain Box	See Contrast table (2)	26	Protector(L)	See Contrast table (2)
			27	Protector(R)	See Contrast table (2)
21	Handle	See Contrast table (2)	28	Rod Antenna	See Contrast table (2)
22	Cord	See Contrast table (2)	29	GPS Antenna	CYX1095
23	Microphone Assy	See Contrast table (2)	30	Double Side Tape	CYN1012

(2) CONTRAST TABLE

AVIC-6200NEX/XNUC, AVIC-5200NEX/XNUC, AVIC-F980DAB/XNEU5, AVIC-F980BT/XNEU5, AVIC-F980BT/XNUR, AVIC-F980DAB/XNAU, AVIC-F980BT/XNID and AVIC-F980TV/XFBR are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVIC-6200NEX/XNUC</u>	<u>AVIC-5200NEX/XNUC</u>	<u>AVIC-F980DAB/XNEU5</u>	<u>AVIC-F980BT/XNEU5</u>	<u>AVIC-F980BT/XNUR</u>	<u>AVIC-F980DAB/XNAU</u>	<u>AAVIC-F980BT/XNID</u>	<u>AVIC-F980TV/XFBR</u>
	1	Attachment Assy	*CED7015	*CEC8188(Screw Assy)	CEV1603	CEV1603	*CED6845	*CED6844	*CEC7757	*CEC7757
	4	Screw	CBA2383	CBA2383	CBA2383	CBA2383	CBA2383	CBA2383	Not used	Not used
	5	Screw	BPZ20P040	BPZ20P040	Not used	Not used	Not used	Not used	Not used	Not used
	7	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545	CDP1545	CDP1545	CDP1566	CDP1545
	8	USB Extended Cable	CDP1587(x1)	CDP1587(x1)	CDP1587(x2)	CDP1587(x2)	CDP1587(x2)	CDP1587(x1)	CDP1587(x1)	CDP1587(x2)
	12	Cable Assy	CDP1707	CDP1707	Not used	Not used	Not used	CDP1707	Not used	Not used
	15	Card Remote Control Unit	CXE5117	Not used	Not used	Not used	Not used	CXE5117	CXE5117	CXE7089
	16	IM CD-ROM	CPJ1510	CPJ1510	CPJ1512	CPJ1512	Not used	CPJ1512	Not used	CPJ1513
	17	Cover	CEG1359	CEG1359	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356
	18	Protector	CHP4863	CHP4863	CHP4864	CHP4864	CHP4864	CHP4863	CHP4863	Not used
	19	Unit Box	CHG9236	CHG9232	CHG9238	CHG9234	CHG9235	CHG9237	CHG9233	CHG9240
	20	Contain Box	CHL9236	CHL9232	CHL9238	CHL9234	CHL9235	CHL9237	CHL9233	CHL8941
	21	Handle	Not used	Not used	CND6289	CND6289	Not used	Not used	Not used	Not used
	22	Cord	Not used	Not used	CDP1669	Not used	CDP1669	CDP1669	Not used	Not used
	23	Microphone Assy	Not used	Not used	Not used	Not used	Not used	Not used	CPM1086	Not used
	24	Panel	Not used	Not used	Not used	Not used	Not used	Not used	CNS9475	CNS9475
	25-1	Quick Start Guide	CRB4841	CRB4841	CRD4955	CRD4955	CRB4842	CRB4843	CRB4840	Not used
	25-2	Quick Start Guide	Not used	Not used	CRD4956	CRD4956	Not used	Not used	Not used	Not used
	25-3	Quick Start Guide	Not used	Not used	CRD4957	CRD4957	Not used	Not used	Not used	Not used

Mark	No.	Description	AVIC-6200NEX/ XNUC	AVIC-5200NEX/ XNUC	AVIC-F980DAB/ XNEU5	AVIC-F980BT/ XNEU5	AVIC-F980BT/ XNUR	AVIC-F980DAB/ XNAU	AAVIC-F980BT/ XNID	AVIC-F980TV/ XFBRR
A	25-4	Owner's Manual	CRD4948	CRD4948	CRD4949	CRD4949	CRB4834	CRB4791	CRB4783	Not used
	25-5	Owner's Manual	Not used	Not used	Not used	Not used	CRB4838	Not used	CRB4792	Not used
	25-6	Installation Manual	CRD4951	CRD4951	CRD4952	CRD4952	CRB4848	CRB4794	CRB4795	CRB4798
	25-7	Registration Card	CRY1271	CRY1271	Not used	Not used	Not used	Not used	Not used	Not used
	25-8	Warranty Card	QRY3001	QRY3001	CRY1376	CRY1376	CRY1376	Not used	CRY1304	Not used
	25-9	Tag	Not used	Not used	CRW1881	CRW1881	CRW1881	Not used	Not used	Not used
	25-10	Caution Card	Not used	Not used	CRP1481	Not used	Not used	CRP1481	Not used	Not used
	25-11	Service Network	Not used	Not used	Not used	Not used	Not used	Not used	CRY1305	CRY1227
	25-12	Quick Start Guide	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CRB4844
	25-13	Important Information for the User	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CRB4797
B	25-16	Caution Card	Not used	Not used	CRP1509	CRP1509	Not used	Not used	Not used	Not used
	26	Protector(L)	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CHP4275
	27	Protector(R)	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CHP4276
	28	Rod Antenna	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CXE9491


Quick Start Guide, Owner's Manual, Installation Manual, Important Information for the User

Part No.	Language
CRB4541	English
CRD4857	English(Great Britain), French
CRD4858	Italian, Spanish(Espanol)
CRD4859	German, Dutch
CRB4544	Russian
CRB4543	English(Great Britain)
CRB4540	English(Great Britain)
CRB4548	Portugues(B)
CRD4851	English, French
CRD4855	English(Great Britain), French, Italian, Spanish(Espanol), German, Dutch
CRB4524	Russian
CRB4545	Russian
CRB4535	English(Great Britain)
CRB4523	English(Great Britain)
CRB4538	English(Great Britain)
CRB4585	Portugues(B)
CRD4852	English, French
CRD4856	English(Great Britain), French, Italian, Spanish(Espanol), German, Dutch
CRB4546	Russian
CRB4536	English(Great Britain)
CRB4539	English(Great Britain)
CRB4549	Portugues(B)

CONTENTS OF CD-ROM (Operation Manual), CPJ1510

Part No.	Language
* CRB4817	English
* CRB4820	French(Canadian)

9.2 EXTERIOR (1)

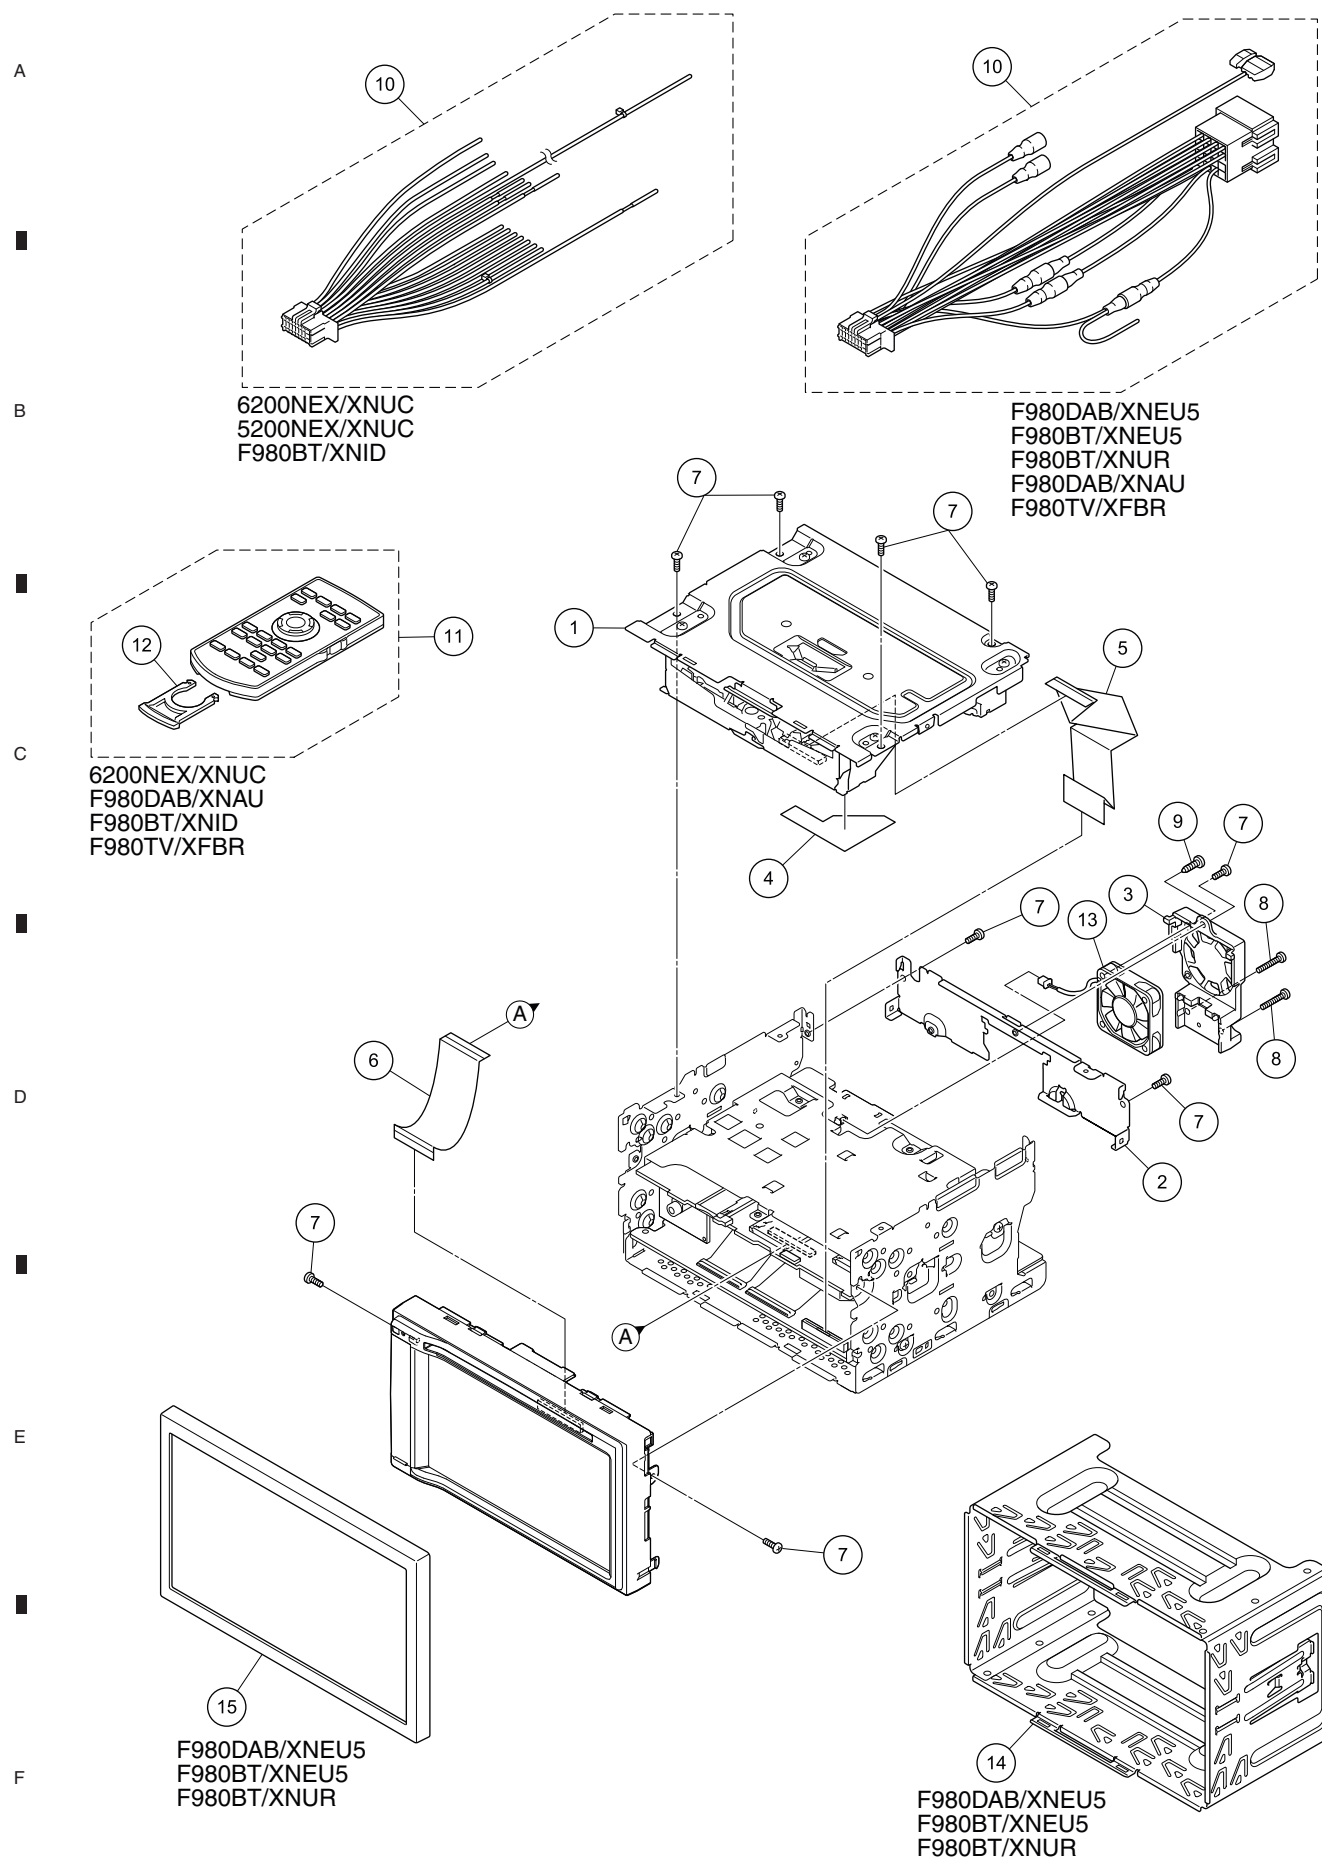

(1) EXTERIO (1) SECTION PARTS LIST


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	DVD Mechanism Module (LS2.5)	CXK8102	9	Screw	BPZ30P080FTC
2	Holder	CND6989	10	Cord Assy	See Contrast table (2)
3	Heat Sink	CNR2165	11	Card Remote Control Unit	See Contrast table (2)
4	Insulator	CNN4613	12	Battery Cover	See Contrast table (2)
5	FFC	CDD1033	13	Fan Motor	See Contrast table (2)
6	FFC	CDD1121	14	Holder	See Contrast table (2)
7	Screw	BSZ26P060FTC	15	Panel	See Contrast table (2)
8	Screw	BSZ26P120FTC			

(2) CONTRAST TABLE

AVIC-6200NEX/XNUC, AVIC-5200NEX/XNUC, AVIC-F980DAB/XNEU5, AVIC-F980BT/XNEU5, AVIC-F980BT/XNUR, AVIC-F980DAB/XNAU, AVIC-F980BT/XNID and AVIC-F980TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-6200NEX/XNUC	AVIC-5200NEX/XNUC	AVIC-F980DAB/XNEU5	AVIC-F980BT/XNEU5	AVIC-F980BT/XNUR	AVIC-F980DAB/XNAU	AVIC-F980BT/XNID	AVIC-F980TV/XFBR
	10	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545	CDP1545	CDP1545	CDP1666	CDP1545
	11	Card Remote Control Unit	CXE5117	Not used	Not used	Not used	Not used	CXE5117	CXE5117	CXE7089
	12	Battery Cover	CNU1624	Not used	Not used	Not used	Not used	CNU1624	CNU1624	10030-0069600
	13	Fan Motor	CXM1446	CXM1446	CXM1449	CXM1449	CXM1449	CXM1449	CXM1446	CXM1446
	14	Holder	Not used	Not used	CND7102	CND7102	CND7102	Not used	Not used	Not used
	15	Panel	Not used	Not used	CNU2645	CNU2645	CNU2645	Not used	Not used	Not used

9.3 EXTERIOR (2)

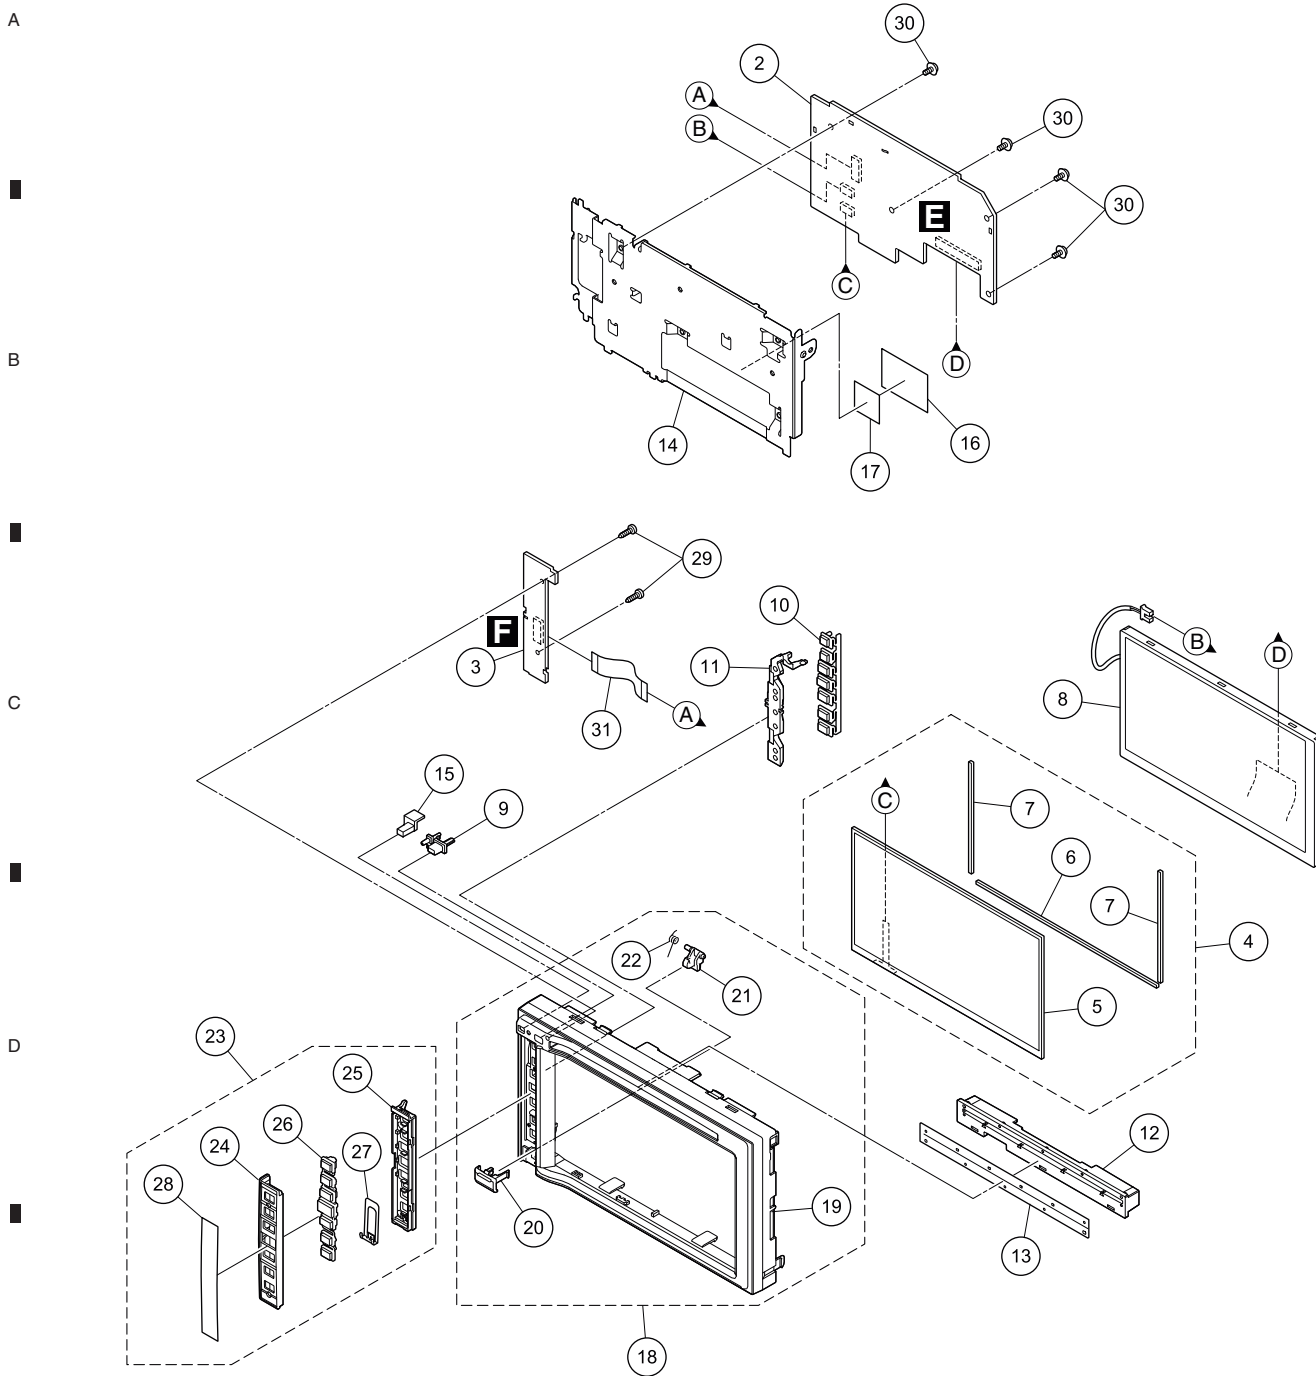

(1) EXTERIOR (2) SECTION PARTS LIST


Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	*****		17	Sheet	CNN4869	
	2	Monitor Unit (Service)	CXX8725	18	Grille Assy	See Contrast table (2)	A
	3	Key Unit (Service)	CXX8727	19	Grille	See Contrast table (2)	
	4	Touch Panel Unit	CXE8371	20	Button (DETACH)	See Contrast table (2)	
	5	Touch Panel	CSX1273				
	6	Cushion	CNN4273	*	21	Arm	CNW2708
	7	Cushion	CNN4964	*	22	Coil Spring	CBH3111
	8	TFT LCD	CWX4348		23	Grille Assy	See Contrast table (2)
	9	Button (EJECT)	See Contrast table (2)	*	24	Grille	See Contrast table (2)
	10	Button	CAI4538		25	Cover	CNU3074
	11	Lighting Conductor	CNW3435	*	26	Button	CAI4324
	12	Holder	CNW3304	*	27	Plate Spring	CBL1845
	13	Cover	CNN4865	*	28	Plate	CNU2671
	14	Holder	CND7351		29	Screw	BPZ20P060FTC
	15	Lighting Conductor	CNW3436		30	Screw	ASZ26P050FTC
	16	Sheet	CNN4232	31	FFC	CDE9768	

(2) CONTRAST TABLE

AVIC-6200NEX/XNUC, AVIC-5200NEX/XNUC, AVIC-F980DAB/XNEU5, AVIC-F980BT/XNEU5, AVIC-F980BT/XNUR, AVIC-F980DAB/XNAU, AVIC-F980BT/XNID and AVIC-F980TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-6200NEX/XNUC	AVIC-5200NEX/XNUC	AVIC-F980DAB/XNEU5	AVIC-F980BT/XNEU5	AVIC-F980BT/XNUR	AVIC-F980DAB/XNAU	AVIC-F980BT/XNID	AVIC-F980TV/XFBR
	9	Button (EJECT)	CAI4537	CAI4537	CAI4574	CAI4574	CAI4574	CAI4574	CAI4537	CAI4537
	18	Grille Assy	CXE9151	CXE9153	CXE8362	CXE8365	CXE9154	CXE9152	CXE9155	CXE9159
	19	Grille	CNU3486	CNU3488	CNU3137	CNU3215	CNU3489	CNU3487	CNU3490	CNU3491
	20	Button (DETACH)	CAI4536	CAI4536	CAI4573	CAI4573	CAI4573	CAI4573	CAI4536	CAI4536
*	23	Grille Assy	CXE8369	CXE8369	CXE8370	CXE8370	CXE8370	CXE8370	CXE8369	CXE8369
	24	Grille	CNU2670	CNU2670	CNU2214	CNU2214	CNU2214	CNU2214	CNU2670	CNU2670

9.4 EXTERIOR (3)

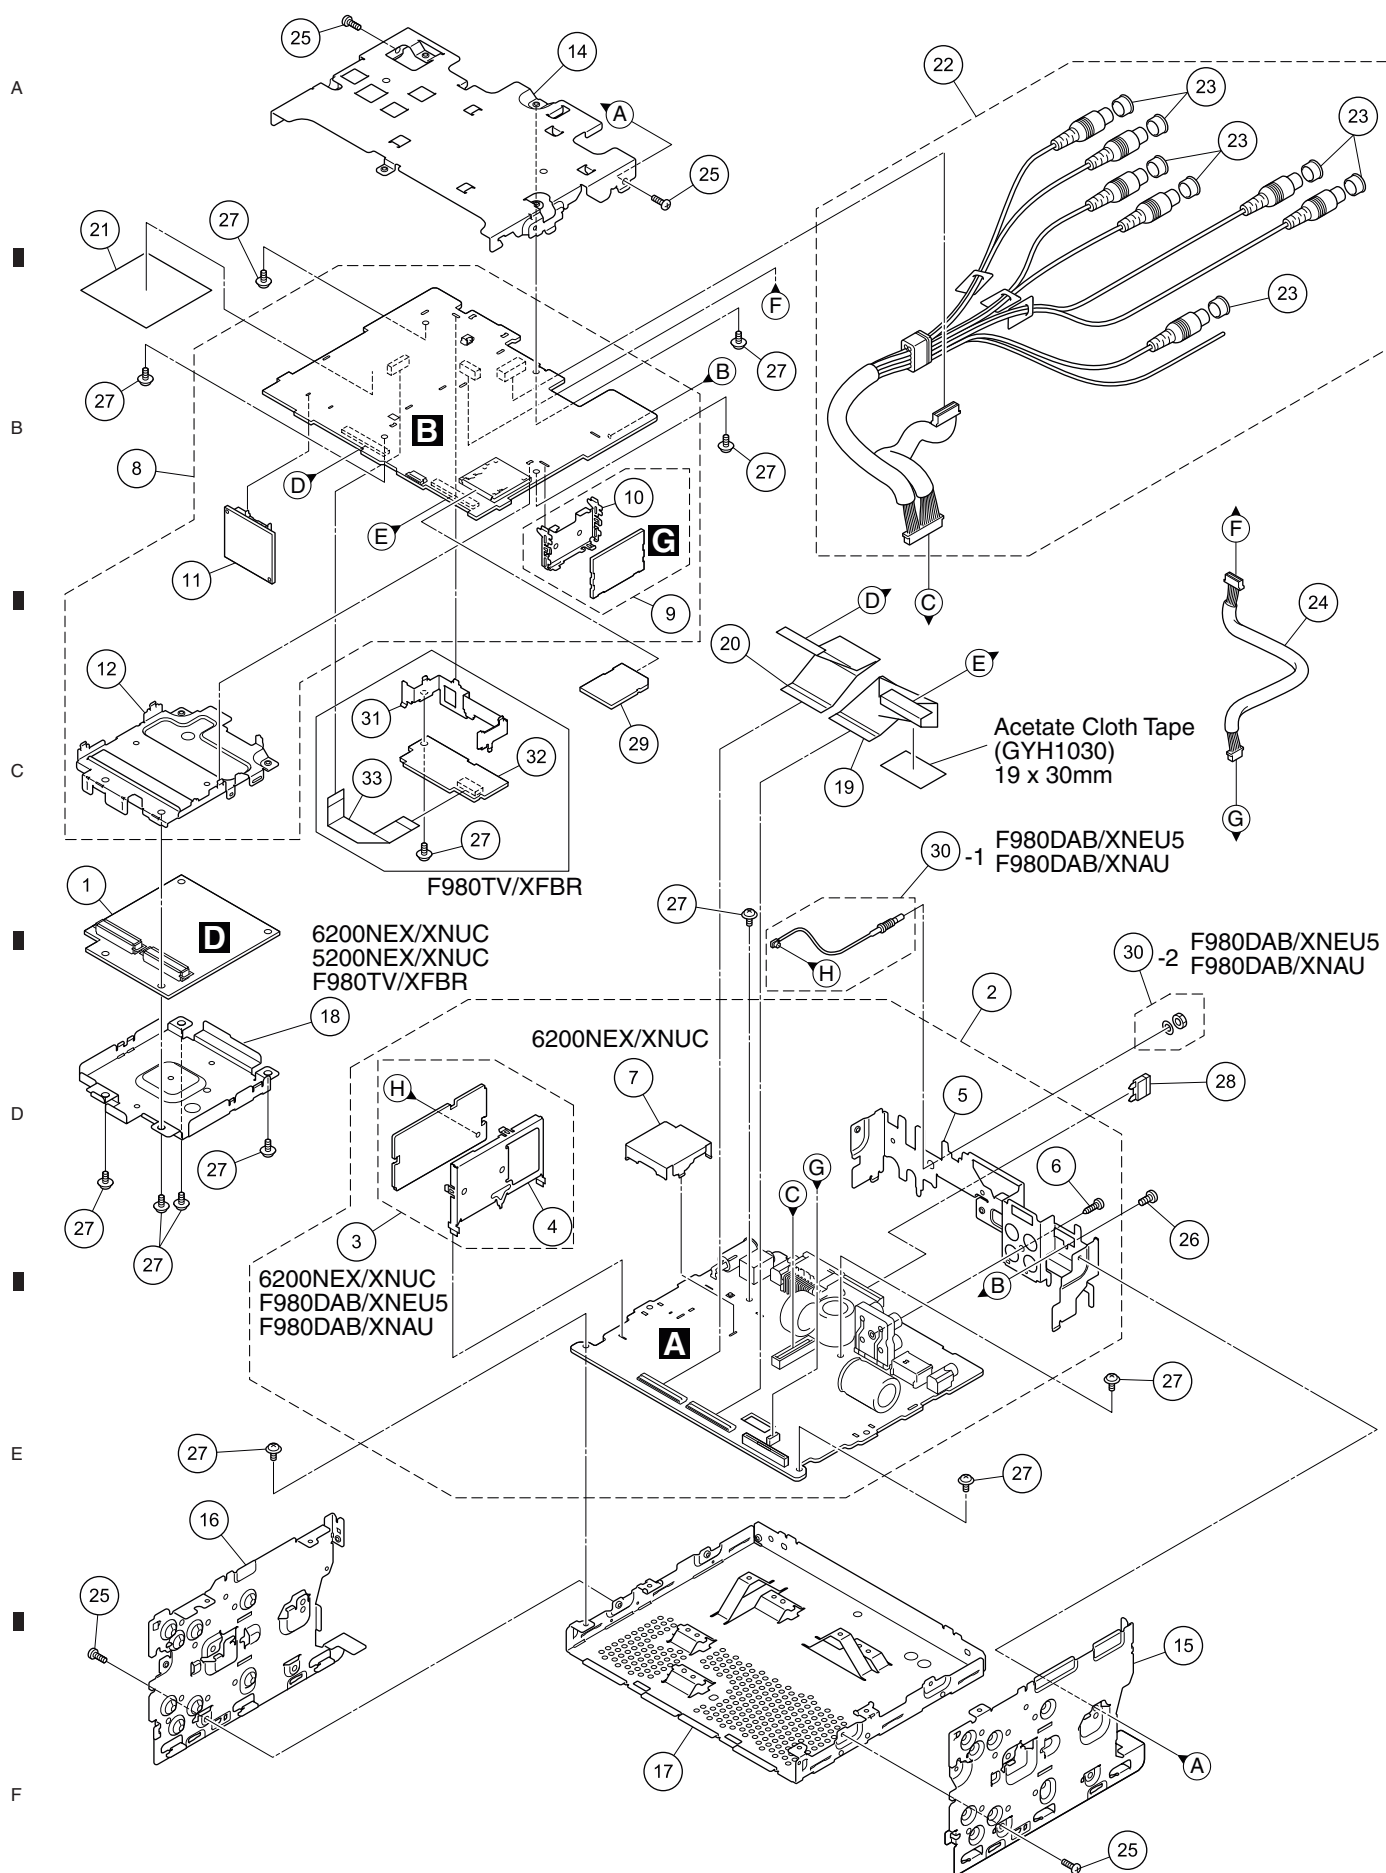

(1) EXTERIOR (3) SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	SOC Dual Core Unit	CWN9870	18	Shield Case	See Contrast table (2)
2	AV Unit	See Contrast table (2)	19	FFC	CDD1035
3	BE Core Unit (U1701)	See Contrast table (2)	20	FFC	CDD1036
4	Holder	See Contrast table (2)			
5	Holder	See Contrast table (2)	21	Sheet	CNN4830
			22	Cable Assy	CDF1082
6	Screw	BPZ26P080FTC	23	Cap	CNV6727
7	Shield Case	See Contrast table (2)	24	Cable Assy	CDF1197
8	IF Unit	See Contrast table (2)	25	Screw	BSZ26P060FTC
9	Sensor Unit	CWX4712			
10	Holder	CND6958	26	Screw	BMZ30P060FTC
			27	Screw	ASZ26P050FTC
11	BT Module	CWX4710	⚠ 28	Fuse (10 A)	YEK5001
12	Holder	CND6987	29	Service Strage SD Assy	See Contrast table (2)
13	*****		30	Antenna Cable Assy	See Contrast table (2)
14	Holder	CND6984			
15	Bracket	CND6985	31	Holder	See Contrast table (2)
			32	DTT Tuner	See Contrast table (2)
16	Bracket	CND6986	33	FFC	See Contrast table (2)
17	Chassis	CNA3310			

(2) CONTRAST TABLE

AVIC-6200NEX/XNUC, AVIC-5200NEX/XNUC, AVIC-F980DAB/XNEU5, AVIC-F980BT/XNEU5, AVIC-F980BT/XNUR, AVIC-F980DAB/XNAU, AVIC-F980BT/XNID and AVIC-F980TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-6200NEX/XNUC	AVIC-5200NEX/XNUC	AVIC-F980DAB/XNEU5	AVIC-F980BT/XNEU5	AVIC-F980BT/XNUR	AVIC-F980DAB/XNAU	AVIC-F980BT/XNID	AVIC-F980TV/XFBR
	2	AV Unit	CWN9889	CWN9892	CWN9888	CWN9891	CWN9894	CWN9890	CWN9895	CWN9893
	3	BE Core Unit (U1701)	CWE2518	Not used	CWE2534 (WWR Tuner Unit)	Not used	Not used	CWE2534 (WWR Tuner Unit)	Not used	Not used
	4	Holder	CND7288	Not used	CND7288	Not used	Not used	CND7288	Not used	Not used
	5	Holder	CND6992	CND6994	CND7409	CND6995	CND7002	CND7002	CND6995	CND7365
	7	Shield Case	CND7003	Not used	Not used	Not used	Not used	Not used	Not used	Not used
	8	IF Unit	CWN9913	CWN9916	CWN9912	CWN9915	CWN9918	CWN9914	CWN9919	CWN9917
	18	Shield Case	CND6988	CND6988	Not used	Not used	Not used	Not used	Not used	CND6988
	29	Service Strage SD Assy	CXX8737	CXX8737	CXX8736	CXX8736	CXX8738	CXX8732	CXX8734	CXX8735
	30	Antenna Cable Assy	Not used	Not used	QXA3732	Not used	Not used	QXA3732	Not used	Not used
	31	Holder	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CND7356
	32	DTT Tuner	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CWE2519
	33	FFC	Not used	Not used	Not used	Not used	Not used	Not used	Not used	CDD1122

9.5 DVD MECHANISM MODULE (1)

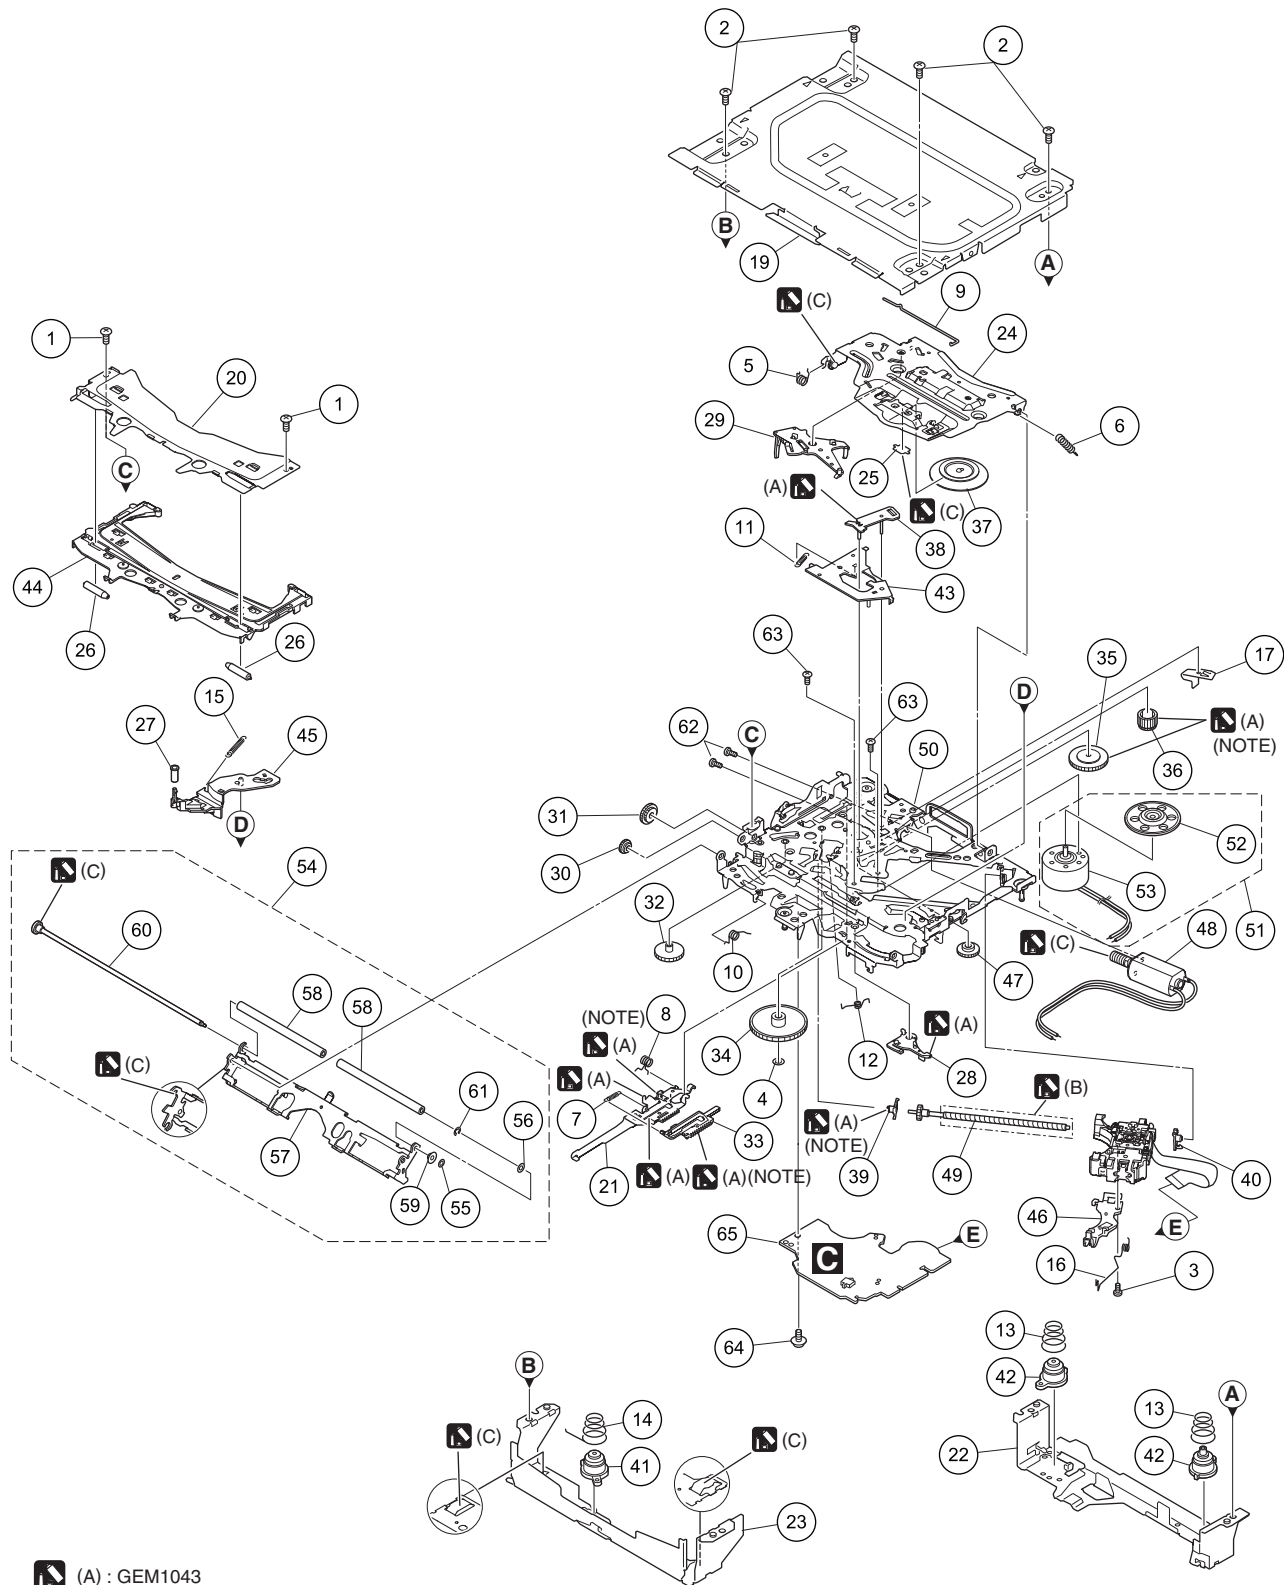

(NOTE) Apply grease to the whole part.

DVD MECHANISM MODULE (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BSZ20P040FTC	36	Gear	CNW1187	
2	Screw	BSZ26P060FTC	37	Clamper	CNW1190	A
3	Screw (M2 x 4)	CBA1835	38	Arm	CNW1192	
4	Washer	CBF1038	39	Holder	CNW1193	
5	Spring	CBH2855	40	Holder	CNW1194	
6	Spring	CBH2860	41	Damper	CNW2439	
7	Spring	CBH3010	42	Damper	CNW2440	
8	Spring	CBH3011	43	Arm	CNW1726	
9	Spring	CBH3014	44	Guide	CNW3489	
10	Spring	CBH3015	45	Arm	CNW2241	
11	Spring	CBH3016	46	Rack	CNW2265	B
12	Spring	CBH3017	47	Gear	CNW2287	
13	Spring	CBH3019	48	Motor Unit	CXC4026	
14	Spring	CBH3086	49	Screw Unit	CXC8894	
15	Spring	CBH3095	50	Chassis Unit	CXE8407	
16	Spring	CBH3096	51			
17	Plate Spring	CBL1824	*	52 Support Wheel	CNW2052	
18			*	53 Spindle Motor	EXM2002	
19	Case	CNB3928		54 Arm Assy	CXE7890	
20	Bracket	CND4553		55 Washer	CBF1037	C
21	Lever	CND7225		56 Washer	CBF1038	
22	Bracket	CND5710		57 Arm	CND6779	
23	Bracket	CND6127		58 Roller	CNW2500	
24	Arm	CND7224		59 Collar	CNW2444	
25	Sheet	CNN3678		60 Gear Unit	CXE6225	
26	Roller	CNW1172	61	E Ring	YE15FTC	
27	Roller	CNW1175	62	Screw	JFZ20P025FTC	
28	Arm	CNW1177	63	Screw	JGZ17P020FTC	
29	Arm	CNW1178	64	Screw (M2 x 5)	EBA1028	D
30	Gear	CNW1180	65	DVD Core Unit	CWX4717	
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by μ instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVIC-6200NEX/XNUC	
B:AVIC-5200NEX/XNUC	
C:AVIC-F980DAB/XNEU5	
D:AVIC-F980BT/XNEU5	
E:AVIC-F980BT/XNUR	
F:AVIC-F980DAB/XNAU	
G:AVIC-F980BT/XNID	
H:AVIC-F980TV/XFBR	
Unit Number : CWN9889(A)	
Unit Number : CWN9892(B)	
Unit Number : CWN9888(C)	
Unit Number : CWN9891(D)	
Unit Number : CWN9894(E)	
Unit Number : CWN9890(F)	
Unit Number : CWN9895(G)	
Unit Number : CWN9893(H)	
Unit Name : AV Unit	
Unit Number : CWN9913(A)	
Unit Number : CWN9916(B)	
Unit Number : CWN9912(C)	
Unit Number : CWN9915(D)	
Unit Number : CWN9918(E)	
Unit Number : CWN9914(F)	
Unit Number : CWN9919(G)	
Unit Number : CWN9917(H)	
Unit Name : IF Unit	
Unit Number : CWX4717	
Unit Name : DVD Core Unit	

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
-------------------------------	-----------------

Unit Number : CWN9870
Unit Name : SOC Dual Core Unit

Unit Number : CXX8725
Unit Name : Monitor Unit(Service)

Unit Number : CXX8727
Unit Name : Key Unit(Service)

Unit Number : CWX4712
Unit Name : Sensor Unit

A	
Unit Number : CWN9889(A)	
Unit Number : CWN9892(B)	
Unit Number : CWN9888(C)	
Unit Number : CWN9891(D)	
Unit Number : CWN9894(E)	
Unit Number : CWN9890(F)	
Unit Number : CWN9895(G)	
Unit Number : CWN9893(H)	
Unit Name : AV Unit	

MISCELLANEOUS

IC 101	(A,59,104)	IC	NJM12904V
IC 201	(A,98,136)	Power AMP IC	PA2032A
IC 302	(B,148,58)	Regulator IC	MM3411A33N
IC 303	(B,164,47)	DC/DC CONV IC	NJW4132U2-A
IC 304	(B,170,83)	Regulator	BA00CC0WFP
IC 305	(B,154,46)	Regulator IC	R1516S033B-AE
IC 501	(B,30,51)	Regulator IC(A,C,F)	MM3479A33P
IC 502	(B,33,58)	Regulator IC(A,C,F)	S-1172B12-E6
IC 503	(A,29,82)	Regulator IC(C,F)	MM3479A33P
IC 504	(B,46,50)	Regulator IC	MM3571A33P
IC 505	(B,42,43)	Regulator IC(A,C,D,E,F)	MM3571A33P

	1	2	3	4
	Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
A	IC 601 (A,68,46) ROM IC	CAT93C66VI	Q 2205 (A,34,111) Chip Transistor	2SD2114K
	* IC602 (A,90,35) Flash Blank UC IC	UPD70F3925AGMA	Q 2206 (A,26,112) Transistor	RN4984
	IC 603 (B,118,17) Reset IC	PST8229N	Q 2207 (A,41,114) Transistor	RN4984
	IC 801 (B,74,62) IC	AK4223VQ	Q 2301 (A,115,34) Transistor(G,H)	RN4982
	IC 901 (B,51,29) IC	AK4223VQ	Q 2302 (A,115,25) Transistor(G,H)	RN4982
	IC 902 (B,61,19) Dual OP-AMP	NJM4565V	Q 2303 (A,115,29) Transistor(G,H)	RN4982
	IC 1002 (B,148,75) Dual OP-AMP	NJM4565V	Q 2304 (B,87,29) Transistor(G,H)	RN4982
	IC 1003 (B,152,100) Dual OP-AMP	NJM4565V	D 103 (B,71,110) Diode	UDZV6R2(B)
	IC 1005 (B,154,87) IC	TC4052BFT	D 105 (B,129,81) Diode	DZ2J200M0
	IC 1101 (B,134,55) IC	AK7734XQ	D 106 (B,129,76) Diode	UDZV7R5(B)
	IC 1201 (A,118,44) CONV IC	WM8761BGED	D 107 (B,127,79) Rectifier Diode	DAN202UM
	IC 1202 (A,116,54) CONV IC	WM8761BGED	D 109 (B,64,112) Rectifier Diode	DA2J101
	IC 1203 (A,115,64) CONV IC	WM8761BGED	D 110 (B,79,136) Diode	D1F60-5053
	IC 1301 (B,80,89) IC	PM9012A	D 111 (B,75,136) Diode	D1F60-5053
	IC 1501 (A,45,64) Tuner IC(A)	TEF6688HN	D 112 (B,50,108) Diode	DZ2J056M0
B	IC 1501 (A,45,64) Tuner IC(Except A)	TEF6686HN	D 113 (B,52,111) Diode	DZ2J180M0
	IC 1601 (A,38,45) Tuner IC(A,C,D,E,F)	TEF6686HN	D 116 (B,61,107) Rectifier Diode	DA2J101
	Q 101 (B,68,106) Bipolar TR	LSCR523UB	D 118 (B,56,106) Rectifier Diode	DA2J101
	Q 102 (B,132,78) Chip Transistor	HN1C01FU	D 120 (A,58,112) Rectifier Diode	DA2J101
	Q 104 (B,67,108) Resistor Built-IN TR	LTC014EEB	D 122 (A,53,110) Diode	D1F60-5053
	Q 105 (B,52,104) Chip Transistor	HN1C01FU	D 123 (B,90,95) Diode	RB080L-30
	Q 107 (B,64,106) Bipolar TR	LSAR523UB	D 124 (B,105,123) Diode	CRG03
	Q 108 (B,58,106) Bipolar TR	LSAR523UB	D 201 (B,94,114) Rectifier Diode	DA2J101
	Q 109 (A,52,106) Resistor Built-IN TR	LTC014EEB	D 202 (B,76,116) Rectifier Diode	DAN202UM
	Q 110 (A,53,115) Resistor Built-IN TR	LTC014EEB	D 203 (B,72,114) Rectifier Diode	DAN202UM
C	Q 111 (B,61,104) Resistor Built-IN TR	LTC014EEB	D 205 (B,93,111) Diode	DZ2J082M0
	Q 201 (B,79,111) Transistor	RN4987	D 206 (B,85,110) Rectifier Diode	DA2J101
	Q 202 (B,74,109) Transistor	RN4987	D 311 (B,171,44) Schottky Diode	RB551VM-30
	Q 203 (B,77,112) Resistor Built-IN TR	LTA024EEB	D 501 (B,36,54) Diode(A,C,F)	CRG03
	Q 204 (B,85,113) Chip Transistor	RN1903	D 601 (B,115,19) Rectifier Diode	DA2J101
	Q 205 (B,89,111) Bipolar TR	LSCR523UB	D 602 (B,94,24) Schottky Diode	DB2J31400
	Q 301 (B,160,39)	LTC014EEB	D 603 (B,94,31) Schottky Diode	DB2J31400
	Q 302 (B,163,38) Bipolar TR	LSAR523UB	D 604 (B,74,23) Schottky Diode(A,B)	DB2J31400
	Q 312 (A,152,46) Bipolar TR	LSCR523UB	D 1401 (B,23,103) Diode	EZAEG2A50AX
	Q 314 (B,125,38) Chip Transistor	2SB1689	D 1402 (B,59,83) Diode(A,C,D,E,F)	DAN217UM
D	Q 315 (B,124,35) Bipolar TR	LSCR523UB	D 1404 (B,44,89) Diode(A,C,D,E,F)	RN779F
	Q 602 (A,67,39) Bipolar TR	LSCR523UB	D 1501 (A,43,82) Diode	EZAEG2A50AX
	Q 1001 (B,155,82) Chip Transistor	RN1907	D 1502 (A,36,75) Diode	EZAEG2A50AX
	Q 1401 (A,50,90) Transistor(A,C,D,E,F)	2SC3357	D 1702 (B,35,78) Diode(C,F)	DZ2J160M0
	Q 1402 (B,51,89) Bipolar TR(A,C,D,E,F)	LSAR523UB	D 2204 (A,29,113) Diode	DZ2J043M0
	Q 1403 (B,52,85) Bipolar TR(A,C,D,E,F)	LSCR523UB	L 101 (A,85,103) Choke Coil 600 uH	CTH1221
	Q 1404 (B,60,90) Transistor(A,C,D,E,F)	2SC4083	L 303 (A,170,40) Choke Coil	CTH1561
	Q 1405 (B,58,88) Transistor(A,C,D,E,F)	2SC4083	L 901 (B,47,41) Inductor	CTF1786
	Q 1501 (A,31,58) Bipolar TR(A)	MMBT2369L	L 902 (B,48,41) Inductor	CTF1786
	Q 1502 (A,31,55) Bipolar TR(A)	MMBT2369L	L 1101 (A,130,54) Ferrite Bead	CTF1528
E	Q 1503 (A,38,58) Bipolar TR(A)	MMBT2369L	L 1102 (A,144,52) Ferrite Bead	CTF1528
	Q 1504 (A,37,55) Bipolar TR(A)	MMBT2369L	L 1201 (A,112,49) Inductor	CTF1786
	Q 1701 (B,25,79) Resistor Built-IN TR(C,F)	LTC014EEB	L 1202 (A,110,59) Inductor	CTF1786
	Q 1702 (B,27,88) Transistor(C,F)	2SAR293PGZE	L 1203 (A,114,70) Inductor	CTF1786
	Q 1703 (B,33,84) Transistor(C,F)	2SAR293PGZE	L 1204 (B,141,51) Chip Beads	VTL1132
	Q 1801 (B,153,20) Chip Transistor	RN4982	L 1405 (A,47,93) Inductor(A,C,D,E,F)	CTF1794
	Q 1802 (B,148,19) Chip Transistor	RN1910	L 1406 (A,42,93) Inductor(A,C,D,E,F)	ATL7054
	Q 1804 (B,159,18) Transistor	2SB1260	L 1407 (A,46,87) Inductor(A,C,D,E,F)	LCYB47NJ1608
	Q 1805 (B,155,16) Resistor Built-IN TR	LTC014EEB	L 1408 (A,54,91) Inductor(A,C,D,E,F)	LCYB22NJ1608
	Q 1806 (A,153,24) IC	RZQ050P01	L 1409 (A,54,78) Coil(A,C,D,E,F)	CTC1213
F	Q 1807 (A,153,20) Bipolar TR	LSCR523UB	L 1411 (A,63,83) Inductor(A,C,D,E,F)	CTF1786
	Q 2201 (A,81,81) Chip Transistor	HN1C03FU	L 1501 (A,53,54) Inductor	CTF1749
	Q 2202 (A,78,85) Chip Transistor	HN1C03FU	L 1503 (A,37,73) Inductor	LCYC150K1608
	Q 2203 (B,172,104) Chip Transistor	HN1C03FU	L 1504 (B,29,96) Inductor	CTF1389
	Q 2204 (B,131,93) Chip Transistor	HN1C03FU	L 1505 (A,45,82) Inductor	LCMAR27J1608

5			6			7			8		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.		
L 1601	(A,34,33)	Inductor(A,C,D,E,F)	CTF1749			R 120	(B,54,109)		RS1/16SS472J		
L 1603	(A,56,45)	Inductor(A,C,D,E,F)	LCMAR27J1608			R 122	(B,62,110)		RS1/16SS102J		
L 2201	(A,94,72)	Ferrite Bead	CTF1528			R 123	(B,65,108)		RS1/16SS103J		
L 2202	(A,104,72)	Ferrite Bead	CTF1528			R 124	(B,65,104)		RS1/16SS223J		A
						R 125	(B,58,112)		RS1/16SS103J		
L 2203	(A,94,73)	Ferrite Bead	CTF1528								
L 2204	(A,105,74)	Ferrite Bead	CTF1528			R 126	(B,56,104)		RS1/16SS223J		
L 2205	(A,106,76)	Ferrite Bead	CTF1528			R 127	(B,60,108)		RS1/16SS102J		
L 2206	(A,94,76)	Ferrite Bead	CTF1528			R 128	(B,58,108)		RS1/16SS103J		
L 2207	(A,104,76)	Ferrite Bead	CTF1528			R 129	(B,55,113)		RS1/16SS103J		
						R 130	(A,54,104)		RS1/16SS104J		
L 2208	(A,94,77)	Ferrite Bead	CTF1528								
L 2209	(A,104,78)	Ferrite Bead	CTF1528			R 131	(A,53,104)		RS1/16SS473J		
L 2210	(A,101,68)	Ferrite Bead	CTF1528			R 132	(A,54,103)		RS1/16SS563J		
L 2211	(A,111,82)	Chip Ferrite Bead	BTX1047			R 133	(A,58,107)		RS1/16SS513J		
X 601	(A,110,31)	Resonator 3.932 16 MHz	CSS1772			R 134	(A,64,104)		RS1/16SS104J		
						R 135	(A,65,104)		RS1/16SS513J		B
X 1101	(B,136,65)	Resonator 12.288 MHz	CSS1811								
X 1501	(A,54,60)	Crystal Resonator 9.216 MHz	CSS1863			R 136	(A,64,103)		RS1/16SS513J		
X 1601	(A,39,37)	Crystal Resonator 9.216 MHz(A,C,D,E,F)	CSS1863			R 137	(A,60,110)		RS1/16SS102J		
P 1401	(B,24,103)	Surge Absorber	IMSA-6803-01Y900			R 138	(A,64,106)		RS1/16SS102J		
P 1701	(B,72,100)	Poly Switch(C,F)	FSMD075-24R			R 139	(A,66,107)		RS1/16SS564J		
						R 140	(A,55,113)		RS1/16SS822J		
P 2101	(A,127,105)	Poly Switch	FSMD075-24R								
P 2201	(A,113,78)	Poly Switch	FSMD075-24R			R 141	(A,56,112)		RS1/16SS202J		
P 2202	(B,164,125)	Poly Switch	FSMD075-24R			R 142	(A,56,114)		RS1/16SS203J		
P 2203	(B,134,99)	Poly Switch	FSMD075-24R			R 143	(A,55,112)		RS1/16SS333J		
P 2206	(B,141,98)	Poly Switch	FSMD075-24R			R 144	(A,49,112)		RS1/10SR0R0J		
						R 145	(B,50,116)		RS1/4SA102J		
△P2207	(A,94,101)	Fuse 3.5 A	CEK1343								C
△P2208	(A,107,89)	Fuse 5.0 A	CEK1346			R 149	(A,54,119)		RS1/10SR0R0J		
P 2209	(A,43,121)	Poly Switch	FSMD075-24R			R 150	(B,54,116)		RS1/10SR0R0J		
BZ601	(A,165,29)	Buzzer	CPV1062			R 201	(B,83,110)		RS1/16SS683J		
CN1801	(A,153,8)	Connector	VKN1620			R 202	(B,92,114)		RS1/16SS102J		
						R 205	(B,86,120)		RS1/16SS0R0J		
CN1802	(A,145,18)	Connector	CKS6007								
CN2001	(A,108,11)	Connector	CKS6646			R 207	(A,86,121)		RS1/16SS0R0J		
CN2002	(A,71,11)	Connector	CKS6646			R 210	(A,109,126)		RS1/16SS0R0J		
CN2101	(A,157,116)	Connector	CKS4497			R 213	(B,87,109)		RS1/16SS683J		
CN2201	(A,99,83)	Connector	CKS6600			R 214	(B,84,120)		RS1/16SS152J		
						R 215	(B,85,120)		RS1/16SS101J		
JA 101	(A,64,132)	Connector	CKM1613								
JA 1401	(A,16,120)	Jack	CKX1104			R 217	(B,90,114)		RS1/16SS473J		D
JA 2202	(A,174,119)	Jack	CKS6437			R 218	(B,90,113)		RS1/16SS104J		
JA 2203	(A,131,113)	Jack	CKB1111			R 219	(B,88,113)		RS1/16SS103J		
JA 2204	(A,30,131)	Jack	AKN1073			R 223	(B,105,58)		RS1/10SR0R0J		
						R 224	(B,86,121)		RS1/16SS473J		
JA 2205	(A,43,130)	Jack	CKS6437								
VL1501	(A,44,73)	Variable Coil	CTC1216			R 225	(B,87,117)		RS1/16SS101J		
VL1601	(A,48,45)	Variable Coil(A,C,D,E,F)	CTC1216			R 311	(B,163,41)		RS1/16SS222J		
						R 312	(B,161,40)		RS1/16SS222J		
						R 313	(B,161,35)		RS1/16SS473J		
						R 314	(B,174,87)		RS1/16SS6800D		
RESISTORS											
R 102	(B,128,87)		RS1/10SR224J								
R 105	(B,70,107)		RS1/16SS473J			R 315	(B,174,86)		RS1/16SS3901D		
R 106	(B,70,108)		RS1/16SS473J			R 316	(B,174,88)		RS1/16SS2702D		E
R 107	(B,69,111)		RS1/16SS432J			R 318	(B,167,95)		RS1/4SA0R0J		
R 108	(B,68,115)	1 kohm	CCN1326			R 320	(B,164,87)		RS1/10SR0R0J		
						R 323	(A,151,52)		RS1/10SR102J		
R 109	(B,130,77)		RS1/16SS473J								
R 110	(B,132,80)		RS1/16SS103J			R 324	(A,145,53)		RS1/10SR0R0J		
R 111	(B,130,79)		RS1/16SS103J			R 341	(A,150,48)		RS1/16SS471J		
R 113	(B,132,75)		RS1/16SS473J			R 342	(A,155,44)		RS1/16SS103J		
R 114	(B,66,111)		RS1/16SS103J			R 343	(A,152,44)		RS1/16SS682J		
						R 346	(B,163,43)		RS1/16SS1303D		
R 115	(B,66,114)		RS1/16SS472J								
R 116	(B,64,116)		RS1/4SA102J			R 347	(B,161,44)		RS1/16SS1002D		
R 117	(B,54,104)		RS1/16SS473J			R 354	(A,169,47)		RS1/10SR0R0J		
R 118	(B,52,106)		RS1/16SS473J			R 355	(B,162,57)		RS1/16SS0R0J		F
R 119	(B,53,106)		RS1/16SS104J			R 358	(B,156,40)		RS1/10SR0R0J		
						R 359	(B,159,42)		RS1/10SR0R0J		

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 361	(B,156,52)	RS1/10SR0R0J	R 667	(A,72,38)	RS1/16SS101J
	R 362	(B,122,38)	RS1/10SR103J	R 668	(A,71,40) (H)	RS1/16SS101J
	R 363	(B,121,34)	RS1/10SR331J	R 669	(B,77,42) (H)	RS1/16SS0R0J
	R 364	(B,126,34)	RS1/16SS103J	R 670	(B,102,23)	RS1/16SS472J
	R 365	(B,127,36)	RS1/16SS103J	R 671	(A,96,50)	RS1/16SS681J
	R 366	(B,129,33)	RS1/16SS103J	R 673	(B,103,43) (Except H)	RS1/16SS221J
	R 504	(B,30,32) (B,D,E,G,H)	RS1/16SS102J	R 673	(B,103,43) (H)	RS1/16SS821J
	R 505	(B,27,51) (A,C,F)	RS1/16SS102J	R 675	(B,102,22)	RS1/16SS471J
	R 508	(A,25,82) (C,F)	RS1/16SS102J	R 677	(A,106,45)	RS1/16SS0R0J
	R 509	(B,35,62) (A,C,F)	RS1/16SS102J	R 678	(B,84,44)	RS1/16SS121J
B	R 511	(B,41,46) (A,C,D,E,F)	RS1/16SS102J	R 679	(B,105,46)	RS1/16SS101J
	R 513	(B,29,33) (A,C,F)	RS1/16SS102J	R 680	(B,102,45)	RS1/16SS101J
	R 518	(A,75,71)	RS1/8SQ0R0J	R 682	(A,106,41)	RS1/16SS680J
	R 602	(B,77,40) (H)	RS1/16SS471J	R 684	(B,99,14)	RS1/16SS102J
	R 604	(A,74,41) (H)	RS1/16SS473J	R 685	(A,103,50)	RS1/16SS102J
	R 605	(B,85,44)	RS1/16SS121J	R 686	(A,106,25)	RS1/16SS681J
	R 607	(B,113,16)	RS1/16SS104J	R 687	(A,107,24)	RS1/16SS0R0J
	R 608	(B,103,34)	RS1/16SS104J	R 688	(A,72,27)	RS1/16SS0R0J
	R 609	(B,103,35)	RS1/16SS104J	R 689	(B,105,22)	RS1/16SS101J
	R 610	(A,105,32)	RS1/16SS100J	R 690	(A,104,23)	RS1/16SS0R0J
C	R 611	(B,99,28)	RS1/16SS104J	R 691	(B,102,28)	RS1/16SS0R0J
	R 612	(B,113,17)	RS1/16SS102J	R 693	(B,118,15)	RS1/16SS102J
	R 613	(A,105,35)	RS1/16SS473J	R 694	(B,103,33)	RS1/16SS104J
	R 614	(A,99,54)	RS1/16SS681J	R 695	(B,103,36)	RS1/16SS104J
	R 615	(A,97,50)	RS1/16SS681J	R 697	(A,106,39)	RS1/16SS471J
	R 616	(B,102,26)	RS1/16SS101J	R 698	(A,107,42)	RS1/16SS473J
	R 617	(B,102,25)	RS1/16SS101J	R 699	(A,77,49)	RS1/16SS102J
	R 618	(A,105,46)	RS1/16SS473J	R 700	(A,72,50)	RS1/16SS472J
	R 620	(B,103,23)	RS1/16SS472J	R 701	(A,77,48)	RS1/16SS102J
	R 621	(B,103,22)	RS1/16SS471J	R 702	(A,66,41)	RS1/16SS473J
D	R 622	(A,101,51)	RS1/16SS473J	R 703	(A,74,48)	RS1/16SS102J
	R 623	(A,100,51)	RS1/16SS473J	R 704	(A,73,47)	RS1/16SS473J
	R 624	(A,99,51)	RS1/16SS473J	R 705	(A,74,49)	RS1/16SS473J
	R 625	(B,103,27)	RS1/16SS182J	R 706	(B,96,53)	RS1/16SS473J
	R 630	(B,94,20)	RS1/16SS102J	R 707	(A,95,50)	RS1/16SS101J
	R 632	(B,104,27)	RS1/16SS182J	R 708	(A,94,52)	RS1/16SS681J
	R 633	(B,102,41)	RS1/16SS0R0J	R 709	(B,92,41)	RS1/16SS222J
	R 634	(A,73,46)	RS1/16SS0R0J	R 710	(B,91,43)	RS1/16SS101J
	R 637	(B,92,16)	RS1/16SS101J	R 711	(A,92,52)	RS1/16SS101J
	R 639	(B,104,46)	RS1/16SS182J	R 712	(A,85,53)	RS1/16SS221J
	R 640	(A,88,51)	RS1/16SS0R0J	R 713	(A,83,54)	RS1/16SS182J
	R 641	(A,93,54)	RS1/16SS101J	R 714	(A,84,53)	RS1/16SS221J
	R 642	(A,86,51) (A,B)	RS1/16SS102J	R 715	(A,83,53)	RS1/16SS182J
	R 645	(B,102,47)	RS1/16SS182J	R 716	(B,81,24) (A,E,G,H)	RS1/16SS104J
	R 646	(B,79,20)	RS1/16SS104J	R 717	(A,82,20) (B,C,D,F)	RS1/16SS104J
E	R 647	(A,108,39)	RS1/16SS473J	R 720	(A,90,51) (A,C,D,E,F)	RS1/16SS101J
	R 648	(A,73,33)	RS1/16SS104J	R 722	(B,83,44)	RS1/16SS121J
	R 649	(A,75,33) (A,C,D,E,F)	RS1/16SS104J	R 723	(A,83,50) (A,C,F)	RS1/16SS104J
	R 651	(B,72,33)	RS1/16SS104J	R 724	(A,80,50) (A,C,F)	RS1/16SS102J
	R 654	(A,74,25)	RS1/16SS101J	R 725	(A,74,50)	RS1/16SS102J
	R 655	(A,73,25)	RS1/16SS101J	R 726	(A,74,45)	RS1/16SS471J
	R 656	(A,74,28)	RS1/16SS0R0J	R 727	(B,77,45)	RS1/16SS104J
	R 657	(B,98,42)	RS1/16SS103J	R 728	(A,73,44) (A,C,F)	RS1/16SS101J
	R 659	(B,73,29)	RS1/16SS104J	R 729	(A,75,44) (A,C,F)	RS1/16SS101J
	R 660	(A,92,54)	RS1/16SS101J	R 730	(B,85,24) (Except A)	RS1/16SS104J
F	R 661	(B,86,45) (A,C,D,E,F)	RS1/16SS681J	R 733	(B,86,23) (A,B,D,F)	RS1/16SS104J
	R 662	(A,91,51) (A,C,D,E,F)	RS1/16SS101J	R 738	(A,69,38)	RS1/16SS104J
	R 663	(A,102,53)	RS1/16SS0R0J	R 739	(A,69,40)	RS1/16SS473J
	R 664	(A,109,42)	RS1/16SS101J	R 740	(B,92,23) (Except G,H)	RS1/16SS103J
	R 665	(B,103,39)	RS1/16SS471J	R 740	(B,92,23) (G,H)	RS1/16SS1002D

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 741	(B,87,22) (C,E,G,H)	RS1/16SS104J		R 901	(A,49,30)	RS1/16SS0R0J	
R 743	(A,69,36)	RS1/16SS222J		R 910	(B,58,31)	RS1/16SS104J	
R 744	(A,69,37)	RS1/16SS473J		R 920	(B,51,16) (A,B,H)	RS1/16SS101J	
R 746	(B,75,19) (A,B)	RS1/16SS0R0J		R 921	(B,50,14) (A,B,H)	RS1/16SS101J	A
R 748	(B,87,23) (A)	RS1/16SS104J		R 922	(B,50,16) (A,B,H)	RS1/16SS101J	
R 750	(B,87,24)	RS1/16SS0R0J		R 923	(A,49,28)	RS1/16SS0R0J	
R 751	(B,85,33)	RS1/16SS0R0J		R 925	(B,63,14)	RS1/16SS273J	
R 752	(B,74,34)	RS1/16SS223J		R 926	(B,63,16)	RS1/16SS473J	
R 754	(B,76,33)	RS1/16SS223J		R 927	(B,64,17)	RS1/16SS621J	
R 755	(B,112,16)	RS1/16SS0R0J		R 929	(B,62,25)	RS1/16SS104J	
R 757	(A,72,25)	RS1/16SS101J		R 930	(B,59,15)	RS1/16SS104J	
R 761	(A,75,23)	RS1/16SS101J		R 931	(B,57,18)	RS1/16SS0R0J	
R 762	(A,75,25)	RS1/16SS101J		R 944	(B,33,24)	RS1/10SR0R0J	
R 763	(A,77,22)	RS1/16SS101J		R 953	(B,38,11)	RS1/10SR0R0J	
R 767	(B,105,24)	RS1/16SS105J		R 954	(B,33,26)	RS1/10SR0R0J	B
R 769	(B,100,43)	RS1/16SS104J		R 1007	(B,154,73)	RS1/16SS473J	
R 770	(B,88,20)	RS1/16SS104J		R 1008	(B,153,73)	RS1/16SS473J	
R 775	(A,71,40)	RS1/16SS473J		R 1009	(B,144,73)	RS1/16SS473J	
R 776	(B,80,23)	RS1/16SS104J		R 1010	(B,143,73)	RS1/16SS473J	
R 777	(B,80,16)	RS1/16SS101J		R 1011	(B,146,101)	RS1/16SS473J	
R 779	(B,90,56)	RS1/16SS472J		R 1012	(B,147,101)	RS1/16SS473J	
R 780	(B,96,17) (C,F)	RS1/16SS0R0J		R 1013	(B,157,101)	RS1/16SS473J	
R 782	(B,93,34)	RS1/16SS1002D		R 1014	(B,158,101)	RS1/16SS473J	
R 787	(B,82,29)	RS1/16SS104J		R 1015	(B,148,71)	RS1/16SS0R0J	
R 792	(B,106,20)	RS1/16SS103J		R 1016	(B,152,103)	RS1/16SS0R0J	
R 793	(B,79,28)	RS1/16SS104J		R 1017	(B,145,71)	RS1/16SS473J	C
R 796	(B,93,35)	RS1/16SS1001D		R 1018	(B,154,103)	RS1/16SS473J	
R 797	(B,95,26) (Except G,H)	RS1/16SS102J		R 1019	(B,152,71)	RS1/16SS473J	
R 797	(B,95,26) (G,H)	RS1/16SS1001D		R 1020	(B,150,103)	RS1/16SS473J	
R 798	(A,108,61)	RS1/10SR0R0J		R 1023	(B,143,75)	RS1/16SS473J	
R 800	(B,100,46)	RS1/16SS101J		R 1024	(B,158,99)	RS1/16SS473J	
R 801	(A,73,63)	RS1/16SS0R0J		R 1025	(B,154,75)	RS1/16SS473J	
R 802	(A,75,63)	RS1/16SS0R0J		R 1026	(B,146,99)	RS1/16SS473J	
R 803	(B,78,70)	RS1/16SS101J		R 1027	(B,145,80)	RS1/16SS0R0J	
R 804	(B,78,71)	RS1/16SS101J		R 1028	(B,155,95)	RS1/16SS0R0J	
R 805	(B,81,67)	RS1/16SS101J		R 1040	(B,151,93)	RS1/16SS0R0J	D
R 806	(B,83,66)	RS1/16SS101J		R 1044	(B,151,82)	RS1/16SS473J	
R 811	(B,64,56)	RS1/16SS223J		R 1047	(B,147,88)	RS1/16SS473J	
R 812	(B,64,54)	RS1/16SS223J		R 1048	(B,146,88)	RS1/16SS473J	
R 813	(B,63,61)	RS1/16SS223J		R 1057	(B,156,93)	RS1/16SS0R0J	
R 814	(B,63,59)	RS1/16SS223J		R 1058	(B,151,83)	RS1/16SS473J	
R 817	(B,68,74)	RS1/16SS223J		R 1061	(B,153,78)	RS1/10SR0R0J	
R 818	(B,65,69)	RS1/16SS223J		R 1062	(B,143,78)	RS1/10SR0R0J	
R 821	(B,76,55) (Except A,B)	RS1/16SS470J		R 1063	(B,147,96)	RS1/10SR0R0J	
R 823	(B,73,54)	RS1/16SS104J		R 1064	(B,157,96)	RS1/10SR0R0J	
R 824	(B,81,69)	RS1/16SS75R0D		R 1065	(B,154,68)	RS1/10SR0R0J	
R 825	(B,82,67)	RS1/16SS75R0D		R 1066	(B,144,67)	RS1/10SR0R0J	E
R 827	(B,83,58) (Except H)	RS1/16SS2200D		R 1067	(B,151,65)	RS1/10SR0R0J	
R 829	(B,77,55)	RS1/16SS750J		R 1068	(B,146,65)	RS1/10SR0R0J	
R 831	(B,84,64)	RS1/16SS104J		R 1101	(B,130,60)	RS1/16SS473J	
R 844	(B,70,74)	RS1/16SS101J		R 1102	(B,136,62)	RS1/16SS222J	
R 845	(B,66,73)	RS1/16SS101J		R 1103	(B,126,53)	RS1/16SS473J	
R 846	(B,67,69)	RS1/16SS101J		R 1104	(B,140,58)	RS1/16SS220J	
R 850	(B,64,62)	RS1/16SS101J		R 1105	(B,139,47)	RS1/16SS101J	
R 851	(B,65,60)	RS1/16SS101J		R 1106	(B,138,47)	RS1/16SS470J	
R 852	(B,65,59)	RS1/16SS101J		R 1107	(B,144,56)	RS1/16SS101J	
R 853	(B,63,57)	RS1/16SS101J		R 1109	(B,136,43)	RS1/8SQ102J	F
R 854	(B,65,55)	RS1/16SS101J		R 1110	(B,137,47)	RS1/8SQ102J	
R 855	(B,65,54)	RS1/16SS101J		R 1111	(B,135,47)	RS1/8SQ102J	
R 859	(B,82,56)	RS1/16SS75R0D		R 1112	(B,141,58)	RS1/16SS220J	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 1113	(B,144,58)	RS1/8SQ220J	R 1449	(B,53,91) (A,C,D,E,F)	RS1/16SS751J
	R 1115	(B,131,48)	RS1/16SS0R0J	R 1453	(B,60,86) (A,C,D,E,F)	RS1/16SS0R0J
	R 1119	(B,142,56)	RS1/16SS104J	R 1502	(A,51,68)	RS1/16SS0R0J
	R 1120	(B,128,61)	RS1/8SQ222J	R 1503	(A,40,70)	RS1/16SS0R0J
	R 1121	(B,126,61)	RS1/8SQ222J	R 1505	(A,50,62)	RS1/16SS103J
	R 1122	(B,125,58)	RS1/16SS472J	R 1507	(A,49,62)	RS1/16SS103J
	R 1123	(B,125,56)	RS1/16SS472J	R 1508	(A,49,58)	RS1/16SS472J
	R 1124	(A,122,59)	RS1/8SQ0R0J	R 1509	(A,48,56)	RS1/16SS472J
	R 1205	(A,135,47)	RS1/10SR470J	R 1510	(A,48,60)	RS1/16SS101J
	R 1206	(A,135,49)	RS1/10SR470J	R 1511	(A,47,60)	RS1/16SS101J
	R 1207	(B,142,49)	RS1/10SR820J	R 1512	(A,46,57)	RS1/16SS0R0J
	R 1208	(B,143,52)	RS1/10SR470J	R 1513	(A,36,72)	RS1/16SS391J
	R 1209	(B,142,53)	RS1/10SR470J	R 1514	(B,29,102)	RS1/16SS105J
	R 1210	(A,135,50)	RS1/10SR470J	R 1515	(B,29,98)	RS1/16SS105J
	R 1212	(B,117,45)	RS1/8SQ821J	R 1516	(A,43,57) (A,C,F)	RS1/16SS0R0J
B	R 1213	(B,121,47)	RS1/8SQ821J	R 1517	(A,43,59) (A,C,F)	RS1/16SS0R0J
	R 1214	(B,114,57)	RS1/10SR821J	R 1518	(A,42,57) (A,C,F)	RS1/16SS0R0J
	R 1215	(B,115,55)	RS1/10SR821J	R 1519	(A,41,59) (A,C,F)	RS1/16SS0R0J
	R 1217	(B,116,65)	RS1/10SR821J	R 1520	(A,49,66)	RS1/16SS0R0J
	R 1218	(A,125,49)	RS1/16SS0R0J	R 1522	(A,31,60) (A)	RS1/16SS182J
	R 1219	(A,125,48)	RS1/16SS0R0J	R 1523	(A,33,58) (A)	RS1/16SS332J
	R 1220	(B,115,50)	RS1/16SS0R0J	R 1524	(A,30,51) (A)	RS1/16SS121J
	R 1221	(B,120,54)	RS1/16SS0R0J	R 1525	(A,33,56) (A)	RS1/16SS102J
	R 1222	(B,117,60)	RS1/16SS0R0J	R 1526	(A,40,63) (A)	RS1/16SS0R0J
	R 1301	(A,80,79)	RS1/10SR0R0J	R 1527	(A,38,61) (A)	RS1/16SS0R0J
C	R 1305	(B,94,119)	RS1/8SQ362J	R 1528	(A,40,57) (A)	RS1/16SS182J
	R 1306	(B,91,118)	RS1/8SQ362J	R 1529	(A,35,57) (A)	RS1/16SS332J
	R 1307	(B,98,123)	RS1/8SQ362J	R 1530	(A,40,54) (A)	RS1/16SS121J
	R 1308	(B,88,118)	RS1/8SQ362J	R 1531	(A,34,56) (A)	RS1/16SS102J
	R 1309	(B,98,120)	RS1/16SS562J	R 1532	(A,35,63) (A)	RS1/16SS0R0J
	R 1310	(B,91,120)	RS1/16SS562J	R 1533	(A,35,60) (A)	RS1/16SS0R0J
	R 1311	(B,98,121)	RS1/16SS562J	R 1534	(A,33,63) (A)	RS1/16SS0R0J
	R 1312	(B,90,119)	RS1/16SS562J	R 1535	(A,33,62) (A)	RS1/16SS0R0J
	R 1402	(B,32,100)	RS1/16SS0R0J	R 1536	(A,33,54) (A)	RS1/16SS0R0J
	R 1403	(A,46,92) (A,C,D,E,F)	RS1/16SS103J	R 1537	(A,34,54) (A)	RS1/16SS0R0J
D	R 1404	(A,43,90) (A,C,D,E,F)	RS1/4SA181J	R 1538	(A,34,59) (A)	RS1/16SS0R0J
	R 1405	(A,44,87) (A,C,D,E,F)	RS1/10SR0R0J	R 1539	(A,40,59) (A)	RS1/16SS0R0J
	R 1406	(A,54,93) (A,C,D,E,F)	RS1/10SR220J	R 1540	(A,45,52)	RS1/10SR0R0J
	R 1407	(A,54,74) (A,C,D,E,F)	RS1/16SS101J	R 1542	(A,43,52)	RS1/10SR0R0J
	R 1408	(A,43,84) (A,C,D,E,F)	RS1/16SS0R0J	R 1543	(A,33,67)	RS1/10SR0R0J
	R 1409	(A,55,73) (A,C,D,E,F)	RS1/16SS0R0J	R 1545	(A,48,58)	RS1/16SS0R0J
	R 1410	(A,40,83) (B,G,H)	RS1/16SS0R0J	R 1546	(A,47,58)	RS1/16SS0R0J
	R 1413	(B,37,91) (B,G,H)	RS1/16SS0R0J	R 1547	(A,51,56)	RS1/8SQ0R0J
	R 1415	(B,26,103)	RS1/16SS0R0J	R 1548	(A,34,67)	RS1/10SR0R0J
	R 1417	(B,51,87) (A,C,D,E,F)	RS1/16SS472J	R 1549	(B,52,63)	RS1/16SS0R0J
E	R 1418	(B,53,84) (A,C,D,E,F)	RS1/16SS271J	R 1550	(A,45,69)	RS1/16SS0R0J
	R 1420	(B,53,88) (A,C,D,E,F)	RS1/16SS220J	R 1551	(A,44,69)	RS1/16SS0R0J
	R 1421	(B,53,90) (A,C,D,E,F)	RS1/16SS472J	R 1552	(A,26,50) (A)	RS1/16SS0R0J
	R 1422	(B,55,86) (A,C,D,E,F)	RS1/16SS223J	R 1602	(A,42,38) (A,C,D,E,F)	RS1/16SS0R0J
	R 1423	(B,54,84) (A,C,D,E,F)	RS1/16SS474J	R 1603	(A,44,49) (A,C,D,E,F)	RS1/16SS0R0J
	R 1425	(B,59,87) (A,C,D,E,F)	RS1/16SS681J	R 1604	(A,35,38) (A,C,D,E,F)	RS1/16SS103J
	R 1426	(B,62,92) (A,C,D,E,F)	RS1/16SS271J	R 1606	(A,33,40) (A,C,D,E,F)	RS1/16SS103J
	R 1427	(B,60,92) (A,C,D,E,F)	RS1/16SS561J	R 1608	(A,32,39) (A,C,D,E,F)	RS1/16SS472J
	R 1437	(B,39,91) (A,C,D,E,F)	RS1/16SS0R0J	R 1609	(A,31,40) (A,C,D,E,F)	RS1/16SS472J
	R 1439	(A,54,83) (A,C,D,E,F)	RS1/16SS0R0J	R 1610	(A,34,41) (A,C,D,E,F)	RS1/16SS101J
F	R 1441	(B,55,92) (A,C,D,E,F)	RS1/16SS471J	R 1611	(A,33,42) (A,C,D,E,F)	RS1/16SS101J
	R 1444	(B,48,88) (A,C,D,E,F)	RS1/10SR821J	R 1612	(A,30,40) (A,C,D,E,F)	RS1/16SS0R0J
	R 1445	(B,47,87) (A,C,D,E,F)	RS1/16SS473J	R 1613	(A,40,41) (A,C,D,E,F)	RS1/16SS0R0J
	R 1447	(B,55,90) (A,C,D,E,F)	RS1/16SS0R0J	R 1615	(A,32,41) (A,C,D,E,F)	RS1/16SS0R0J
	R 1448	(B,55,88) (A,C,D,E,F)	RS1/16SS132J	R 1616	(A,32,43) (A,C,D,E,F)	RS1/16SS0R0J

1

2

3

4

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	C 110 (B,103,119)	CKSSYB104K16	C 615 (A,105,52)	CKSSYB104K10
A	C 113 (A,59,108)	CKSSYB104K10	C 616 (A,105,54) 10 uF	CCG1192
	C 114 (A,63,104)	CKSSYB102K50	C 618 (B,103,41)	CCSSCH101J50
	C 115 (A,59,112)	CKSSYB104K16	C 620 (A,70,42)	CKSSYB104K10
	C 116 (A,59,113)	CKSSYB123K16	C 625 (B,117,13)	CKSSYB102K50
	C 117 (A,56,115)	CKSRYB823K16	C 633 (B,94,29)	CKSSYB104K10
	C 201 (B,95,122)	CKSQYB105K25	C 639 (B,94,28)	CKSSYB104K10
	C 202 (B,93,122)	CKSQYB105K25	C 801 (B,81,58)	CKSSYB104K10
	C 203 (B,101,122)	CKSQYB105K25	C 802 (B,80,55)	CKSSYB104K10
	C 204 (B,90,123)	CKSQYB105K25	C 803 (A,71,67)	CKSRYB105K10
	C 205 (A,104,125) 4.7 uF	CCG1331	C 804 (B,70,70)	CKSRYB105K10
B	C 206 (A,92,122)	XCEVW100M16	C 805 (B,71,70)	CKSRYB105K10
	C 207 (B,119,127)	CKSRYB104K16	C 806 (B,73,70)	CKSRYB105K10
	C 212 (B,82,113) 4.7 uF	CCG1201	C 807 (B,77,53) (Except A,B)	CCSSCH271J50
	C 216 (A,103,111) 4 700 uF/16 V	CCH2085	C 810 (A,72,66)	CKSSYB104K10
	C 217 (A,69,112)	XCEVW101M16	C 811 (B,70,67)	CKSRYB105K10
	C 218 (A,110,125)	CKSRYB104K50	C 812 (B,80,68)	CKSSYB104K10
	C 219 (B,89,115) 10 uF	CCG1192	C 813 (B,66,71)	CKSRYB105K10
	C 220 (A,90,126) 0.1 uF	CCG1357	C 814 (B,81,66)	CKSSYB104K10
	C 312 (A,171,85)	XCEVW101M16	C 815 (B,67,70)	CKSRYB105K10
	C 313 (B,169,90)	CKSRYB105K16	C 816 (B,81,65)	CKSSYB104K10
C	C 314 (B,161,36)	CKSSYB104K10	C 817 (B,66,67)	CKSQYB105K16
	C 317 (B,145,61)	CKSQYB104K25	C 818 (B,81,64)	CKSSYB104K10
	C 318 (B,150,56)	CKSQYB104K25	C 819 (B,66,66)	CKSQYB105K16
	C 320 (A,150,56)	XCEVW101M16	C 820 (B,81,63)	CKSSYB104K10
	C 327 (A,149,45)	CKSSYB104K16	C 821 (B,66,64)	CKSQYB105K16
	C 328 (A,152,48) 0.1 uF	CCG1266	C 822 (B,82,62)	CKSSYB104K10
	C 329 (A,155,45)	CKSSYB102K50	C 823 (B,67,62)	CKSRYB105K10
	C 335 (B,164,43)	CCSSCH101J50	C 824 (B,82,61)	CKSSYB104K10
	C 336 (B,171,46) 10 uF	CCG1236	C 825 (B,67,61)	CKSRYB105K10
	C 337 (B,167,54) 10 uF	CCG1236	C 826 (B,82,60)	CKSSYB104K10
D	C 339 (B,171,48) 10 uF	CCG1236	C 827 (B,67,59)	CKSRYB105K10
	C 342 (B,156,42)	CKSSYB104K16	C 828 (B,82,59)	CKSSYB104K10
	C 343 (B,154,51)	CKSRYB104K50	C 829 (B,67,58)	CKSRYB105K10
	C 344 (B,147,61)	CKSRYB105K10	C 830 (B,67,57)	CKSRYB105K10
	C 345 (B,152,56)	CKSRYB105K10	C 831 (B,68,55)	CKSRYB105K10
	C 347 (B,127,35)	CKSSYB104K10	C 832 (B,79,57)	CKSSYB104K10
	C 349 (A,152,40)	XCEVW470M16	C 833 (A,76,58) 10 uF	CCG1192
	C 502 (B,30,46) (A,C,F)	CKSRYB105K10	C 834 (B,74,54)	CKSSYB104K10
	C 503 (B,29,57) 4.7 uF(A,C,F)	CCG1201	C 835 (A,76,56)	CKSSYB104K10
	C 504 (B,31,47) (A,C,F)	CKSRYB105K10	C 836 (A,73,61)	CKSQYB104K25
E	C 505 (B,38,57) 4.7 uF(A,C,F)	CCG1201	C 837 (A,78,61)	CKSQYB104K25
	C 506 (A,33,82) (C,F)	CKSRYB105K10	C 838 (A,73,58) 10 uF	CCG1192
	C 507 (A,26,82) (C,F)	CKSSYB104K16	C 839 (A,78,60) 10 uF	CCG1192
	C 508 (A,28,86) (C,F)	CKSRYB105K10	C 840 (B,78,68)	CKSSYB104K10
	C 510 (B,42,51)	CKSRYB105K10	C 841 (B,74,70)	CKSRYB105K10
	C 511 (B,51,51)	CKSRYB105K10	C 842 (B,75,70)	CKSRYB105K10
	C 513 (B,43,46) (A,C,D,E,F)	CKSRYB105K10	C 843 (B,77,70)	CKSRYB105K10
	C 514 (B,43,38) (A,C,D,E,F)	CKSRYB105K10	C 901 (A,47,27)	CKSRYB105K10
	C 516 (B,31,55) (A,C,F)	CKSSYB104K16	C 902 (B,43,27)	CKSRYB105K10
	C 602 (B,116,22)	CKSRYB105K10	C 903 (B,40,28)	CKSRYB105K10
F	C 603 (A,106,31)	CCSRCH220J50	C 904 (B,43,28)	CKSRYB105K10
	C 604 (A,105,30)	CCSSCH220J50	C 905 (B,40,29) (A,E,F)	CKSRYB105K10
	C 605 (A,106,44)	CKSSYB104K10	C 906 (B,43,30) (A,E,F)	CKSRYB105K10
	C 606 (A,105,25)	CKSSYB104K10	C 907 (B,40,31) (A,E,F)	CKSRYB105K10
	C 607 (B,103,29)	CKSSYB104K10	C 908 (A,48,27)	CKSSYB104K10
	C 608 (B,98,32) 4.7 uF	CCG1331	C 909 (B,47,21)	CKSRYB105K10
	C 611 (B,87,25)	CKSSYB104K10	C 910 (B,48,18)	CKSRYB105K10
	C 612 (A,88,50)	CKSSYB104K10	C 911 (B,49,21)	CKSRYB105K10
	C 613 (A,75,29)	CKSSYB104K10	C 912 (B,50,18) (A,B,H)	CKSRYB105K10

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 913	(B,50,21) (A,B,H)	CKSRYB105K10		C 1117	(B,127,56) 10 uF	CCG1192	
C 914	(B,51,18) (A,B,H)	CKSRYB105K10		C 1118	(B,128,64) 10 uF	CCG1192	
C 915	(A,56,32) 10 uF	CCG1192		C 1119	(B,126,64) 10 uF	CCG1192	
C 916	(B,57,31)	CKSSYB104K10		C 1120	(A,140,53)	CKSQYB104K25	A
C 917	(A,55,31)	CKSSYB104K10		C 1123	(B,139,60)	CCSSCH121J50	
C 918	(A,53,27)	CKSQYB104K25		C 1125	(B,140,61)	CCSSCH121J50	
C 919	(A,53,30)	CKSQYB104K25		C 1126	(B,140,63)	CCSSCH121J50	
C 920	(A,51,27) 10 uF	CCG1192		C 1201	(A,123,46)	CKSSYB104K16	
C 921	(A,51,30) 10 uF	CCG1192		C 1202	(A,124,46) 10 uF	CCG1192	
C 922	(B,64,15)	CCSSCH100D50		C 1205	(B,116,49) 10 uF	CCG1192	
C 923	(B,58,18)	CKSSYB104K16		C 1207	(B,141,49)	CCSSCH470J50	
C 924	(B,61,26) 2.2 uF	CCG1218		C 1208	(B,146,52)	CCSSCH121J50	
C 926	(B,60,14) 10 uF	CCG1192		C 1209	(B,144,53)	CCSSCH121J50	
C 927	(B,54,18)	CKSRYB105K10		C 1210	(A,121,57)	CKSSYB104K16	B
C 928	(B,55,21)	CKSRYB105K10		C 1211	(A,123,57) 10 uF	CCG1192	
C 939	(B,52,21)	CKSRYB105K10		C 1216	(A,120,66)	CKSSYB104K16	
C 940	(B,53,18)	CKSRYB105K10		C 1217	(A,121,67) 10 uF	CCG1192	
C 941	(B,53,21)	CKSRYB105K10		C 1222	(B,119,46)	CKSRYB182K50	
C 1003	(B,152,68)	CKSQYB105K16		C 1223	(B,121,49)	CKSRYB182K50	
C 1004	(B,150,68)	CKSQYB105K16		C 1224	(B,109,58)	CKSRYB182K50	
C 1005	(B,147,68)	CKSQYB105K16		C 1225	(B,113,55)	CKSRYB182K50	
C 1006	(B,145,68)	CKSQYB105K16		C 1227	(B,117,68)	CKSRYB182K50	
C 1007	(B,149,106)	CKSQYB105K16		C 1229	(A,115,49)	CKSSYB104K16	
C 1008	(B,151,106)	CKSQYB105K16		C 1230	(A,111,57) 10 uF	CCG1192	
C 1009	(B,153,106)	CKSQYB105K16		C 1231	(A,112,59)	CKSSYB104K16	C
C 1010	(B,155,106)	CKSQYB105K16		C 1232	(A,110,65) 10 uF	CCG1192	
C 1011	(B,145,72)	CCSSCH330J50		C 1233	(A,114,69)	CKSSYB104K16	
C 1012	(B,154,102)	CCSSCH330J50		C 1301	(B,86,90) 2.2 uF	CCG1218	
C 1013	(B,152,72)	CCSSCH330J50		C 1302	(B,86,88) 2.2 uF	CCG1218	
C 1014	(B,150,102)	CCSSCH330J50		C 1303	(B,93,82) 10 uF	CCG1192	
C 1015	(B,144,75)	CCSSCH330J50		C 1304	(B,87,81) 10 uF	CCG1192	
C 1016	(B,157,99)	CCSSCH330J50		C 1305	(B,85,93)	CKSRYB105K10	
C 1017	(B,153,75)	CCSSCH330J50		C 1306	(B,86,91)	CKSRYB105K10	
C 1018	(B,147,99)	CCSSCH330J50		C 1307	(B,73,93)	CKSRYB105K10	
C 1019	(B,145,78)	CKSRYB105K16		C 1308	(B,73,92)	CKSRYB105K10	
C 1020	(B,155,96)	CKSRYB105K16		C 1314	(A,73,99)	XCEVW100M16	D
C 1021	(B,145,77)	CKSSYB104K16		C 1315	(B,73,90) 2.2 uF	CCG1218	
C 1022	(B,155,98)	CKSSYB104K16		C 1317	(A,73,92)	XCEVW100M16	
C 1028	(B,151,90)	CKSSYB104K16		C 1319	(B,89,81)	CKSQYB104K25	
C 1039	(B,156,90) 10 uF	CCG1234		C 1321	(B,85,81)	CKSQYB104K25	
C 1040	(B,150,81) 10 uF	CCG1192		C 1322	(A,85,76)	XCEVW470M16	
C 1041	(B,158,92) 10 uF	CCG1192		C 1323	(A,74,77)	XCEVW470M16	
C 1042	(B,157,94)	CKSRYB105K10		C 1410	(A,55,92) (A,C,D,E,F)	CKSSYB103K16	
C 1043	(B,149,90)	CKSRYB105K10		C 1412	(A,50,87) (A,C,D,E,F)	CCSSCH270J50	
C 1101	(B,134,62)	CCSSCH120J50		C 1413	(A,41,88) (A,C,D,E,F)	CKSSYB103K16	
C 1102	(B,138,63)	CCSSCH120J50		C 1424	(B,42,93) (A,C,D,E,F)	CKSSYB103K16	
C 1103	(B,129,50)	CKSRYB105K16		C 1428	(B,55,84) (A,C,D,E,F)	CKSRYB105K16	
C 1104	(B,130,59)	CKSSYB123K16		C 1430	(B,57,84) (A,C,D,E,F)	CKSSYB222K50	
C 1105	(A,132,59)	CKSSYB104K16		C 1431	(B,61,85) (A,C,D,E,F)	CCSSCH220J50	
C 1106	(A,130,59)	CKSQYB225K10		C 1432	(B,61,92) (A,C,D,E,F)	CKSSYB102K50	
C 1107	(B,130,50)	CKSRYB105K16		C 1435	(B,59,86) (A,C,D,E,F)	CKSSYB103K25	
C 1108	(A,138,56)	CKSQYB104K25		C 1443	(B,46,87) (A,C,D,E,F)	CKSSYB472K25	
C 1109	(A,135,53)	CKSQYB104K25		C 1444	(B,44,92) (A,C,D,E,F)	CKSSYB391K50	
C 1110	(A,133,55)	CKSQYB104K25		C 1445	(B,55,91) (A,C,D,E,F)	CCSSCH220J50	
C 1111	(B,141,56)	CKSSYB103K16		C 1447	(B,32,103) (A,C,D,E,F)	CCSSCH150J50	
C 1112	(A,131,57)	CKSQYB104K25		C 1447	(B,32,103) (B,G,H)	CKSSYB103K16	
C 1113	(A,136,59)	CKSQYB104K25		C 1501	(A,54,54)	CKSSYB104K16	F
C 1114	(B,127,58) 10 uF	CCG1192		C 1502	(A,54,56)	CKSSYB104K16	
C 1115	(A,129,57) 10 uF	CCG1192		C 1503	(A,56,55) 10 uF	CCG1192	
C 1116	(A,142,53) 10 uF	CCG1192		C 1504	(A,46,55) 10 uF	CCG1192	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 1505	(A,48,67)	CKSSYB104K16
C 1507	(A,47,68)	CKSSYB224K6R3
C 1508	(A,47,69)	CKSSYB102K50
C 1509	(A,42,67)	CKSSYB104K16
C 1511	(A,47,79)	CCSSCH220J50
C 1512	(A,42,79)	CCSSCH271J50
C 1515	(A,45,60)	CKSSYB104K16
C 1518	(A,37,70)	CCSSCH102J50
C 1519	(B,28,101)	CCSSCH471J50
C 1523	(A,40,65)	CKSSYB152K50
C 1533	(A,41,83) (A,C,D,E,F)	CCSSCH220J50
C 1533	(A,41,83) (B,G,H)	CCSSCH100D50
C 1601	(A,36,32) (A,C,D,E,F)	CKSSYB104K16
C 1602	(A,36,34) (A,C,D,E,F)	CKSSYB104K16
C 1603	(A,38,33) 10 uF(A,C,D,E,F)	CCG1192
C 1604	(A,30,37) 10 uF(A,C,D,E,F)	CCG1192
C 1605	(A,41,41) (A,C,D,E,F)	CKSSYB104K16
C 1607	(A,42,43) (A,C,D,E,F)	CKSSYB224K6R3
C 1608	(A,43,43) (A,C,D,E,F)	CKSSYB102K50
C 1609	(A,41,47) (A,C,D,E,F)	CKSSYB104K16
C 1611	(A,53,43) (A,C,D,E,F)	CCSSCH220J50
C 1612	(A,53,48) (A,C,D,E,F)	CCSSCH820J50
C 1613	(A,34,45) (A,C,D,E,F)	CKSSYB104K16
C 1617	(A,57,47) (A,C,D,E,F)	CCSSCH100D50
C 1703	(A,25,86) (C,F)	CKSSYB104K10
C 1705	(A,26,57) 10 uF(A,C,F)	CCG1192
C 1706	(A,25,57) (A,C,F)	CKSSYB104K10
C 1707	(A,26,46) 10 uF(A,C,F)	CCG1192
C 1708	(A,25,46) (A,C,F)	CKSSYB104K10
C 1710	(B,35,80) (C,F)	CKSSYB104K16
C 1711	(B,20,16) (A,C,F)	CKSSYB104K16
C 1801	(B,162,13)	CKSSYB104K10
C 1804	(B,166,16)	CKSSYB104K16
C 1805	(A,166,13)	CKSSYB104K16
C 1806	(B,157,10)	CCSSCH101J50
C 1813	(B,158,11)	CCSSCH101J50
C 1814	(B,162,8)	CCSSCH270J50
C 1815	(B,145,11)	CCSSCH270J50
C 1824	(B,91,83)	CKSRYB104K25
C 2101	(B,157,109)	CCSRCH101J50
C 2102	(B,156,111)	CCSRCH101J50
C 2103	(B,159,113)	CCSRCH101J50
C 2201	(A,76,88) 10 uF	CCG1192
C 2202	(A,85,84) 10 uF	CCG1192
C 2203	(A,81,88) 10 uF	CCG1192
C 2204	(A,86,88) 10 uF	CCG1192
C 2205	(B,163,127)	CCSSCH101J50
C 2208	(B,26,110)	CKSRYB104K50
C 2209	(B,30,110)	CKSRYB104K50
C 2210	(B,128,94) 10 uF	CCG1192
C 2211	(B,136,93) 10 uF	CCG1192
C 2214	(A,31,111)	CKSSYB102K50
C 2217	(A,109,76)	CKSRYB104K50
C 2220	(B,170,103) 4.7 uF	CCG1201
C 2221	(B,175,104) 4.7 uF	CCG1201
C 2225	(B,24,113)	CCSSCH270J50
C 2226	(B,31,132)	CCSSCH270J50
C 2227	(B,113,79)	CCSSCH270J50
C 2228	(A,108,75)	CCSSCH270J50
C 2231	(B,170,107)	CCSRCH101J50

C 2232	(B,173,107)	CCSRCH101J50
C 2233	(A,172,103)	CCSRCH121J50

B**Unit Number : CWN9913(A)****Unit Number : CWN9916(B)****Unit Number : CWN9912(C)****Unit Number : CWN9915(D)****Unit Number : CWN9918(E)****Unit Number : CWN9914(F)****Unit Number : CWN9919(G)****Unit Number : CWN9917(H)****Unit Name : IF Unit****MISCELLANEOUS**

IC 7003	(A,79,104) IC	NJM2387ADL3
IC 7004	(A,12,34) Regulator IC	MM3479A18P
IC 7008	(A,118,47) Regulator IC(A,E,F)	MM3479A12P
IC 7009	(B,140,74) Regulator IC	MM3479A33P
IC 7010	(A,82,44) Regulator IC	MM3411A15N
IC 7011	(B,26,78) IC	AN33012UA
IC 7012	(A,32,91) IC	NJM2886DL3-05
IC 7101	(B,52,70) DC/DC CONV IC	LTC3858EGN-1
IC 7202	(A,97,107) DC/DC CONV IC	AN33014UA
IC 7203	(A,91,86) DC/DC CONV IC	AN33014UA
IC 7601	(B,162,29) CONV IC	WM8761BGED
IC 7602	(B,140,25) CONV IC	WM8761BGED
IC 7603	(B,138,54) CONV IC	WM8761BGED
IC 7701	(B,32,51) IC	NJM2740V
IC 7703	(B,143,65) AD Convtr IC	AK5357VT
IC 7704	(A,22,35) IC	TC4066BFT
IC 7705	(A,7,105) IC	NJU7043V
IC 7706	(A,43,41) IC	AK7738VQ
IC 7709	(B,45,49) IC	NJM2740V
IC 7851	(A,66,8) IC(H)	NJM2235V
IC 7901	(B,63,43) V AMP IC	BH7673G
IC 7902	(B,67,43) V AMP IC	BH7673G
IC 7903	(A,65,43) V AMP IC	BH7673G
IC 7904	(A,61,44) V AMP IC	BH7673G
IC 7905	(A,81,61) IC	ML86V7675TBZA3A
IC 7906	(A,94,59) IC	TC74LCX541FK
IC 7907	(A,94,66) IC	TC7SZ125FUS1
IC 7908	(B,74,87) V AMP IC	BH7673G
IC 7911	(B,70,80) V AMP IC	BH7673G
IC 7912	(B,68,68) V AMP IC	BH7673G
IC 8001	(B,113,64) IC(A,E,F)	MN864779KT
IC 8003	(A,124,66) IC(A,E,F)	WM8761BGED
IC 8103	(A,146,77) IC	NJM2115V
IC 8202	(B,48,24) IC(A)	TC7WZ34FK
IC 8501	(A,13,89) IC(A,B,C,E,F)	TC7SH08FUS1
IC 8502	(B,140,92) IC	MAX14644ETA
IC 8504	(A,7,89) L-MOS And Gate(A,B,C,E,F)	TC7SET08FUS1
IC 8505	(A,42,109) L-MOS And Gate(A,B)	TC7SET08FUS1
IC 8506	(A,34,109) IC(A,B)	TC7SH08FUS1
IC 8507	(A,38,109) L-MOS And Gate(A,B)	TC7SET08FUS1
Q 7002	(A,70,101) Resistor Built-IN TR	LTC014EEB
Q 7011	(A,107,46) IC	RZQ050P01

1

2

3

4

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
Q 7012	(A,113,47) Transistor	LSCR523UB		L 7201	(B,109,109) SMD SPL Inductor	CTH1524	
Q 7013	(A,21,66) Transistor	ATP112-H		L 7202	(B,103,89) SMD SPL Inductor	CTH1524	
Q 7014	(A,12,74) Chip Transistor	2SB1689		L 7203	(B,102,112) Inductor	CTF1793	
Q 7015	(A,8,78) Transistor	LSCR523UB		L 7204	(B,96,92) Inductor	CTF1793	A
Q 7016	(A,63,85) IC	RZQ050P01		L 7301	(B,83,44) Inductor	CTF1868	
Q 7017	(A,66,88) Transistor	LSCR523UB		L 7302	(B,88,44) Inductor	CTF1870	
Q 7101	(A,41,78) FET	FK8V03040		L 7303	(B,143,33) Inductor(A,B,H)	CTF1795	
Q 7102	(A,41,62) FET	FK8V03040		L 7304	(B,145,32) Inductor(A,B,H)	CTF1795	
Q 7103	(A,38,78) FET	FK8V03050		L 7305	(B,148,30) Inductor	CTF1795	
Q 7104	(A,38,62) FET	FK8V03050		L 7306	(B,150,30) Inductor	CTF1795	
Q 7201	(A,139,71) Resistor Built-IN TR	LTC014EEB		L 7307	(B,152,31) Inductor	CTF1795	
Q 7202	(A,144,68) Bipolar TR	LSAR523UB		L 7308	(B,150,31) Inductor	CTF1795	
Q 7203	(A,141,73) Resistor Built-IN TR	LTC014EEB		L 7309	(B,138,44) Inductor	CTF1795	
Q 7204	(A,146,72) Bipolar TR	LSAR523UB		L 7310	(B,94,43) Inductor	CTF1795	B
Q 7703	(B,27,36) Bipolar TR	LSCR523UB		L 7311	(B,95,45) Inductor	CTF1795	
Q 7704	(A,29,30) Bipolar TR	LTC044EEB		L 7312	(B,96,47) Inductor	CTF1795	
Q 7705	(A,29,35) Bipolar TR	LTC044EEB		L 7313	(B,96,44) Inductor	CTF1795	
Q 7851	(A,74,94) Transistor(H)	LSCR523UB		L 7314	(B,97,46) Inductor	CTF1795	
Q 7852	(A,54,10) Transistor(H)	LSCR523UB		L 7315	(B,97,47) Inductor	CTF1795	
Q 7901	(B,63,49) Bipolar TR	LSCR523UB		L 7502	(A,151,49) Inductor	CTF1736	
Q 7902	(B,67,49) Bipolar TR	LSCR523UB		L 7601	(B,166,21) Inductor	CTF1786	
Q 7903	(A,65,49) Bipolar TR	LSCR523UB		L 7602	(B,136,19) Inductor	CTF1786	
Q 7904	(A,61,50) Bipolar TR	LSCR523UB		L 7603	(B,147,49) Inductor	CTF1786	
Q 7905	(B,59,53) Bipolar TR	LSCR523UB		L 7703	(B,29,33) Ferrite Bead	CTF1528	
Q 7906	(A,72,72) Bipolar TR	LSCR523UB		L 7704	(B,152,64) Inductor	CTF1558	C
Q 7907	(B,74,77) Bipolar TR	LSCR523UB		L 7705	(B,149,60) Inductor	CTF1558	
Q 7908	(B,67,64) Bipolar TR	LSCR523UB		L 7707	(B,28,25) Inductor	CTF1869	
Q 8001	(A,119,91) Resistor Built-IN TR(A,E,F)	LTC023EEB		L 7902	(A,69,65) Inductor	CTF1869	
Q 8002	(A,117,95) Bipolar TR(A,E,F)	LSAR523UB		L 7903	(A,79,74) Inductor	CTF1869	
Q 8003	(A,117,73) Chip Transistor(A,E,F)	RN4982		L 7904	(A,86,47) Inductor	CTF1869	
Q 8101	(A,147,84) Transistor	2SAR293PGZE		L 7905	(A,78,41) Inductor	CTF1869	
Q 8501	(A,138,97) Bipolar TR	LSAR523UB		L 7906	(A,97,69) Inductor	CTF1869	
D 7006	(A,26,71) Diode	RB080L-30		L 7907	(A,96,63) Inductor	CTF1869	
D 7101	(B,45,67) Diode	DB2J41100		L 7909	(A,96,65) Chip Beads	VTL1126	
D 7102	(B,45,65) Diode	DB2J41100		L 7915	(A,85,52) Inductor	CTF1787	
D 7201	(B,98,112) Diode	RB060M-30		L 7916	(A,82,51) Inductor	CTF1787	D
D 7202	(B,92,91) Diode	RB060M-30		L 7917	(A,90,65) Inductor	CTF1787	
D 8001	(B,131,100) Diode(A,E,F)	EZAEG2A50AX		L 7918	(A,91,62) Inductor	CTF1787	
D 8002	(B,129,100) Diode(A,E,F)	EZAEG2A50AX		L 7919	(A,80,52) Inductor	CTF1787	
D 8003	(B,129,98) Diode(A,E,F)	EZAEG2A50AX		L 7920	(A,79,52) Inductor	CTF1787	
D 8004	(B,127,98) Diode(A,E,F)	EZAEG2A50AX		L 7921	(A,76,52) Inductor	CTF1787	
D 8005	(B,127,100) Diode(A,E,F)	EZAEG2A50AX		L 7922	(A,81,72) Inductor	CTF1787	
D 8006	(B,125,100) Diode(A,E,F)	EZAEG2A50AX		L 7923	(A,83,71) Inductor	CTF1787	
D 8007	(B,124,98) Diode(A,E,F)	EZAEG2A50AX		L 7930	(A,102,60) Chip Beads	VTL1127	
D 8008	(B,123,98) Diode(A,E,F)	EZAEG2A50AX		L 7931	(A,101,60) Chip Beads	VTL1127	
D 8011	(B,116,98) Diode(A,E,F)	EZAEG2A50AX		L 7932	(A,102,59) Chip Beads	VTL1127	
D 8012	(B,115,100) Diode(A,E,F)	EZAEG2A50AX		L 7933	(A,101,58) Chip Beads	VTL1127	E
D 8013	(A,113,76) Rectifier Diode(A,E,F)	DA2J101		L 7934	(A,102,58) Chip Beads	VTL1127	
D 8014	(B,122,101) Diode(A,E,F)	EZAEG2A50AX		L 7935	(A,101,57) Chip Beads	VTL1127	
D 8015	(A,123,78) Diode(A,E,F)	DAN202UM		L 7936	(A,102,56) Chip Beads	VTL1127	
D 8016	(B,119,102) Diode(A,E,F)	EZAEG2A50AX		L 7937	(A,101,56) Chip Beads	VTL1127	
D 8501	(A,10,86) Rectifier Diode(A,B,C,E,F)	DA2J101		L 8001	(B,130,96) Noise Filter(A,E,F)	CTF1834	
D 8506	(B,143,100) Diode	EZAEG2A50AX		L 8002	(B,123,96) Noise Filter(A,E,F)	CTF1834	
D 8507	(B,141,104) Diode	EZAEG2A50AX		L 8003	(B,126,96) Noise Filter(A,E,F)	CTF1834	
D 8508	(B,143,102) Diode	EZAEG2A50AX		L 8004	(B,128,96) Noise Filter(A,E,F)	CTF1834	
D 8509	(B,141,103) Diode	EZAEG2A50AX		L 8005	(B,110,73) Ferrite Bead(A,E,F)	CTF1528	
L 7003	(A,30,62) SMD SPL Inductor	CTH1544		L 8006	(B,120,67) Chip Beads(A,E,F)	VTL1127	F
L 7101	(A,50,60) Inductor	CTH1482		L 8007	(B,120,65) Chip Beads(A,E,F)	VTL1127	
L 7102	(A,50,81) Choke Coil	CTH1479		L 8008	(B,120,64) Chip Beads(A,E,F)	VTL1127	
L 7103	(B,34,76) Inductor	CTF1738		L 8009	(B,120,62) Chip Beads(A,E,F)	VTL1126	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	L 8011 (A,123,74) Inductor(A,E,F)	CTF1786	R 7050 (A,111,46)	RS1/16SS683J
	L 8012 (A,109,79) Inductor(A,E,F)	CTF1795	R 7056 (A,99,47)	RS1/8SQ0R0J
	L 8101 (A,157,83) Inductor	LCYC1R0K2125	R 7057 (A,102,45)	RS1/10SR331J
A	L 8102 (A,152,84) Chip Ferrite Bead	OTL8019	R 7066 (B,28,69)	RS1/16SS2702D
	L 8103 (B,152,75) Inductor	CTF1547	R 7067 (B,28,70)	RS1/16SS1101D
	L 8104 (B,152,77) Inductor	CTF1547	R 7068 (B,29,71)	RS1/16SS2701D
	L 8201 (B,55,18) Ferrite Bead	CTF1528	R 7071 (A,18,77) 0.011 ohm	CCN1341
	L 8202 (B,54,18) Ferrite Bead	CTF1528	R 7077 (B,30,72)	RS1/16SS1103D
	L 8203 (B,53,18) Ferrite Bead	CTF1528	R 7078 (B,26,69)	RS1/16SS562J
	L 8204 (B,132,15) Ferrite Bead	CTF1528	R 7079 (B,28,68)	RS1/16SS0R0J
	L 8205 (B,69,22) Ferrite Bead	CTF1528	R 7082 (B,30,69)	RS1/16SS0R0J
	L 8401 (B,104,30) Coil(A,B,C,D)	CTH1554	R 7086 (A,9,74)	RS1/16SS102J
	L 8401 (B,104,30) Coil(E,F,G,H)	CTF1731	R 7087 (A,8,75)	RS1/16SS102J
B	L 8402 (B,102,30) Coil(A,B,C,D)	CTH1554	R 7088 (A,10,81)	RS1/16SS103J
	L 8402 (B,102,30) Coil(E,F,G,H)	CTF1731	R 7091 (B,24,72)	RS1/16SS0R0J
	L 8403 (B,101,30) Coil(A,B,C,D)	CTH1554	R 7092 (A,70,85)	RS1/16SS683J
	L 8403 (B,101,30) Coil(E,F,G,H)	CTF1731	R 7093 (A,69,88)	RS1/16SS683J
	L 8404 (B,99,30) Coil(A,B,C,D)	CTH1554	R 7094 (A,63,87)	RS1/10SR103J
	L 8404 (B,99,30) Coil(E,F,G,H)	CTF1731	R 7098 (A,8,80)	RS1/16SS103J
	L 8405 (B,97,30) Coil	CTH1554	R 7099 (B,61,115) (A,B)	RS1/4SA0R0J
	L 8501 (B,140,97) Choke Coil 90 ohm	CTH1319	R 7101 (B,49,55)	RS1/16SS0R0J
	L 8502 (B,137,97) Choke Coil 90 ohm	CTH1319	R 7102 (B,53,55)	RS1/16SS0R0J
X	7701 (A,34,42) Resonator 12.288 MHz	CSS1811	R 7103 (B,56,76)	RS1/16SS0R0J
C	X 7901 (A,86,74) Resonator 32.000 MHz	CSS1818	R 7104 (B,57,78)	RS1/16SS1502D
	X 8001 (B,104,73) Resonator 27.000 MHz(A,E,F)	CSS1768	R 7105 (B,58,77)	RS1/16SS4303D
	P 7001 (B,62,121) Poly Switch(A,B)	MINISMDC150F/24	R 7106 (B,58,75)	RS1/16SS8202D
	CN7001 (A,51,114) Connector	CKS4977	R 7107 (B,56,55)	RS1/16SS104J
	CN7301 (B,99,38) B TO B Connector	CKS6547	R 7109 (B,56,65)	RS1/16SS0R0J
	CN7302 (B,136,38) B TO B Connector	CKS6549	R 7110 (B,57,64)	RS1/16SS1802D
	CN7701 (B,20,20) B TO B Connector	CKS6346	R 7111 (B,58,64)	RS1/16SS4703D
	CN7851 (B,39,94) Connector(H)	CKS5856	R 7112 (B,58,66)	RS1/16SS1503D
	CN8101 (B,161,81) Connector	CKS6599	R 7113 (B,60,75)	RS1/16SS562J
	CN8201 (B,65,11) FFC/FPC Connector	CKS6646	R 7114 (B,56,56)	RS1/16SS0R0J
	CN8202 (B,83,117) Plug	CKM1599	R 7115 (B,59,72)	RS1/10SR0R0J
	CN8203 (B,147,9) FFC/FPC Connector	CKS6646	R 7116 (B,60,66)	RS1/16SS392J
D	CN8204 (B,66,94) Connector	CKS6007	R 7117 (B,59,74)	RS1/10SR0R0J
	CN8401 (B,109,14) FFC/FPC Connector	CKS6646	R 7118 (B,58,69)	RS1/10SR0R0J
	CN8502 (B,58,127) Connector(A,B,C,E,F)	CKS6603	R 7119 (B,58,68)	RS1/10SR0R0J
	JA7502 (A,155,32) Connector	CKS6438	R 7120 (B,55,57)	RS1/10SR334J
	JA8001 (B,125,109) Connector(A,E,F)	CKS6560	R 7121 (B,58,57)	RS1/10SR274J
	JA8102 (B,164,123) Connector	CKS5702	R 7122 (B,57,71)	RS1/16SS104J
	JA8501 (B,147,116) Connector	DKN1417	R 7123 (B,45,75)	RS1/10SR120J
	JA8502 (B,41,127) Connector(A,B)	CKS6495	R 7124 (B,46,63)	RS1/10SR100J
	JA8503 (B,10,127) Jack BT Module	CKN1040 CWX4710	R 7125 (B,44,74)	RS1/10SR2R2J
			R 7128 (A,58,78) 15 mohm	CCN1328
			R 7129 (A,59,78) 15 mohm	CCN1328
			R 7130 (A,59,62) 12 mohm	CCN1321
			R 7131 (A,58,62) 12 mohm	CCN1321
E	<u>RESISTORS</u>			
	R 7001 (A,66,111) (A,B)	RS1/4SA0R0J	R 7132 (A,61,72)	RS1/4SA0R0J
	R 7008 (A,70,104)	RS1/16SS473J	R 7133 (A,61,69)	RS1/4SA0R0J
	R 7011 (A,71,103)	RS1/16SS2401D	R 7134 (B,56,64)	RS1/16SS0R0J
	R 7017 (A,72,104)	RS1/16SS8201D	R 7135 (B,49,65)	RS1/16SS6R8J
	R 7018 (A,72,101)	RS1/16SS2201D	R 7136 (B,48,76)	RS1/16SS6R8J
	R 7025 (A,36,87)	RS1/16SS0R0J	R 7202 (A,142,69)	RS1/16SS222J
	R 7026 (A,41,87)	RS1/10SR0R0J	R 7203 (A,141,70)	RS1/16SS222J
	R 7029 (A,16,32)	RS1/16SS102J	R 7206 (A,143,71)	RS1/16SS222J
	R 7032 (A,13,38)	RS1/8SQ0R0J	R 7207 (A,143,73)	RS1/16SS222J
F	R 7035 (B,136,71)	RS1/16SS102J	R 7211 (B,86,92)	RS1/8SQ0R0J
	R 7041 (A,113,44)	RS1/16SS683J	R 7212 (B,91,111)	RS1/8SQ0R0J
	R 7049 (A,107,49)	RS1/10SR103J	R 7213 (A,102,99)	RS1/16SS102J

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 7214	(A,94,78)	RS1/16SS102J		R 7364	(B,109,32) (A,B,C,E,F)	RS1/16SS0R0J		
R 7215	(A,102,98)	RS1/16SS102J		R 7376	(B,117,43)	RS1/10SR0R0J		
R 7216	(A,94,77)	RS1/16SS102J		R 7385	(B,112,27)	RS1/16SS0R0J		
R 7217	(A,102,97)	RS1/16SS102J		R 7386	(B,83,32)	RS1/16SS0R0J		A
R 7218	(A,93,101)	RS1/16SS152J		R 7387	(B,106,32)	RS1/16SS0R0J		
R 7219	(A,94,76)	RS1/16SS102J		R 7388	(B,86,32)	RS1/16SS0R0J		
R 7220	(A,87,80)	RS1/16SS152J		R 7389	(B,109,29)	RS1/16SS0R0J		
R 7221	(A,102,96)	RS1/16SS102J		R 7390	(B,84,31)	RS1/16SS0R0J		
R 7222	(A,94,75)	RS1/16SS102J		R 7391	(B,107,32)	RS1/16SS0R0J		
R 7224	(A,93,102)	RS1/16SS3002D		R 7392	(B,87,31)	RS1/16SS101J		
R 7225	(A,91,102)	RS1/16SS2701D		R 7393	(B,93,45)	RS1/16SS0R0J		
R 7227	(A,88,104)	RS1/16SS8201D		R 7394	(B,86,30)	RS1/16SS0R0J		
R 7229	(A,87,81)	RS1/16SS3002D		R 7397	(B,128,32)	RS1/16SS0R0J		
R 7230	(A,85,81)	RS1/16SS2701D		R 7398	(B,92,31)	RS1/16SS0R0J		B
R 7232	(A,83,84)	RS1/16SS8201D		R 7399	(B,129,32)	RS1/16SS0R0J		
R 7233	(A,94,113)	RS1/16SS0R0J		R 7400	(B,91,31)	RS1/16SS0R0J		
R 7234	(A,88,92)	RS1/16SS0R0J		R 7401	(B,90,31)	RS1/16SS0R0J		
R 7235	(A,90,103)	RS1/16SS752J		R 7403	(B,91,43)	RS1/16SS0R0J		
R 7236	(A,84,82)	RS1/16SS103J		R 7405	(B,92,45)	RS1/16SS0R0J		
R 7237	(B,107,103) 0.047 ohm	CCN1167		R 7407	(B,130,32)	RS1/16SS0R0J		
R 7238	(B,101,83) 0.047 ohm	CCN1167		R 7408	(B,93,43)	RS1/16SS0R0J		
R 7245	(A,103,104)	RS1/16SS1001D		R 7415	(B,93,32) (A,C,D,E,F)	RS1/16SS0R0J		
R 7246	(A,97,84)	RS1/16SS0R0J		R 7416	(B,94,32) (A,C,D,E,F)	RS1/16SS0R0J		
R 7247	(A,102,101)	RS1/16SS224J		R 7419	(B,140,47)	RS1/16SS0R0J		
R 7248	(A,96,81)	RS1/16SS224J		R 7420	(B,139,44)	RS1/16SS0R0J		C
R 7249	(A,104,104)	RS1/16SS1202D		R 7425	(B,141,44) (A)	RS1/16SS221J		
R 7250	(A,98,84)	RS1/16SS2202D		R 7426	(B,142,44) (A)	RS1/16SS221J		
R 7251	(A,104,103)	RS1/16SS104J		R 7428	(B,143,43) (A)	RS1/16SS0R0J		
R 7252	(A,98,82)	RS1/16SS104J		R 7430	(B,143,45) (A)	RS1/16SS221J		
R 7253	(A,111,103)	RS1/16SS0R0J		R 7433	(B,145,45)	RS1/16SS0R0J		
R 7254	(A,105,83)	RS1/16SS0R0J		R 7435	(B,146,46)	RS1/16SS0R0J		
R 7302	(A,126,43)	RS1/10SR0R0J		R 7437	(B,148,46)	CTF1645		
R 7303	(A,123,42)	RS1/10SR0R0J		R 7439	(B,118,31)	RS1/16SS103J		
R 7306	(B,125,43)	RS1/16SS0R0J		R 7440	(B,150,44)	RS1/16SS0R0J		
R 7307	(B,90,48)	RS1/10SR0R0J		R 7441	(B,150,43)	RS1/16SS0R0J		
R 7308	(B,126,45)	RS1/16SS0R0J		R 7444	(B,125,30)	RS1/16SS0R0J		D
R 7309	(B,91,45)	RS1/16SS0R0J		R 7445	(B,124,30)	RS1/16SS0R0J		
R 7310	(B,126,43)	RS1/16SS0R0J		R 7447	(B,121,30)	RS1/16SS0R0J		
R 7311	(B,127,45)	RS1/16SS0R0J		R 7448	(B,121,31)	RS1/16SS0R0J		
R 7315	(B,128,45)	RS1/16SS0R0J		R 7449	(B,120,30)	RS1/16SS0R0J		
R 7317	(B,129,43)	RS1/16SS0R0J		R 7456	(B,82,29)	RS1/16SS103J		
R 7323	(B,129,45) (A,E,F)	RS1/16SS0R0J		R 7457	(B,112,29)	RS1/16SS103J		
R 7325	(B,130,43) (A,E,F)	RS1/16SS0R0J		R 7458	(B,113,30)	RS1/16SS103J		
R 7327	(B,131,47) (A,E,F)	RS1/16SS0R0J		R 7459	(B,114,30)	RS1/16SS103J		
R 7329	(B,131,43) (A,E,F)	RS1/16SS0R0J		R 7460	(B,115,31)	RS1/16SS103J		
R 7330	(B,131,45) (A,E,F)	RS1/16SS0R0J		R 7461	(B,116,31)	RS1/16SS103J		
R 7331	(B,133,43)	RS1/16SS0R0J		R 7463	(B,149,45)	RS1/16SS0R0J		E
R 7333	(B,132,43)	RS1/16SS0R0J		R 7470	(B,111,31)	RS1/16SS0R0J		
R 7335	(B,132,32)	RS1/16SS0R0J		R 7480	(B,55,112) (H)	RS1/16SS0R0J		
R 7338	(B,130,29)	RS1/16SS0R0J		R 7481	(B,53,110) (H)	RS1/16SS0R0J		
R 7340	(B,130,26)	RS1/16SS0R0J		R 7482	(B,53,113) (A,B)	RS1/16SS0R0J		
R 7341	(B,136,45)	RS1/16SS0R0J		R 7483	(B,53,111) (A,B)	RS1/16SS0R0J		
R 7342	(B,131,27)	RS1/16SS0R0J		R 7484	(B,127,24)	RS1/16SS104J		
R 7343	(B,137,44)	RS1/16SS0R0J		R 7485	(B,94,29) (A,C,D,E,F)	RS1/16SS473J		
R 7344	(B,133,31)	RS1/16SS0R0J		R 7487	(A,137,29) (H)	RS1/16SS473J		
R 7345	(B,137,45)	RS1/16SS0R0J		R 7503	(B,125,27)	RS1/16SS103J		
R 7350	(B,129,27)	RS1/16SS0R0J		R 7504	(B,124,27)	RS1/16SS103J		
R 7356	(B,95,32)	RS1/16SS0R0J		R 7505	(B,121,27)	RS1/16SS103J		F
R 7357	(B,129,29)	RS1/16SS0R0J		R 7506	(B,120,27)	RS1/16SS103J		
R 7362	(B,110,30) (A,B,C,E,F)	RS1/16SS0R0J		R 7507	(B,119,27)	RS1/16SS103J		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 7525 (B,163,46)
R 7526 (B,158,46)
R 7527 (A,146,48)

RS1/16SS680J
RS1/16SS680J
RS1/16SS680J

R 7735 (A,26,36)
R 7737 (B,25,35)
R 7738 (B,23,35)

RS1/16SS223J
RS1/16SS222J
RS1/16SS332J

A

R 7529 (B,87,13)
R 7534 (B,161,46)
R 7535 (A,144,48)
R 7537 (B,162,47)
R 7538 (B,160,47)

RS1/16SS0R0J
RS1/16SS680J
RS1/16SS680J
RS1/16SS103J
RS1/16SS103J

R 7739 (B,46,41)
R 7744 (A,26,33)
R 7745 (B,38,51)
R 7746 (B,37,50)
R 7749 (B,28,48)

RS1/16SS0R0J
RS1/16SS223J
RS1/16SS333J
RS1/16SS473J
RS1/16SS101J

R 7539 (B,157,47)
R 7540 (A,145,50)
R 7541 (A,144,50)
R 7544 (A,141,50)
R 7601 (B,153,27)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS221J

R 7756 (B,139,70)
R 7757 (B,137,64)
R 7758 (B,141,61)
R 7759 (A,34,35)
R 7760 (A,48,31)

RS1/16SS103J
RS1/16SS220J
RS1/16SS220J
RS1/16SS0R0J
RS1/16SS0R0J

B

R 7603 (B,157,26)
R 7604 (B,152,28)
R 7605 (B,154,28)
R 7606 (B,150,28)
R 7607 (B,160,34)

RS1/16SS0R0J
RS1/16SS102J
RS1/16SS102J
RS1/16SS102J
RS1/16SS103J

R 7761 (A,55,41)
R 7762 (B,30,22)
R 7763 (A,51,31)
R 7764 (A,37,50)
R 7765 (A,50,36)

RS1/16SS0R0J
RS1/16SS222J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS101J

R 7609 (B,136,29)
R 7610 (B,141,30)
R 7611 (B,138,32)
R 7612 (B,145,28)
R 7613 (B,140,49)

RS1/16SS0R0J
RS1/16SS330J
RS1/16SS330J
RS1/16SS330J
RS1/16SS221J

R 7766 (B,52,39)
R 7767 (B,52,40)
R 7768 (B,52,37)
R 7769 (B,52,38)
R 7770 (B,52,41)

RS1/16SS471J
RS1/16SS470J
RS1/16SS470J
RS1/16SS471J
RS1/16SS470J

C

R 7614 (B,135,48)
R 7615 (B,132,54)
R 7616 (B,132,52)
R 7617 (B,133,50)
R 7618 (B,138,31)

RS1/16SS0R0J
RS1/16SS330J
RS1/16SS330J
RS1/16SS330J
RS1/16SS103J

R 7774 (A,5,96)
R 7775 (B,26,43)
R 7776 (B,30,37)
R 7777 (A,27,37)
R 7778 (B,45,45)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7619 (B,135,59)
R 7621 (B,160,23)
R 7622 (B,163,23)
R 7623 (B,143,19)
R 7624 (B,147,19)

RS1/16SS103J
RS1/16SS821J
RS1/16SS821J
RS1/16SS821J
RS1/16SS821J

R 7780 (B,40,49)
R 7781 (B,50,47)
R 7782 (B,49,46)
R 7783 (B,52,50)
R 7784 (B,50,49)

RS1/16SS223J
RS1/16SS223J
RS1/16SS0R0J
RS1/16SS472J
RS1/16SS163J

D

R 7625 (B,149,51)
R 7626 (B,149,56)
R 7628 (B,161,22)
R 7631 (B,144,18)
R 7634 (B,150,54)

RS1/16SS821J
RS1/16SS821J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7785 (A,49,50)
R 7786 (B,42,51)
R 7787 (A,7,110)
R 7789 (A,4,103)
R 7791 (A,4,100)

RS1/16SS101J
RS1/16SS0R0J
RS1/16SS333J
RS1/16SS103J
RS1/16SS824J

R 7639 (B,136,31)
R 7640 (B,157,21)
R 7702 (B,28,51)
R 7703 (B,27,50)
R 7704 (A,36,40)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS103J
RS1/16SS222J

R 7792 (A,7,100)
R 7793 (A,21,44)
R 7794 (A,11,105)
R 7795 (A,8,113)
R 7797 (B,42,47)

RS1/16SS563J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS472J
RS1/16SS153J

E

R 7707 (A,5,114)
R 7708 (B,28,22)
R 7709 (B,21,28)
R 7710 (B,29,25)
R 7712 (B,16,25)

RS1/16SS0R0J
RS1/16SS101J
RS1/10SR0R0J
RS1/16SS101J
RS1/16SS0R0J

R 7798 (A,27,29)
R 7804 (A,26,31)
R 7805 (A,12,109)
R 7806 (A,11,113)
R 7811 (B,9,25)

RS1/16SS223J
RS1/16SS0R0J
RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J

R 7713 (B,17,25)
R 7714 (B,26,40)
R 7715 (B,26,33)
R 7716 (B,49,33)
R 7717 (B,13,14)

RS1/16SS0R0J
RS1/16SS102J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS102J

R 7814 (B,44,39)
R 7820 (A,14,28)
R 7821 (A,45,53)
R 7822 (B,26,41)
R 7823 (B,38,48)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS273J

F

R 7718 (B,12,14)
R 7719 (B,49,40)
R 7724 (B,49,39)
R 7728 (A,33,38)
R 7729 (B,13,23)

RS1/16SS102J
RS1/16SS103J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J

R 7826 (B,34,48)
R 7827 (A,41,53)
R 7832 (A,48,22)
R 7833 (A,45,29)
R 7834 (B,40,47)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS223J

R 7730 (B,52,42)
R 7734 (A,26,35)

RS1/16SS222J
RS1/16SS223J

R 7835 (A,58,7) (H)
R 7836 (B,14,26)

RS1/16SS271J
RS1/16SS0R0J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 7838	(B,11,25)	RS1/10SR0R0J		R 7930	(A,92,68)	RS1/16SS221J	
R 7839	(B,11,22)	RS1/10SR0R0J		R 7932	(B,70,65)	RS1/16SS0R0J	
R 7847	(B,29,96) (H)	RS1/16SS750J		R 7933	(B,72,74)	RS1/16SS104J	
R 7849	(B,56,27) (H)	RS1/16SS0R0J		R 7942	(B,58,51)	RS1/16SS273J	A
R 7850	(B,56,26) (H)	RS1/16SS0R0J		R 7943	(B,58,50)	RS1/16SS273J	
R 7851	(A,73,96) (H)	RS1/16SS273J		R 7945	(A,90,69)	RS1/16SS103J	
R 7852	(A,73,94) (H)	RS1/16SS273J		R 7951	(A,90,71)	RS1/16SS101J	
R 7853	(A,60,91) (H)	RS1/16SS0R0J		R 7955	(A,98,62)	RS1/16SS104J	
R 7854	(A,54,8) (H)	RS1/16SS273J		R 7956	(A,99,59)	RAB4CQ151J	
R 7855	(A,56,8) (H)	RS1/16SS273J		R 7957	(A,99,57)	RAB4CQ151J	
R 7856	(B,41,102) (H)	RS1/16SS0R0J		R 7958	(A,90,60)	RAB4CQ391J	
R 7857	(B,39,105) (H)	RS1/16SS0R0J		R 7959	(A,90,57)	RAB4CQ391J	
R 7858	(A,44,100) (H)	RS1/16SS0R0J		R 7968	(A,98,61)	RS1/16SS221J	
R 7859	(A,46,99) (H)	RS1/16SS471J		R 7977	(A,98,65)	RS1/16SS151J	
R 7861	(B,31,95) (H)	RS1/16SS0R0J		R 7982	(B,62,46)	RS1/16SS101J	B
R 7862	(A,30,96) (H)	RS1/16SS0R0J		R 7983	(B,66,46)	RS1/16SS101J	
R 7863	(B,43,110) (H)	RS1/16SS0R0J		R 7984	(A,66,47)	RS1/16SS101J	
R 7864	(B,44,110) (H)	RS1/16SS0R0J		R 7985	(A,62,47)	RS1/16SS101J	
R 7865	(B,45,110) (H)	RS1/16SS0R0J		R 7986	(B,63,34)	RS1/16SS75R0D	
R 7866	(A,60,27) (H)	RS1/16SS2200D		R 7987	(B,66,34)	RS1/16SS75R0D	
R 7867	(A,57,6) (H)	RS1/16SS0R0J		R 7988	(A,65,35)	RS1/16SS75R0D	
R 7868	(B,57,86) (H)	RS1/10SR0R0J		R 7989	(A,61,35)	RS1/16SS75R0D	
R 7869	(B,48,88) (H)	RS1/16SS121J		R 7991	(B,57,25)	RS1/16SS0R0J	
R 7870	(A,60,94) (H)	RS1/16SS0R0J		R 7992	(B,57,46)	RS1/16SS0R0J	
R 7871	(A,46,92) (H)	RS1/10SR0R0J		R 7993	(B,78,72) (H)	RS1/16SS0R0J	C
R 7873	(A,61,6) (H)	RS1/16SS0R0J		R 7994	(B,76,68) (Except H)	RS1/16SS0R0J	
R 7874	(A,65,12) (H)	RS1/16SS0R0J		R 7995	(A,89,66)	RS1/16SS270J	
R 7875	(A,65,11) (H)	RS1/16SS473J		R 8001	(B,116,103) (A,E,F)	RS1/16SS0R0J	
R 7877	(A,60,10) (H)	RS1/16SS0R0J		R 8002	(B,118,103) (A,E,F)	RS1/16SS0R0J	
R 7878	(A,60,13) (H)	RS1/16SS0R0J		R 8003	(B,119,101) (A,E,F)	RS1/16SS151J	
R 7879	(A,60,12) (H)	RS1/16SS0R0J		R 8004	(B,117,100) (A,E,F)	RS1/16SS151J	
R 7885	(A,43,100) (H)	RS1/16SS473J		R 8006	(A,117,93) (A,E,F)	RS1/16SS103J	
R 7881	(B,60,19) (Except H)	RS1/16SS0R0J		R 8007	(A,117,92) (A,E,F)	RS1/16SS102J	
R 7882	(B,59,17) (Except H)	RS1/16SS0R0J		R 8008	(B,115,103) (A,E,F)	RS1/16SS102J	
R 7886	(A,55,99) (H)	RS1/16SS0R0J		R 8009	(B,114,98) (A,E,F)	RS1/16SS473J	
R 7894	(B,39,102) (H)	RS1/16SS473J		R 8010	(B,114,99) (A,E,F)	RS1/16SS473J	D
R 7895	(A,47,99) (H)	RS1/16SS0R0J		R 8011	(A,108,81) (A,E,F)	RS1/16SS223J	
R 7901	(B,76,73)	RS1/16SS151J		R 8012	(A,108,79) (A,E,F)	RS1/16SS433J	
R 7902	(B,74,71)	RS1/16SS151J		R 8013	(A,121,57) (A,E,F)	RS1/16SS0R0J	
R 7903	(B,73,64)	RS1/16SS151J		R 8014	(A,116,56) (A,E,F)	RS1/16SS0R0J	
R 7907	(B,63,54)	RS1/16SS151J		R 8015	(B,120,70) (A,E,F)	RS1/16SS0R0J	
R 7908	(B,65,54)	RS1/16SS151J		R 8016	(A,121,53) (A,E,F)	RS1/16SS0R0J	
R 7909	(B,66,54)	RS1/16SS151J		R 8017	(A,113,79) (A,E,F)	RS1/16SS273J	
R 7910	(A,66,56)	RS1/16SS151J		R 8018	(B,106,70) (A,E,F)	RS1/16SS102J	
R 7911	(B,81,63)	RS1/4SA0R0J		R 8019	(B,120,69) (A,E,F)	RS1/16SS271J	
R 7912	(B,81,61)	RS1/4SA0R0J		R 8021	(B,120,68) (A,E,F)	RS1/16SS0R0J	
R 7913	(B,81,59)	RS1/4SA0R0J		R 8022	(B,106,68) (A,E,F)	RS1/16SS105J	E
R 7916	(B,79,73)	RS1/16SS1500D		R 8024	(A,118,67) (A,E,F)	RS1/16SS333J	
R 7917	(B,76,69) (H)	RS1/16SS271J		R 8025	(A,119,67) (A,E,F)	RS1/16SS333J	
R 7918	(B,75,83)	RS1/16SS0R0J		R 8026	(B,122,67) (A,E,F)	RS1/16SS330J	
R 7919	(B,79,67)	RS1/16SS1500D		R 8027	(A,117,62) (A,E,F)	RS1/16SS333J	
R 7920	(B,82,69)	RS1/16SS472J		R 8028	(A,118,64) (A,E,F)	RS1/16SS333J	
R 7921	(B,82,55)	RS1/16SS473J		R 8029	(B,122,65) (A,E,F)	RS1/16SS330J	
R 7923	(B,82,67)	RS1/16SS101J		R 8031	(A,108,60) (A,E,F)	RS1/16SS103J	
R 7924	(B,83,67)	RS1/16SS101J		R 8032	(A,107,62) (A,E,F)	RS1/16SS0R0J	
R 7925	(A,84,71)	RS1/16SS821J		R 8033	(B,122,64) (A,E,F)	RS1/16SS330J	
R 7926	(A,84,69)	RS1/16SS105J		R 8035	(B,120,63) (A,E,F)	RS1/16SS0R0J	
R 7927	(B,74,95)	RS1/16SS104J		R 8036	(A,105,62) (A,E,F)	RS1/16SS472J	F
R 7928	(B,73,79)	RS1/10SR0R0J		R 8037	(B,122,62) (A,E,F)	RS1/16SS101J	
R 7929	(B,70,90)	RS1/16SS104J		R 8038	(A,124,52) (A,E,F)	RS1/16SS473J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 8040 (A,123,52) (A,E,F)
 R 8041 (A,125,52) (A,E,F)
 R 8042 (B,106,62) (A,E,F)

RS1/16SS473J
 RS1/16SS473J
 RAB4CQ220J

R 8236 (B,62,18)
 R 8237 (B,61,16)
 R 8241 (B,59,19)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

A

R 8043 (B,106,59) (A,E,F)
 R 8044 (B,111,57) (A,E,F)
 R 8045 (B,114,57) (A,E,F)
 R 8046 (A,121,75) (A,E,F)
 R 8052 (B,104,65) (A,E,F)

RAB4CQ220J
 RAB4CQ220J
 RAB4CQ220J
 RS1/16SS472J
 RS1/16SS100J

R 8242 (B,58,17)
 R 8243 (B,57,20) (A,E,F)
 R 8244 (B,56,18) (A,E,F)
 R 8245 (B,56,20) (A,E,F)
 R 8249 (B,53,22) (A,B,H)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8057 (A,128,74) (A,E,F)
 R 8058 (A,128,73) (A,E,F)
 R 8059 (A,128,71) (A,E,F)
 R 8061 (B,121,58) (A,E,F)
 R 8065 (B,123,72) (A,E,F)

RS1/16SS821J
 RS1/16SS0R0J
 RS1/16SS821J
 RAB4CQ221J
 RS1/16SS0R0J

R 8250 (B,52,20) (A,B,H)
 R 8251 (B,51,22) (A,B,H)
 R 8254 (B,50,19) (A,B)
 R 8255 (B,49,19) (A,B)
 R 8304 (B,156,15)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS471J

B

R 8066 (B,127,68) (A,E,F)
 R 8070 (A,117,71) (A,E,F)
 R 8071 (A,112,79) (A,E,F)
 R 8114 (A,143,86)
 R 8115 (A,140,80)

RS1/16SS0R0J
 RS1/16SS222J
 RS1/16SS0R0J
 RS1/16SS10R0D
 RS1/16SS1501D

R 8305 (B,155,17)
 R 8306 (B,155,15)
 R 8307 (B,164,18)
 R 8308 (B,163,18)
 R 8309 (B,161,17)

RS1/16SS471J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8116 (A,140,78)
 R 8117 (A,140,76)
 R 8119 (B,143,81)
 R 8120 (A,141,76)
 R 8121 (A,141,80)

RS1/16SS2402D
 RS1/16SS3302D
 RS1/16SS4702D
 RS1/16SS4702D
 RS1/16SS432J

R 8310 (B,160,17)
 R 8311 (B,159,18)
 R 8312 (B,158,18)
 R 8313 (B,158,17)
 R 8314 (B,157,17)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

C

R 8127 (B,152,79)
 R 8128 (B,152,80)
 R 8129 (B,155,82)
 R 8130 (B,155,83)
 R 8132 (A,156,76)

RS1/16SS471J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8315 (B,154,18)
 R 8316 (B,153,17)
 R 8317 (B,153,15)
 R 8326 (B,149,14) (A,C,D,E,F)
 R 8333 (B,146,16)

RS1/16SS102J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8133 (A,155,76)
 R 8134 (A,154,76)
 R 8135 (A,152,77)
 R 8136 (A,151,76)
 R 8137 (A,155,80)

RS1/16SS0R0J
 RS1/16SS1002D
 RS1/16SS2202D
 RS1/16SS3302D
 RS1/16SS102J

R 8334 (B,145,16)
 R 8336 (B,144,15)
 R 8337 (B,143,16)
 R 8340 (B,141,16)
 R 8341 (B,138,16)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

D

R 8138 (B,145,86)
 R 8139 (A,151,78)
 R 8140 (A,150,80)
 R 8141 (A,155,79)
 R 8142 (A,159,83)

RS1/16SS103J
 RS1/16SS103J
 RS1/10SR0R0J
 RS1/16SS102J
 RS1/16SS0R0J

R 8342 (B,69,98)
 R 8343 (B,68,98)
 R 8344 (B,67,98)
 R 8345 (B,66,98)
 R 8346 (B,65,98)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8143 (A,166,79)
 R 8144 (A,166,78)
 R 8145 (A,166,77)
 R 8146 (B,148,75)
 R 8148 (A,155,81)

RS1/16SS473J
 RS1/16SS473J
 RS1/16SS473J
 RS1/10SR0R0J
 RS1/16SS102J

R 8347 (B,64,98)
 R 8360 (B,130,13)
 R 8401 (B,128,15)
 R 8402 (B,130,16)
 R 8403 (B,129,14)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

E

R 8149 (A,155,78)
 R 8150 (B,151,85)
 R 8201 (B,75,22)
 R 8202 (B,140,15)
 R 8203 (B,74,23)

RS1/16SS102J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8404 (B,122,20)
 R 8408 (B,122,22)
 R 8414 (B,118,25)
 R 8415 (B,117,23)
 R 8416 (B,117,28)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8205 (B,73,22)
 R 8209 (B,88,125)
 R 8210 (B,77,123)
 R 8216 (B,72,16)
 R 8218 (B,71,19)

RS1/16SS0R0J
 RS1/10SR0R0J
 RS1/10SR0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8417 (B,116,20)
 R 8418 (B,116,23)
 R 8419 (B,115,25)
 R 8420 (B,114,20)
 R 8421 (B,114,22)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

F

R 8227 (B,66,16)
 R 8228 (B,65,18)
 R 8229 (B,65,16)
 R 8231 (B,64,18)
 R 8232 (B,64,16)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8422 (B,114,24)
 R 8423 (B,113,25)
 R 8446 (B,100,22)
 R 8447 (B,99,23)
 R 8449 (B,98,24)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8233 (B,63,18)
 R 8235 (B,62,16)

RS1/16SS0R0J
 RS1/16SS0R0J

R 8451 (B,97,23)
 R 8452 (B,96,23)

RS1/16SS0R0J
 RS1/16SS0R0J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 8453	(B,93,24)	RS1/16SS0R0J		C 7023	(A,7,33) 4.7 uF	CCG1212		
R 8454	(B,94,21)	RS1/16SS0R0J		C 7029	(A,117,51) 4.7 uF(A,E,F)	CCG1212		
R 8456	(B,120,22)	RS1/8SQ0R0J		C 7032	(A,85,44)	CKSRYB105K10		
R 8458	(B,101,21)	RS1/8SQ0R0J		C 7033	(A,80,44)	CKSRYB105K10		A
R 8460	(B,93,20)	RS1/8SQ0R0J		C 7036	(A,111,44)	CKSRYB105K10		
R 8461	(B,88,29)	RS1/16SS0R0J		C 7039	(A,111,45)	CKSSYB473K16		
R 8501	(A,139,94)	RS1/16SS473J		C 7042	(A,16,35)	CKSSYB104K10		
R 8503	(A,138,94)	RS1/16SS472J		C 7043	(A,119,44) (A,E,F)	CKSSYB104K10		
R 8509	(A,15,87) (A,B,C,E,F)	RS1/16SS101J		C 7045	(B,27,69)	CCSSCH561J50		
R 8510	(A,6,86) (A,B,C,E,F)	RS1/16SS103J		C 7046	(A,31,71) 10 uF/16 V	DCH1263		
R 8511	(A,17,90) (A,B,C,E,F)	RS1/16SS0R0J		C 7047	(A,31,72) 10 uF/16 V	DCH1263		
R 8512	(B,143,90)	RS1/16SS0R0J		C 7048	(A,31,74) 10 uF/16 V	DCH1263		
R 8514	(A,4,90) (A,B,C,E,F)	RS1/16SS0R0J		C 7049	(A,31,76)	CKSSYB104K16		
R 8517	(A,10,89) (A,B,C,E,F)	RS1/16SS104J		C 7052	(B,28,85)	CKSSYB104K16		B
R 8520	(A,43,105) (A,B)	RS1/16SS473J		C 7053	(A,22,78) 10 uF	CCG1236		
R 8525	(A,33,111) (A,B)	RS1/16SS104J		C 7055	(B,25,72)	CKSSYB103K16		
R 8526	(A,45,114) (A,B)	RS1/16SS471J		C 7056	(B,26,71)	CCSSCH8R0D50		
R 8528	(A,38,107) (A,B)	RS1/16SS473J		C 7057	(B,31,72)	CKSSYB103K16		
R 8529	(A,43,113) (A,B)	RS1/16SS223J		C 7058	(B,25,71)	CKSSYB152K50		
R 8530	(A,46,114) (A,B)	RS1/16SS223J		C 7059	(B,26,72)	CKSRYB105K16		
R 8533	(A,33,106) (A,B)	RS1/16SS331J		C 7060	(A,22,76) 10 uF	CCG1236		
R 8534	(A,43,114) (A,B)	RS1/16SS181J		C 7061	(A,22,74) 10 uF	CCG1236		
R 8535	(A,47,112) (A,B)	RS1/16SS181J		C 7074	(A,70,88)	CKSRYB105K10		
R 8541	(A,35,113) (A,B)	RS1/10SR102J		C 7078	(A,40,93) 2.2 uF	CCG1218		
R 8542	(A,40,112) (A,B)	RS1/10SR102J		C 7081	(A,40,90)	CCG1320		C
R 8547	(A,53,119) (A,B)	RS1/10SR0R0J		C 7085	(B,136,75)	CKSSYB104K10		
R 8548	(B,48,118) (A,B)	VTL1133		C 7086	(A,67,85) 10 uF	CCG1192		
R 8549	(B,33,118) (A,B)	VTL1133		C 7101	(B,57,76)	CCSSCH150J50		
R 8550	(B,47,118) (A,B)	VTL1133		C 7102	(B,59,75)	CCSSCH220J50		
R 8551	(B,42,118) (A,B)	VTL1133		C 7103	(B,60,77)	CKSSYB152K50		
R 8552	(B,40,118) (A,B)	VTL1133		C 7104	(B,57,65)	CCSSCH150J50		
R 8553	(B,37,118) (A,B)	VTL1133		C 7105	(B,59,66)	CCSSCH220J50		
R 8565	(A,6,116)	VTL1134		C 7106	(B,56,73)	CCSSCH102J50		
R 8566	(A,10,116)	RS1/16SS0R0J		C 7107	(B,60,65)	CKSSYB472K50		
R 8581	(A,140,90)	RS1/16SS103J		C 7108	(B,56,68)	CCSSCH102J50		
R 8582	(A,142,94)	RS1/16SS103J		C 7109	(B,58,56)	CKSSYB103K16		D
R 8585	(B,54,123) (A,B,C,E,F)	RS1/16SS102J		C 7110	(B,51,76)	CKSSYB222K50		
R 8586	(B,57,123) (A,B,C,E,F)	RS1/16SS102J		C 7111	(B,54,65)	CKSSYB153K16		
R 8603	(A,10,5)	RS1/16SS0R0J		C 7112	(B,47,71)	CKSRYB104K50		
R 8604	(A,32,13)	RS1/16SS0R0J		C 7113	(B,45,77)	CKSRYB104K50		
R 8704	(A,127,89) (A,C,F)	RS1/16SS0R0J		C 7114	(B,46,62)	CKSRYB104K50		
R 8705	(A,127,87) (B,D,E,G,H)	RS1/16SS0R0J		C 7115	(B,45,70) 4.7 uF	CCG1201		
R 8709	(A,135,95) (A,B)	RS1/16SS0R0J		C 7116	(A,39,75) 10 uF	CCG1236		
R 8710	(A,135,93) (C,D)	RS1/16SS0R0J		C 7117	(A,40,66) 10 uF	CCG1236		
R 8711	(A,135,91) (F)	RS1/16SS0R0J		C 7121	(A,56,75) 47 uF	CCG1229		
R 8713	(A,135,87) (G)	RS1/16SS0R0J		C 7122	(A,56,69) 47 uF	CCG1229		
R 8714	(A,135,85) (H)	RS1/16SS0R0J		C 7124	(A,56,72) 47 uF	CCG1229		E
R 8715	(A,135,83) (E)	RS1/16SS0R0J		C 7125	(A,56,66) 47 uF	CCG1229		
R 8802	(B,22,124) (H)	RS1/4SA0R0J		C 7201	(A,142,66)	CKSSYB104K10		
R 8803	(A,87,78)	RS1/10SR0R0J		C 7202	(A,145,66)	CKSSYB104K10		
CAPACITORS				C 7204	(A,146,70)	CKSSYB104K10		
C 7006	(A,72,108)	CKSRYB334K50		C 7207	(B,88,87) 10 uF	CCG1236		
C 7013	(B,70,117)	CEVW220M16		C 7208	(B,88,89) 10 uF	CCG1236		
C 7014	(B,51,118) (A,B)	CKSRYB104K50		C 7209	(B,94,109) 10 uF	CCG1236		
C 7017	(B,144,74) 4.7 uF	CCG1212		C 7210	(B,94,107) 10 uF	CCG1236		
C 7018	(A,8,35)	CKSRYB105K10		C 7211	(A,91,101)	CCSSCH471J50		
C 7021	(A,121,47) 4.7 uF(A,E,F)	CCG1212		C 7212	(A,85,80)	CCSSCH471J50		F
C 7022	(B,142,78)	CKSRYB105K10		C 7213	(B,102,99)	CEVW101M16		
				C 7214	(B,94,78)	CEVW101M16		
				C 7215	(A,91,103)	CCSSCH270J50		

1

Circuit Symbol and No.

C 7216 (A,86,83)
C 7217 (B,105,103)
C 7218 (B,99,82)

2

Part No.

CCSSCH270J50
CKSSYB104K10
CKSSYB104K10

3

Circuit Symbol and No.

C 7733 (B,37,51)
C 7736 (B,148,69)
C 7737 (B,149,66) 4.7 uF

4

Part No.

CCSSCH680J50
CKSQYB225K16
CCG1201

A

C 7219 (A,90,104)
C 7220 (A,84,83)
C 7221 (A,95,112)
C 7222 (A,89,91)
C 7223 (A,90,106)

CKSSYB222K50
CCSSCH821J50
CKSRYB104K50
CKSRYB104K50
CKSRYB105K10

C 7738 (B,147,65)
C 7739 (B,149,63) 10 uF
C 7740 (B,26,32)
C 7741 (B,146,61) 10 uF
C 7742 (B,153,66)

CKSSYB104K10
CCG1192
CKSSYB104K10
CCG1192
CKSSYB104K10

C 7224 (A,84,85)
C 7225 (B,103,104) 22 uF
C 7226 (B,97,84) 22 uF
C 7229 (A,103,109)
C 7230 (A,103,106)

CKSRYB105K10
CCG1254
CCG1254
CKSSYB104K16
CKSSYB104K16

C 7743 (B,146,60)
C 7747 (A,43,48)
C 7748 (A,42,49) 2.2 uF
C 7749 (A,40,48)
C 7751 (A,38,52) 10 uF

CKSSYB104K10
CKSSYB104K10
CCG1218
CKSSYB104K10
CCG1192

B

C 7231 (A,103,101)
C 7232 (A,101,101)
C 7233 (A,97,89)
C 7234 (A,97,86)
C 7235 (A,97,81)

CKSSYB102K50
CKSSYB472K50
CKSSYB104K16
CKSSYB104K16
CKSSYB102K50

C 7752 (A,51,42)
C 7753 (B,41,49)
C 7758 (A,36,42)
C 7759 (A,35,39)
C 7761 (A,38,49)

CKSSYB104K10
CCSSCH120J50
CCSSCH120J50
CCSSCH120J50
CCG1393

C 7236 (A,95,81)
C 7301 (B,79,44) 22 uF
C 7303 (A,124,38)
C 7305 (B,85,47) 22 uF
C 7306 (A,127,40)

CKSSYB472K50
DCH1256
CKSSYB104K10
DCH1256
CKSSYB104K10

C 7762 (A,46,49)
C 7765 (B,51,46)
C 7766 (B,51,48)
C 7767 (B,51,49)
C 7768 (B,41,51)

CCG1393
CKSRYB474K10
CCSSCH101J50
CCSSCH680J50
CKSSYB104K10

C

C 7504 (A,155,49) 10 uF
C 7506 (A,155,48)
C 7601 (B,164,35) 10 uF
C 7602 (B,146,23) 10 uF
C 7603 (B,141,59) 10 uF

CCG1192
CKSSYB104K10
CCG1192
CCG1192
CCG1192

C 7769 (A,7,111)
C 7770 (A,8,112)
C 7771 (A,4,105)
C 7772 (A,4,101)
C 7773 (A,6,100)

CCSSCH101J50
CCG1393
CCG1393
CCSSCH6R0D50
CCSSCH220J50

C 7604 (B,164,33)
C 7605 (B,145,23)
C 7606 (B,140,58)
C 7607 (B,166,24)
C 7608 (B,137,20)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 7774 (A,10,104)
C 7775 (A,19,29)
C 7779 (A,25,31)
C 7780 (A,11,108) 22 uF
C 7782 (A,48,48)

CKSSYB104K10
CKSRYB105K10
CKSSYB104K10
DCH1256
CCG1393

D

C 7609 (B,142,49)
C 7610 (B,166,23) 10 uF
C 7611 (B,138,18) 10 uF
C 7612 (B,144,50) 10 uF
C 7613 (B,160,22)

CKSSYB104K10
CCG1192
CCG1192
CCG1192
CKSSYB102K50

C 7783 (B,33,48)
C 7785 (B,135,63)
C 7786 (B,21,24)
C 7789 (B,41,45) 2.2 uF
C 7791 (A,4,107)

CKSSYB104K10
CCSSCH101J50
CKSSYB104K10
CCG1218
CKSSYB102K50

C 7614 (B,163,22)
C 7615 (B,143,18)
C 7616 (B,146,18)
C 7617 (B,149,53)
C 7618 (B,149,55)

CKSSYB102K50
CKSSYB102K50
CKSSYB102K50
CKSSYB102K50
CKSSYB102K50

C 7793 (A,5,102)
C 7854 (A,75,96) (H)
C 7855 (A,71,93) 10 uF(H)
C 7856 (A,52,9) (H)
C 7857 (A,54,7) 10 uF(H)

CCSSCH6R0D50
CKSSYB104K10
CCG1192
CKSSYB104K10
CCG1192

E

C 7701 (B,28,50)
C 7705 (B,25,26) 10 uF
C 7707 (A,23,41)
C 7708 (B,22,26) 10 uF
C 7710 (B,23,24)

CKSSYB471K50
CCG1192
CCG1393
CCG1192
CKSSYB104K10

C 7862 (B,49,89) (H)
C 7865 (A,60,8) (H)
C 7866 (A,60,9) (H)
C 7867 (A,71,8) (H)
C 7868 (A,73,8) 10 uF(H)

CKSSYB104K10
CKSRYB105K10
CKSRYB105K10
CKSRYB104K16
CCG1192

C 7711 (B,27,22)
C 7712 (A,35,38)
C 7713 (A,36,36)
C 7714 (A,19,28)
C 7715 (A,13,24)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSRYB105K10
CKSRYB105K10

C 7897 (B,71,67)
C 7898 (B,66,68)
C 7899 (B,66,66)
C 7909 (B,64,39)
C 7910 (B,62,39)

CKSRYB105K10
CKSSYB104K10
CKSSYB104K10
CKSRYB105K10
CKSRYB105K10

F

C 7717 (A,46,34)
C 7723 (B,49,42) 2.2 uF
C 7724 (B,23,37) 10 uF
C 7727 (B,25,34)
C 7728 (B,26,39)

CKSSYB104K10
CCG1218
CCG1192
CKSSYB104K10
CKSRYB105K10

C 7911 (B,67,39)
C 7912 (B,66,39)
C 7913 (A,64,40)
C 7914 (A,66,40)
C 7915 (A,60,41)

CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSRYB105K10

C 7730 (A,44,50)
C 7732 (B,38,49)

CCG1393
CKSSYB561K50

C 7916 (A,62,40)
C 7917 (A,64,57) 10 uF

CKSRYB105K10
CCG1192

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 7918	(B,75,71)	CKSRYB105K16		C 8000	(B,71,70)	CKSRYB105K10	
C 7919	(B,73,67)	CKSRYB105K16		C 8004	(B,109,71) 10 uF(A,E,F)	CCG1192	
C 7920	(B,74,61)	CKSRYB105K16		C 8007	(B,116,101) (A,E,F)	CCSSCH270J50	
C 7921	(B,64,45)	CKSSYB104K10		C 8008	(B,110,70) (A,E,F)	CKSSYB104K10	A
C 7922	(B,67,45)	CKSSYB104K10		C 8009	(B,116,97) (A,E,F)	CCSSCH270J50	
C 7923	(A,65,46)	CKSSYB104K10		C 8012	(A,112,66) (A,E,F)	CKSSYB104K10	
C 7924	(A,61,47)	CKSSYB104K10		C 8013	(A,114,66) (A,E,F)	CKSSYB104K10	
C 7925	(B,71,60)	CKSRYB105K16		C 8014	(A,116,65) (A,E,F)	CKSSYB104K10	
C 7926	(A,73,64)	CCSSCH102J50		C 8016	(B,105,70) (A,E,F)	CCSSCH120J50	
C 7927	(A,72,64)	CKSSYB104K10		C 8017	(B,104,70) (A,E,F)	CCSSCH150J50	
C 7928	(B,72,58)	CKSRYB105K16		C 8019	(A,111,65) (A,E,F)	CKSSYB104K10	
C 7929	(A,72,62)	CKSSYB103K16		C 8023	(B,125,62) (A,E,F)	CCSSCH470J50	
C 7930	(A,72,61)	CKSSYB474K6R3		C 8024	(A,111,62) (A,E,F)	CKSSYB104K10	
C 7931	(A,72,60)	CKSSYB474K6R3		C 8025	(A,114,61) (A,E,F)	CKSSYB104K10	
C 7932	(B,73,56)	CKSRYB105K16		C 8026	(A,116,63) (A,E,F)	CKSSYB104K10	B
C 7933	(A,72,58)	CKSSYB104K10		C 8028	(A,130,68) 10 uF(A,E,F)	CCG1192	
C 7934	(A,73,58)	CCSSCH102J50		C 8029	(A,129,68) (A,E,F)	CKSSYB104K10	
C 7935	(A,67,58)	CKSRYB105K16		C 8031	(A,124,71) (A,E,F)	CKSSYB104K10	
C 7936	(A,71,66) 10 uF	CCG1192		C 8032	(A,124,72) 10 uF(A,E,F)	CCG1192	
C 7937	(A,73,61)	CKSSYB474K6R3		C 8033	(A,130,74) (A,E,F)	CKSSYB102K50	
C 7939	(A,77,69)	CKSSYB104K10		C 8034	(A,130,72) (A,E,F)	CKSSYB102K50	
C 7940	(A,77,68)	CCSSCH102J50		C 8101	(A,156,85)	CKSSYB102K50	
C 7941	(A,77,54)	CKSSYB104K10		C 8102	(A,155,85)	CKSSYB103K16	
C 7942	(A,79,54)	CKSSYB104K10		C 8103	(A,144,86)	CKSSYB104K10	
C 7943	(B,78,68) (H)	CKSRYB105K16		C 8104	(A,154,85)	CKSSYB104K10	C
C 7944	(B,80,70)	CKSRYB105K16		C 8105	(A,151,85)	CKSSYB103K16	
C 7945	(A,78,72) 10 uF	CCG1192		C 8108	(A,141,78)	CCSSCH101J50	
C 7946	(A,80,69)	CKSSYB104K10		C 8109	(A,147,80)	CKSSYB104K10	
C 7947	(A,81,54)	CKSSYB104K10		C 8110	(A,147,79)	CKSSYB104K10	
C 7948	(A,81,70)	CKSSYB104K10		C 8111	(B,157,75)	CKSRYB104K16	
C 7949	(A,83,48) 10 uF	CCG1192		C 8112	(B,157,77)	CKSRYB104K16	
C 7950	(A,82,68)	CKSSYB104K10		C 8113	(A,159,86)	CKSRYB104K16	
C 7951	(A,83,53)	CKSSYB104K10		C 8205	(A,80,115) 10 uF	CCG1236	
C 7952	(A,84,53)	CKSSYB104K10		C 8208	(B,50,27) (A)	CKSSYB104K10	
C 7953	(A,77,43) 10 uF	CCG1192		C 8501	(A,16,90) (A,B,C,E,F)	CKSSYB104K10	
C 7954	(A,86,71)	CCSSCH5R0C50		C 8503	(B,141,91)	CKSSYB104K10	D
C 7955	(A,85,71)	CCSSCH6R0D50		C 8505	(A,5,90) (A,B,C,E,F)	CKSSYB104K10	
C 7956	(A,88,64)	CKSSYB104K10		C 8506	(A,41,107)	CKSSYB104K10	
C 7957	(A,89,63)	CKSSYB104K10		C 8507	(A,36,110)	CKSSYB104K10	
C 7958	(A,90,68)	CKSSYB103K16		C 8508	(A,34,107)	CKSSYB104K10	
C 7963	(A,94,63) 1 uF	DCH1246		C 8512	(B,43,116) (A,B)	CCSRCH220J50	
C 7965	(A,94,62)	CKSSYB103K16		C 8517	(A,53,121) (A,B)	CKSRYB104K50	
C 7967	(A,91,66)	CCSSCH470J50		C 8520	(B,36,116) (A,B)	CCSRCH220J50	
C 7968	(A,100,66)	CCSSCH150J50		C 8521	(B,39,116) (A,B)	CCSRCH220J50	
C 7970	(B,64,50)	CKSSYB104K10		C 8522	(B,46,116) (A,B)	CCSRCH220J50	
C 7971	(B,67,50)	CKSSYB104K10		C 8523	(B,35,116) (A,B)	CCSRCH220J50	
C 7972	(A,64,51)	CKSSYB104K10		C 8524	(B,48,114) (A,B)	CCSRCH220J50	E
C 7973	(A,60,52)	CKSSYB104K10		C 8525	(A,5,119)	CCSRCH470J50	
C 7974	(A,95,69) 1 uF	DCH1246		C 8801	(B,107,121)	CCSRCH331J50	
C 7975	(A,95,68)	CKSSYB103K16		C 8813	(A,91,74)	CKSRYB102K50	
C 7979	(B,61,55)	CKSSYB104K10		C 8814	(A,95,70) 4.7 uF	CCG1201	
C 7980	(B,56,48) 10 uF	CCG1192		C 8815	(A,113,52)	CCSSCH9R0D50	
C 7988	(B,73,91)	CKSRYB105K10		C 8816	(A,112,52)	CCSSCH9R0D50	
C 7989	(B,74,91)	CKSRYB105K10		C 8817	(A,110,52)	CCSSCH9R0D50	
C 7990	(B,73,85)	CKSSYB104K10		C 8818	(A,109,52)	CCSSCH9R0D50	
C 7991	(A,71,74)	CKSSYB104K10		C 8819	(A,108,52)	CCSSCH9R0D50	
C 7994	(B,69,84)	CKSRYB105K10		C 8820	(A,106,52)	CCSSCH9R0D50	
C 7995	(B,70,84)	CKSRYB105K10		C 8821	(A,105,52)	CCSSCH9R0D50	F
C 7996	(B,69,78)	CKSSYB104K10		C 8822	(A,104,52)	CCSSCH9R0D50	
C 7997	(B,71,77)	CKSSYB104K10		C 8823	(A,78,76)	CCSRCH121J50	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 8824 (A,69,31)
C 8825 (A,56,30)

CCSRCH121J50
CCSRCH121J50

R 1223 (A,42,50)
R 1225 (B,29,7)
R 1251 (A,6,48)
R 1252 (A,6,47)

RS1/16SS561J
RS1/16SS471J
RS1/16SS333J
RS1/16SS473J

R 1253 (A,6,46)
R 1254 (A,6,45)
R 1255 (A,22,48)
R 1256 (A,21,45)
R 1257 (B,8,37)

RS1/16SS333J
RS1/16SS473J
RS1/16SS183J
RS1/16SS153J
RS1/16SS221J

R 1258 (A,19,39)
R 1401 (B,34,28)
R 1402 (B,35,47)
R 1405 (B,55,35)
R 1406 (B,39,45)

RS1/16SS221J
RS1/16SS221J
RS1/16SS104J
RS1/16SS104J
RS1/16SS472J

R 1480 (A,73,24)
R 1481 (A,73,28)
R 1482 (A,73,32)
R 1483 (A,73,35)
R 1484 (A,73,39)

RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J

R 1485 (A,55,22)
R 1486 (A,56,27)
R 1487 (A,56,37)
R 1488 (A,56,40)
R 1489 (A,54,29)

RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RS1/16SS560J

R 1490 (A,73,21)
R 1501 (B,49,20)
R 1503 (B,47,20)
R 1504 (A,50,17)
R 1505 (A,46,18)

RS1/16SS560J
RS1/16SS122J
RS1/16SS105J
RS1/16SS121J
RS1/16SS101J

R 1506 (B,46,15)
R 1507 (B,44,17)
R 1508 (B,43,17)
R 1509 (A,21,34)
R 1510 (A,11,29)

RS1/16SS101J
RS1/16SS101J
RS1/16SS221J
RS1/16SS102J
RS1/16SS102J

R 1512 (A,55,31)
R 1513 (A,23,38)
R 1514 (A,25,40)
R 1516 (A,25,36)
R 1517 (B,58,22)

RS1/16SS470J
RS1/16SS203J
RS1/16SS183J
RS1/16SS104J
RS1/16SS103J

RESISTORS

R 1004 (B,12,20)
R 1007 (B,12,21)
R 1019 (B,34,7)
R 1025 (B,36,6)
R 1027 (A,40,18)

RS1/16SS4702F
RS1/16SS6801F
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1518 (B,34,31)
R 1519 (A,25,43)
R 1522 (A,21,37)
R 1523 (A,23,37)
R 1524 (B,29,33)

RS1/16SS103J
RS1/16SS102J
RS1/16SS104J
RS1/16SS221J
RS1/16SS472J

R 1101 (B,15,57)
R 1102 (B,11,56)
R 1103 (B,14,61)
R 1104 (B,11,58)
R 1105 (B,17,54)

RS1/16SS104J
RS1/16SS104J
RS1/16SS4300F
RS1/16SS5100F
RS1/16SS4300F

R 1525 (A,25,44)
R 1526 (A,23,40)
R 1527 (A,35,48)
R 1528 (B,20,33)
R 1529 (B,35,21)

RS1/16SS103J
RS1/16SS103J
RS1/16SS682J
RS1/16SS103J
RS1/16SS103J

R 1106 (B,10,57)
R 1109 (B,6,57)
R 1110 (B,16,54)
R 1111 (B,6,63)
R 1112 (B,5,58)

RS1/16SS5600F
RS1/16SS3R3J
RS1/16SS3R3J
RS1/10SR3R3J
RS1/10SR3R3J

R 1530 (B,18,33)
R 1531 (B,34,30)
R 1533 (A,29,48)
R 1534 (B,29,48)
R 1535 (A,22,44)

RS1/16SS103J
RS1/16SS103J
RS1/16SS104J
RS1/16SS221J
RS1/16SS104J

R 1113 (B,15,59)
R 1114 (B,19,57)
R 1115 (B,6,61)
R 1116 (B,6,62)
R 1117 (B,18,59)

RS1/10SR3R9J
RS1/10SR3R3J
RS1/10SR2R7J
RS1/10SR2R7J
RS1/10SR3R9J

R 1536 (B,32,48)
R 1537 (A,25,46)
R 1538 (A,56,35)
R 1539 (B,34,48)
R 1540 (A,26,46)

RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS221J

R 1118 (B,16,59)

RS1/10SR3R9J

R 1541 (A,26,45)

RS1/16SS221J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1542	(B,27,34)	RS1/16SS103J		C 1481	(A,73,22)	CKSSYB104K10	
R 1546	(A,33,48)	RS1/16SS682J					
R 1601	(A,32,17)	RS1/16SS123J		C 1482	(A,72,26)	CKSSYB104K10	
R 1602	(A,32,18)	RS1/16SS123J		C 1484	(A,73,30)	CKSSYB104K10	
				C 1485	(A,73,41)	CKSSYB104K10	A
R 1603	(B,31,20)	RS1/16SS1002D		C 1487	(A,58,29)	CKSSYB104K10	
R 1604	(A,24,21)	RS1/16SS105J		C 1488	(A,57,25)	CKSSYB104K10	
R 1605	(A,22,23)	RS1/16SS105J					
R 1670	(B,40,19)	RS1/16SS1002D		C 1489	(A,65,17) 10 uF	CCG1192	
R 1671	(B,43,19)	RS1/16SS2402D		C 1490	(A,66,18)	CKSSYB102K50	
				C 1501	(B,62,20) 10 uF	CCG1192	
R 1672	(A,39,18)	RS1/16SS2000D		C 1502	(B,55,19) 10 uF	CCG1192	
R 1674	(A,38,17)	RS1/16SS3002D		C 1503	(A,54,33)	CKSSYB104K10	
R 1801	(B,51,8)	RS1/16SS104J					
R 1802	(B,53,8)	RS1/16SS104J		C 1504	(A,54,24)	CKSSYB104K10	
R 1803	(B,51,14)	RS1/16SS821J		C 1505	(A,54,27)	CKSSYB104K10	
				C 1506	(B,53,34)	CKSSYB104K10	B
R 1804	(B,53,14)	RS1/16SS821J		C 1507	(A,54,36)	CKSSYB104K10	
R 1982	(A,10,62)	RS1/16SS822J		C 1508	(A,54,38)	CKSSYB104K10	
R 1983	(B,41,19)	RS1/16SS1000D					
R 1987	(B,43,20)	RS1/16SS0R0J		C 1509	(A,54,42)	CKSSYB104K10	
R 1990	(B,35,19)	RS1/16SS2000D		C 1510	(B,51,18)	CCSSCH120J50	
				C 1511	(A,49,18)	CKSSYB104K10	
R 1991	(B,31,16)	RS1/16SS101J		C 1512	(B,46,18)	CCSSCH120J50	
R 1996	(B,36,13)	RS1/16SS2000D		C 1513	(A,48,47)	CKSSYB104K10	
R 1997	(B,36,10)	RS1/16SS101J					
R 2002	(B,43,10)	RS1/16SS2000D		C 1514	(B,45,20)	CKSSYB104K10	
R 2003	(B,43,8)	RS1/16SS101J		C 1515	(A,44,19)	CKSSYB104K10	
				C 1516	(A,44,47)	CKSSYB104K10	
				C 1517	(A,42,47)	CKSSYB104K10	C
				C 1518	(A,38,47)	CKSSYB104K10	
				C 1519	(A,34,47)	CKSSYB104K10	
				C 1520	(A,27,47)	CKSSYB104K10	
				C 1521	(A,25,33)	CKSSYB104K10	
				C 1522	(A,25,38)	CKSSYB104K10	
				C 1523	(A,20,45)	CKSSYB104K10	
				C 1524	(A,21,48)	CKSSYB473K16	
				C 1526	(A,25,37)	CKSSYB103K16	
				C 1528	(B,30,48)	CCSSCH471J50	
				C 1601	(A,32,19)	CKSSYB103K16	
				C 1602	(A,34,17)	CCSSCH101J50	D
				C 1603	(A,34,18)	CCSSCH101J50	
				C 1604	(A,30,17)	CCSSCH680J50	
				C 1605	(A,30,18)	CCSSCH680J50	
				C 1606	(A,35,19)	CKSSYB104K10	
				C 1607	(A,20,24) 10 uF	CCG1192	
				C 1608	(A,28,18) 4.7 uF	CCG1201	
				C 1609	(A,26,22)	CKSSYB104K10	
				C 1612	(A,24,24)	CKSSYB104K10	
				C 1613	(A,25,25)	CKSSYB104K10	
				C 1614	(A,23,24)	CKSSYB104K10	
							E
				C 1615	(A,23,26)	CKSSYB104K10	
				C 1616	(A,25,27)	CKSSYB104K10	
				C 1617	(B,27,28)	CKSSYB104K10	
				C 1618	(A,23,29)	CCSSCH101J50	
				C 1619	(A,23,30)	CKSSYB562K25	
				C 1620	(B,27,30)	CKSSYB224K6R3	
				C 1621	(A,23,31)	CKSSYB224K6R3	
				C 1622	(A,25,31)	CKSSYB333K16	
				C 1623	(A,27,20)	CKSRYB105K10	
				C 1624	(A,25,32)	CKSSYB104K10	
				C 1625	(A,25,29)	CKSSYB104K10	
				C 1671	(A,42,19)	CKSSYB104K10	
				C 1673	(A,37,17)	CKSSYB104K10	
				C 1674	(B,42,20)	CKSSYB104K10	F

CAPACITORS

C 1001	(B,43,13)	
C 1002	(B,13,17)	
C 1003	(B,16,18)	
C 1004	(B,15,17) 4.7 uF	
C 1005	(B,41,11)	
C 1010	(B,60,23)	
C 1011	(B,64,22)	
C 1015	(A,26,7)	
C 1016	(B,64,15)	
C 1018	(B,14,21)	
C 1040	(B,59,12)	
C 1041	(B,19,12)	
C 1101	(B,15,53) 10 uF	
C 1104	(B,8,57)	
C 1105	(B,18,54)	
C 1106	(B,8,66)	
C 1107	(B,26,53)	
C 1108	(A,20,56)	
C 1109	(A,7,57)	
C 1110	(A,18,58)	
C 1111	(A,9,66)	
C 1112	(B,17,52) 22 uF	
C 1113	(B,9,58) 22 uF	
C 1210	(B,77,33)	
C 1251	(B,13,41)	
C 1252	(B,8,41) 4.7 uF	
C 1253	(B,8,39)	
C 1254	(A,6,37)	
C 1255	(A,19,37)	
C 1401	(B,34,27)	
C 1403	(B,39,40)	
C 1408	(B,58,27)	
C 1410	(B,34,29)	
C 1480	(A,71,19)	

CKSRYB105K10	
CKSSYB104K16	
CKSSYB104K16	
CCG1201	
CKSRYB105K16	
CKSQYB225K10	
CKSRYB105K10	
CKSSYB102K50	
CKSSYB102K50	
CKSSYB104K10	
CCSRCH821J50	
CCSRCH271J50	
CCG1192	
CKSSYB104K10	
CKSSYB104K10	
CKSSYB103K16	
CKSSYB103K16	
CKSSYB103K16	
CKSRYB224K16	
CKSSYB103K16	
CKSRYB224K16	
DCH1256	
DCH1256	
CKSSYB104K16	
CEVW101M16	
CCG1222	
CKSSYB104K16	
CKSSYB104K16	
CKSSYB104K16	
CKSSYB104K16	
CKSSYB104K10	
CKSSYB104K10	
CKSSYB104K16	
CKSSYB104K10	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 1676	(B,38,20)	CKSRYB105K10
C 1801	(B,51,10) 4.7 uF	CCG1201
C 1802	(B,53,10) 4.7 uF	CCG1201
C 1803	(B,50,12)	CCSRCH182J50
C 1804	(B,53,12)	CCSRCH182J50
C 1805	(B,47,14)	CKSSYB104K10
C 1806	(B,56,8) 10 uF	CCG1192
C 1809	(B,40,17)	CKSSYB102K50
C 1953	(B,60,17)	CKSRYB105K10
C 1954	(B,55,17)	CKSRYB105K10
C 1955	(B,77,40)	CKSSYB104K16
C 1962	(B,40,20)	CKSRYB105K10

R 4001	(A,27,54)
R 4002	(A,27,51)
R 4003	(A,27,48)
R 4004	(A,27,46)
R 4005	(A,27,43)
R 4006	(A,27,41)
R 4007	(A,50,31)
R 4008	(A,4,23)
R 4010	(A,34,58)
R 4011	(A,24,46)
R 4012	(A,25,52)
R 4015	(A,45,31)
R 4017	(A,24,55)
R 4018	(B,50,41)
R 4022	(B,18,43)

RAB4CQ470J
RAB4CQ470J
RAB4CQ470J
RAB4CQ470J
RAB4CQ470J
RS1/16SS470J
RS1/16SS470J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS103J
RS1/16SS102J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS330J

D
Unit Number : CWN9870
Unit Name : SOC Dual Core Unit

MISCELLANEOUS

IC 4001	(A,43,43) IC	MCIMX6U6AVM08ACS1
IC 4301	(A,54,72) RAM IC	H5TQ4G63CFR-RDC
IC 4302	(A,35,72) RAM IC	H5TQ4G63CFR-RDC
IC 4401	(A,10,60) IC	CWJ2605
IC 4402	(B,21,65) IC	PE1038A

IC 4403	(B,24,56) IC	TC7WU04FU
IC 4501	(B,11,39) IC	AK8814VQ
IC 4701	(B,69,62) IC	LTC3612EUDC
IC 4721	(B,68,35) IC	LTC3612EUDC
IC 4741	(B,68,50) IC	LTC3612EUDC

IC 4766	(A,30,17) Regulator IC	MM3479A30P
IC 4791	(A,47,23) IC	TC7SH08FUS1
IC 4792	(A,47,18) IC	PST8429N
IC 4793	(A,45,15) IC	TC7SH08FUS1
IC 4794	(A,42,20) IC	TC7SH08FUS1

IC 4796	(A,23,59) Regulator IC	MM3479A12P
IC 4901	(A,68,26) IC	337S3959
IC 4903	(A,29,25) IC	TC7WBL3306CFK
Q 4776	(A,63,23) Chip Transistor	2SB1689
Q 4777	(A,62,29) Resistor Built-IN TR	LTC044EEB

Q 4778	(A,27,23) Resistor Built-IN TR	LTC044EEB
L 4501	(B,6,49) Inductor	LCYA2R7J2016
L 4502	(B,8,30) Inductor	LCYA2R7J2016
L 4701	(A,70,59) SMD SPL Inductor	CTH1500
L 4721	(A,64,34) SMD SPL Inductor	CTH1499

L 4741	(A,69,47) SMD SPL Inductor	CTH1499
L 4901	(B,57,42) Ferrite Bead	CTF1528
L 4909	(A,56,38) Inductor	CTF1787
L 5001	(A,71,22) Inductor	CTF1868
L 5002	(A,67,19) Inductor	CTF1870

TH4381	(A,25,72) Thermistor	CCX1084
X 4001	(A,49,28) Resonator 24 MHz	CSS1773
X 4002	(A,44,28) Resonator 32.768 kHz	CSS1807
X 4401	(B,30,55) Crystal Resonator 14.745 6 MHz	CSS1835
X 4901	(B,60,43) VCXO 11.289 6MHz	CWX4566

CN5001	(B,57,20) B TO B Connector	CKS6499
CN5002	(B,20,20) B TO B Connector	CKS6556

RESISTORS

R 4029	(B,64,11)
R 4054	(A,24,52)
R 4055	(A,24,41)
R 4056	(A,25,41)
R 4057	(A,23,44)

R 4058	(A,24,44)
R 4059	(A,24,44)
R 4060	(A,25,44)
R 4063	(A,23,49)
R 4064	(A,24,49)

R 4066	(A,25,49)
R 4067	(A,23,52)
R 4068	(A,24,52)
R 4070	(A,23,55)
R 4073	(A,24,46)

R 4074	(A,25,46)
R 4081	(A,4,35)
R 4084	(A,4,29)
R 4091	(A,47,28)
R 4095	(A,43,24)

R 4100	(B,20,42)
R 4101	(B,53,41)
R 4103	(B,13,68)
R 4105	(A,25,55)
R 4111	(B,15,65)

R 4141	(B,57,83)
R 4151	(A,28,28)
R 4154	(B,66,27)
R 4155	(B,67,27)
R 4157	(A,30,28)

R 4158	(B,30,38)
R 4159	(B,30,41)
R 4160	(B,31,43)
R 4162	(B,31,46)
R 4163	(A,30,40)

R 4164	(B,20,43)
R 4165	(A,29,40)
R 4186	(A,26,39)
R 4209	(A,24,55)
R 4213	(A,24,49)

R 4216	(A,23,46)
R 4220	(A,21,41)
R 4222	(A,23,41)
R 4224	(A,21,39)
R 4226	(A,24,41)

RS1/16SS472J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

RS1/16SS103J
RS1/10SR0R0J
RS1/16SS102J
RS1/16SS225J
RS1/16SS0R0J

RS1/16SS470J
RS1/16SS0R0J
RS1/16SS220J
RS1/16SS103J
RS1/16SS472J

RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

RAB4CQ471J
RAB4CQ471J
RAB4CQ471J
RAB4CQ471J
RS1/16SS470J

RS1/16SS470J
RS1/16SS470J
RS1/16SS101J
RS1/16SS103J
RS1/16SS103J

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4228	(A,22,41)	RS1/16SS103J		R 4411	(B,20,57)	RS1/16SS220J	
R 4230	(A,20,39)	RS1/16SS222J		R 4412	(B,24,58)	RS1/16SS102J	
R 4232	(A,20,39)	RS1/16SS222J		R 4413	(A,15,72)	RS1/16SS0R0J	
R 4236	(B,24,39)	RS1/16SS103J		R 4415	(A,26,62)	RS1/16SS0R0J	A
R 4237	(B,22,44)	RS1/16SS103J		R 4416	(A,17,57)	RS1/16SS0R0J	
R 4238	(A,56,40)	RS1/16SS0R0J		R 4417	(A,16,73)	RS1/16SS472J	
R 4242	(A,4,25)	RS1/16SS101J		R 4418	(A,16,74)	RS1/16SS472J	
R 4244	(A,20,41)	RS1/16SS103J		R 4419	(A,16,75)	RS1/16SS472J	
R 4260	(B,51,13)	RS1/16SS103J		R 4420	(A,20,67)	RS1/16SS101J	
R 4261	(B,53,13)	RS1/16SS103J		R 4421	(A,21,63)	RS1/16SS101J	
R 4262	(B,62,9)	RS1/16SS103J		R 4445	(B,18,46)	RAB4CQ101J	
R 4263	(B,24,30)	RS1/16SS103J		R 4446	(B,18,49)	RAB4CQ101J	
R 4264	(B,12,27)	RS1/16SS103J		R 4447	(B,13,70)	RS1/16SS103J	
R 4265	(A,13,19)	RS1/16SS103J		R 4448	(A,24,69)	RS1/16SS0R0J	
R 4266	(A,14,19)	RS1/16SS103J		R 4449	(B,6,69)	RS1/16SS0R0J	B
R 4268	(B,23,30)	RS1/16SS103J		R 4450	(B,5,66)	RS1/16SS330J	
R 4270	(B,50,32)	RS1/16SS103J		R 4451	(B,15,64)	RS1/16SS0R0J	
R 4271	(B,50,31)	RS1/16SS103J		R 4452	(B,13,64)	RS1/16SS561J	
R 4272	(A,27,40)	RS1/16SS470J		R 4453	(B,5,63)	RS1/16SS561J	
R 4273	(A,38,56)	RS1/16SS2400F		R 4454	(B,5,65)	RS1/16SS561J	
R 4274	(B,56,55)	RS1/16SS1001D		R 4455	(B,13,57)	RS1/16SS220J	
R 4275	(B,54,55)	RS1/16SS1001D		R 4456	(B,5,55)	RS1/16SS220J	
R 4276	(B,33,10)	RS1/16SS103J		R 4457	(B,11,51)	RS1/16SS220J	
R 4277	(B,54,47)	RS1/16SS103J		R 4458	(B,12,51)	RS1/16SS220J	
R 4278	(B,63,29)	RS1/16SS103J		R 4459	(B,14,55)	RS1/16SS220J	
R 4279	(B,24,11)	RS1/16SS103J		R 4460	(B,14,54)	RS1/16SS220J	C
R 4280	(B,30,30)	RS1/16SS103J		R 4461	(B,14,52)	RS1/16SS220J	
R 4281	(B,32,11)	RS1/16SS103J		R 4462	(B,13,52)	RS1/16SS220J	
R 4282	(B,26,10)	RS1/16SS103J		R 4463	(B,27,49)	RS1/16SS0R0J	
R 4283	(B,29,30)	RS1/16SS103J		R 4464	(B,27,48)	RS1/16SS0R0J	
R 4284	(B,46,11)	RS1/16SS103J		R 4465	(B,27,48)	RS1/16SS0R0J	
R 4285	(B,60,13)	RS1/16SS103J		R 4466	(B,27,47)	RS1/16SS0R0J	
R 4286	(A,43,56)	RS1/16SS0R0J		R 4467	(B,26,46)	RS1/16SS0R0J	
R 4287	(A,42,56)	RS1/16SS0R0J		R 4468	(B,26,45)	RS1/16SS0R0J	
R 4288	(B,65,27)	RS1/16SS103J		R 4469	(B,26,44)	RS1/16SS0R0J	
R 4289	(B,41,7)	RS1/16SS103J		R 4470	(B,26,43)	RS1/16SS0R0J	D
R 4290	(B,51,43)	RS1/16SS0R0J		R 4473	(B,24,70)	RS1/16SS0R0J	
R 4291	(A,41,56)	RS1/16SS0R0J		R 4474	(B,22,70)	RS1/16SS0R0J	
R 4292	(A,40,56)	RS1/16SS0R0J		R 4475	(B,28,62)	RS1/16SS0R0J	
R 4293	(B,44,10)	RS1/16SS104J		R 4476	(B,28,61)	RS1/16SS0R0J	
R 4295	(B,26,13)	RS1/16SS103J		R 4477	(B,20,70)	RS1/16SS0R0J	
R 4296	(B,64,9)	RS1/16SS222J		R 4479	(B,17,70)	RS1/16SS181J	
R 4297	(B,63,9)	RS1/16SS103J		R 4480	(B,21,72)	RS1/16SS0R0J	
R 4300	(B,24,13)	RS1/16SS103J		R 4481	(B,16,62)	RS1/16SS0R0J	
R 4302	(B,46,10)	RS1/16SS104J		R 4482	(B,16,64)	RS1/16SS472J	
R 4303	(A,21,52)	RS1/16SS101J		R 4502	(B,16,42)	RS1/16SS103J	
R 4307	(B,54,73)	RS1/16SS1200D		R 4503	(B,22,34)	RS1/16SS101J	E
R 4308	(B,35,73)	RS1/16SS1200D		R 4504	(B,21,34)	RS1/16SS101J	
R 4309	(B,51,73)	RS1/16SS2400F		R 4505	(B,17,41)	RS1/16SS103J	
R 4310	(B,32,73)	RS1/16SS2400F		R 4507	(B,17,39)	RS1/16SS221J	
R 4314	(B,57,82)	RS1/16SS102J		R 4508	(B,17,37)	RS1/16SS221J	
R 4315	(B,39,82)	RS1/16SS102J		R 4510	(B,11,32)	RS1/16SS6801D	
R 4317	(B,19,4)	RS1/16SS0R0J		R 4511	(B,20,40)	RS1/16SS101J	
R 4381	(A,25,73)	RS1/16SS1802D		R 4512	(B,5,42)	RS1/16SS103J	
R 4401	(A,7,47)	RS1/16SS102J		R 4513	(B,16,34)	RS1/10SR0R0J	
R 4402	(A,11,72)	RS1/16SS0R0J		R 4514	(B,16,30)	RS1/10SR0R0J	
R 4403	(A,10,48)	RS1/16SS0R0J		R 4515	(B,16,33)	RS1/10SR0R0J	F
R 4404	(B,28,57)	RS1/16SS102J		R 4525	(B,5,67)	RS1/16SS0R0J	
R 4405	(B,28,55)	RS1/16SS105J		R 4529	(B,5,46)	RS1/16SS0R0J	
R 4407	(B,15,63)	RS1/16SS471J		R 4540	(B,6,68)	RS1/16SS220J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 4543	(A,14,33)	RS1/16SS101J	R 4768	(B,36,10)	RS1/10SR0R0J
	R 4544	(A,13,33)	RS1/16SS101J	R 4769	(A,25,16)	RS1/16SS0R0J
	R 4545	(A,12,33)	RS1/16SS101J	R 4772	(A,40,12)	RS1/16SS103J
	R 4546	(A,11,33)	RS1/16SS101J	R 4773	(A,32,6)	RS1/10SR0R0J
	R 4547	(A,8,37)	RS1/16SS101J	R 4775	(A,39,13)	RS1/16SS0R0J
	R 4548	(A,8,36)	RS1/16SS101J	R 4776	(A,63,27)	RS1/10SR332J
	R 4549	(A,8,36)	RS1/16SS101J	R 4777	(A,63,26)	RS1/10SR332J
	R 4550	(A,8,35)	RS1/16SS101J	R 4778	(A,26,18)	RS1/16SS103J
	R 4702	(A,74,64)	RS1/8SQ0R0J	R 4779	(A,27,27)	RS1/16SS103J
	R 4704	(A,65,60)	RS1/8SQ0R0J	R 4780	(A,27,26)	RS1/16SS101J
B	R 4705	(B,69,59)	RS1/16SS220J	R 4790	(A,50,23)	RS1/16SS101J
	R 4706	(B,65,59)	RS1/16SS105J	R 4791	(A,46,25)	RS1/16SS101J
	R 4707	(B,64,59)	RS1/16SS105J	R 4792	(A,49,17)	RS1/16SS0R0J
	R 4708	(B,64,61)	RS1/16SS2201D	R 4793	(A,41,16)	RS1/16SS0R0J
	R 4709	(B,67,65)	RS1/16SS0R0J	R 4794	(A,49,15)	RS1/16SS103J
	R 4710	(B,64,63)	RS1/16SS1003D	R 4795	(A,46,21)	RS1/16SS683J
	R 4711	(B,65,63)	RS1/16SS183J	R 4798	(A,42,17)	RS1/16SS104J
	R 4713	(B,67,66)	RS1/16SS1002D	R 4799	(A,44,21)	RS1/16SS0R0J
	R 4714	(B,65,66)	RS1/16SS1503D	R 4800	(A,44,20)	RS1/16SS0R0J
	R 4715	(B,65,62)	RS1/16SS1503D	R 4801	(A,43,13)	RS1/16SS0R0J
C	R 4716	(A,64,62)	RS1/16SS0R0J	R 4802	(A,43,23)	RS1/16SS0R0J
	R 4717	(B,67,59)	RS1/16SS0R0J	R 4803	(A,51,25)	RS1/16SS101J
	R 4721	(A,66,39)	RS1/8SQ0R0J	R 4804	(A,50,24)	RS1/16SS103J
	R 4722	(A,70,30)	RS1/8SQ0R0J	R 4805	(A,44,25)	RS1/16SS103J
	R 4723	(A,64,39)	RS1/8SQ0R0J	R 4845	(A,65,59)	RS1/8SQ0R0J
	R 4724	(B,64,35)	RS1/16SS220J	R 4901	(A,39,31)	RS1/16SS103J
	R 4725	(B,65,39)	RS1/16SS105J	R 4902	(A,71,26)	RS1/16SS222J
	R 4726	(B,65,41)	RS1/16SS105J	R 4903	(A,37,31)	RS1/16SS470J
	R 4727	(B,66,40)	RS1/16SS2702D	R 4904	(A,65,28)	RS1/16SS222J
	R 4728	(B,71,37)	RS1/16SS105J	R 4905	(A,65,27)	RS1/16SS221J
D	R 4729	(B,70,41)	RS1/16SS1503D	R 4906	(A,65,26)	RS1/16SS103J
	R 4730	(B,72,37)	RS1/16SS1002D	R 4907	(A,65,24)	RS1/16SS0R0J
	R 4731	(B,72,39)	RS1/16SS1503D	R 4911	(A,56,37)	RS1/16SS151J
	R 4732	(B,67,39)	RS1/16SS1203D	R 4912	(B,62,41)	RS1/16SS0R0J
	R 4733	(A,68,40)	RS1/16SS0R0J	R 4913	(B,60,41)	RS1/16SS0R0J
	R 4734	(B,69,39)	RS1/16SS223J	R 4914	(A,36,31)	RS1/16SS470J
	R 4735	(A,71,40)	RS1/10SR102J	R 4915	(A,40,24)	RS1/16SS0R0J
	R 4736	(B,64,37)	RS1/16SS0R0J	R 4916	(B,35,6)	RS1/16SS0R0J
	R 4737	(B,68,40)	RS1/16SS4703D	R 4918	(A,32,25)	RS1/16SS0R0J
	R 4738	(B,62,27)	RS1/16SS103J	R 4934	(B,32,49)	RS1/16SS0R0J
E	R 4739	(B,70,44)	RS1/16SS0R0J	R 4937	(A,24,12)	RS1/16SS103J
	R 4741	(A,63,49)	RS1/8SQ0R0J	R 4938	(A,23,12)	RS1/16SS103J
	R 4742	(A,72,52)	RS1/8SQ0R0J	R 4939	(A,22,12)	RS1/16SS103J
	R 4743	(A,63,47)	RS1/8SQ0R0J	R 4941	(B,54,40)	RS1/16SS431J
	R 4744	(B,68,46)	RS1/16SS220J	R 4942	(B,53,44)	RS1/16SS102J
	R 4745	(B,63,47)	RS1/16SS105J	R 4945	(B,24,37)	RS1/16SS103J
	R 4746	(B,62,47)	RS1/16SS105J	R 4946	(A,27,12)	RS1/16SS102J
	R 4747	(B,62,48)	RS1/16SS2702D	R 4954	(A,27,21)	RS1/16SS0R0J
	R 4749	(B,61,52)	RS1/16SS1503D	R 4955	(A,29,22)	RS1/16SS0R0J
	R 4750	(B,66,54)	RS1/16SS1002D	R 5003	(B,63,27)	RS1/16SS0R0J
F	R 4751	(B,64,54)	RS1/16SS1503D	R 5004	(B,64,27)	RS1/16SS0R0J
	R 4752	(B,64,49)	RS1/16SS1203D	R 5006	(B,22,13)	RS1/16SS0R0J
	R 4753	(A,63,51)	RS1/16SS0R0J	R 5007	(B,14,13)	RS1/16SS471J
	R 4754	(B,64,51)	RS1/16SS223J	R 5008	(B,27,13)	RS1/16SS151J
	R 4755	(A,62,53)	RS1/10SR102J	R 5009	(B,12,13)	RS1/16SS471J
	R 4756	(B,65,47)	RS1/16SS0R0J	R 5012	(B,42,13)	RS1/16SS0R0J
	R 4757	(B,62,50)	RS1/16SS4703D	R 5013	(B,43,13)	RS1/16SS0R0J
	R 4758	(B,71,39)	RS1/16SS0R0J	R 5014	(B,44,13)	RS1/16SS0R0J
	R 4759	(B,60,52)	RS1/16SS0R0J	R 5015	(B,44,13)	RS1/16SS0R0J
	R 4767	(A,37,17)	RS1/10SR0R0J	R 5016	(B,45,13)	RS1/16SS0R0J

AVIC-6200NEX/XNUC

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	C 4031 (B,40,45)	CKSSYB104K10	C 4319 (B,50,75)	CKSSYB104K10
	C 4034 (B,48,43)	CKSSYB104K10	C 4320 (A,49,78)	CKSSYB104K10
	C 4037 (B,40,38)	CKSSYB104K10	C 4321 (B,59,68)	CKSSYB104K10
A	C 4038 (B,39,43) 1 uF	DCH1246	C 4322 (B,59,70)	CKSSYB104K10
	C 4039 (B,36,46)	CKSSYB104K10	C 4323 (B,56,73)	CKSSYB104K10
	C 4040 (B,44,46)	CKSSYB104K10	C 4324 (B,59,75)	CKSSYB104K10
	C 4041 (B,36,44)	CKSSYB104K10	C 4325 (A,41,66)	CKSSYB104K10
	C 4042 (B,48,46)	CKSSYB104K10	C 4326 (B,40,66)	CKSSYB104K10
	C 4043 (B,46,46)	CKSSYB104K10	C 4327 (B,33,63)	CKSSYB104K10
	C 4044 (B,40,46)	CKSSYB104K10	C 4328 (B,33,64)	CKSSYB104K10
	C 4045 (B,39,47)	CKSSYB104K10	C 4329 (A,30,67)	CKSSYB104K10
	C 4047 (B,49,48)	CKSSYB104K10	C 4330 (B,30,67)	CKSSYB104K10
	C 4048 (B,44,48)	CKSSYB104K10	C 4331 (A,30,69)	CKSSYB104K10
B	C 4050 (B,41,48)	CKSSYB104K10	C 4332 (A,30,71)	CKSSYB104K10
	C 4051 (B,44,42) 22 uF	DCH1256	C 4333 (B,28,69) 4.7 uF	CCG1201
	C 4052 (B,43,46) 22 uF	CCG1254	C 4334 (B,33,71)	CKSSYB104K10
	C 4053 (B,36,36) 22 uF	CCG1254	C 4335 (A,41,68)	CKSSYB104K10
	C 4054 (B,52,33) 10 uF	CCG1192	C 4336 (A,41,70)	CKSSYB104K10
	C 4055 (B,50,35)	CKSSYB104K10	C 4337 (B,38,71)	CKSSYB104K10
	C 4056 (A,36,14) 10 uF	CCG1192	C 4338 (B,50,69)	CKSSYB104K10
	C 4057 (B,35,49) 10 uF	CCG1192	C 4339 (B,50,71)	CKSSYB104K10
	C 4058 (B,38,46)	CKSSYB104K10	C 4340 (A,43,71)	CKSSYB104K10
	C 4059 (B,47,48)	CKSSYB104K10	C 4341 (B,52,75)	CKSSYB104K10
	C 4062 (B,56,54)	CKSSYB104K10	C 4342 (B,50,78)	CKSSYB104K10
C	C 4063 (B,54,54)	CKSSYB104K10	C 4343 (B,40,68)	CKSSYB104K10
	C 4064 (B,44,36) 10 uF	CCG1192	C 4344 (B,39,70)	CKSSYB104K10
	C 4065 (B,37,39)	CKSSYB104K10	C 4345 (B,33,75)	CKSSYB104K10
	C 4066 (B,48,40)	CKSSYB104K10	C 4346 (B,30,75)	CKSSYB104K10
	C 4067 (B,48,38)	CKSSYB104K10	C 4347 (A,30,75)	CKSSYB104K10
	C 4068 (B,40,39)	CKSSYB104K10	C 4348 (A,30,77)	CKSSYB104K10
	C 4069 (B,41,42) 1 uF	DCH1246	C 4349 (A,41,75)	CKSSYB104K10
	C 4070 (B,45,37)	CKSSYB104K10	C 4350 (A,41,77)	CKSSYB104K10
	C 4071 (B,46,34)	CKSSYB104K10	C 4351 (B,40,77)	CKSSYB104K10
	C 4072 (B,39,32) 10 uF	CCG1192	C 4352 (B,38,76) 4.7 uF	CCG1201
	C 4073 (B,44,31) 10 uF	CCG1192	C 4353 (A,61,71)	CKSSYB104K10
D	C 4075 (B,41,36)	CKSSYB104K10	C 4354 (B,40,75)	CKSSYB104K10
	C 4076 (B,35,41) 10 uF	CCG1192	C 4355 (B,30,69)	CKSSYB104K10
	C 4077 (B,53,49) 10 uF	CCG1192	C 4356 (B,51,75)	CKSSYB104K10
	C 4078 (B,48,36)	CKSSYB104K10	C 4357 (B,39,81)	CKSSYB103K16
	C 4079 (A,43,25)	CCSSCH101J50	C 4358 (B,57,81)	CKSSYB103K16
	C 4080 (B,52,51)	CKSSYB104K10	C 4361 (B,30,71)	CKSSYB104K10
	C 4087 (B,43,38) 22 uF	DCH1256	C 4362 (B,33,72)	CKSSYB104K10
	C 4301 (B,59,66)	CKSSYB104K10	C 4363 (B,30,77)	CKSSYB104K10
	C 4302 (A,59,66)	CKSSYB104K10	C 4364 (B,38,73)	CKSSYB104K10
	C 4303 (B,51,63)	CKSSYB104K10	C 4381 (A,26,73)	CKSSYB104K10
E	C 4304 (B,51,65)	CKSSYB104K10	C 4382 (A,25,71)	CKSSYB104K10
	C 4305 (B,50,67)	CKSSYB104K10	C 4401 (A,9,48)	CKSSYB471K50
	C 4306 (A,49,67)	CKSSYB104K10	C 4402 (A,5,71)	CKSSYB104K10
	C 4307 (A,49,69)	CKSSYB104K10	C 4403 (A,9,71)	CKSSYB103K16
	C 4308 (A,49,71)	CKSSYB104K10	C 4404 (B,30,52)	CCSSCH8R0D50
	C 4309 (B,52,67) 4.7 uF	CCG1201	C 4405 (B,29,57)	CCSSCH8R0D50
	C 4310 (B,52,70)	CKSSYB104K10	C 4406 (B,22,58)	CKSSYB103K16
	C 4311 (A,59,68)	CKSSYB104K10	C 4412 (A,22,65)	CKSSYB103K16
	C 4312 (B,58,70)	CKSSYB104K10	C 4413 (A,19,68)	CKSSYB103K16
	C 4313 (B,56,71)	CKSSYB104K10	C 4414 (A,19,65)	CKSSYB103K16
	C 4314 (A,59,75)	CKSSYB104K10	C 4415 (A,20,64)	CKSSYB103K16
F	C 4315 (A,59,77)	CKSSYB104K10	C 4416 (A,20,67)	CKSSYB103K16
	C 4316 (B,59,77)	CKSSYB104K10	C 4417 (A,19,63)	CKSSYB103K16
	C 4317 (B,58,77) 4.7 uF	CCG1201	C 4418 (A,17,63)	CKSSYB103K16
	C 4318 (A,49,75)	CKSSYB104K10	C 4419 (A,17,64)	CKSSYB103K16

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 4420	(A,17,65)	CKSSYB103K16		C 4792	(A,44,18)	CKSSYB104K10	
C 4421	(A,17,66)	CKSSYB103K16		C 4793	(A,49,19)	CKSSYB222K50	
C 4422	(A,19,67)	CKSSYB103K16		C 4794	(A,42,15)	CKSSYB104K10	A
C 4423	(A,26,65)	CKSSYB103K16		C 4796	(A,19,59) 4.7 uF	CCG1201	
C 4424	(B,26,65)	CKSSYB103K16		C 4797	(A,20,56) 4.7 uF	CCG1201	
C 4425	(A,25,67)	CKSSYB103K16		C 4798	(A,43,22)	CKSSYB104K10	
C 4426	(A,18,67)	CKSSYB103K16		C 4799	(A,49,25)	CCSSCH101J50	
C 4427	(A,17,60)	CKSSYB104K10		C 4800	(A,27,60)	CKSSYB473K16	
C 4428	(A,17,59) 1 uF	DCH1246		C 4901	(A,40,23) 1 uF	DCH1246	
C 4429	(A,26,63) 1 uF	DCH1246		C 4902	(B,58,43)	CKSSYB104K10	
C 4430	(A,26,64)	CKSSYB104K10		C 4903	(A,67,24)	CKSSYB104K10	
C 4431	(A,17,60)	CKSSYB103K16		C 4904	(A,65,25)	CKSSYB102K50	
C 4432	(A,26,65)	CKSSYB103K16		C 4914	(B,59,45)	CKSSYB103K16	
C 4433	(B,26,58)	CKSSYB471K50		C 4915	(A,31,25)	CKSSYB104K10	B
C 4435	(A,22,67)	CKSSYB104K10		C 4933	(A,56,35)	CCSSCH101J50	
C 4436	(A,23,67) 10 uF	CCG1192		C 5001	(A,73,21) 22 uF	DCH1256	
C 4437	(A,22,63)	CKSSYB104K10		C 5003	(A,67,16) 22 uF	DCH1256	
C 4438	(A,24,63) 10 uF	CCG1192		C 5007	(B,40,11)	CKSRYB102K50	
C 4439	(B,26,59)	CKSSYB103K16		E Unit Number : CXX8725 Unit Name : Monitor Unit(Service)			
C 4501	(B,11,45)	CKSSYB104K10					
C 4502	(B,5,40)	CKSSYB104K10					
C 4503	(B,4,38)	CKSSYB104K10		<u>MISCELLANEOUS</u>			
C 4504	(B,11,33)	CKSSYB103K16					
C 4505	(B,14,33)	CKSSYB103K16					
C 4506	(B,13,31) 10 uF	CCG1192					
C 4507	(B,13,32)	CKSSYB103K16					
C 4508	(B,18,37)	CKSSYB103K16		IC 2704	(A,109,30) Interface IC	AK4187VN	
C 4509	(B,8,32) 10 uF	CCG1192		IC 2801	(B,40,75) Regulator IC	MM3411A15N	
C 4510	(B,15,44)	CKSSYB102K50		IC 2802	(B,30,77) Regulator IC	MM3411A25N	
C 4511	(B,6,44) 10 uF	CCG1192		IC 2803	(B,71,55) Interface IC	BU90R104	
C 4516	(B,17,40)	CCSSCH101J50		IC 3001	(A,35,58) Display IC	TC90193ASBG	
C 4704	(B,67,58)	CKSRYB105K10		IC 3101	(A,109,72) Driver IC	BD81A04EFV-M	
C 4706	(B,65,64)	CCSSCH470J50		IC 3201	(A,96,16) DC/DC Converter IC	R1290K103A	
C 4707	(B,64,64)	CKSSYB471K50		Q 3001	(B,22,47) Bipolar Transistor	LSAR523UB	
C 4708	(A,71,64) 47 uF	CCG1229		Q 3002	(A,21,45) Bipolar Transistor	LSCR523UB	
C 4709	(A,68,64) 100 uF	CCG1232		Q 3201	(A,97,26) Transistor	2SAR502UB	D
C 4711	(B,64,62)	CCSSCH220J50		Q 3202	(A,102,12) Transistor	LTC024EEB	
C 4712	(B,73,63)	CKSSYB103K16		Q 3301	(A,63,33) Bipolar Transistor	LSAR523UB	
C 4722	(B,63,37)	CKSRYB105K10		Q 3302	(A,68,35) Bipolar Transistor	LSCR523UB	
C 4723	(B,71,39)	CKSSYB103K16		D 3101	(A,108,61) Diode	RB060M-30	
C 4724	(B,70,39)	CCSSCH470J50		D 3201	(B,98,14) Schottky Diode	DB3S308F0	
C 4725	(B,70,40)	CKSSYB471K50		D 3202	(B,93,22) Schottky Diode	DB3S308F0	
C 4726	(A,69,33) 47 uF	CCG1229		D 3203	(B,95,22) Schottky Diode	DB3S308F0	
C 4727	(A,70,36) 100 uF	CCG1232		D 3204	(A,87,21) Schottky Diode	RB162M-40	
C 4729	(B,67,40)	CCSSCH220J50		L 2801	(B,71,44) Chip Beads	VTL1127	
C 4730	(B,68,31)	CKSSYB103K16		L 2802	(B,70,44) Chip Beads	VTL1127	
C 4742	(B,65,46)	CKSRYB105K10		L 2803	(B,68,43) Chip Beads	VTL1127	E
C 4744	(B,64,52)	CCSSCH470J50		L 2804	(B,66,43) Chip Beads	VTL1127	
C 4745	(B,62,52)	CKSSYB471K50		L 2805	(B,68,44) Chip Beads	VTL1127	
C 4746	(A,70,52) 47 uF	CCG1229		L 2806	(B,66,45) Chip Beads	VTL1127	
C 4747	(A,67,52) 100 uF	CCG1232		L 2807	(B,64,48) Chip Beads	VTL1127	
C 4749	(B,62,49)	CCSSCH220J50		L 2808	(B,68,47) Chip Beads	VTL1127	
C 4750	(B,71,51)	CKSSYB103K16		L 2809	(B,63,50) Chip Beads	VTL1127	
C 4766	(A,35,17) 4.7 uF	CCG1201		L 2810	(B,63,51) Chip Beads	VTL1127	
C 4767	(A,33,17) 4.7 uF	CCG1201		L 2811	(B,63,52) Chip Beads	VTL1127	
C 4768	(A,26,16)	CKSSYB473K16		L 2812	(B,63,53) Chip Beads	VTL1127	
C 4776	(A,65,23)	CKSSYB104K10		L 2813	(B,61,54) Chip Beads	VTL1127	F
C 4778	(A,27,25)	CKSSYB473K16		L 2814	(B,61,55) Chip Beads	VTL1127	
C 4790	(A,47,22)	CCSSCH101J50		L 2815	(B,61,56) Chip Beads	VTL1127	
C 4791	(A,45,23)	CKSSYB104K10		L 2816	(B,61,57) Chip Beads	VTL1127	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	L 2817 (B,61,58) Chip Beads	VTL1127	R 2706 (A,103,49)	RS1/16SS222J
	L 2818 (B,61,59) Chip Beads	VTL1127	R 2712 (A,38,74)	RS1/16SS0R0J
	L 2819 (B,61,60) Chip Beads	VTL1127	R 2713 (A,36,73)	RS1/16SS0R0J
	L 2820 (B,61,61) Chip Beads	VTL1127	R 2715 (A,109,16)	RS1/16SS0R0J
	L 2821 (B,61,62) Chip Beads	VTL1127	R 2716 (A,108,18)	RS1/16SS0R0J
B	L 2822 (A,76,59) Chip Solid Inductor	XTL3010	R 2717 (A,106,23)	RS1/16SS621J
	L 2823 (A,70,57) Chip Solid Inductor	XTL3010	R 2718 (A,107,24)	RS1/16SS181J
	L 2829 (A,76,62) Chip Ferrite Bead	BTX1047	R 2719 (A,111,26)	RS1/16SS201J
	L 2830 (B,76,47) Chip Beads	VTL1127	R 2720 (A,109,25)	RS1/16SS620J
	L 2831 (B,75,47) Chip Beads	VTL1127	R 2724 (A,107,35)	RS1/16SS121J
C	L 2832 (B,75,42) Chip Beads	VTL1127	R 2725 (A,110,35)	RS1/16SS0R0J
	L 2833 (B,74,44) Chip Beads	VTL1127	R 2726 (A,112,35)	RS1/16SS0R0J
	L 2834 (B,73,44) Chip Beads	VTL1127	R 2744 (A,99,77)	RS1/16SS0R0J
	L 2835 (B,72,44) Chip Beads	VTL1127	R 2745 (A,101,76)	RS1/16SS0R0J
	L 3001 (A,46,52) Inductor	CTF1734	R 2746 (B,104,78)	RS1/16SS0R0J
D	L 3002 (A,45,53) Inductor	CTF1734	R 2749 (A,81,68)	RS1/10SR0R0J
	L 3003 (A,45,54) Inductor	CTF1734	R 2750 (A,71,69)	RS1/10SR0R0J
	L 3004 (A,45,55) Inductor	CTF1734	R 2751 (B,51,76)	RS1/10SR0R0J
	L 3005 (A,45,57) Inductor	CTF1734	R 2753 (A,134,58)	RS1/16SS0R0J
	L 3006 (A,47,57) Inductor	CTF1734	R 2754 (A,132,57)	RS1/16SS0R0J
E	L 3007 (A,50,52) Inductor	CTF1734	R 2801 (B,70,42)	RS1/16SS221J
	L 3008 (A,50,50) Inductor	CTF1734	R 2802 (B,62,42)	RS1/16SS221J
	L 3009 (A,51,56) Inductor	CTF1734	R 2803 (B,64,42)	RS1/16SS221J
	L 3010 (A,52,54) Inductor	CTF1734	R 2804 (B,63,43)	RS1/16SS221J
	L 3011 (A,52,56) Inductor	CTF1734	R 2805 (B,65,44)	RS1/16SS221J
F	L 3012 (A,45,61) Inductor	CTF1734	R 2806 (B,63,45)	RS1/16SS221J
	L 3013 (A,46,48) Inductor	CTF1734	R 2807 (B,62,48)	RS1/16SS221J
	L 3014 (A,45,47) Inductor	CTF1734	R 2808 (B,65,46)	RS1/16SS221J
	L 3015 (A,44,47) Inductor	CTF1734	R 2809 (B,62,49)	RS1/16SS221J
	L 3016 (A,43,47) Inductor	CTF1734	R 2810 (B,61,50)	RS1/16SS221J
G	L 3017 (A,42,47) Inductor	CTF1734	R 2811 (B,61,51)	RS1/16SS221J
	L 3018 (A,40,45) Inductor	CTF1734	R 2812 (B,61,52)	RS1/16SS221J
	L 3020 (A,38,48) Inductor	CTF1734	R 2813 (B,59,54)	RS1/16SS221J
	L 3021 (A,34,49) Inductor	CTF1740	R 2814 (B,59,55)	RS1/16SS221J
	L 3022 (A,33,49) Inductor	CTF1734	R 2815 (B,59,56)	RS1/16SS221J
H	L 3025 (B,14,50) Inductor	CTF1545	R 2816 (B,59,57)	RS1/16SS221J
	L 3026 (A,46,59) Inductor	CTF1734	R 2817 (B,59,58)	RS1/16SS221J
	L 3027 (A,48,58) Inductor	CTF1734	R 2818 (B,59,59)	RS1/16SS221J
	L 3028 (A,44,49) Inductor	CTF1734	R 2819 (B,59,60)	RS1/16SS221J
	L 3029 (A,44,50) Inductor	CTF1734	R 2820 (B,59,61)	RS1/16SS221J
I	L 3030 (A,46,62) Inductor	CTF1734	R 2821 (B,59,62)	RS1/16SS221J
	L 3031 (A,46,63) Inductor	CTF1734	R 2822 (B,79,55)	RS1/16SS103J
	L 3104 (A,108,65) Inductor	CTF1545	R 2823 (A,72,57)	RS1/10SR0R0J
	L 3105 (A,103,63) SMD Inductor	CTH1558	R 2824 (B,72,63)	RS1/16SS1000D
	L 3201 (A,94,22) Choke Coil 22 uH	CTH1426	R 2825 (B,70,64)	RS1/16SS1000D
J	L 3301 (A,74,34) Inductor	ATL7054	R 2826 (B,69,63)	RS1/16SS1000D
	L 3302 (B,48,42) Inductor	CTF1635	R 2827 (B,67,63)	RS1/16SS1000D
	TH3301 (A,131,14) Thermistor	CCX1084	R 2828 (B,66,63)	RS1/16SS1000D
	X 3001 (A,21,55) Resonator 27.000 MHz	CSS1768	R 2831 (B,44,77)	RS1/10SR0R0J
	U 3551 (A,7,74) Remote Receiver Unit	RS-470	R 2832 (B,35,78)	RS1/10SR0R0J
K	CN2701 (A,121,29) Connector	CKS4428	R 2834 (B,76,45)	RS1/16SS221J
	CN2704 (A,61,75) Connector	CKS6646	R 2835 (B,75,45)	RS1/16SS221J
	CN2705 (A,118,17) Connector	CKS6625	R 2836 (B,73,40)	RS1/16SS221J
	CN2707 (A,117,48) Connector	CKS6063	R 2837 (B,73,42)	RS1/16SS221J
	CN3301 (A,34,34) Connector	CKS6602	R 2838 (B,72,42)	RS1/16SS221J
L			R 2839 (B,71,42)	RS1/16SS221J
			R 2857 (B,80,56)	RS1/16SS103J
			R 2858 (B,84,55)	RS1/16SS103J
			R 2859 (B,79,59)	RS1/16SS103J
			R 2865 (B,85,55)	RS1/16SS221J
RESISTORS				
M	R 2704 (A,103,51)	RS1/16SS222J		
	R 2705 (A,101,50)	RS1/16SS222J		

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 3001	(A,47,50)	RS1/16SS151J		R 3073	(B,30,54)	RS1/16SS0R0J		A
R 3002	(A,47,53)	RS1/16SS151J		R 3074	(A,25,49)	RS1/16SS152J		
R 3003	(A,47,54)	RS1/16SS151J		R 3075	(B,35,76)	RS1/10SR0R0J		
R 3004	(A,48,52)	RS1/16SS151J		R 3077	(A,20,62)	RS1/16SS470J		
R 3005	(A,47,56)	RS1/16SS151J		R 3078	(A,20,64)	RS1/16SS273J		
R 3006	(A,48,56)	RS1/16SS151J		R 3079	(A,22,63)	RS1/16SS470J		
R 3007	(A,50,47)	RS1/16SS151J		R 3080	(A,23,69)	RS1/16SS470J		
R 3008	(A,50,45)	RS1/16SS151J		R 3081	(A,24,69)	RS1/16SS470J		
R 3009	(A,51,54)	RS1/16SS151J		R 3082	(B,23,78)	RS1/10SR0R0J		
R 3010	(A,51,48)	RS1/16SS151J		R 3083	(A,19,48)	RS1/16SS122J		
R 3011	(A,52,51)	RS1/16SS151J		R 3087	(A,25,53)	RS1/16SS0R0J		B
R 3012	(A,47,61)	RS1/16SS151J		R 3088	(A,17,51)	RS1/10SR0R0J		
R 3014	(B,43,52)	RS1/16SS0R0J		R 3089	(B,17,53)	RS1/10SR0R0J		
R 3016	(B,46,61)	RS1/16SS0R0J		R 3091	(A,21,66)	RS1/16SS472J		
R 3017	(A,46,65)	RS1/16SS472J		R 3094	(A,22,62)	RS1/16SS472J		
R 3018	(A,46,66)	RS1/16SS472J		R 3095	(A,19,66)	RS1/16SS273J		
R 3019	(A,44,67)	RS1/16SS472J		R 3103	(B,109,71)	RS1/16SS104J		
R 3020	(B,45,58)	RS1/16SS0R0J		R 3104	(B,108,72)	RS1/16SS154J		
R 3021	(B,47,60)	RS1/16SS0R0J		R 3105	(A,111,77)	RS1/16SS273J		
R 3022	(A,46,46)	RS1/16SS151J		R 3106	(A,112,77)	RS1/16SS511J		
R 3023	(A,45,46)	RS1/16SS151J		R 3108	(B,101,68)	RS1/16SS5602D		C
R 3024	(A,44,45)	RS1/16SS151J		R 3110	(B,99,68)	RS1/16SS6801D		
R 3025	(A,43,45)	RS1/16SS151J		R 3111	(A,75,69)	RS1/16SS0R0J		
R 3026	(A,42,45)	RS1/16SS151J		R 3116	(A,124,65)	RS1/16SS3603D		
R 3027	(A,41,46)	RS1/16SS0R0J		R 3117	(A,124,67)	RS1/16SS5102D		
R 3028	(A,41,43)	RS1/16SS151J		R 3118	(A,126,62)	RS1/10SR0R0J		
R 3030	(A,40,69)	RS1/16SS0R0J		R 3129	(B,108,76)	RS1/16SS0R0J		
R 3031	(A,38,47)	RS1/16SS151J		R 3132	(B,106,75)	RS1/16SS0R0J		
R 3033	(B,38,49)	RS1/16SS0R0J		R 3201	(A,103,10)	RS1/16SS0R0J		
R 3034	(A,36,69)	RS1/16SS0R0J		R 3202	(A,93,14)	RS1/16SS103J		
R 3036	(B,37,49)	RS1/16SS0R0J		R 3203	(B,95,15)	RS1/10SR9102D		D
R 3037	(A,35,69)	RS1/16SS0R0J		R 3204	(B,95,18)	RS1/10SR1802D		
R 3038	(A,34,47)	RS1/16SS680J		R 3205	(B,94,13)	RS1/16SS203J		
R 3040	(A,32,44)	RS1/16SS470J		R 3206	(B,93,13)	RS1/16SS104J		
R 3042	(B,15,61)	RS1/16SS0R0J		R 3207	(A,97,23)	RS1/16SS103J		
R 3044	(B,24,62)	RS1/16SS472J		R 3208	(A,98,11)	RS1/16SS472J		
R 3045	(A,30,47)	RS1/16SS0R0J		R 3209	(B,98,23)	RS1/10SR1003D		
R 3046	(A,29,69)	RS1/16SS0R0J		R 3210	(B,98,27)	RS1/10SR9101D		
R 3047	(B,18,47)	RS1/16SS912J		R 3211	(A,99,12)	RS1/16SS6800D		
R 3048	(B,26,67)	RS1/16SS472J		R 3212	(A,100,12)	RS1/16SS1502D		
R 3049	(B,18,49)	RS1/16SS103J		R 3213	(A,101,13)	RS1/16SS8201D		E
R 3050	(B,20,46)	RS1/16SS103J		R 3214	(A,90,22)	RS1/10SR2R2J		
R 3051	(B,19,49)	RS1/16SS391J		R 3215	(A,88,15)	RS1/10SR0R0J		
R 3053	(A,26,69)	RS1/16SS472J		R 3216	(A,91,12)	RS1/10SR1203D		
R 3054	(A,28,69)	RS1/16SS472J		R 3217	(A,94,12)	RS1/10SR3001D		
R 3055	(A,27,69)	RS1/16SS472J		R 3218	(A,94,9)	RS1/10SR1502D		
R 3056	(A,20,59)	RS1/16SS472J		R 3219	(A,91,11)	RS1/10SR472J		
R 3057	(A,20,60)	RS1/16SS472J		R 3291	(A,125,74)	RS1/16SS0R0J		
R 3058	(B,23,62)	RS1/16SS472J		R 3292	(A,125,73)	RS1/16SS0R0J		
R 3059	(A,20,61)	RS1/16SS472J		R 3301	(B,16,33)	RS1/16SS51R0D		
R 3060	(A,25,69)	RS1/16SS472J		R 3302	(B,17,32)	RS1/16SS2R2J		
R 3061	(A,22,66)	RS1/16SS472J		R 3303	(B,18,33)	RS1/16SS75R0D		
R 3064	(A,24,56)	RS1/16SS105J		R 3304	(B,19,32)	RS1/16SS2200D		
R 3065	(A,22,57)	RS1/16SS471J		R 3305	(B,20,33)	RS1/16SS51R0D		
R 3066	(A,78,62)	RS1/10SR0R0J		R 3306	(B,21,32)	RS1/16SS4R7J		
R 3067	(A,25,64)	RS1/16SS0R0J		R 3307	(B,22,33)	RS1/16SS51R0D		
R 3068	(A,25,59)	RS1/16SS0R0J		R 3308	(B,23,32)	RS1/16SS0R0J		
R 3069	(A,23,61)	RS1/16SS0R0J		R 3309	(B,24,33)	RS1/16SS1600D		F
R 3071	(A,25,50)	RS1/16SS0R0J		R 3310	(B,25,32)	RS1/16SS100J		
R 3072	(A,25,51)	RS1/16SS0R0J		R 3311	(B,26,33)	RS1/16SS43R0D		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 3312 (B,27,32)
R 3313 (B,28,33)
R 3314 (B,29,32)

RS1/16SS2200D
RS1/16SS1600D
RS1/16SS18R0D

C 2825 (B,81,54)
C 2826 (B,80,54)
C 2830 (B,83,57)
C 3002 (B,43,53)
C 3003 (B,43,54)

CKSSYB103K16
CKSSYB104K10
CKSQYB225K10
CKSSYB104K10
CKSSYB104K10

A

R 3315 (B,30,33)
R 3316 (B,31,32)
R 3317 (B,32,33)
R 3318 (B,33,32)
R 3319 (B,34,33)

RS1/16SS120J
RS1/16SS47R0D
RS1/16SS68R0D
RS1/16SS4R7J
RS1/16SS1500D

C 3004 (B,42,59)
C 3005 (B,45,60)
C 3006 (B,44,62)
C 3007 (A,41,48)
C 3008 (A,39,68)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

R 3320 (B,35,32)
R 3321 (B,36,33)
R 3322 (B,36,31)
R 3323 (B,34,39)
R 3325 (B,39,46)

RS1/16SS1500D
RS1/16SS33R0D
RS1/16SS2R2J
RS1/16SS473J
RS1/10SR0R0J

C 3010 (B,37,50)
C 3011 (A,36,66)
C 3013 (B,35,48)
C 3014 (A,35,66)
C 3015 (A,33,47)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH220J50

B

R 3326 (B,29,37)
R 3328 (A,34,43)
R 3329 (B,22,41)
R 3330 (A,61,37)
R 3332 (A,61,35)

RS1/10SR0R0J
RS1/16SS473J
RS1/10SR0R0J
RS1/16SS153J
RS1/16SS105J

C 3019 (B,16,48) 10 uF
C 3021 (A,31,49)
C 3022 (A,32,67)
C 3023 (B,20,50)
C 3024 (A,27,47)

CCG1192
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

R 3334 (A,64,36)
R 3335 (A,69,33)
R 3336 (A,67,32)
R 3337 (A,66,36)
R 3338 (A,66,34)

RS1/16SS153J
RS1/16SS472J
RS1/16SS101J
RS1/16SS273J
RS1/16SS474J

C 3025 (A,25,46)
C 3026 (A,27,48)
C 3027 (A,26,58)
C 3028 (A,25,60)
C 3029 (A,26,63)

CKSRYB474K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C

R 3340 (A,37,47)
R 3342 (A,36,45)
R 3343 (A,36,42)
R 3344 (A,128,13)
R 3352 (A,30,43)

RS1/16SS473J
RS1/16SS473J
RS1/16SS0R0J
RS1/16SS183J
RS1/16SS473J

C 3030 (A,23,50)
C 3031 (A,28,49)
C 3032 (A,26,50)
C 3033 (A,26,52)
C 3037 (A,24,54)

CKSSYB152K50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH120J50

R 3371 (A,39,43)
R 3380 (A,64,35)
R 3510 (B,20,72)
R 3511 (A,47,59)
R 3512 (A,49,56)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J

C 3038 (A,26,54)
C 3040 (A,22,48)
C 3041 (A,21,57)
C 3042 (A,20,76) 4.7 uF
C 3043 (A,25,54)

CKSSYB103K16
CCSSCH4R0C50
CCSSCH120J50
CCG1201
CKSSYB104K10

D

R 3513 (A,46,49)
R 3514 (A,46,50)
R 3515 (A,48,62)
R 3516 (A,48,63)
R 3565 (B,7,74)

RS1/16SS151J
RS1/16SS151J
RS1/16SS151J
RS1/16SS151J
RS1/16SS470J

C 3044 (A,20,66)
C 3101 (A,117,72) 10 uF
C 3102 (A,115,74)
C 3103 (A,112,79)
C 3104 (A,113,77)

CKSSYB103K16
CCG1236
CKSSYB104K16
CKSSYB104K10
CKSSYB104K10

CAPACITORS

C 2705 (A,105,31) 10 uF
C 2706 (A,106,31)
C 2707 (B,109,32)
C 2708 (B,111,31) 10 uF
C 2803 (A,61,54)

DCH1201
CKSSYB104K10
CKSSYB104K10
DCH1201
CKSSYB104K10

C 3107 (A,110,67) 2.2 uF
C 3109 (A,113,63) 10 uF
C 3110 (A,115,63) 10 uF
C 3111 (A,117,63) 10 uF
C 3201 (A,93,16)

CCG1218
CCG1236
CCG1236
CCG1236
CKSSYB102K50

E

C 2804 (B,60,53)
C 2805 (B,63,61)
C 2806 (A,65,59)
C 2807 (B,76,62)
C 2808 (B,77,62)

CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CKSSYB103K16
CKSSYB104K10

C 3202 (B,96,15)
C 3203 (B,93,16) 1 uF
C 3205 (B,94,28)
C 3206 (B,96,28)
C 3208 (B,101,17)

CKSRYB105K16
DCH1246
CKSQYB105K25
CKSQYB105K25
CKSRYB104K50

C 2809 (A,67,60)
C 2810 (A,67,59)
C 2814 (A,69,60)
C 2816 (A,74,60) 10 uF
C 2819 (B,42,76)

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CCG1192
CKSRYB105K10

C 3209 (B,94,20)
C 3210 (B,95,20)
C 3211 (A,100,8)
C 3212 (A,99,8)
C 3214 (A,98,8) 1 uF

CKSRYB104K50
CKSRYB104K50
CKSSYB224K6R3
CKSSYB224K6R3
DCH1246

F

C 2820 (B,33,78)
C 2821 (B,27,77)
C 2822 (B,37,73)
C 2823 (B,71,46)
C 2824 (B,71,47)

CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSSYB104K10
CKSSYB103K16

C 3215 (A,100,23)
C 3216 (A,97,9)
C 3217 (A,92,27) 4.7 uF
C 3218 (B,97,25)
C 3219 (A,101,14)

CKSYB475K16
CKSRYB682K50
CCG1201
CCSRCH561J50
CCSSCH101J50

1

2

3

4

5
Circuit Symbol and No.

C 3220 (A,90,25)
C 3221 (A,101,17)
C 3222 (A,87,19) 4.7 uF
C 3223 (A,87,17) 4.7 uF
C 3224 (A,94,11)

C 3309 (B,26,30)
C 3310 (B,25,30)
C 3311 (B,27,30)
C 3312 (B,29,30)
C 3321 (B,36,40)

C 3322 (B,37,40)
C 3323 (B,42,43) 10 uF/16 V
C 3326 (B,53,40)
C 3328 (B,33,40)
C 3329 (B,47,36)

C 3330 (B,31,44) 10 uF
C 3333 (B,28,40)
C 3334 (B,30,41) 4.7 uF
C 3336 (B,31,37)
C 3338 (B,21,38)

C 3342 (A,31,43)
C 3343 (A,62,35)
C 3344 (A,71,35) 10 uF
C 3345 (A,128,14)
C 3346 (A,132,14)

C 3347 (A,35,44)
C 3349 (A,23,42)
C 3350 (A,25,42)
C 3351 (A,33,42)
C 3557 (B,6,75)

6
Part No.

CKSRYB222K50
CKSRYB224K16
CCG1222
CCG1222
CCSRCH471J50

CKSSYB102K50
CKSSYB104K10
CKSSYB102K50
CKSSYB104K10
CKSSYB102K50

CKSSYB104K16
DCH1263
CKSSYB102K50
CKSSYB102K50
CKSSYB104K10

CCG1192
CKSSYB104K16
CCG1201
CKSQYB225K16
CKSQYB334K50

CKSSYB104K10
CKSSYB104K10
CCG1236
CKSSYB104K10
CKSSYB104K10

CKSRYB105K10
CKSSYB104K16
CKSSYB104K16
CKSSYB104K16
CKSSYB104K10

F

Unit Number : CXX8727
Unit Name : Key Unit(Service)

MISCELLANEOUS

Q 3601 (B,8,47) Chip Transistor HN1C01FU
Q 3602 (B,10,53) Bipolar TR LSCR523UB
Q 3603 (B,8,9) Chip Transistor HN1C01FU
Q 3604 (B,4,10) Bipolar TR LSCR523UB
D 3601 (A,4,57) LED SMLVN6RGB2UK(B)

D 3602 (A,4,18) LED SMLVN6RGB2UK(B)
S 3601 (A,11,26) Push Switch CSG1155
S 3602 (A,11,6) Push Switch CSG1155
S 3603 (A,11,10) Push Switch CSG1155
S 3604 (A,23,76) Push Switch CSG1155

S 3605 (A,11,49) Push Switch CSG1155
S 3606 (A,11,64) Push Switch CSG1155
S 3607 (A,11,45) Push Switch CSG1155
S 3608 (A,11,35) Push Switch CSG1155
S 3609 (A,13,75) Push Switch CSG1155

S 3610 (A,6,67) Switch CSN1057
CN3601 (B,12,31) Connector CKS6063

RESISTORS

R 3607 (B,5,32) RS1/16SS473J
R 3608 (B,7,55) RS1/10SR910J
R 3609 (B,7,53) RS1/10SR101J
R 3610 (B,7,50) RS1/10SR101J

7
Circuit Symbol and No.

R 3611 (B,5,55)
R 3612 (B,5,53)
R 3613 (B,5,50)
R 3614 (B,4,55)
R 3615 (B,4,53)
R 3616 (B,4,50)

R 3617 (B,5,34)
R 3618 (B,5,30)
R 3619 (B,5,27)
R 3620 (B,13,7)
R 3621 (B,12,7)

R 3622 (B,14,76)
R 3623 (B,15,44)
R 3624 (B,14,44)
R 3625 (B,13,75)
R 3626 (B,7,19)

R 3627 (B,7,16)
R 3628 (B,7,13)
R 3629 (B,6,19)
R 3630 (B,6,16)
R 3631 (B,6,13)

R 3632 (B,4,19)
R 3633 (B,4,16)
R 3634 (B,4,13)

G

Unit Number : CWX4712
Unit Name : Sensor Unit

MISCELLANEOUS

IC 401 (A,21,17) IC UBX-G6010-ST
IC 402 (A,36,16) Sensor S-5851AAA-I6U
IC 403 (B,23,15) IC R5S726A0D216FP
IC 404 (A,7,18) Flash ROM Unit CWW9799
IC 405 (B,6,7) IC S-80827CNMC-B8M

IC 406 (A,6,7) Regulator IC S-1206B1C-I6U
D 402 (B,7,22) Diode DA2J101
L 401 (A,25,11) Inductor LCYB10NJ1005
L 402 (A,16,12) SMD Ferrite Bead CTF1806
L 403 (A,32,21) Chip Ferrite Bead OTL8019

L 404 (A,38,14) Chip Ferrite Bead OTL8019
L 405 (A,39,13) Chip Ferrite Bead OTL8019
L 406 (A,10,8) Chip Ferrite Bead OTL8019
L 407 (A,15,9) Chip Ferrite Bead OTL8019
X 401 (A,13,13) Crystal Oscillator 26 MHz CWX4552

X 402 (A,29,18) Resonator 32.768 kHz CSS1807
X 403 (B,8,17) Crystal Resonator 10 MHz CSS1799
F 401 (A,29,14) Filter CTF1830
GY401 (A,34,10) Sensor(Gyro Sensor) CSX1209
GY402 (A,35,21) Sensor(G Sensor) CSX1210

CN401 (A,20,5) Connector CKS5204

RESISTORS

R 401 (A,14,16) RS1/16SS0R0J
R 404 (A,37,18) RS1/16SS221J
R 405 (A,33,24) RS1/16SS101J
R 407 (A,34,16) RS1/16SS221J
R 408 (A,38,10) RS1/16SS101J

1

Circuit Symbol and No.

R 409 (A,26,12)
R 410 (A,15,16)
R 411 (A,27,16)

A

R 412 (A,20,23)
R 413 (A,29,22)
R 414 (A,19,24)
R 415 (A,21,23)
R 416 (A,22,23)

■

R 417 (B,36,19)
R 418 (B,35,18)
R 420 (B,34,21)
R 421 (B,34,20)

B

R 422 (B,32,3)
R 423 (A,10,24)
R 424 (A,8,24)
R 425 (A,6,24)
R 426 (A,8,11)

■

R 427 (B,24,3)
R 428 (B,25,3)
R 429 (B,7,24)
R 430 (B,8,25)
R 431 (A,27,10)

C

R 432 (A,5,11)
R 433 (B,11,25)
R 434 (A,20,10)
R 435 (B,21,25)
R 436 (B,16,3)

■

R 437 (A,29,10)
R 438 (A,4,12)
R 439 (A,8,12)
R 441 (B,15,25)

D

R 444 (B,11,21)
R 445 (B,12,15)
R 446 (B,11,9)
R 449 (B,37,21)
R 450 (B,34,22)

■

R 451 (B,9,11)
R 452 (B,8,13)
R 453 (B,12,19)
R 454 (B,36,14)
R 455 (B,36,12)

R 456 (B,12,4)
R 458 (B,12,6)

2

Part No.

RS1/16SS473J
RS1/16SS101J
RS1/16SS105J

RS1/16SS0R0J
RS1/10SR101J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS101J

RS1/16SS103J
RS1/16SS103J
RS1/16SS101J
RS1/16SS151J

RS1/16SS101J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS101J

RS1/16SS101J
RS1/16SS103J
RS1/16SS101J
RS1/16SS101J
RS1/16SS103J

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS103J

RAB4CQ473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

RS1/16SS473J
RS1/16SS392J
RS1/16SS104J
RS1/16SS473J
RS1/16SS473J

RS1/16SS0R0J
RS1/16SS473J
RS1/16SS473J
RS1/16SS101J
RS1/16SS101J

RS1/16SS101J
RS1/16SS101J

3

Circuit Symbol and No.

C 415 (A,36,14)

C 416 (A,36,6)
C 417 (A,38,19)
C 418 (A,16,13) 1 uF
C 419 (A,27,15)
C 420 (A,31,17)

C 421 (A,31,19)
C 422 (A,27,18) 1 uF
C 423 (A,15,18) 2.2 uF
C 424 (A,15,19) 1 uF
C 425 (A,16,21) 1 uF

C 426 (A,17,22) 1 uF
C 427 (A,19,23) 1 uF
C 428 (A,24,23) 2.2 uF
C 429 (A,26,21) 1 uF
C 431 (B,34,17)

C 432 (B,34,13)
C 433 (B,34,11)
C 434 (B,30,4)
C 435 (B,28,25)
C 436 (B,26,25)

C 437 (B,25,4)
C 438 (B,24,25)
C 439 (B,22,4)
C 440 (B,21,3)
C 441 (B,19,25)

C 442 (B,16,4)
C 443 (A,6,12)
C 444 (A,10,13)
C 445 (B,12,23)
C 446 (B,12,21)

C 447 (B,12,13)
C 448 (B,12,12)
C 449 (B,13,10)
C 450 (B,12,16)
C 452 (B,9,9) 1 uF

C 453 (B,8,19)
C 454 (B,8,15)
C 455 (A,8,7) 1 uF
C 456 (A,4,8) 1 uF
C 457 (A,27,12)

4

Part No.

CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10
CCSSCH120J50

CCSSCH100D50
DCH1246
CCG1205
DCH1246
DCH1246

DCH1246
DCH1246
CCG1205
DCH1246
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CCSSCJ3R0C50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1246

CCSSCH120J50
CCSSCH120J50
DCH1246
DCH1246
CCSSCH101J50

CAPACITORS

E

C 401 (A,13,15) 1 uF
C 402 (A,25,9)
C 403 (A,25,10)
C 404 (A,14,10)
C 405 (A,32,7)

■

C 406 (A,35,18)
C 407 (A,19,11)
C 408 (A,22,11) 1 uF
C 409 (A,21,10) 1 uF
C 410 (A,23,11) 1 uF

F

C 411 (A,23,10) 1 uF
C 412 (A,34,5)
C 413 (A,33,19) 1 uF
C 414 (A,35,5) 1 uF

DCH1246
CCSSCH470J50
CCSSCKR50C50
CKSSYB102K50
CKSSYB103K16

CKSSYB104K10
CKSSYB104K10
DCH1246
DCH1246
DCH1246

DCH1246
CKSSYB104K10
DCH1246
DCH1246