


# EXPLODED VIEW • PARTS LIST


DCP section

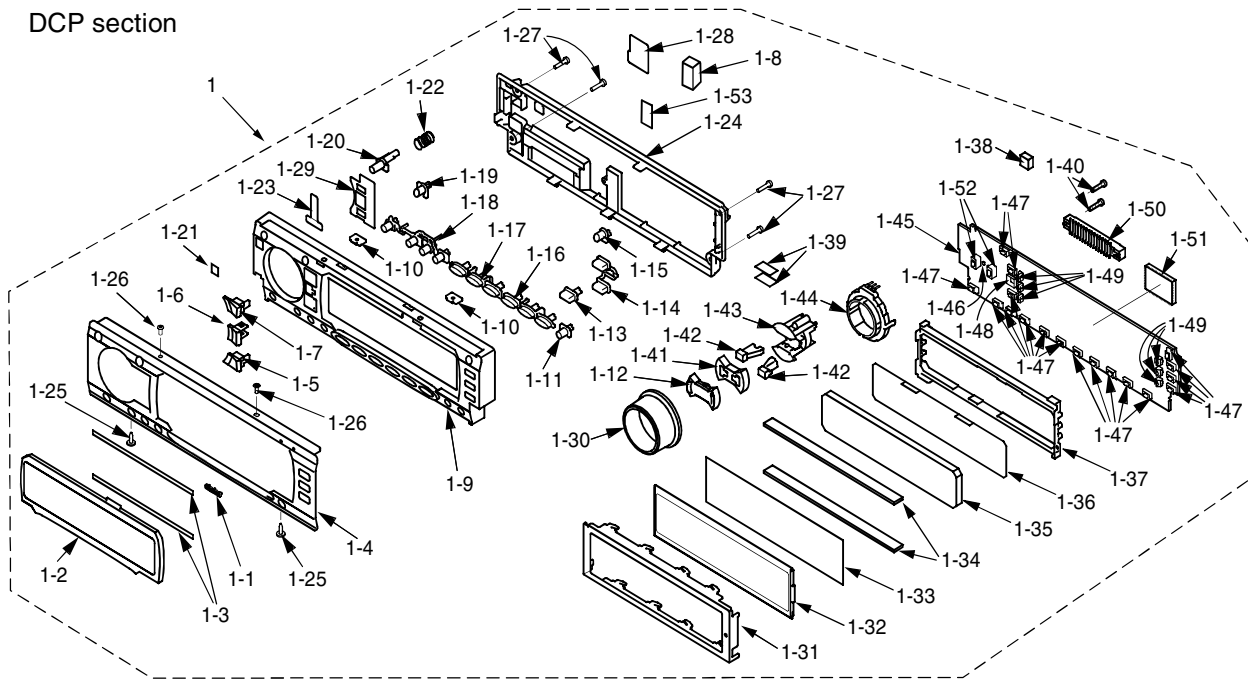

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

| NO.  | PART NO.                                  | DESCRIPTION                                                          | Q'TY | NO.  | PART NO.                   | DESCRIPTION                                      | Q'TY |
|------|-------------------------------------------|----------------------------------------------------------------------|------|------|----------------------------|--------------------------------------------------|------|
| 1    | DCP-335-600<br>DCP-336-600<br>DCP-334-600 | DCP-ASSY(PE-2408B)<br>DCP-ASSY(PE-2441B)<br>DCP-ASSY(PE-2443B)       | 1    | 1-27 | 716-0872-12                | PAD SCREW(M1.7x8)                                | 4    |
| 1-2  | 373-0951-10<br>373-0951-40<br>373-0951-20 | DIAL-CVR(PE-2408B)<br>DIAL-CVR(PE-2441B)<br>DIAL-CVR(PE-2443B)       | 1    | 1-28 | 347-6529-00                | COVER FILM                                       | 1    |
| 1-3  | 347-6482-01                               | DOUBLE FACE                                                          | 2    | 1-29 | 353-0535-00                | SHADE                                            | 1    |
| 1-4  | 371-5691-00<br>371-5691-40<br>371-5691-05 | FACE PANEL(PE-2408B)<br>FACE PANEL(PE-2441B)<br>FACE PANEL(PE-2443B) | 1    | 1-30 | 947-0518-00<br>947-0518-01 | KNOB-ASSY(PE-2408B/2441B)<br>KNOB-ASSY(PE-2443B) | 1    |
| 1-5  | 382-6106-00                               | BUTTON(BND)                                                          | 1    | 1-31 | 331-3114-00                | LCD-CVR                                          | 1    |
| 1-6  | 335-6494-00                               | IR-FILTER                                                            | 1    | 1-32 | 379-1204-51<br>379-1206-51 | INDICATOR(PE-2408B/2443B)<br>INDICATOR(PE-2441B) | 1    |
| 1-7  | 382-6105-00                               | BUTTON(FNC)                                                          | 1    | 1-33 | 347-6484-00                | FILM                                             | 1    |
| 1-8  | 345-8647-00                               | CUSHION                                                              | 1    | 1-34 | 345-8608-00                | RUBBER CONNECT                                   | 2    |
| 1-9  | 370-5934-01<br>370-5934-02<br>370-5934-00 | ESCUTCHEON(PE-2408B)<br>ESCUTCHEON(PE-2441B)<br>ESCUTCHEON(PE-2443B) | 1    | 1-35 | 335-6504-00                | ILLUMI PLATE                                     | 1    |
| 1-10 | 331-3149-00                               | SCREW PLATE                                                          | 2    | 1-36 | 347-6485-00                | REFLECTOR                                        | 1    |
| 1-11 | 382-6115-00                               | BUTTON(Z-EHCR)                                                       | 1    | 1-37 | 335-6503-00                | LCD-HOLDR                                        | 1    |
| 1-12 | 382-6108-00                               | BUTTON(SRCH)                                                         | 1    | 1-38 | 345-7560-00                | RUBBER PART                                      | 1    |
| 1-13 | 382-6117-00                               | BUTTON(PRT)                                                          | 1    | 1-39 | 347-6549-00                | SPACER                                           | 2    |
| 1-14 | 382-6116-00                               | BUTTON(SCN/RDM)                                                      | 1    | 1-40 | 716-0872-01                | PAD SCREW                                        | 2    |
| 1-15 | 382-6119-00                               | BUTTON(EJECT)                                                        | 1    | 1-41 | 345-8612-00                | SPONGE                                           | 1    |
| 1-16 | 382-6113-00                               | BUTTON(4-6)                                                          | 1    | 1-42 | 335-6496-00                | PUSH LOD                                         | 2    |
| 1-17 | 382-6112-00                               | BUTTON(1-3)                                                          | 1    | 1-43 | 335-6495-00                | BUTTON-HOLDER                                    | 1    |
| 1-18 | 382-6111-00                               | BUTTON(PLY/PUSE)                                                     | 1    | 1-44 | 013-8002-00                | JOG ROTARY SW                                    | 1    |
| 1-19 | 382-6110-00                               | BUTTON(TTL)                                                          | 1    | 1-45 | 039-1906-00                | SW-PWB<br>(WITHOUT COMPONENT)                    | 1    |
| 1-20 | 382-6107-01                               | BUTTON(OPEN)                                                         | 1    | 1-46 | 001-7045-91<br>001-7045-90 | DIODE(PE-2408B/2441B)<br>DIODE(PE-2443B)         | 1    |
| 1-21 | 347-6522-00                               | DOUBLE FACE                                                          | 1    | 1-47 | 013-6518-50<br>013-6512-50 | L-SWITCH(PE-2408B/2441B)<br>L-SWITCH(PE-2443B)   | 18   |
| 1-22 | 750-3455-00                               | SPRING                                                               | 1    | 1-48 | 060-4008-00                | IR-RECEIVER                                      | 1    |
| 1-23 | 347-6491-00                               | SURGE FILM                                                           | 1    | 1-49 | 001-7055-90                | DIODE                                            | 6    |
| 1-24 | 335-6493-00                               | REAR-CVR                                                             | 1    | 1-50 | 076-0647-00                | PLUG                                             | 1    |
| 1-25 | 716-1809-01<br>716-1809-02                | PAD SCREW(PE-2408B/2443B)<br>PAD SCREW(PE-2441B)                     | 2    | 1-51 | 051-6057-00                | IC(ML9090-01)                                    | 1    |
| 1-26 | 716-3443-00<br>716-3443-01                | SCREW(PE-2408B/2443B)<br>SCREW(PE-2441B)                             | 2    | 1-52 | 013-6302-50                | SWITCH                                           | 2    |
|      |                                           |                                                                      |      | 1-53 | 347-6628-00                | FILM                                             | 1    |

# Main section

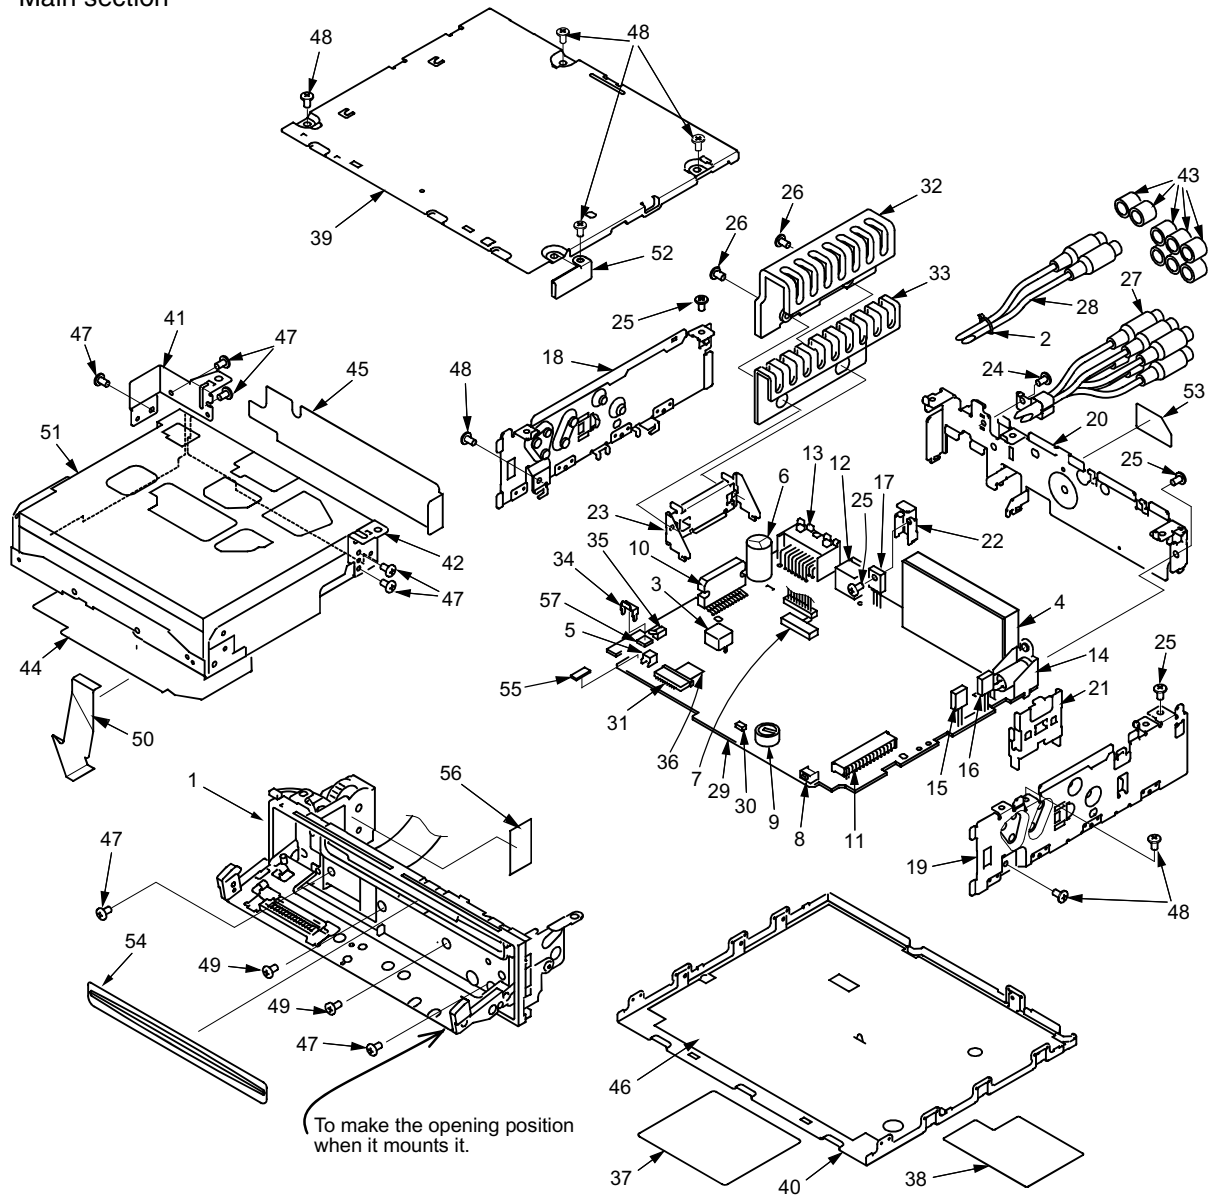


| NO. | PART NO.                                  | DESCRIPTION                                                             | Q'TY | NO. | PART NO.                                  | DESCRIPTION                                                                | Q'TY |
|-----|-------------------------------------------|-------------------------------------------------------------------------|------|-----|-------------------------------------------|----------------------------------------------------------------------------|------|
| 1   | -----                                     | INNER-ES ASSY                                                           | 1    | 17  | 102-3420-50                               | TRANSISTOR (2SC3420 G)                                                     | 1    |
| 2   | 335-0833-01                               | LEAD HOLDER                                                             | 1    | 18  | 305-0274-01                               | SIDE-CVR(L)                                                                | 1    |
| 3   | 331-2869-00                               | SHIELD CASE                                                             | 1    | 19  | 305-0275-00                               | SIDE-CVR(R)                                                                | 1    |
| 4   | 880-2087G                                 | TUNER                                                                   | 1    | 20  | 307-0616-03                               | REAR-CVR                                                                   | 1    |
| 5   | 076-0313-02                               | PLUG                                                                    | 1    | 21  | 313-1651-21                               | HEAT SINK                                                                  | 1    |
| 6   | 042-0447-00<br>042-0547-04<br>042-0447-00 | ALUMI-ELE-C(PE-2408B)<br>ALUMI-ELE-C(PE-2441B)<br>ALUMI-ELE-C(PE-2443B) | 1    | 22  | 313-1715-20                               | HEAT SINK                                                                  | 1    |
| 7   | 013-5102-00                               | SLIDE-SW(PE-2408B/2443B)                                                | 1    | 23  | 331-2255-20                               | IC-HOLDER(PE-2408B/2443B)                                                  | 1    |
| 8   | 013-6100-00                               | SWITCH                                                                  | 1    | 24  | 731-3006-80                               | TAPTIGHT                                                                   | 1    |
| 9   | 042-0576-00                               | DOUBLE-LAYER-C                                                          | 1    | 25  | 714-3006-81                               | MACHINE SCREW                                                              | 4    |
| 10  | 051-2031-10<br>051-2038-10                | IC LA4743A(PE-2408B-A/2443B)<br>IC LA47501(PE-2408B-B)                  | 1    | 26  | 731-3008-89                               | TAPTIGHT(PE-2408B/2443B)                                                   | 2    |
| 11  | 074-1186-26                               | OUTLET SOCKET                                                           | 1    | 27  | 855-5424-50<br>855-5460-30<br>855-5424-50 | RCA PIN CORD(PE-2408B)<br>RCA PIN CORD(PE-2441B)<br>RCA PIN CORD(PE-2443B) | 1    |
| 12  | 074-1194-00                               | OUTLET SOCKET                                                           | 1    | 28  | 855-5458-50<br>855-5461-30<br>855-5458-50 | RCA PIN CORD(PE-2408B)<br>RCA PIN CORD(PE-2441B)<br>RCA PIN CORD(PE-2443B) | 1    |
| 13  | 074-1214-00                               | OUTLET SOCKET                                                           | 1    | 29  | 039-1905-01                               | MAIN PWB (WITHOUT COMPONENT)                                               | 1    |
| 14  | 092-4000-51                               | ANT-RECEPT                                                              | 1    | 30  | 001-7011-05                               | DIODE                                                                      | 1    |
| 15  | 101-0941-00                               | TRANSISTOR (2SB941)                                                     | 1    | 31  | 074-1198-68                               | OUTLET SOCKET                                                              | 1    |
| 16  | 103-2012-00                               | TRANSISTOR (2SD2012 )                                                   | 1    |     |                                           |                                                                            |      |

| NO. | PART NO.                                  | DESCRIPTION                                                    | Q'TY |
|-----|-------------------------------------------|----------------------------------------------------------------|------|
| 32  | 313-1813-00                               | HEAT SINK(PE-2408B/2443B)                                      | 1    |
| 33  | 313-1814-00                               | HEAT SINK(PE-2408B/2443B)                                      | 1    |
| 34  | 331-3223-00                               | SW-HOLDER                                                      | 1    |
| 35  | 013-7106-00                               | DETECTOR SWITCH(C)                                             | 1    |
| 36  | 347-6215-00                               | SPACER-FILM                                                    | 1    |
| 37  | 286-9600-00<br>286-9613-00<br>286-9597-00 | SETPLATE(PE-2408B)<br>SETPLATE(PE-2441B)<br>SETPLATE(PE-2443B) | 1    |
| 38  | 290-7672-00                               | LABEL                                                          | 1    |
| 39  | 303-0472-00                               | UPPER-CVR                                                      | 1    |
| 40  | 304-0460-01                               | LOWER-CVR                                                      | 1    |
| 41  | 331-2493-00                               | CD-SUB-BRKT                                                    | 1    |
| 42  | 331-2494-00                               | CD-SUB-BRKT                                                    | 1    |
| 43  | 345-3799-20                               | RUBBER PART                                                    | 8    |
| 44  | 347-5916-02                               | INSULATOR                                                      | 1    |

| NO. | PART NO.    | DESCRIPTION        | Q'TY |
|-----|-------------|--------------------|------|
| 45  | 347-5917-00 | INSULATOR          | 1    |
| 46  | 347-5918-00 | INSULATOR          | 1    |
| 47  | 716-0717-10 | STEEL SCREW        | 7    |
| 48  | 731-3006-80 | TAPTIGHT(M3X8)     | 7    |
| 49  | 780-2005-00 | SPECIAL SCREW      | 2    |
| 50  | 816-2391-00 | FLAT CABLE         | 1    |
| 51  | 929-0092-82 | CD-MECH-MODULE     | 1    |
| 52  | 331-2744-00 | STOPPER            | 1    |
| 53  | 347-6245-00 | FILM               | 1    |
| 54  | 346-0137-00 | LEATHER SHEET      | 1    |
| 55  | 345-8627-00 | CUSHION            | 1    |
| 56  | 347-6536-00 | PROTECT SHEET      | 1    |
| 57  | 013-7206-50 | DETECTOR SWITCH(O) | 1    |

### Inner-Es assy section

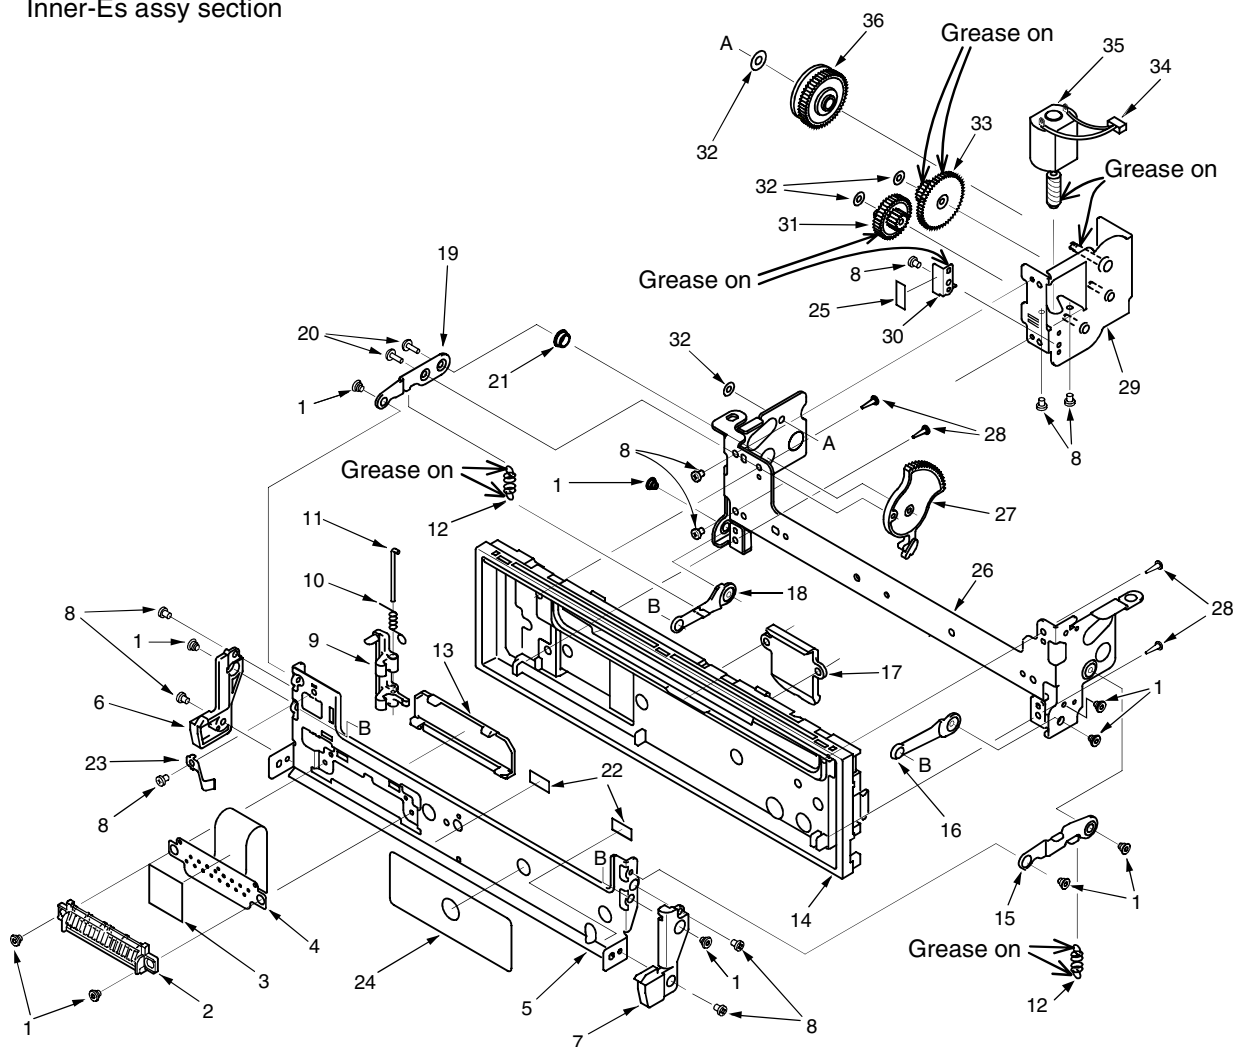


| NO. | PART NO.    | DESCRIPTION    | Q'TY |
|-----|-------------|----------------|------|
| 1   | 716-1715-02 | DECO-SCREW(M2) | 10   |
| 2   | 074-1278-00 | OUTLET SOCKET  | 1    |
| 3   | 347-6528-00 | INSULATER      | 1    |
| 4   | 039-1862-00 | FPC            | 1    |
| 5   | 331-3115-00 | DCP HOLDER     | 1    |
| 6   | 335-6507-00 | ARM-COVER LEFT | 1    |

| NO. | PART NO.    | DESCRIPTION           | Q'TY |
|-----|-------------|-----------------------|------|
| 7   | 335-6508-00 | ARM-COVER RIGHT       | 1    |
| 8   | 716-1468-20 | SPECIAL SCREW(M2X2.5) | 10   |
| 9   | 335-6506-00 | HOOK                  | 1    |
| 10  | 750-3431-01 | SPRING(HOOK)          | 1    |
| 11  | 341-1736-00 | SHAFT                 | 1    |
| 12  | 750-3303-20 | SPRING(ARM)           | 2    |

| NO. | PART NO.    | DESCRIPTION      | Q'TY | NO. | PART NO.    | DESCRIPTION       | Q'TY |
|-----|-------------|------------------|------|-----|-------------|-------------------|------|
| 13  | 335-6499-00 | CN-CVR           | 1    | 25  | 347-6275-00 | FILM              | 1    |
| 14  | 370-5935-00 | ESCUTCHEON INNER | 1    | 26  | 309-0772-01 | FRONT PLATE       | 1    |
| 15  | 331-3117-01 | LEVER-UP(R)      | 1    | 27  | 613-0719-00 | ARM GEAR          | 1    |
| 16  | 331-3118-01 | LEVER-LO(R)      | 1    | 28  | 716-0872-00 | PAD SCREW(M1.7X5) | 4    |
| 17  | 335-6505-00 | ILLUMI PLATE     | 1    | 29  | 946-0079-00 | GEAR-BOX ASSY     | 1    |
| 18  | 331-3119-00 | LEVER-LO(L)      | 1    | 30  | 750-3432-00 | SPRING(MOTO)      | 1    |
| 19  | 331-3120-00 | LEVER-UP(L)      | 1    | 31  | 613-0720-00 | HUS-GEAR          | 1    |
| 20  | 716-1758-00 | PAD SCREW(2X5)   | 2    | 32  | 746-0768-20 | SPECIAL WASHER    | 4    |
| 21  | 341-1740-00 | ROLLER(ARM)      | 1    | 33  | 613-0717-00 | INPUT GEAR        | 1    |
| 22  | 347-6527-00 | CUSHION          | 2    | 34  | 854-4380-01 | EXTENSION LEAD    | 1    |
| 23  | 750-3457-00 | SPRING           | 1    | 35  | 634-0023-00 | MOTOR ASSY        | 1    |
| 24  | 291-0093-00 | STICKER          | 1    | 36  | 947-0513-00 | T-LIM-GEAR-ASSY   | 1    |


CD mechanism :Mecha chassis section

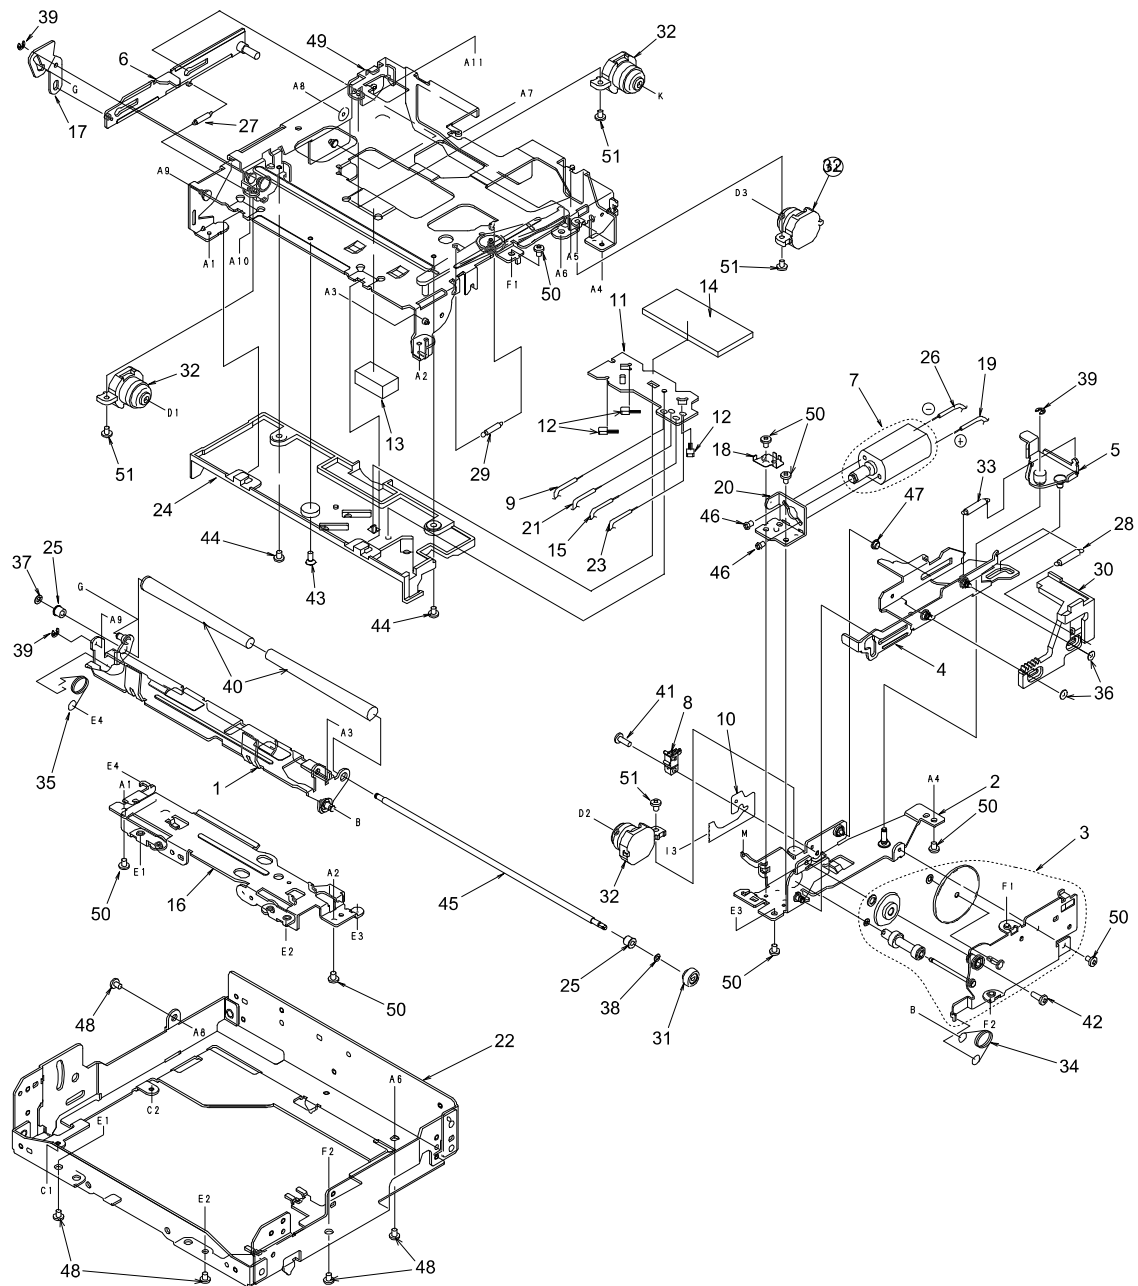

| NO. | PART NO.    | DESCRIPTION                                | Q'TY |
|-----|-------------|--------------------------------------------|------|
| 1   | 966-0309-05 | L-DISC-G-ASSY                              | 1    |
| 2   | 966-0310-06 | SHIFT-P-CH-ASSY                            | 1    |
| 3   | HBS-430-100 | GEAR PLATE ASSY                            | 1    |
| 4   | 966-0312-06 | SHIFT-PLATE-ASSY                           | 1    |
| 5   | 966-0358-01 | DRIVE-L-PLATE-ASSY                         | 1    |
| 6   | 966-0359-03 | SIDE-L-PLATE-ASSY                          | 1    |
| 7   | SMA-147-100 | MOTOR ASSY(LOADING)                        | 1    |
| 8   | 013-3879-01 | CHUCKING SWITCH                            | 1    |
| 9   | 804-4910-60 | VINYL-COAT-WIRE(YEL)                       | 1    |
| 10  | 039-0586-01 | CHUCKING SWITCH PWB<br>(WITHOUT COMPONENT) | 1    |
| 11  | 039-0588-01 | SENSOR PWB<br>(WITHOUT COMPONENT))         | 1    |
| 12  | 060-0252-01 | PHOTO-TR                                   | 3    |
| 13  | 345-7513-01 | CLAMPER SHEET                              | 1    |
| 14  | 345-7514-00 | SENSOR PWB SHEET                           | 1    |
| 15  | 802-4910-60 | VINYL-COAT-WIRE(RED)                       | 1    |
| 16  | 620-0485-04 | FRONT PLATE                                | 1    |
| 17  | 620-0488-01 | S-L-LINK PLATE                             | 1    |
| 18  | 620-0489-02 | MOTOR PLATE                                | 1    |
| 19  | 802-4904-60 | VINYL-COAT-WIRE(RED)                       | 1    |
| 20  | 620-0492-01 | MOTOR BRACKET                              | 1    |
| 21  | 801-4910-60 | VINYL-COAT-WIRE(BRN)                       | 1    |
| 22  | 620-0773-01 | CD-MECH-BRKT                               | 1    |
| 23  | 800-4910-60 | VINYL-COAT-WIRE(BLK)                       | 1    |
| 24  | 621-0402-01 | U-DISC GUIDE-F                             | 1    |
| 25  | 621-0243-02 | ROLLER SLEEVE                              | 2    |

| NO. | PART NO.    | DESCRIPTION          | Q'TY |
|-----|-------------|----------------------|------|
| 26  | 800-4904-60 | VINYL-COAT-WIRE(BLK) | 1    |
| 27  | 750-3189-00 | SIDE-L-SPRING        | 1    |
| 28  | 750-3098-00 | L-LINK SPRING        | 1    |
| 29  | 750-3094-00 | S-ARM SPRING         | 1    |
| 30  | 621-0248-07 | RACK GEAR            | 1    |
| 31  | 621-0249-02 | ROLLER GEAR          | 1    |
| 32  | 629-0074-00 | DAMPER               | 4    |
| 33  | 750-3092-03 | SHIFT SPRING         | 1    |
| 34  | 750-3091-03 | ROADING-SPRING-R     | 1    |
| 35  | 750-3090-02 | ROADING-SPRING-L     | 1    |
| 36  | 746-0877-02 | WASHER               | 2    |
| 37  | 746-0762-00 | WASHER               | 1    |
| 38  | 746-0712-03 | WASHER               | 1    |
| 39  | 743-1500-10 | E-RING               | 3    |
| 40  | 621-0258-03 | LOADING ROLLER       | 2    |
| 41  | 716-1742-00 | SCREW(M2×5)          | 1    |
| 42  | 716-1704-00 | SCREW(M2×7)          | 1    |
| 43  | 716-1677-00 | SCREW(M2×5)          | 1    |
| 44  | 716-1507-00 | SCREW(M2×3)          | 2    |
| 45  | 622-1072-05 | ROLLER SHAFT         | 1    |
| 46  | 716-1468-00 | SCREW(M2×2.5)        | 2    |
| 47  | 622-1219-01 | SHIFT ROLLER         | 1    |
| 48  | 714-2603-81 | SCREW(M2.6×3)        | 5    |
| 49  | 966-0308-11 | CHASSIS ASSY         | 1    |
| 50  | 714-2003-81 | SCREW(M2×3)          | 8    |
| 51  | 716-1670-00 | SCREW(M2×4)          | 4    |

## Drive unit section

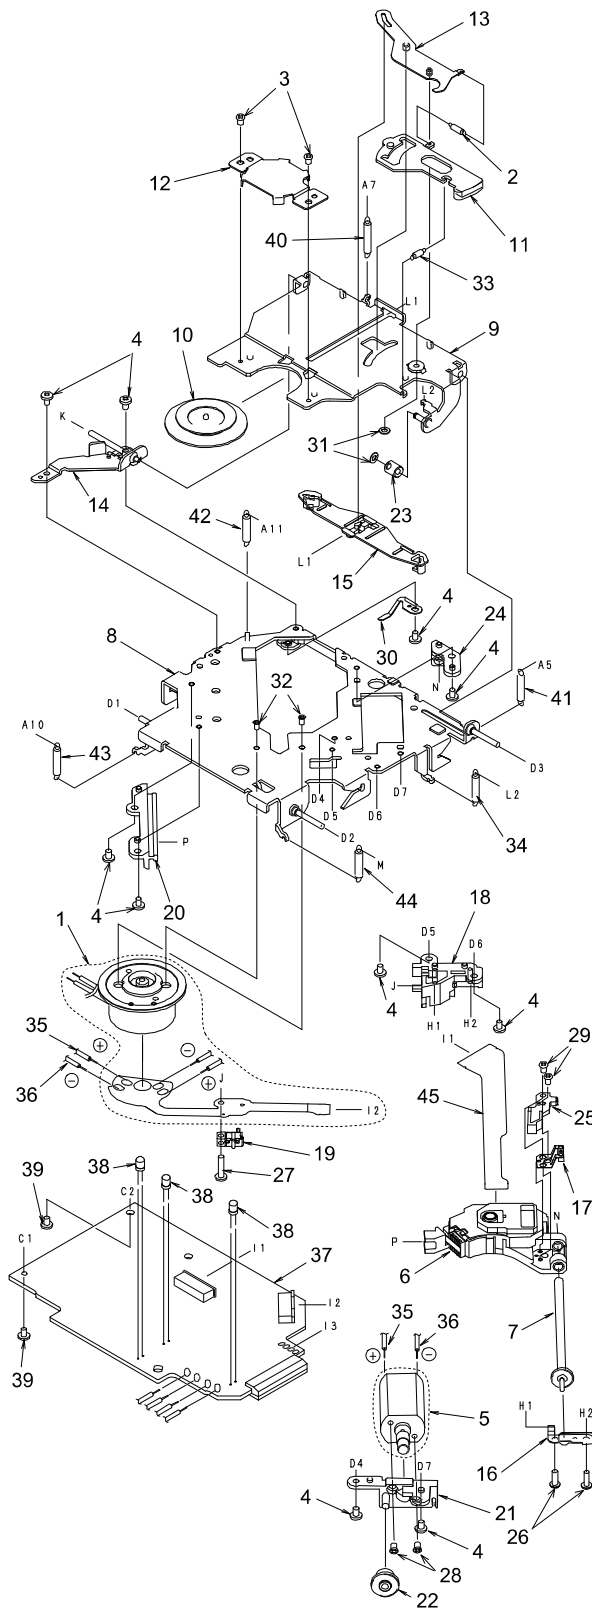

| NO. | PART NO.    | DESCRIPTION                   | Q'TY |
|-----|-------------|-------------------------------|------|
| 1   | SMA-151-100 | MOTOR ASSY(SPINDLE)           | 1    |
| 2   | 750-3098-00 | L-LINK SPRING                 | 1    |
| 3   | 716-1468-00 | SCREW(M2×2.5)                 | 2    |
| 4   | 716-2003-81 | SCREW(M2×3)                   | 10   |
| 5   | SMA-146-100 | MOTOR ASSY(SLED)              | 1    |
| 6   | 969-0008-00 | PICK UP UNIT                  | 1    |
| 7   | HBS-432-100 | LS-GEAR ASSY                  | 1    |
| 8   | 966-0447-07 | DR-PLATE-ASSY                 | 1    |
| 9   | 966-0449-04 | CLAMP-LINK-ASSY               | 1    |
| 10  | 621-0205-02 | CLAMPER RING                  | 1    |
| 11  | 621-0251-03 | LOCK LINK                     | 1    |
| 12  | 620-0198-03 | CLAMPER PLATE                 | 1    |
| 13  | 966-0314-01 | STOP LINK-ASSY                | 1    |
| 14  | 966-0448-01 | SIDE PLATE-ASSY               | 1    |
| 15  | 621-0252-03 | DISC STOPPER                  | 1    |
| 16  | 620-0491-03 | SPRING PLATE                  | 1    |
| 17  | 966-0454-00 | SCREW H-RACK-ASSY             | 1    |
| 18  | 621-0358-02 | LS-HOLDER-F                   | 1    |
| 19  | 013-7100-00 | SWITCH(LIMIT)                 | 1    |
| 20  | 621-0357-03 | PICK UP GUIDE                 | 1    |
| 21  | 621-0253-02 | MOTOR HOLDER                  | 1    |
| 22  | 621-0255-02 | SECOND GEAR                   | 1    |
| 23  | 622-1073-02 | CLAMPER ROLLER                | 1    |
| 24  | 621-0359-02 | LS-HOLDER-R                   | 1    |
| 25  | 621-0375-00 | SH-BASE                       | 1    |
| 26  | 716-0675-00 | SCREW(M2×5.5)                 | 2    |
| 27  | 716-1555-00 | WAVE SCREW(Φ2×8)              | 1    |
| 28  | 732-2004-11 | SEMS SCREW(M2×4)              | 2    |
| 29  | 739-1735-17 | PRECISION SCREW<br>(M1.7×3.5) | 2    |
| 30  | 620-0690-01 | RATTLE PLATE                  | 1    |
| 31  | 746-0761-00 | WASHER                        | 2    |
| 32  | 716-1733-00 | SCREW(M1.7×2.3)               | 2    |
| 33  | 750-3099-00 | ES-SPRING                     | 1    |
| 34  | 750-3097-03 | CLAMPER SPRING                | 1    |
| 35  | 816-2373-00 | LEAD WIRE(WHT)                | 1    |
| 36  | 816-2372-00 | LEAD WIRE(BLU)                | 1    |
| 37  | 039-1732-01 | CD PWB<br>(WITHOUT COMPONENT) | 1    |
| 38  | 001-0563-00 | LED                           | 3    |
| 39  | 716-1670-00 | SCREW(M2×4)                   | 2    |
| 40  | 750-3202-00 | CENTER SPRING-B               | 1    |
| 41  | 750-3096-01 | DR-SPRING R                   | 1    |
| 42  | 750-3164-00 | DR-SPRING LR                  | 1    |
| 43  | 750-3188-00 | DR-SPRING F-B                 | 1    |
| 44  | 750-3201-00 | DR-SPRING F-R                 | 1    |
| 45  | 039-1587-00 | FPC<br>(WITHOUT COMPONENT)    | 1    |

# ELECTRICAL PARTS LIST

## Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

| REF No. | PART No.    | DESCRIPTION                   | REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION       |
|---------|-------------|-------------------------------|---------|-------------|-----------------|---------|-------------|-------------------|
| BL 1    | 880-2087G   | TUNER PACK                    | C 283   | 042-0631-50 | 10V100 $\mu$ F  | C 551   | 168-1032-05 | 0.01 $\mu$ F      |
| C 1     | 166-1011-00 | 100pF CH                      | C 284   | 168-2232-05 | 0.022 $\mu$ F   | C 553   | 042-0423-00 | 10V3.3 $\mu$ F    |
| C 4     | 042-0592-73 | 50V1 $\mu$ F                  | C 285   | 168-1042-78 | 16V 0.1 $\mu$ F | C 554   | 168-1042-78 | 16V 0.1 $\mu$ F   |
| C 7     | 183-4763-31 | 16V47 $\mu$ F                 | C 286   | 168-2212-05 | 220pF           | C 556   | 168-1042-78 | 16V 0.1 $\mu$ F   |
| C 8     | 168-2232-05 | 0.022 $\mu$ F                 | C 287   | 168-1042-78 | 16V 0.1 $\mu$ F | C 557   | 042-0416-02 | 10V10 $\mu$ F TAN |
| C 9     | 166-1011-00 | 100pF CH                      | C 302   | 042-0592-58 | 16V10 $\mu$ F   | C 558   | 042-0416-02 | 10V10 $\mu$ F TAN |
| C 10    | 168-6822-05 | 6800pF                        | C 304   | 042-0592-58 | 16V10 $\mu$ F   | C 559   | 168-1042-78 | 16V 0.1 $\mu$ F   |
| C 11    | 183-1073-21 | 10V100 $\mu$ F                | C 305   | 042-0592-58 | 16V10 $\mu$ F   | C 560   | 042-0397-00 | 16V1 $\mu$ F TAN  |
| C 12    | 183-4763-31 | 16V47 $\mu$ F                 | C 306   | 042-0592-58 | 16V10 $\mu$ F   | C 561   | 168-1022-05 | 1000pF            |
| C 14    | 166-2096-00 | 2pF CK                        | C 308   | 042-0592-58 | 16V10 $\mu$ F   | C 562   | 168-1042-78 | 16V 0.1 $\mu$ F   |
| C 15    | 168-1022-05 | 1000pF                        | C 309   | 042-0592-58 | 16V10 $\mu$ F   | C 564   | 166-4701-00 | 47pF CH           |
| C 16    | 168-1042-78 | 16V 0.1 $\mu$ F               | C 310   | 042-0592-58 | 16V10 $\mu$ F   | C 601   | 166-1011-00 | 100pF CH          |
| C 18    | 163-1053-60 | 50V1 $\mu$ F                  | C 311   | 042-0592-58 | 16V10 $\mu$ F   | C 605   | 042-0505-00 | 25V 1 $\mu$ F     |
| C 20    | 163-4763-10 | 6.3V47 $\mu$ F                | C 312   | 042-0592-58 | 16V10 $\mu$ F   | C 606   | 168-4732-78 | 0.047 $\mu$ F     |
| C 22    | 166-1011-00 | 100pF CH                      | C 313   | 042-0592-58 | 16V10 $\mu$ F   | C 613   | 042-0576-00 | 5.5V0.1F          |
| C 23    | 166-1011-00 | 100pF CH                      | C 405   | 042-0592-74 | 50V 2.2 $\mu$ F | C 614   | 168-1032-05 | 0.01 $\mu$ F      |
| C 24    | 166-3311-00 | 330pF CH                      | C 406   | 042-0592-74 | 50V 2.2 $\mu$ F | C 615   | 042-0577-00 | 6.3V100 $\mu$ F   |
| C 25    | 166-1501-00 | 15pF CH                       | C 407   | 042-0592-74 | 50V 2.2 $\mu$ F | C 616   | 163-1063-30 | 16V10 $\mu$ F     |
| C 26    | 166-1501-00 | 15pF CH                       | C 408   | 042-0592-74 | 50V 2.2 $\mu$ F | C 617   | 168-1022-05 | 1000pF            |
| C 27    | 168-1032-05 | 0.01 $\mu$ F                  | C 409   | 042-0592-50 | 6.3V22 $\mu$ F  | C 619   | 168-4732-78 | 0.047 $\mu$ F     |
| C 28    | 168-1032-05 | 0.01 $\mu$ F                  | C 410   | 042-0592-50 | 6.3V22 $\mu$ F  | C 620   | 178-2242-78 | 0.22 $\mu$ F      |
| C 29    | 168-2232-05 | 0.022 $\mu$ F                 | C 411   | 042-0592-50 | 6.3V22 $\mu$ F  | C 630   | 166-1011-00 | 100pF CH          |
| C 30    | 168-2732-05 | 16V 0.027 $\mu$ F             | C 412   | 042-0592-50 | 6.3V22 $\mu$ F  | C 631   | 166-1011-00 | 100pF CH          |
| C 31    | 168-2732-05 | 16V 0.027 $\mu$ F             | C 413   | 042-0592-50 | 6.3V22 $\mu$ F  | C 632   | 168-1032-05 | 0.01 $\mu$ F      |
| C 55    | 166-2201-00 | 22pF CH                       | C 414   | 042-0592-50 | 6.3V22 $\mu$ F  | C 633   | 168-1032-05 | 0.01 $\mu$ F      |
| C 66    | 166-2201-00 | 22pF CH                       | C 415   | 168-4732-78 | 0.047 $\mu$ F   | C 635   | 168-1042-78 | 16V 0.1 $\mu$ F   |
| C 67    | 168-1032-05 | 0.01 $\mu$ F                  | C 416   | 168-4732-78 | 0.047 $\mu$ F   | C 904   | 168-1032-05 | 0.01 $\mu$ F      |
| C 68    | 168-2232-05 | 0.022 $\mu$ F                 | C 417   | 042-0592-58 | 16V10 $\mu$ F   | C 905   | 168-1032-05 | 0.01 $\mu$ F      |
| C 101   | 178-4742-78 | 0.47 $\mu$ F                  | C 418   | 042-0592-58 | 16V10 $\mu$ F   | C 907   | 168-1032-05 | 0.01 $\mu$ F      |
| C 102   | 178-4742-78 | 0.47 $\mu$ F                  | C 419   | 042-0592-58 | 16V10 $\mu$ F   | C 908   | 168-1022-05 | 1000pF            |
| C 103   | 178-4742-78 | 0.47 $\mu$ F                  | C 420   | 042-0592-58 | 16V10 $\mu$ F   | C 909   | 168-1022-05 | 1000pF            |
| C 104   | 178-4742-78 | 0.47 $\mu$ F                  | C 421   | 042-0592-58 | 16V10 $\mu$ F   | C 911   | 168-1022-05 | 1000pF            |
| C 106   | 163-4763-30 | 16V47 $\mu$ F                 | C 422   | 042-0592-58 | 16V10 $\mu$ F   | C 914   | 168-1022-05 | 1000pF            |
| C 107   | 183-3343-61 | 50V0.33 $\mu$ F               | C 423   | 042-0592-58 | 16V10 $\mu$ F   | C 915   | 168-1032-05 | 0.01 $\mu$ F      |
| C 108   | 163-2263-30 | 16V22 $\mu$ F                 | C 424   | 042-0592-58 | 16V10 $\mu$ F   | C 917   | 168-1032-05 | 0.01 $\mu$ F      |
| C 109   | 043-0506-00 | 0.1 $\mu$ F                   | C 430   | 163-1063-30 | 16V10 $\mu$ F   | D 101   | 001-2403-90 | M1F60             |
| C 109   | 172-3331-15 | 0.033 $\mu$ F<br>(PE-2408B-B) | C 431   | 042-0563-71 | 16V100 $\mu$ F  | D 102   | 001-2403-90 | M1F60             |
| C 110   | 043-0506-00 | 0.1 $\mu$ F                   | C 433   | 166-2201-00 | 22pF CH         | D 103   | 001-2403-90 | M1F60             |
| C 110   | 172-3331-15 | 0.033 $\mu$ F<br>(PE-2408B-B) | C 434   | 166-2201-00 | 22pF CH         | D 104   | 001-2403-90 | M1F60             |
| C 111   | 043-0506-00 | 0.1 $\mu$ F                   | C 435   | 166-2201-00 | 22pF CH         | D 105   | 001-2403-90 | M1F60             |
| C 111   | 172-3331-15 | 0.033 $\mu$ F<br>(PE-2408B-B) | C 436   | 166-2201-00 | 22pF CH         | D 106   | 001-2403-90 | M1F60             |
| C 112   | 043-0506-00 | 0.1 $\mu$ F                   | C 437   | 166-2201-00 | 22pF CH         | D 107   | 001-2403-90 | M1F60             |
| C 112   | 172-3331-15 | 0.033 $\mu$ F<br>(PE-2408B-B) | C 438   | 166-2201-00 | 22pF CH         | D 108   | 001-2403-90 | M1F60             |
| C 113   | 183-3353-61 | 50V 1 $\mu$ F<br>(PE-2408B-B) | C 439   | 168-2222-05 | 2200pF          | D 201   | 001-0592-00 | RM4Z              |
| C 114   | 166-8201-50 | 82pF CH                       | C 440   | 168-2222-05 | 2200pF          | D 203   | 001-0503-46 | HZS9B2L           |
| C 116   | 168-1022-05 | 1000pF                        | C 441   | 168-2222-05 | 2200pF          | D 211   | 001-0516-00 | MA111             |
| C 201   | 042-0447-00 | 16V2200 $\mu$ F               | C 442   | 168-2222-05 | 2200pF          | D 212   | 001-0516-00 | MA111             |
| C 202   | 172-2231-11 | 0.022 $\mu$ F                 | C 443   | 168-2222-05 | 2200pF          | D 221   | 001-0466-00 | S5688B            |
| C 203   | 042-0563-71 | 16V100 $\mu$ F                | C 444   | 168-2222-05 | 2200pF          | D 222   | 001-0466-00 | S5688B            |
| C 204   | 183-2263-31 | 16V22 $\mu$ F                 | C 502   | 042-0592-74 | 50V 2.2 $\mu$ F | D 223   | 001-0516-00 | MA111             |
| C 205   | 168-4732-78 | 0.047 $\mu$ F                 | C 504   | 042-0592-74 | 50V 2.2 $\mu$ F | D 224   | 001-0466-01 | S5688G            |
| C 210   | 042-0592-50 | 6.3V22 $\mu$ F                | C 507   | 042-0592-74 | 50V 2.2 $\mu$ F | D 225   | 001-0466-01 | S5688G            |
| C 211   | 163-2263-30 | 16V22 $\mu$ F                 | C 508   | 168-1042-78 | 16V 0.1 $\mu$ F | D 228   | 001-0377-11 | MA4030M           |
| C 216   | 042-0452-02 | 16V100 $\mu$ F                | C 509   | 042-0592-74 | 50V 2.2 $\mu$ F | D 229   | 001-0377-11 | MA4030M           |
| C 222   | 183-4763-31 | 16V47 $\mu$ F                 | C 510   | 168-1042-78 | 16V 0.1 $\mu$ F | D 229   | 001-0466-00 | S5688B            |
| C 223   | 168-2232-05 | 0.022 $\mu$ F                 | C 511   | 168-1042-78 | 16V 0.1 $\mu$ F | D 230   | 001-0466-00 | S5688B            |
| C 224   | 172-4731-11 | 0.047 $\mu$ F                 | C 512   | 168-1042-78 | 16V 0.1 $\mu$ F | D 231   | 001-0466-00 | S5688B            |
| C 230   | 042-0631-50 | 10V100 $\mu$ F                | C 513   | 168-4732-78 | 0.047 $\mu$ F   | D 241   | 001-0503-46 | HZS9B2L           |
| C 241   | 183-1063-31 | 16V10 $\mu$ F                 | C 517   | 042-0592-58 | 16V10 $\mu$ F   | D 280   | 001-2606-90 | M1FS4             |
| C 243   | 183-1073-21 | 10V100 $\mu$ F                | C 521   | 042-0592-58 | 16V10 $\mu$ F   | D 401   | 001-0516-00 | MA111             |
| C 244   | 183-1073-12 | 6.3V100 $\mu$ F               | C 523   | 042-0592-58 | 16V10 $\mu$ F   | D 402   | 001-0516-00 | MA111             |
| C 245   | 168-1042-78 | 16V 0.1 $\mu$ F               | C 530   | 042-0592-74 | 50V 2.2 $\mu$ F | D 403   | 001-0528-44 | MA8082-M          |
| C 280   | 042-0416-02 | 10V10 $\mu$ F TAN             | C 531   | 042-0592-74 | 50V 2.2 $\mu$ F | D 404   | 001-0516-00 | MA111             |
| C 281   | 042-0452-01 | 10V220 $\mu$ F                | C 532   | 042-0592-58 | 16V10 $\mu$ F   | D 405   | 001-0516-00 | MA111             |
| C 282   | 042-0631-50 | 10V100 $\mu$ F                | C 533   | 042-0592-58 | 16V10 $\mu$ F   | D 501   | 001-0528-34 | MA8062-L          |
|         |             |                               | C 534   | 042-0592-58 | 16V10 $\mu$ F   | D 603   | 001-0516-00 | MA111             |
|         |             |                               | C 535   | 042-0592-58 | 16V10 $\mu$ F   | D 610   | 001-0516-00 | MA111             |
|         |             |                               | C 536   | 042-0592-74 | 50V 2.2 $\mu$ F | D 651   | 001-7011-05 | CL-150FG-CD       |
|         |             |                               | C 537   | 042-0592-74 | 50V 2.2 $\mu$ F | D 903   | 001-0516-00 | MA111             |
|         |             |                               | C 550   | 168-1042-78 | 16V 0.1 $\mu$ F | FIL 401 | 060-3104-00 | NFM41P11C204      |

| REF No. | PART No.    | DESCRIPTION             | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION   |
|---------|-------------|-------------------------|---------|-------------|-------------|---------|-------------|---------------|
| IC 1    | 051-6201-00 | LC72146M                | Q 243   | 100-1298-00 | 2SA1298     | R 243   | 119-1031-10 | 1/16W 10kΩ    |
| IC 101  | 051-2031-10 | LA4743A                 | Q 244   | 125-0002-02 | RN2402      | R 246   | 119-1031-10 | 1/16W 10kΩ    |
| IC 101  | 051-2038-10 | LA47501<br>(PE-2408B-B) | Q 245   | 125-2004-06 | RN1406      | R 247   | 119-1011-10 | 1/16W 100Ω    |
| IC 220  | 051-3201-00 | AN77L06                 | Q 246   | 100-1298-00 | 2SA1298     | R 248   | 119-1031-10 | 1/16W 10kΩ    |
| IC 230  | 051-1014-05 | TA7291F                 | Q 247   | 125-2004-03 | RN1403      | R 249   | 032-0104-67 | 1/4W 1.2kΩ    |
| IC 280  | 051-3605-00 | NJM2360AM               | Q 248   | 125-2004-03 | RN1403      | R 250   | 119-1031-10 | 1/16W 10kΩ    |
| IC 302  | 051-3034-90 | NJM4558V                | Q 249   | 125-2004-03 | RN1403      | R 251   | 032-0104-67 | 1/4W 1.2kΩ    |
| IC 303  | 051-7232-08 | 74VHC4066M              | Q 250   | 103-2012-00 | 2SD2012     | R 252   | 032-0104-69 | 1/4W 1.5kΩ    |
| IC 401  | 051-3034-90 | NJM4558V                | Q 252   | 125-2004-06 | RN1406      | R 253   | 119-4711-10 | 1/16W 470Ω    |
| IC 402  | 051-3034-90 | NJM4558V                | Q 307   | 125-0002-06 | RN2406      | R 254   | 119-0000-00 | 1/16W 0Ω JW   |
| IC 403  | 051-3034-90 | NJM4558V                | Q 308   | 125-2004-03 | RN1403      | R 256   | 032-0104-67 | 1/4W 1.2kΩ    |
| IC 404  | 051-6327-08 | LC89051VD               | Q 401   | 103-1306-00 | 2SD1306     | R 257   | 032-0104-67 | 1/4W 1.2kΩ    |
| IC 405  | 051-6370-08 | AK4380VT                | Q 402   | 103-1306-00 | 2SD1306     | R 260   | 119-2721-10 | 1/16W 2.7kΩ   |
| IC 406  | 051-3034-90 | NJM4558V                | Q 403   | 103-1306-00 | 2SD1306     | R 261   | 119-1031-10 | 1/16W 10kΩ    |
| IC 407  | 051-3034-90 | NJM4558V                | Q 404   | 103-1306-00 | 2SD1306     | R 281   | 119-2291-15 | 1/16W2.2Ω     |
| IC 408  | 051-3034-90 | NJM4558V                | Q 405   | 103-1306-00 | 2SD1306     | R 282   | 119-2291-15 | 1/16W2.2Ω     |
| IC 501  | 051-5020-00 | M61508FP                | Q 406   | 103-1306-00 | 2SD1306     | R 283   | 119-2721-10 | 1/16W 2.7kΩ   |
| IC 502  | 051-6600-38 | CA0008AM                | Q 414   | 125-2004-06 | RN1406      | R 284   | 119-1531-10 | 1/16W 15kΩ    |
| IC 504  | 052-3368-00 | M30624MGA-D65GP         | Q 415   | 102-2712-00 | 2SC2712     | R 311   | 119-1021-10 | 1/16W 1kΩ     |
| IC 505  | 051-5407-18 | S-80721SN-DJ-T1         | Q 416   | 125-0002-06 | RN2406      | R 331   | 119-1041-10 | 1/16W 100kΩ   |
| IC 506  | 051-0869-55 | NJM2103M                | Q 602   | 125-2004-03 | RN1403      | R 332   | 119-1041-10 | 1/16W 100kΩ   |
| J 201   | 074-1214-00 | 16P                     | Q 603   | 100-1162-00 | 2SA1162     | R 333   | 119-1041-10 | 1/16W 100kΩ   |
| J 601   | 074-1194-00 | 13P CE-NET              | Q 617   | 125-2004-03 | RN1403      | R 334   | 119-1041-10 | 1/16W 100kΩ   |
| J 602   | 074-1198-18 | 18P                     | R 1     | 119-1021-10 | 1/16W 1kΩ   | R 335   | 119-1041-10 | 1/16W 100kΩ   |
| J 604   | 076-0313-02 | 2P                      | R 7     | 119-1231-10 | 1/16W 12kΩ  | R 336   | 119-1041-10 | 1/16W 100kΩ   |
| J 902   | 074-1186-26 | 26P                     | R 8     | 119-1031-10 | 1/16W 10kΩ  | R 337   | 119-1041-10 | 1/16W 100kΩ   |
| L 1     | 010-2199-40 | 220μH J                 | R 9     | 119-4741-10 | 1/16W 470kΩ | R 338   | 119-1041-10 | 1/16W 100kΩ   |
| L 2     | 010-2285-08 | BLM21A102FPB            | R 10    | 119-2221-10 | 1/16W 2.2kΩ | R 339   | 119-4731-10 | 1/16W 47kΩ    |
| L 3     | 010-2285-08 | BLM21A102FPB            | R 14    | 119-5631-10 | 1/16W 56kΩ  | R 340   | 119-1011-10 | 1/16W 100Ω    |
| L 52    | 010-4046-00 | 30μH                    | R 15    | 119-1031-10 | 1/16W 10kΩ  | R 341   | 119-1011-10 | 1/16W 100Ω    |
| L 211   | 010-2174-16 | 22μH                    | R 16    | 119-2221-10 | 1/16W 2.2kΩ | R 342   | 119-1011-10 | 1/16W 100Ω    |
| L 280   | 010-2199-78 | 22μH J                  | R 18    | 119-1031-10 | 1/16W 10kΩ  | R 343   | 119-1011-10 | 1/16W 100Ω    |
| L 281   | 010-2199-78 | 22μH J                  | R 19    | 119-1031-10 | 1/16W 10kΩ  | R 402   | 119-0000-00 | 1/16W 0Ω JW   |
| L 282   | 010-6003-03 | 270μH                   | R 21    | 119-1021-10 | 1/16W 1kΩ   | R 403   | 119-0000-00 | 1/16W 0Ω JW   |
| L 283   | 010-2285-56 | BLM21B222S              | R 24    | 119-1521-10 | 1/16W 1.5kΩ | R 404   | 119-0000-00 | 1/16W 0Ω JW   |
| L 408   | 010-2285-08 | BLM21A102FPB            | R 25    | 119-1521-10 | 1/16W 1.5kΩ | R 405   | 119-0000-00 | 1/16W 0Ω JW   |
| L 409   | 010-2285-08 | BLM21A102FPB            | R 26    | 119-1031-10 | 1/16W 10kΩ  | R 409   | 117-1021-10 | 1/10W 1kΩ     |
| L 410   | 010-2285-08 | BLM21A102FPB            | R 27    | 119-1021-10 | 1/16W 1kΩ   | R 410   | 117-1021-10 | 1/10W 1kΩ     |
| L 411   | 010-2285-08 | BLM21A102FPB            | R 28    | 119-1021-10 | 1/16W 1kΩ   | R 411   | 117-2231-10 | 1/10W 22kΩ    |
| L 412   | 010-2285-08 | BLM21A102FPB            | R 29    | 119-8211-10 | 1/16W 820Ω  | R 412   | 117-2231-10 | 1/10W 22kΩ    |
| L 413   | 010-2285-08 | BLM21A102FPB            | R 30    | 119-1041-10 | 1/16W 100kΩ | R 413   | 119-1031-10 | 1/16W 10kΩ    |
| L 414   | 010-2285-08 | BLM21A102FPB            | R 83    | 119-2221-10 | 1/16W 2.2kΩ | R 414   | 119-1031-10 | 1/16W 10kΩ    |
| L 501   | 010-2199-78 | 22μH J                  | R 84    | 119-0000-00 | 1/16W 0Ω JW | R 415   | 117-1021-10 | 1/10W 1kΩ     |
| L 502   | 010-2199-78 | 22μH J                  | R 101   | 119-1231-10 | 1/16W 12kΩ  | R 416   | 117-1021-10 | 1/10W 1kΩ     |
| L 505   | 010-2285-56 | BLM21B222S              | R 102   | 119-1031-10 | 1/16W 10kΩ  | R 417   | 117-1021-10 | 1/10W 1kΩ     |
| L 601   | 010-2198-56 | 2.2μH                   | R 103   | 119-0000-00 | 1/16W 0Ω JW | R 418   | 117-1021-10 | 1/10W 1kΩ     |
| L 602   | 010-2198-56 | 2.2μH                   | R 210   | 119-1031-10 | 1/16W 10kΩ  | R 419   | 119-1041-10 | 1/16W 100kΩ   |
| L 603   | 010-2198-56 | 2.2μH                   | R 211   | 119-4731-10 | 1/16W 47kΩ  | R 420   | 119-1041-10 | 1/16W 100kΩ   |
| L 604   | 010-2198-56 | 2.2μH                   | R 212   | 119-1531-10 | 1/16W 15kΩ  | R 421   | 119-1041-10 | 1/16W 100kΩ   |
| Q 6     | 100-1162-00 | 2SA1162                 | R 213   | 119-1031-10 | 1/16W 10kΩ  | R 422   | 119-1041-10 | 1/16W 100kΩ   |
| Q 7     | 100-1162-00 | 2SA1162                 | R 214   | 119-4731-10 | 1/16W 47kΩ  | R 423   | 117-2231-10 | 1/10W 22kΩ    |
| Q 8     | 125-2004-03 | RN1403                  | R 215   | 119-2221-10 | 1/16W 2.2kΩ | R 424   | 119-1031-10 | 1/16W 10kΩ    |
| Q 201   | 102-3420-50 | 2SC3420GR,BL            | R 216   | 119-2221-10 | 1/16W 2.2kΩ | R 425   | 119-1031-10 | 1/16W 10kΩ    |
| Q 202   | 108-0241-50 | 2SK241Y,GR              | R 220   | 119-1031-10 | 1/16W 10kΩ  | R 426   | 117-2231-10 | 1/10W 22kΩ    |
| Q 210   | 125-0013-07 | RN2427                  | R 221   | 119-3921-10 | 1/16W 3.9kΩ | R 427   | 119-1031-10 | 1/16W 10kΩ    |
| Q 211   | 125-2004-06 | RN1406                  | R 222   | 119-1801-10 | 1/16W 18Ω   | R 428   | 119-1031-10 | 1/16W 10kΩ    |
| Q 212   | 100-1162-00 | 2SA1162                 | R 223   | 119-1031-10 | 1/16W 10kΩ  | R 429   | 117-2231-10 | 1/10W 22kΩ    |
| Q 213   | 102-2712-00 | 2SC2712                 | R 224   | 032-0104-63 | 1/4W 1.5Ω   | R 430   | 117-2231-10 | 1/10W 22kΩ    |
| Q 222   | 100-1162-00 | 2SA1162                 | R 224   | 111-4700-91 | 1/4WS 47Ω   | R 431   | 119-2231-10 | 1/16W 22kΩ    |
| Q 223   | 125-2004-03 | RN1403                  | R 225   | 032-0104-63 | 1/4W 1.5Ω   | R 432   | 119-2231-10 | 1/16W 22kΩ    |
| Q 224   | 101-0941-00 | 2SB941                  | R 225   | 111-4700-91 | 1/4WS 47Ω   | R 433   | 119-2231-10 | 1/16W 22kΩ    |
| Q 225   | 100-1162-00 | 2SA1162                 | R 226   | 119-4731-10 | 1/16W 47kΩ  | R 434   | 119-2231-10 | 1/16W 22kΩ    |
| Q 226   | 102-2712-00 | 2SC2712                 | R 227   | 119-3321-10 | 1/16W 3.3kΩ | R 435   | 119-2231-10 | 1/16W 22kΩ    |
| Q 227   | 101-1237-50 | 2SB1237QR               | R 228   | 119-3321-10 | 1/16W 3.3kΩ | R 436   | 119-2231-10 | 1/16W 22kΩ    |
| Q 228   | 125-2004-03 | RN1403                  | R 229   | 032-0104-63 | 1/4W 1.5Ω   | R 437   | 119-3311-10 | 1/16W 330Ω    |
| Q 229   | 100-1416-00 | 2SA1416                 | R 230   | 119-2231-10 | 1/16W 22kΩ  | R 438   | 119-3311-10 | 1/16W 330Ω    |
| Q 230   | 100-1162-00 | 2SA1162                 | R 231   | 032-0104-63 | 1/4W 1.5Ω   | R 439   | 119-3311-10 | 1/16W 330Ω    |
| Q 231   | 100-1416-00 | 2SA1416                 | R 232   | 119-0000-00 | 1/16W 0Ω JW | R 440   | 119-3311-10 | 1/16W 330Ω    |
| Q 232   | 101-1237-50 | 2SB1237QR               | R 236   | 119-1031-10 | 1/16W 10kΩ  | R 441   | 119-3311-10 | 1/16W 330Ω    |
| Q 235   | 125-2004-03 | RN1403                  | R 238   | 119-3321-10 | 1/16W 3.3kΩ | R 442   | 119-3311-10 | 1/16W 330Ω    |
| Q 236   | 100-1162-00 | 2SA1162                 | R 239   | 119-1221-10 | 1/16W 1.2kΩ | R 443   | 119-1021-10 | 1/16W 1kΩ     |
| Q 239   | 125-2004-06 | RN1406                  | R 240   | 032-0104-73 | 1/4W 330Ω   | R 444   | 119-1021-10 | 1/16W 1kΩ     |
| Q 240   | 125-2004-03 | RN1403                  | R 241   | 119-1031-10 | 1/16W 10kΩ  | R 445   | 119-1021-10 | 1/16W 1kΩ     |
|         |             |                         | R 242   | 032-0104-73 | 1/4W 330Ω   | R 446   | 032-0140-50 | 1/16W 10kΩ 1% |

| REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION   |
|---------|-------------|---------------|---------|-------------|---------------|---------|-------------|---------------|
| R 447   | 032-0140-56 | 1/16W 51kΩ 1% | R 517   | 119-1021-10 | 1/16W 1kΩ     | R 644   | 119-1541-10 | 1/16W 150kΩ   |
| R 448   | 119-2231-10 | 1/16W 22kΩ    | R 525   | 032-0140-52 | 1/16W 33kΩ 1% | R 645   | 119-8221-10 | 1/16W 8.2kΩ   |
| R 449   | 119-3311-10 | 1/16W 330Ω    | R 526   | 032-0140-52 | 1/16W 33kΩ 1% | R 646   | 119-4321-15 | 1/16W 4.3kΩ   |
| R 450   | 032-0140-50 | 1/16W 10kΩ 1% | R 527   | 032-0140-52 | 1/16W 33kΩ 1% | R 647   | 119-0000-00 | 1/16W 0Ω JW   |
| R 451   | 032-0140-56 | 1/16W 51kΩ 1% | R 528   | 032-0140-52 | 1/16W 33kΩ 1% | R 651   | 119-1011-10 | 1/16W 100Ω    |
| R 452   | 119-3311-10 | 1/16W 330Ω    | R 529   | 032-0140-89 | 1/4W 47kΩ 1%  | R 652   | 119-1811-10 | 1/16W 180Ω    |
| R 453   | 032-0140-50 | 1/16W 10kΩ 1% | R 530   | 032-0140-89 | 1/4W 47kΩ 1%  | R 653   | 119-1811-10 | 1/16W 180Ω    |
| R 454   | 032-0140-56 | 1/16W 51kΩ 1% | R 531   | 032-0140-89 | 1/4W 47kΩ 1%  | R 654   | 119-1811-10 | 1/16W 180Ω    |
| R 455   | 119-2231-10 | 1/16W 22kΩ    | R 532   | 032-0140-89 | 1/4W 47kΩ 1%  | R 655   | 119-0000-00 | 1/16W 0Ω JW   |
| R 456   | 032-0140-50 | 1/16W 10kΩ 1% | R 533   | 119-1041-10 | 1/16W 100kΩ   | R 657   | 119-1811-10 | 1/16W 180Ω    |
| R 457   | 032-0140-56 | 1/16W 51kΩ 1% | R 534   | 119-1041-10 | 1/16W 100kΩ   | R 658   | 119-1521-10 | 1/16W 1.5kΩ   |
| R 458   | 032-0140-50 | 1/16W 10kΩ 1% | R 550   | 119-2711-10 | 1/16W 270Ω    | R 659   | 119-0000-00 | 1/16W 0Ω JW   |
| R 459   | 032-0140-56 | 1/16W 51kΩ 1% | R 551   | 119-2711-10 | 1/16W 270Ω    | R 660   | 119-0000-00 | 1/16W 0Ω JW   |
| R 460   | 119-2231-10 | 1/16W 22kΩ    | R 552   | 119-2711-10 | 1/16W 270Ω    | R 661   | 119-0000-00 | 1/16W 0Ω JW   |
| R 461   | 119-3311-10 | 1/16W 330Ω    | R 553   | 119-3341-10 | 1/16W 330kΩ   | R 662   | 119-0000-00 | 1/16W 0Ω JW   |
| R 462   | 032-0140-50 | 1/16W 10kΩ 1% | R 554   | 119-2431-10 | 1/16W 24kΩ    | R 663   | 119-0000-00 | 1/16W 0Ω JW   |
| R 463   | 032-0140-56 | 1/16W 51kΩ 1% | R 555   | 119-2421-15 | 1/16W 2.4kΩ   | R 667   | 119-0000-00 | 1/16W 0Ω JW   |
| R 464   | 119-3311-10 | 1/16W 330Ω    | R 556   | 119-5121-15 | 1/16W 5.1kΩ   | R 670   | 119-0000-00 | 1/16W 0Ω JW   |
| R 465   | 032-0140-50 | 1/16W 10kΩ 1% | R 557   | 119-1511-10 | 1/16W 150Ω    | R 671   | 119-4731-10 | 1/16W 47kΩ    |
| R 466   | 032-0140-56 | 1/16W 51kΩ 1% | R 559   | 119-2711-10 | 1/16W 270Ω    | R 672   | 119-0000-00 | 1/16W 0Ω JW   |
| R 467   | 119-2231-10 | 1/16W 22kΩ    | R 560   | 119-2711-10 | 1/16W 270Ω    | R 674   | 032-0104-67 | 1/4W 1.2kΩ    |
| R 468   | 032-0140-50 | 1/16W 10kΩ 1% | R 561   | 119-2711-10 | 1/16W 270Ω    | R 677   | 119-1031-10 | 1/16W 10kΩ    |
| R 469   | 032-0140-56 | 1/16W 51kΩ 1% | R 562   | 119-4701-10 | 1/16W 47Ω     | R 678   | 119-1031-10 | 1/16W 10kΩ    |
| R 474   | 119-0000-00 | 1/16W 0Ω JW   | R 603   | 032-0104-64 | 1/4W 68Ω      | R 680   | 119-0000-00 | 1/16W 0Ω JW   |
| R 477   | 119-0000-00 | 1/16W 0Ω JW   | R 604   | 119-3321-10 | 1/16W 3.3kΩ   | R 681   | 119-0000-00 | 1/16W 0Ω JW   |
| R 478   | 119-1041-10 | 1/16W 100kΩ   | R 607   | 119-2231-10 | 1/16W 22kΩ    | R 682   | 119-0000-00 | 1/16W 0Ω JW   |
| R 479   | 119-1241-10 | 1/16W 120kΩ   | R 608   | 119-1031-10 | 1/16W 10kΩ    | R 683   | 119-0000-00 | 1/16W 0Ω JW   |
| R 480   | 119-1021-10 | 1/16W 1kΩ     | R 609   | 119-4731-10 | 1/16W 47kΩ    | R 686   | 119-0000-00 | 1/16W 0Ω JW   |
| R 481   | 119-1221-10 | 1/16W 1.2kΩ   | R 610   | 119-4721-10 | 1/16W 4.7kΩ   | R 687   | 119-0000-00 | 1/16W 0Ω JW   |
| R 482   | 032-0104-58 | 1/4W 390Ω     | R 625   | 119-1041-10 | 1/16W 100kΩ   | R 689   | 119-0000-00 | 1/16W 0Ω JW   |
| R 483   | 119-8221-10 | 1/16W 8.2kΩ   | R 626   | 119-1041-10 | 1/16W 100kΩ   | R 690   | 119-4721-10 | 1/16W 4.7kΩ   |
| R 484   | 119-1021-10 | 1/16W 1kΩ     | R 627   | 119-1041-10 | 1/16W 100kΩ   | R 691   | 119-4721-10 | 1/16W 4.7kΩ   |
| R 485   | 119-2231-10 | 1/16W 22kΩ    | R 628   | 119-4731-10 | 1/16W 47kΩ    | R 692   | 119-0000-00 | 1/16W 0Ω JW   |
| R 486   | 119-1021-10 | 1/16W 1kΩ     | R 637   | 119-1241-10 | 1/16W 120kΩ   | S 401   | 013-5102-00 |               |
| R 487   | 119-1041-10 | 1/16W 100kΩ   | R 638   | 119-4731-10 | 1/16W 47kΩ    | S 601   | 013-6100-00 | SKHLLB        |
| R 488   | 119-1041-10 | 1/16W 100kΩ   | R 639   | 119-4721-10 | 1/16W 4.7kΩ   | S 602   | 013-7106-00 | TKR00120670MM |
| R 492   | 119-0000-00 | 1/16W 0Ω JW   | R 640   | 119-4731-10 | 1/16W 47kΩ    | S 603   | 013-7206-50 | SPPB530701    |
| R 496   | 119-1021-10 | 1/16W 1kΩ     | R 641   | 119-1831-10 | 1/16W 18kΩ    | SUP 51  | 060-0122-20 | DSP-141N-S00B |
| R 515   | 119-4721-10 | 1/16W 4.7kΩ   | R 642   | 119-1031-10 | 1/16W 10kΩ    | X 1     | 061-1066-00 | 7.2MHz        |
| R 516   | 119-4721-10 | 1/16W 4.7kΩ   | R 643   | 119-5621-10 | 1/16W 5.6kΩ   | X 601   | 060-1505-50 | 10MHz         |

Switch PWB(B2) section

| REF No. | PART No. | DESCRIPTION                        |
|---------|----------|------------------------------------|
| C       | 705      | 042-0415-52 6.3V/10 $\mu$ F TAN    |
| C       | 706      | 168-1042-78 16V 0.1 $\mu$ F        |
| C       | 707      | 042-0415-52 6.3V/10 $\mu$ F TAN    |
| C       | 708      | 042-0415-00 16V4.7 $\mu$ F TAN     |
| C       | 710      | 168-1042-78 16V 0.1 $\mu$ F        |
| C       | 711      | 042-0415-00 16V4.7 $\mu$ F TAN     |
| D       | 701      | 001-40528-32 MA8056-M              |
| D       | 704      | 001-7045-91 CL-165                 |
| D       | 713      | 001-7055-90 NSCWS405T              |
| D       | 714      | 001-7055-90 NSCWS405T              |
| D       | 715      | 001-7055-90 NSCWS405T              |
| D       | 716      | 001-7055-90 NSCWS405T              |
| D       | 717      | 001-7055-90 NSCWS405T              |
| D       | 718      | 001-7055-90 NSCWS405T              |
| IC      | 701      | 051-6057-00 ML9090A-01GA           |
| IR      | 701      | 060-4008-00 RS171                  |
| LCD     | 701      | 379-1204-51 INDICATOR              |
| P       | 701      | 076-0647-00 16P                    |
| Q       | 702      | 125-2017-07 RN1427                 |
| Q       | 702      | 125-2017-07 RN1427                 |
| Q       | 705      | 100-1162-00 25A1162                |
| Q       | 706      | 102-2712-51 2SC2712G.L             |
| R       | 705      | 119-3921-10 1/16W 3.9k $\Omega$    |
| R       | 707      | 119-1011-10 1/16W 100 $\Omega$     |
| R       | 708      | 119-1041-10 1/16W 100k $\Omega$    |
| R       | 714      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 715      | 032-0140-98 1/16W 120k $\Omega$ 1% |

| REF No. | PART No. | DESCRIPTION                        |
|---------|----------|------------------------------------|
| R       | 716      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 717      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 718      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 719      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 720      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 721      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 722      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 723      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 724      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 725      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 726      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 727      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 728      | 119-1521-10 1/16W 1.5k $\Omega$    |
| R       | 729      | 119-1521-10 1/16W 1.5k $\Omega$    |
| R       | 730      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 731      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 732      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 733      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 734      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 735      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 736      | 119-1521-10 1/16W 1.5k $\Omega$    |
| R       | 737      | 119-1521-10 1/16W 1.5k $\Omega$    |
| R       | 741      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 742      | 119-1221-10 1/16W 1.2k $\Omega$    |
| R       | 743      | 119-0000-00 1/16W 0 $\Omega$ JW    |
| R       | 744      | 119-0000-00 1/16W 0 $\Omega$ JW    |
| R       | 745      | 119-0000-00 1/16W 0 $\Omega$ JW    |

| REF No. | PART No. | DESCRIPTION                        |
|---------|----------|------------------------------------|
| R       | 746      | 119-0000-00 1/16W 0 $\Omega$ JW    |
| R       | 750      | 032-0140-00 1/16W 10k $\Omega$ 1%  |
| R       | 751      | 032-0140-53 1/16W 2.2k $\Omega$ 1% |
| R       | 752      | 032-0140-98 1/16W 120k $\Omega$ 1% |
| R       | 753      | 119-4731-10 1/16W 47k $\Omega$     |
| R       | 754      | 119-4731-10 1/16W 47k $\Omega$     |
| S       | 701      | 013-8002-00 LA22809                |
| S       | 702      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 703      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 704      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 706      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 707      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 708      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 709      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 710      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 711      | 013-6302-50 SKQMAL                 |
| S       | 712      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 713      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 714      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 715      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 716      | 013-6302-50 SKQMAL                 |
| S       | 717      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 718      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 719      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 720      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 721      | 013-6518-50 LS9T2M-2SR/PG          |
| S       | 722      | 013-6518-50 LS9T2M-2SR/PG          |

PRINTED WIRING BOARD

Switch PWB(B2) section

