



■ EXPLODED VIEW ▪ PARTS LIST:

Escutcheon section

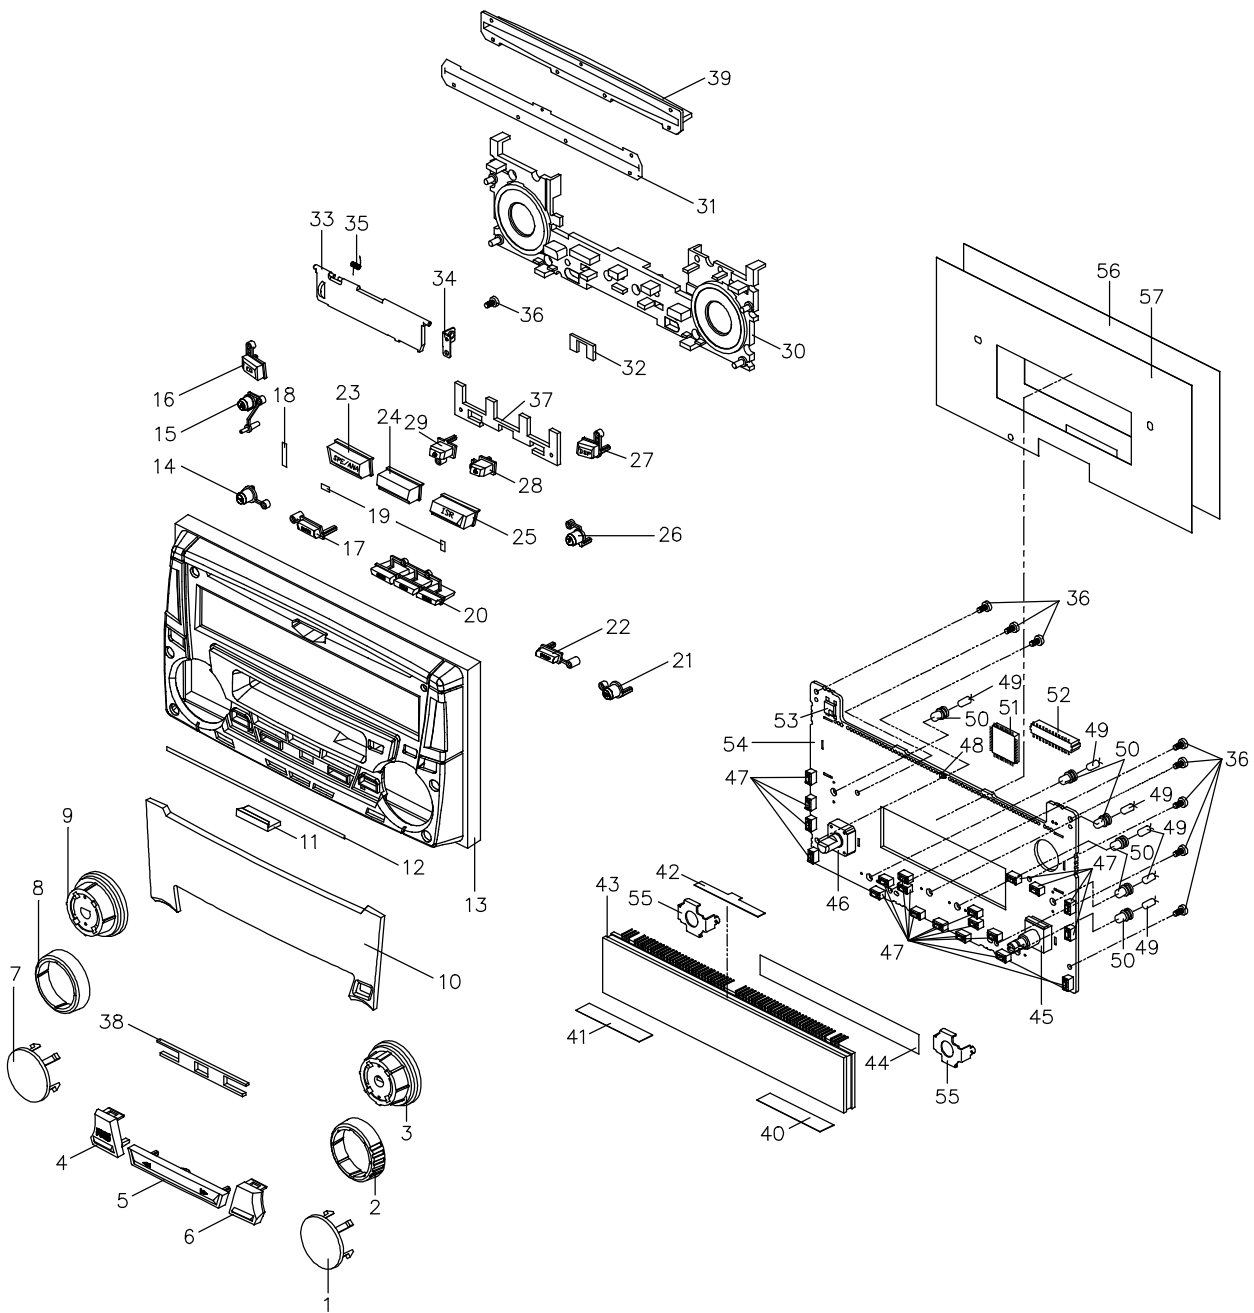

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	383-0673-00	DECORATE KNOB(P-CH)	1	30	335-6554-01	ILLUMI PART	1
2	345-8589-00	RUBBER CAP	1	31	346-0118-20	LEATHER SHEET	1
3	380-5520-00	KNOB(P-CH)	1	32	345-8708-00	STOPPER	1
4	382-6159-02	BUTTON(FNC)	1	33	320-0562-03	DUSTPROOF CVR	1
5	382-6161-02	BUTTON(◀▶)	1	34	331-3153-00	STOPPER(CS-DOOR)	1
6	382-6160-04	BUTTON(BND)	1	35	750-3343-01	SPRING(DOOR)	1
7	383-0672-00	DECORATE KNOB(VOL)	1	36	716-0778-00	WAVE SCREW(M2x 6)	9
8	345-8588-00	RUBBER CAP	1	37	345-8630-00	SPONGE	1
9	380-5519-00	KNOB(VOL)	1	38	345-8641-00	SPONGE	1
10	373-0959-06	DIAL-CVR	1	39	371-3827-20	TRIM PLATE	1
11	335-6552-00	ILLUMI PART(CD)	1	40	347-5919-00	SURGE PROTECT	1
12	347-6538-00	DOUBLE FACE	1	41	347-6543-00	SHADE	1
13	370-5946-02	ESCUTCHEON	1	42	347-6621-00	SHADE	1
14	382-6168-01	BUTTON(▶■)	1	43	379-4036-24	INDICATOR	1
15	382-6167-01	BUTTON(A-M)	1	44	347-6541-00	DOUBLE FACE	1
16	382-6165-03	BUTTON(EQ)	1	45	016-9900-80	VR W / SHAFT	1
17	382-6171-01	BUTTON(MUTE)	1	46	016-9900-81	VR W / SHAFT	1
18	347-6539-00	SHADE	1	47	013-6305-50	TACT SWITCH	20
19	347-6540-00	SHADE	2	48	001-7011-96	DIODE	1
20	382-6175-00	BUTTON(SC / RP / RD)	1	49	017-0444-00	PILOT LAMP(14V 50mA)	6
21	382-6169-01	BUTTON(MEMO)	1	50	345-3739-14	LAMP CAP	6
22	382-6172-01	BUTTON(DISP)	1	51	051-6029-00	IC	1
23	382-6162-02	BUTTON(SPE / ANA)	1	52	074-1279-24	OUTLET SOCKET	1
24	382-6163-01	DUMMY BUTTON	1	53	060-4008-00	IR-RECEIVER	1
25	382-6164-03	BUTTON(ISR)	1	54	039-2071-00	SW PWB (WITHOUT COMPONENT)	1
26	382-6170-01	BUTTON(TITLE)	1	55	331-3197-00	JOG-SW-HOLDER	2
27	382-6166-03	BUTTON(DSP)	1	56	347-6544-00	SHIELD PART	1
28	382-6173-01	BUTTON(CD-EJE)	1	57	347-6545-00	FILM	1
29	382-6174-02	BUTTON(CS / MD-EJE)	1				

Main section

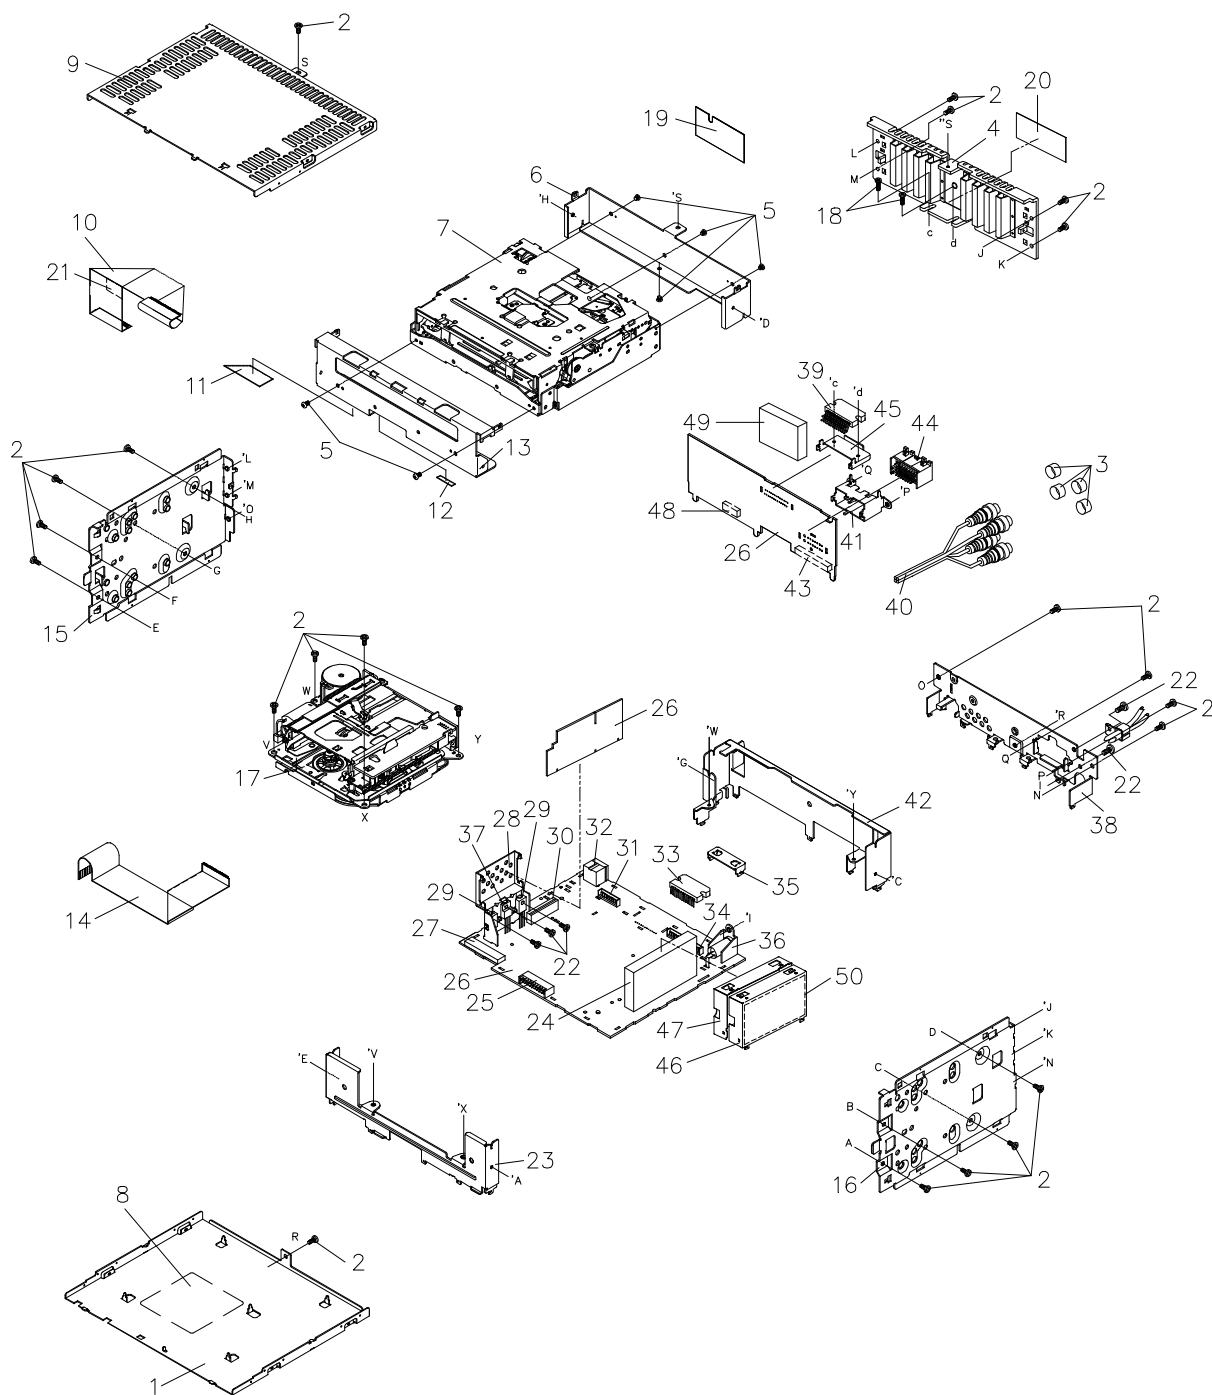


NO.	PARTS NO.	DESCRIPTION	QTY
1	311-1772-01	LOWER CASE	1
2	714-2606-81	MACHINE SCREW(M2.6 x 6)	22
3	345-3799-20	RUBBER CAP	4
4	313-1811-00	HEAT SINK	1
5	714-2303-81	MACHINE SCREW(M2.3 x 3)	6
6	331-2282-20	MECH BRKT(R)	1
7	929-0092-82	CD-MECH-MODULE	1
8	286-9888-00	SET PLATE	1
9	310-1639-20	UPPER CASE	1
10	816-2451-50	FLAT WIRE	1
11	347-5679-22	DOUBLE FACE	1
12	347-6036-00	DOUBLE FACE	1
13	331-2281-21	MECH BRKT(F)	1
14	816-2478-00	FLAT WIRE	1
15	305-0279-00	SIDE PLATE(LH)	1
16	305-0278-00	SIDE PLATE(RH)	1
17	930-0798-81	TAPE-MECH	1
18	714-2612-81	MACHINE SCREW(M2.6 x 12)	2
19	347-6309-00	INSULATOR	1
20	347-6542-00	SHADE	1
21	347-6242-00	INSULATOR	1
22	714-3006-81	MACHINE SCREW(M3 x 6)	5
23	309-0728-02	FRONT PLATE	1
24	880-2089B	TUNER	1
25	076-0648-24	PLUG	1
26	039-2068-01	MAIN PWB (WITHOUT COMPONENT)	1

NO.	PARTS NO.	DESCRIPTION	QTY
27	074-1186-26	OUTLET SOCKET	1
28	313-1789-00	HEAT SINK	1
29	102-3420-50	TRANSISTOR	2
30	074-0834-22	OUTLET SOCKET	1
31	076-0353-06	PLUG	1
32	074-1194-00	OUTLET SOCKET	1
33	051-3261-00	IC	1
34	076-0353-17	PLUG	1
35	313-1772-02	HEAT SINK	1
36	092-4000-51	ANT-RECEPT	1
37	103-2012-00	TRANSISTOR	1
38	307-0650-00	REAR PLATE	1
39	051-2031-31	IC	1
40	855-5401-00	RCA-PIN-CORD	1
41	331-2644-00	OUTLET HOLDER	1
42	331-2920-01	MECH PLATE	1
43	074-0881-17	OUTLET SOCKET	1
44	074-1214-01	OUTLET SOCKET	1
45	331-2277-20	IC HOLDER	1
46	331-2945-00	SHIELD CVR(F)	1
47	331-2946-00	SHIELD CVR(R)	1
48	074-0881-06	OUTLET SOCKET	1
49	060-6019-00	DC-DC CONVERTER	1
50	347-6285-00	INSULATOR	1

■ EXPLODEDVIEW:

Tape mechanism section 930-0798-81

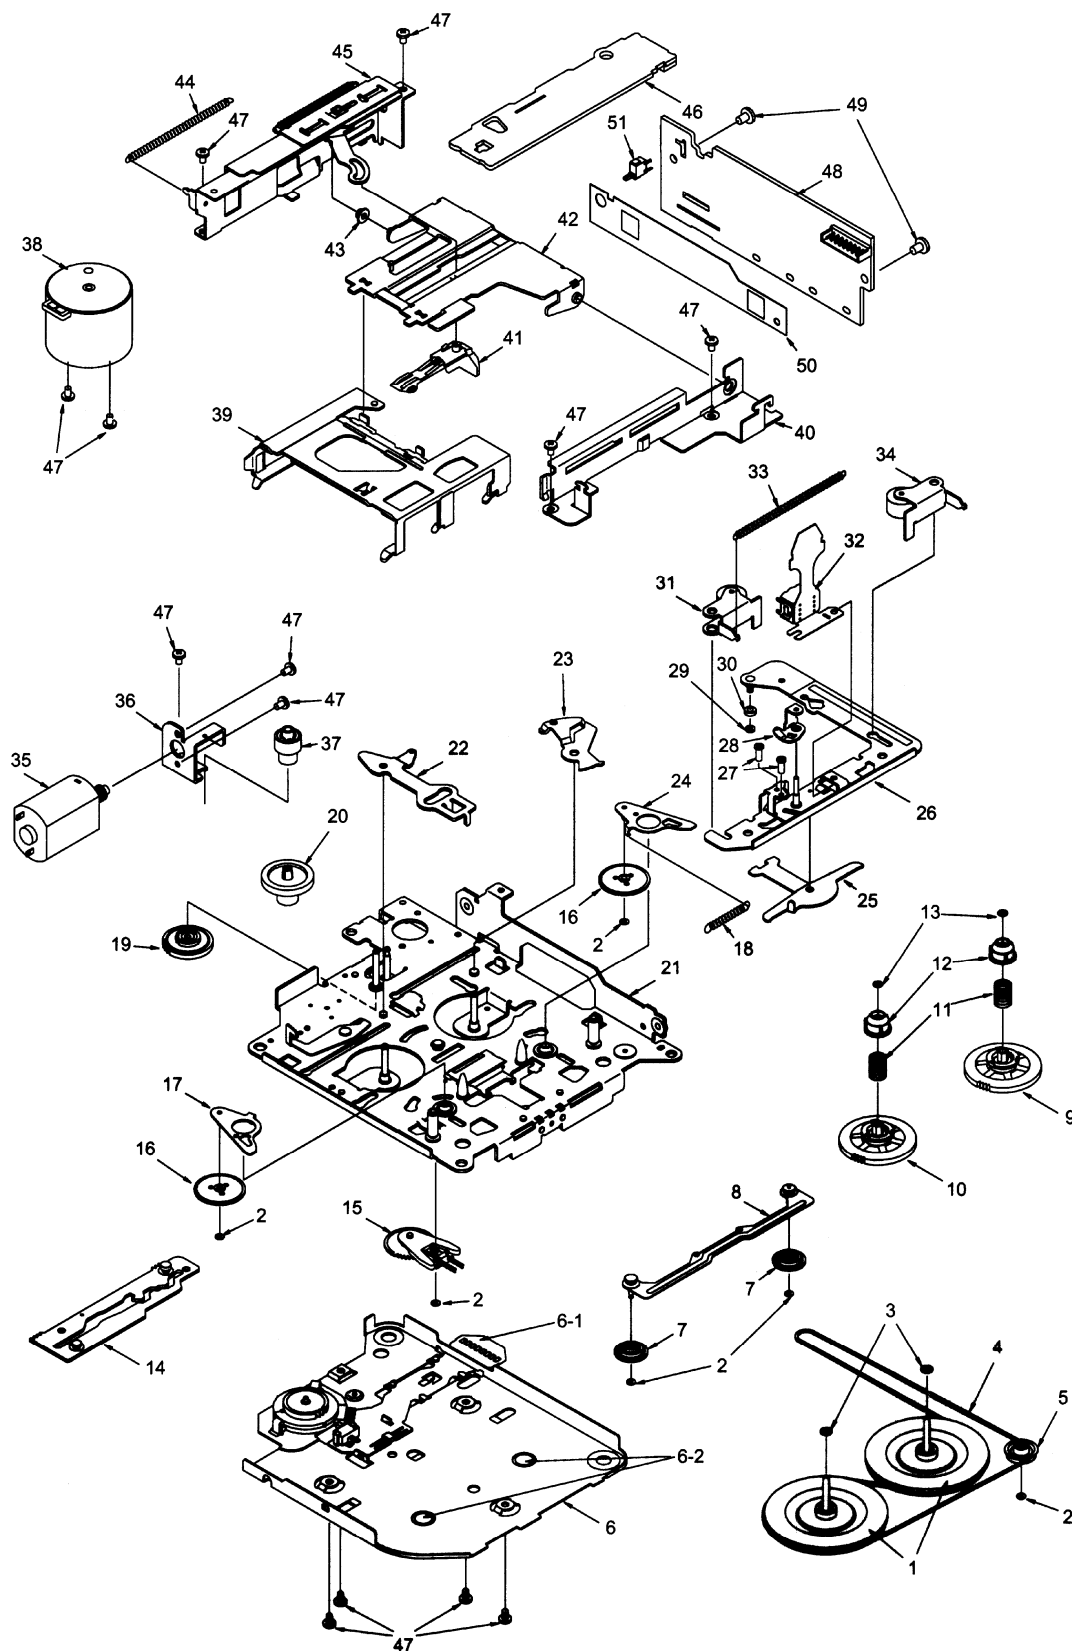

■ PARTS LIST:

Tape mechanism section 930-0798-81

Note) Several different parts of the same reference number are alternative parts.


One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	611-0091-03	FLYWHEEL	2	26	960-4261-20	HEAD PLATE ASSY	1
2	746-0724-00	WASHER	6	27	716-0833-10	AZIMUTH SCREW	2
3	746-0624-00	WASHER	2	28	630-2600-01	ADJUST LINK	1
4	602-0118-00	BELT	1	29	746-0762-00	WASHER	1
5	604-0046-00	TENTION PULLEY	1	30	610-0342-01	HADE PLATE ROLLER	1
6	960-4450-00	BOTTOM SUB ASSY	1	31	960-4270-05	ROLLER ASSY R	1
6-1	099-9926-01	BOTTOM FLEX-PWB (WITHOUT COMPONENT)	1	32	011-0328-00	HEAD	1
6-2	746-0767-00	WASHER	2	33	750-2946-02	PINCH SPRING	1
7	613-0286-02	FF/REW GEAR	2	34	960-4269-05	ROLLER ASSY F	1
8	960-4262-03	FF/REW PLATE ASSY	1	35	SMA-131-100	POWER MOTOR ASSY	1
9	960-4430-00	REEL ASSY F	1	36	630-2601-02	MOTOR PLATE	1
10	960-4431-00	REEL ASSY R	1	37	613-0288-01	HELICAL GEAR	1
11	750-2949-00	SLIDE SPRING	2	38	SMA-130-100	MAIN MOTOR ASSY	1
12	631-1993-01	SLIDE BUSH	2	39	606-0093-82	PACK GUIDE	1
13	746-0761-00	WASHER	2	40	630-2626-05	PWB FRAME	1
14	960-4266-20	MODE POLATE ASSY	1	41	631-1992-02	PACK STOPPER	1
15	960-4282-06	DETECT SUB ASSY	1	42	630-2642-01	GUIDE ARM	1
16	613-0662-00	IDLER GEAR	2	43	610-0343-00	GUIDE A ROLLER	1
17	960-4264-03	IDOLER PLATE ASSY R	1	44	750-2947-04	EJECT PLATE SPRING	1
18	750-3017-02	IDLER SPRING	1	45	960-4389-20	EJECT SUB ASSY	1
19	613-0337-00	POWER GEAR	1	46	039-0053-00	SIDE PWB (WITHOUT COMPONENT)	1
20	613-0289-01	GEAR A	1	47	716-0484-00	SCREW	13
21	960-4294-22	DECK PLATE ASSY	1	48	HBS-487-100	REAR PWB ASSY (WITH COMPONENT)	1
22	960-4301-02	PLAY LINK ASSY	1	49	716-0761-01	PWB SCREW	2
23	630-2598-05	EJECT LINK	1	50	347-4080-01	INSULATOR	1
24	960-4263-03	IDOLER PLATE ASSY F	1	51	013-3906-00	SWITCH	1
25	630-2597-01	CHANGE LINK	1				

■ EXPLODEDVIEW:

CD mechanism section 929-0092-82(BB-CD)

Drive unit section

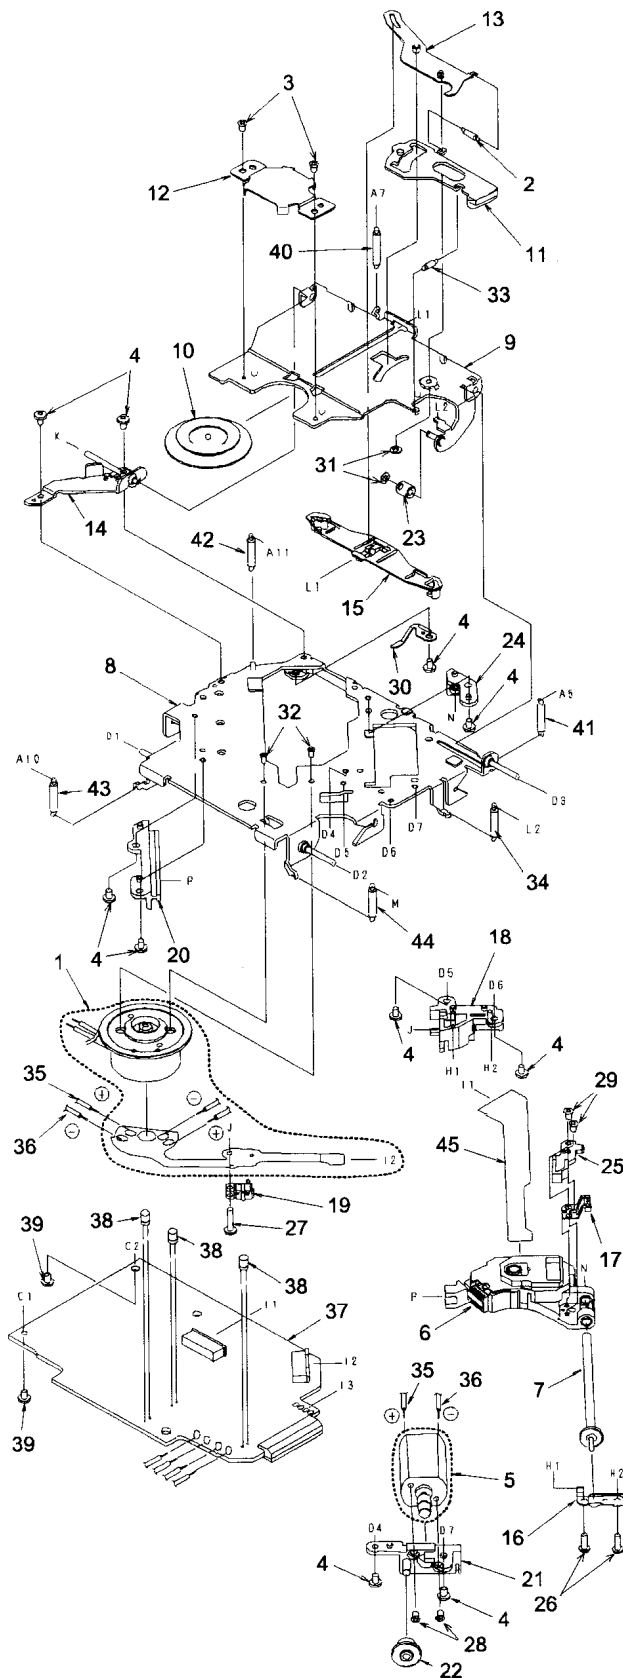

■ PARTS LIST:

CD mechanism section 929-0092-82(BB-CD)


Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Drive unit section

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	SMA-151-100	MOTOR ASSY (SPINDLE)	1	25	621-0375-00	SH-BASE	1
2	750-3098-00	L-LINK SPRING	1	26	716-0675-00	SCREW (M2 x 5.5)	2
3	716-1468-00	SCREW (M2 x 2.5)	2	27	716-1555-00	WAVE SCREW (Φ2 x 8)	1
4	716-2003-81	SCREW (M2 x 3)	10	28	732-2004-11	SEMS SCREW (M2 x 4)	2
5	SMA-146-100	MOTOR ASSY (SLED)	1	29	739-1735-17	PRECISION SCREW (M1.7 x 3.5)	2
6	969-0008-00	PICK UP UNIT	1	30	620-0690-01	RATTLE PLATE	1
7	HBS-432-100	LS-GEAR ASSY	1	31	746-0761-00	WASHER	2
8	966-0447-07	DR-PLATE-ASSY	1	32	716-1733-00	SCREW (M1.7 x 2.3)	2
9	966-0449-04	CLAMP-LINK-ASSY	1	33	750-3099-00	ES-SPRING	1
10	621-0205-02	CLAMPER RING	1	34	750-3097-03	CLAMPER SPRING	1
11	621-0251-03	LOCK LINK	1	35	816-2373-00	LEAD WIRE (WHT)	1
12	620-0198-03	CLAMPER PLATE	1	36	816-2372-00	LEAD WIRE (BLU)	1
13	966-0314-01	STOP LINK-ASSY	1	37	039-1732-01	CD PWB (WITHOUT COMPONENT)	1
14	966-0448-01	SIDE PLATE-ASSY	1	38	001-0563-00	LED	3
15	621-0252-03	DISC STOPPER	1	39	716-1670-00	SCREW (M2 x 4)	2
16	620-0491-03	SPRING PLATE	1	40	750-3202-00	CENTER SPRING-B	1
17	966-0454-00	SCREW H-RACK-ASSY	1	41	750-3096-01	DR-SPRING R	1
18	621-0358-02	LS-HOLDER-F	1	42	750-3164-00	DR-SPRING LR	1
19	013-7100-00	SWITCH (LIMIT)	1	43	750-3188-00	DR-SPRING F-B	1
20	621-0357-03	PICK UP GUIDE	1	44	750-3201-00	DR-SPRING F-R	1
21	621-0253-02	MOTOR HOLDER	1	45	039-1587-00	FPC (WITHOUT COMPONENT)	1
22	621-0255-02	SECOND GEAR	1				
23	622-1073-02	CLAMPER ROLLER	1				
24	621-0359-02	LS-HOLDER-R	1				

MECH chassis section

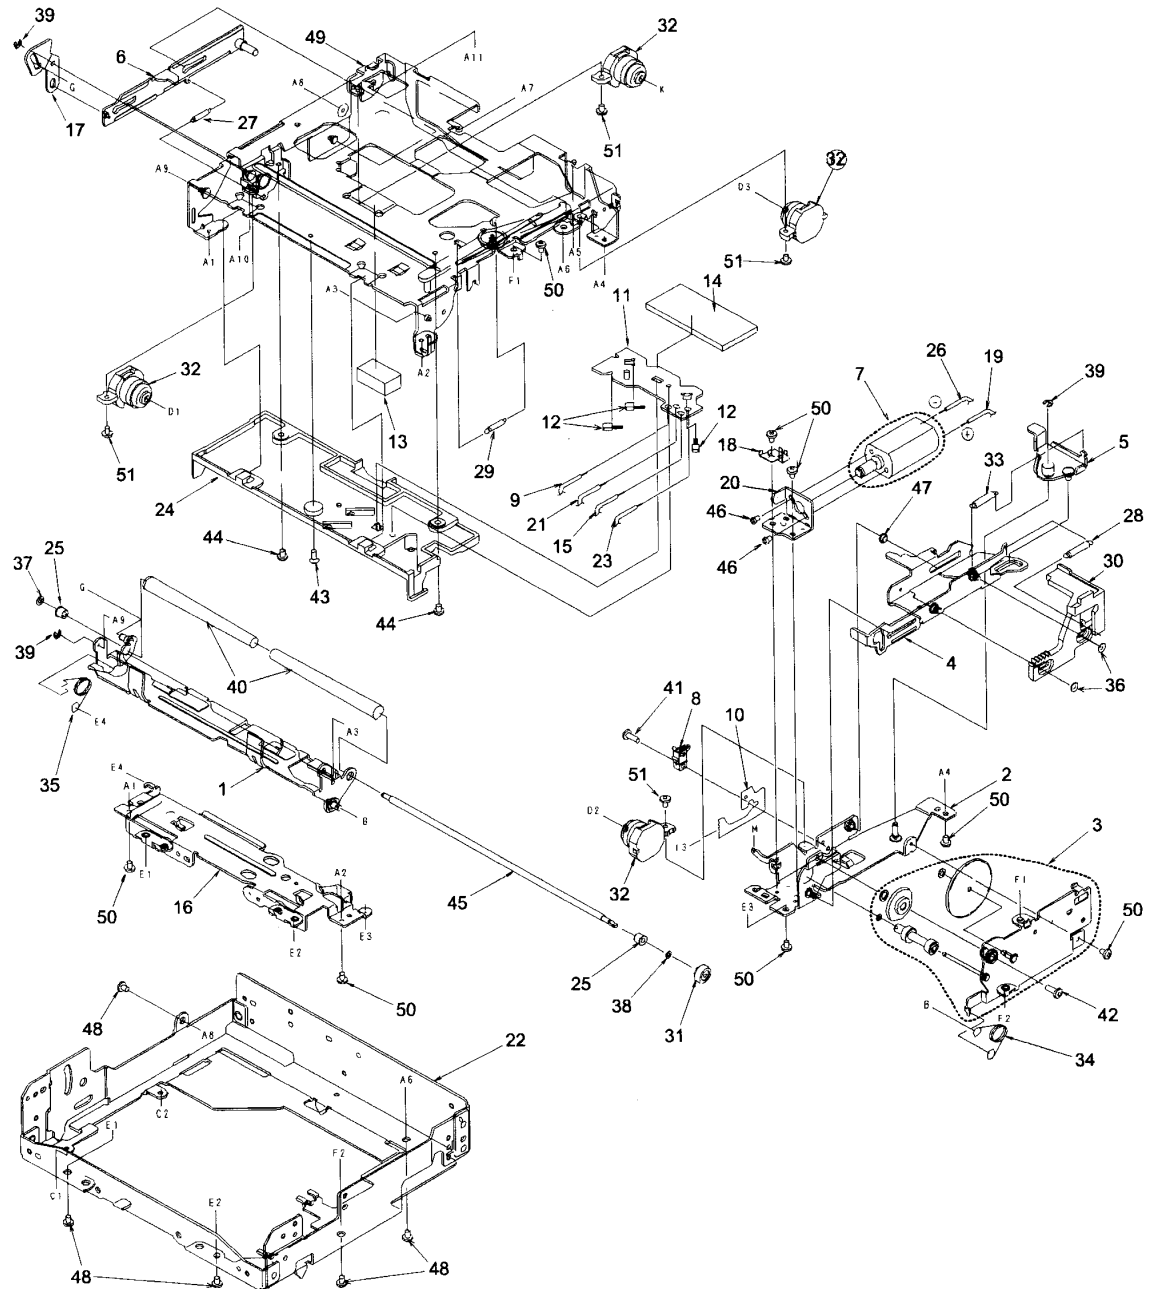

MECH chassis section

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	966-0309-05	L-DISC-G-ASSY	1	26	800-4904-60	VINYL-COAT-WIRE (BLK)	1
2	966-0310-06	SHIFT-P-CH-ASSY	1	27	750-3189-00	SIDE-L-SPRING	1
3	HBS-430-100	GEAR PLATE ASSY	1	28	750-3098-00	L-LINK SPRING	1
4	966-0312-06	SHIFT-PLATE-ASSY	1	29	750-3094-00	S-ARM SPRING	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1	30	621-0248-07	RACK GEAR	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1	31	621-0249-02	ROLLER GEAR	1
7	SMA-147-100	MOTOR ASSY (LOADING)	1	32	629-0074-00	DAMPER	4
8	013-3879-01	CHUCKING SWITCH	1	33	750-3092-03	SHIFT SPRING	1
9	804-4910-60	VINYL-COAT-WIRE (YEL)	1	34	750-3091-03	LOADING-SPRING-R	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1	35	750-3090-02	LOADING-SPRING-L	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1	36	746-0877-02	WASHER	2
12	060-0252-01	PHOTO-TR	3	37	746-0762-00	WASHER	1
13	345-7513-01	CLAMPER SHEET	1	38	746-0712-03	WASHER	1
14	345-7514-00	SENSOR PWB SHEET	1	39	743-1500-10	E-RING	3
15	802-4910-60	VINYL-COAT-WIRE (RED)	1	40	621-0258-03	LOADING ROLLER	2
16	620-0485-04	FRONT PLATE	1	41	716-1742-00	SCREW (M2 x 5)	1
17	620-0488-01	S-L-LINK PLATE	1	42	716-1704-00	SCREW (M2 x 7)	1
18	620-0489-02	MOTOR PLATE	1	43	716-1677-00	SCREW (M2 x 5)	1
19	802-4904-60	VINYL-COAT-WIRE (RED)	1	44	716-1507-00	SCREW (M2 x 3)	2
20	620-0492-01	MOTOR BRACKET	1	45	622-1072-05	ROLLER SHAFT	1
21	801-4910-60	VINYL-COAT-WIRE (BRN)	1	46	716-1468-00	SCREW (M2 x 2.5)	2
22	620-0773-01	CD-MECH-BRKT	1	47	622-1219-01	SHIFT ROLLER	1
23	800-4910-60	VINYL-COAT-WIRE (BLK)	1	48	714-2603-81	SCREW (M2.6 x 3)	5
24	621-0402-01	U-DISC GUIDE-F	1	49	966-0308-11	CHASSIS ASSY	1
25	621-0243-02	ROLLER SLEEVE	2	50	714-2003-81	SCREW (M2 x 3)	8
				51	716-1670-00	SCREW (M2 x 4)	4

ELECTRICAL PARTS LIST

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 301	051-6201-90	LC72146M	D 905	001-0316-47	MTZ9.1JB	C 301	168-2232-55	0.022 uF
IC 501	051-5016-90	TDA7404	D 906	001-0516-90	MA111	C 302	183-4763-37	16V 47 uF
IC 502	051-0350-93	NJM4558M	D 907	001-0346-32	MTZ5.6JB	C 303	168-3312-55	330P
IC 651	051-3261-00	BA4906	L 101	010-4046-00	AM5.6 uH	C 304	166-1011-50	100P
IC 801	052-3921-01	M30624MGA-E52FP	L 103	010-2230-38	220 uH	C 305	166-1011-50	100P
IC 803	051-6600-38	CA0008AM	L 104	010-2230-38	220 uH	C 306	043-0523-50	0.1 uF
IC 821	051-5403-08	S-80725NT	L 105	010-2230-32	68 uH	C 307	183-1053-67	50V 1 uF
IC 852	051-5818-90	BA3834F	L 301	010-2230-38	220 uH	C 310	166-1501-50	15P
Q 104	125-2001-92	RN1402	L 801	010-2230-10	1 uH	C 311	166-1501-50	15P
Q 651	191-1237-00	2SB1237	L 802	010-2230-14	2.2 uH	C 501	168-2732-55	0.027 uF
Q 652	192-2712-00	2SC2712	L 951	010-2230-19	5.6 uH	C 502	168-2732-55	0.027 uF
Q 653	125-0002-92	RN2402	L 952	010-2230-35	120 uH	C 503	183-1053-67	50V 1 uF
Q 654	125-2004-93	RN1403	X 301	061-1066-00	AT51-7.2M	C 504	183-1053-67	50V 1 uF
Q 701	125-4001-90	XN1504	X 801	060-1505-50	CSCTCC10MG	C 505	183-1053-67	50V 1 uF
Q 702	125-4001-90	XN1504	C 101	166-2201-50	22P	C 506	183-1053-67	50V 1 uF
Q 801	192-2712-00	2SC2712	C 103	166-1801-50	18P	C 507	183-1053-67	50V 1 uF
Q 802	190-1162-00	2SA1162	C 104	168-2232-55	0.022 uF	C 508	183-1053-67	50V 1 uF
Q 803	190-1162-00	2SA1162	C 105	183-4763-37	16V 47 uF	C 509	168-1032-55	0.01 uF
Q 804	125-0002-92	RN2402	C 106	183-4763-37	16V 47 uF	C 510	168-1032-55	0.01 uF
Q 805	125-0002-92	RN2402	C 107	168-2232-55	0.022 uF	C 511	183-1053-67	50V 1 uF
Q 806	192-2712-00	2SC2712	C 108	168-2232-55	0.022 uF	C 512	183-1053-67	50V 1 uF
Q 807	192-2712-00	2SC2712	C 109	042-0615-01	10V 100 uF	C 513	042-0563-71	16V 100 uF
Q 813	125-2001-92	RN1402	C 110	168-6822-55	6800P	C 514	042-0563-71	16V 100 uF
Q 816	125-2004-94	RN1404	C 111	168-1032-55	0.01 uF	C 515	168-1032-55	0.01 uF
Q 901	191-1240-00	2SB1240	C 112	183-1053-67	50V 1 uF	C 518	168-1522-55	1500P
Q 902	125-2004-96	RN1406	C 113	166-1011-50	100P	C 519	168-1522-55	1500P
Q 904	103-2012-00	2SD2012	C 114	168-1032-55	0.01 uF	C 551	183-4763-37	16V 10 uF
Q 905	125-0002-96	RN2406	C 115	166-2201-50	22P	C 552	183-4763-37	16V 10 uF
Q 906	125-2004-96	RN1406	C 116	168-2232-55	0.022 uF	C 553	183-4763-37	16V 10 uF
Q 907	125-0002-96	RN2406	C 117	168-2232-55	0.022 uF	C 554	183-4763-37	16V 10 uF
Q 908	102-3420-50	2SC3420GR	C 118	168-1022-55	1000P	C 555	166-1201-50	12P
Q 909	125-2004-96	RN1406	C 120	168-1032-55	0.01 uF	C 556	166-1201-50	12P
Q 910	125-2004-96	RN1406	C 121	168-1032-55	0.01 uF	C 557	166-1201-50	12P
Q 911	102-3420-50	2SC3420GR	C 123	168-4732-78	0.047 uF	C 558	166-1201-50	12P
Q 912	125-0002-96	RN2406	C 124	168-4732-78	0.047 uF	C 559	183-4763-37	16V 47 uF
Q 913	125-2004-96	RN1406	C 125	043-0523-50	0.1 uF	C 570	042-9034-00	63V 47 uF
Q 951	190-1298-00	2SA1298	C 126	168-1022-55	1000P	C 601	183-4743-67	50V 0.47 uF
Q 952	125-2001-92	RN1402	C 127	168-1022-55	1000P	C 602	183-4743-67	50V 0.47 uF
D 551	001-0346-26	MTZ4.7JB	C 128	168-1022-55	1000P	C 603	183-4743-67	50V 0.47 uF
D 611	001-0466-91	S5688G	C 129	168-1022-55	1000P	C 604	183-4743-67	50V 0.47 uF
D 613	001-0516-90	MA111	C 130	166-1011-50	100P	C 615	183-3353-67	50V 3.3 uF
D 614	001-0516-90	MA111	C 131	166-1011-50	100P	C 616	166-1011-50	100P
D 651	001-0516-90	MA111	C 132	166-1011-50	100P	C 651	042-0563-71	16V 100 uF
D 652	001-0516-90	MA111	C 134	168-1022-55	1000P	C 652	042-0563-71	16V 100 uF
D 801	001-0516-90	MA111	C 135	172-1041-15	0.1 uF	C 653	183-2263-37	16V 22 uF
D 802	001-0516-90	MA111	C 136	173-4711-18	470P	C 657	042-0393-00	35V 100 uF
D 803	001-0516-90	MA111	C 137	173-4711-18	470P	C 658	042-0393-00	35V 100 uF
D 805	001-0516-90	MA111	C 139	183-4763-37	16V 47 uF	C 701	183-2263-37	16V 22 uF
D 806	001-0346-41	MTZ7.5JB	C 231	168-6812-55	680P	C 702	183-2263-37	16V 22 uF
D 807	001-0346-30	MTZ5.1JC	C 232	168-1022-55	1000P	C 703	183-2263-37	16V 22 uF
D 901	001-0466-91	S5688G	C 233	168-4732-78	0.047 uF	C 704	183-2263-37	16V 22 uF
D 903	001-0316-47	MTZ9.1JB	C 236	166-2069-50	2P	C 801	183-1063-37	16V 10 uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 802	172-1031-15	0.01 u F	R 311	119-1021-15	1K Ω	R 811	119-2231-15	22K Ω
C 803	172-1031-15	0.01 u F	R 312	119-1041-15	100K Ω	R 812	119-1041-15	100K Ω
C 804	183-1063-37	16V 10 u F	R 313	119-1031-15	10K Ω	R 813	119-1041-15	100K Ω
C 805	168-4732-78	0.047 u F	R 501	119-4721-15	4.7K Ω	R 814	119-5621-15	5.6K Ω
C 807	168-2232-55	0.022 u F	R 502	119-4721-15	4.7K Ω	R 816	119-4731-15	47K Ω
C 808	168-1032-55	0.01 u F	R 503	119-4721-15	4.7K Ω	R 817	119-2231-15	22K Ω
C 809	042-0577-00	6.3V 100 u F(LN)	R 504	119-4721-15	4.7K Ω	R 823	119-2231-15	22K Ω
C 810	042-0576-00	5.5V 0.1 u F	R 505	119-4721-15	4.7K Ω	R 824	119-1041-15	100K Ω
C 811	166-1011-50	100P	R 506	119-4721-15	4.7K Ω	R 826	119-3321-15	3.3K Ω
C 818	166-1011-50	100P	R 510	119-4721-15	4.7K Ω	R 827	111-1811-98	1/4W 180 Ω
C 819	168-1022-55	1000P	R 511	119-4721-15	4.7K Ω	R 828	111-1811-98	1/4W 180 Ω
C 820	166-1007-50	10P	R 551	119-5131-15	51K Ω	R 829	111-6801-98	1/4W 68 Ω
C 821	166-1011-50	100P	R 552	119-5131-15	51K Ω	R 831	119-1031-15	10K Ω
C 824	168-1022-55	1000P	R 553	119-5131-15	51K Ω	R 832	119-1031-15	10K Ω
C 825	166-1011-50	100P	R 554	119-5131-15	51K Ω	R 834	119-3321-15	3.3K Ω
C 827	168-1022-55	1000P	R 555	119-2131-15	20K Ω	R 835	119-3321-15	3.3K Ω
C 830	168-1022-55	1000P	R 556	119-2131-15	20K Ω	R 836	119-3321-15	3.3K Ω
C 831	168-1022-55	1000P	R 557	119-2131-15	20K Ω	R 837	119-1011-15	100 Ω
C 832	183-1063-37	16V 10 u F	R 558	119-2131-15	20K Ω	R 851	119-1041-15	100K Ω
C 833	166-2211-50	220P	R 559	119-6811-15	680 Ω	R 852	119-2231-15	22K Ω
C 834	166-2211-50	220P	R 570	119-6811-15	680 Ω	R 854	119-2231-15	22K Ω
C 851	043-0523-50	0.1 u F	R 605	119-1231-15	12K Ω	R 855	119-1831-15	1/4W 18K Ω
C 852	043-0523-50	0.1 u F	R 606	119-1031-15	10K Ω	R 856	119-1031-15	10K Ω
C 853	043-0523-50	0.1 u F	R 607	119-1821-15	1.8K Ω	R 857	119-1031-15	10K Ω
C 854	043-0523-50	0.1 u F	R 651	119-4731-15	47K Ω	R 861	119-2221-15	2.2K Ω
C 855	183-1063-37	16V 10 u F	R 652	111-1021-98	1/4W 1K Ω	R 862	119-2221-15	2.2K Ω
C 856	168-1032-55	0.01 u F	R 653	119-1031-15	10K Ω	R 863	119-2221-15	2.2K Ω
C 857	168-1032-55	0.01 u F	R 654	119-2231-15	22K Ω	R 901	119-1031-15	10K Ω
C 901	042-0563-71	16V 100 u F	R 655	119-4721-15	4.7K Ω	R 902	111-4711-98	1/4W 470 Ω
C 902	183-1063-37	16V 10 u F	R 656	119-1021-15	1K Ω	R 903	111-4711-98	1/4W 470 Ω
C 903	043-0523-50	0.1 u F	R 657	119-2231-15	22K Ω	R 904	111-3311-98	1/4W 330 Ω
C 904	042-0563-71	16V 100 u F	R 658	119-1031-15	10K Ω	R 905	111-3311-98	1/4W 330 Ω
C 905	183-1063-37	16V 10 u F	R 701	119-1021-15	1K Ω	R 908	119-4731-15	47K Ω
C 907	183-4763-37	16V 47 u F	R 702	119-2231-15	4.7K Ω	R 909	119-1041-15	100K Ω
C 908	168-4732-78	0.047 u F	R 703	119-2231-15	4.7K Ω	R 910	119-1041-15	100K Ω
C 931	166-1011-50	100P	R 704	119-3311-15	330 Ω	R 911	119-1041-15	100K Ω
C 933	166-1011-50	100P	R 705	119-3311-15	330 Ω	R 914	119-1041-15	100K Ω
C 934	166-1011-50	100P	R 706	119-1021-15	1K Ω	R 915	119-1031-15	10K Ω
C 951	168-2232-55	0.022 u F	R 707	119-2231-15	4.7K Ω	R 916	119-1031-15	10K Ω
R 104	119-1031-15	10K Ω	R 708	119-2231-15	4.7K Ω	R 917	119-1031-15	10K Ω
R 105	119-1031-15	10K Ω	R 709	119-3311-15	330 Ω	R 918	119-1031-15	10K Ω
R 106	119-4741-15	470K Ω	R 710	119-3311-15	330 Ω	R 919	119-1031-15	10K Ω
R 107	119-1021-15	1K Ω	R 801	119-4721-15	4.7K Ω	R 922	119-2231-15	22K Ω
R 111	119-1831-15	18K Ω	R 802	119-1031-15	10K Ω	R 923	111-5611-98	1/4W 560 Ω
R 136	111-1521-98	1/4W 1.5K Ω	R 803	119-4721-15	4.7K Ω	R 951	119-1031-15	10K Ω
R 301	119-1021-15	1K Ω	R 804	119-4721-15	47K Ω	R 952	111-1221-98	1/4W 1.2K Ω
R 302	119-2221-15	2.2K Ω	R 805	119-4741-15	470K Ω	R 953	111-4711-98	1/4W 470 Ω
R 304	119-2221-15	2.2K Ω	R 806	119-1531-15	15K Ω	R 954	111-4711-98	1/4W 470 Ω
R 307	119-5631-15	56K Ω	R 807	119-1031-15	10K Ω	R 955	119-1031-15	10K Ω
R 308	119-1011-15	100 Ω	R 808	119-3311-15	330 Ω	SUP101	060-0122-91	MDSP-201
R 309	119-8211-15	820 Ω	R 809	119-3321-15	3.3K Ω	CN 101	076-0648-24	22PD
R 310	119-1021-15	1K Ω	R 810	119-1531-15	15K Ω	CN 102	854-4529-51	CNT1

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
CN 103	074-1186-26	26P	CN 105	854-4529-50	CNNT	J 810	074-1194-00	13P
CN 104	076-0353-06	6P	CN 106	076-0353-17	CN-POWER	J 903	074-0834-22	CN-CASS

Switch PWB section (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 701	051-6029-00	u - COM	C 712	043-0318-90	5600P	R 718	119-2021-15	2K Ω
IC 702	051-6618-08	M66006FP-41A	C 713	043-0318-90	5600P	R 720	119-1031-15	10K Ω
D 701	001-0516-90	MA111	C 714	043-0318-90	5600P	R 721	119-1031-15	10K Ω
D 702	001-0516-90	MA111	C 715	043-0318-90	5600P	PL 701	017-0444-00	LAMP
D 703	001-0516-90	MA111	C 716	043-0318-90	5600P	PL 702	017-0444-00	LAMP
D 704	001-0516-90	MA111	C 717	043-0318-90	5600P	PL 703	017-0444-00	LAMP
D 707	001-0516-90	MA111	C 718	043-0318-90	5600P	PL 704	017-0444-00	LAMP
D 709	001-0516-90	MA111	C 719	043-0318-90	5600P	PL 705	017-0444-00	LAMP
D 710	001-0516-90	MA111	C 720	043-0318-90	5600P	PL 706	017-0444-00	LAMP
D 711	001-0516-90	MA111	C 721	168-1522-55	1500P	S 701	013-6305-50	SKQMAH
D 713	001-0516-90	MA111	C 722	166-1011-50	100P	S 702	013-6305-50	SKQMAH
D 714	001-0516-90	MA111	C 725	042-0416-51	6.3V 10 μ F	S 703	013-6305-50	SKQMAH
D 715	001-0516-90	MA111	C 728	043-0523-50	0.1 μ F	S 706	013-6305-50	SKQMAH
D 716	001-0516-90	MA111	C 731	168-1032-55	0.01 μ F	S 707	013-6305-50	SKQMAH
D 717	001-0516-90	MA111	CN 101	074-1279-24	OUTLET SOCKET	S 708	013-6305-50	SKQMAH
D 718	001-0516-90	MA111	R 701	119-1031-15	10K Ω	S 709	013-6305-50	SKQMAH
D 719	001-0516-90	MA111	R 702	119-1031-15	10K Ω	S 710	013-6305-50	SKQMAH
D 720	001-0516-90	MA111	R 703	119-1031-15	10K Ω	S 711	013-6305-50	SKQMAH
D 721	001-0516-90	MA111	R 704	119-1031-15	10K Ω	S 712	013-6305-50	SKQMAH
L 701	010-2174-78	220 μ H	R 706	119-1041-15	100K Ω	S 713	013-6305-50	SKQMAH
C 701	168-1522-55	1500P	R 707	119-1041-15	100K Ω	S 715	013-6305-50	SKQMAH
C 702	166-1011-50	100P	R 708	119-1041-15	100K Ω	S 716	013-6305-50	SKQMAH
C 703	043-0318-90	5600P	R 709	119-1041-15	100K Ω	S 717	013-6305-50	SKQMAH
C 704	043-0318-90	5600P	R 710	119-1041-15	100K Ω	S 718	013-6305-50	SKQMAH
C 705	043-0318-90	5600P	R 711	119-1031-15	10K Ω	S 719	013-6305-50	SKQMAH
C 706	043-0318-90	5600P	R 712	119-1011-15	100 Ω	S 723	013-6305-50	SKQMAH
C 707	043-0318-90	5600P	R 713	119-1021-15	1K Ω	S 724	013-6305-50	SKQMAH
C 708	043-0318-90	5600P	R 714	119-1521-15	1.5K Ω	S 725	013-6305-50	SKQMAH
C 709	043-0318-90	5600P	R 715	119-1521-15	1.5K Ω	S 726	013-6305-50	SKQMAH
C 710	043-0318-90	5600P	R 716	119-1021-15	1K Ω	VR 701	016-9900-81	VR
C 711	043-0318-90	5600P	R 717	119-2421-15	2.4K Ω	VR 702	016-9900-80	VR

D/D CON PWB section (B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 401	051-6368-08	M65849BFP	D 603	001-0466-91	S5688G	L 401	010-2230-38	220 μ H
IC 402	051-5021-90	M62415FP	D 604	001-0466-91	S5688G	L 402	010-2230-38	220 μ H
IC 601	051-2031-31	LA4763	D 605	001-0466-91	S5688G	L 601	010-8020-01	CHOKE
Q 401	125-2004-96	RN1406	D 606	001-0466-91	S5688G	L 851	010-3058-57	47 μ H
Q 402	125-2004-96	RN1406	D 607	001-0466-91	S5688G	L 852	010-2230-38	220 μ H
Q 403	125-2004-96	RN1406	D 608	001-0466-91	S5688G	C 404	042-0563-71	16V 100 μ F
Q 404	125-2004-96	RN1406	D 609	001-0466-91	S5688G	C 413	042-0563-71	16V 100 μ F
Q 851	191-1243-00	2SB1243	D 851	001-0644-90	MA113	C 415	042-0458-53	50V 2.2 μ F(LN)
Q 852	192-2713-00	2SC2713	D 852	001-0347-55	MA4120L	C 416	042-0458-53	50V 2.2 μ F(LN)
Q 853	192-2712-00	2SC2712	D 853	001-0347-69	MA4180M	C 417	183-4753-57	35V 4.7 μ F
D/DPACK	060-6019-00	DC-DC CONVERTER	D 854	001-0516-90	MA111	C 418	183-1063-37	16V 10 μ F
D 601	001-0592-00	RM4Z	D 855	001-0516-90	MA111	C 421	168-4712-55	470P
D 602	001-0466-91	S5688G	D 856	001-0516-90	MA111	C 422	168-4732-78	0.047 μ F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 423	166-3301-50	33P	C 610	172-3331-15	0.033 u F	R 604	119-4721-15	4.7K Ω
C 424	168-1522-55	1500P	C 612	172-2231-15	0.022 u F	R 861	111-1831-98	1/4W 18K Ω
C 425	183-1063-37	16V 10 u F	C 613	042-0479-00	16V 2200 u F	R 871	111-1521-98	1/4W 1.5K Ω
C 426	183-1063-37	16V 10 u F	C 623	183-1053-67	50V 1 u F	R 872	111-1521-98	1/4W 1.5K Ω
C 427	168-1522-55	1500P	C 624	183-1053-67	50V 1 u F	R 873	119-4721-15	4.7K Ω
C 428	166-3301-50	33P	C 625	168-4722-55	4700P	R 874	119-4721-15	4.7K Ω
C 429	168-4732-78	0.047 u F	C 626	168-4722-55	4700P	R 875	111-1031-98	1/4W 10K Ω
C 430	168-4712-55	470P	C 627	168-4722-55	4700P	R 876	119-4731-15	47K Ω
C 431	168-4745-79	0.47 u F	C 861	042-0393-00	35V 100 u F	R 878	119-4721-15	4.7K Ω
C 432	168-6822-55	6800P	C 862	042-9034-00	63V 47 u F	R 879	119-1021-15	1K Ω
C 433	183-1063-37	16V 10 u F	C 863	043-0523-50	0.1 u F	R 880	119-2231-15	22K Ω
C 434	183-4763-37	16V 47 u F	C 864	042-9034-00	63V 47 u F	CN 107	074-0881-17	OUTLET SOCKET
C 605	183-4763-37	16V 47 u F	R 402	119-6821-15	6.8K Ω	CN 108	074-0881-06	OUTLET SOCKET
C 606	183-2263-37	16V 22 u F	R 403	119-6821-15	6.8K Ω	CN 109	854-4529-50	CNNT
C 607	172-3331-15	0.033 u F	R 601	119-4721-15	4.7K Ω	CN 401	854-4529-51	CNNT
C 608	172-3331-15	0.033 u F	R 602	119-4721-15	4.7K Ω	J 601	074-1214-01	16PIN
C 609	172-3331-15	0.033 u F	R 603	119-4721-15	4.7K Ω			

Tape mechanism Side PWB section (B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 1	175-3311-00	330pF CH	C 13	183-4743-61	50V 0.47 u F	R 7	117-3341-10	1/10W 330K Ω
C 2	175-3311-00	330pF CH	C 14	183-2263-31	16V 22 u F	R 8	117-1131-10	1/10W 11K Ω
C 3	175-3311-00	330pF CH	C 15	183-4753-51	35V 4.7 u F	R 9	117-1531-10	1/10W 15K Ω
C 4	175-3311-00	330pF CH	C 16	183-4753-51	35V 4.7 u F	R 10	117-1531-10	1/10W 15K Ω
C 5	183-4763-11	6.3V 47 u F	IC 1	051-1546-10	BA3430S	R 11	117-1131-10	1/10W 11K Ω
C 6	042-0552-02	10V 68 u F	J 1	074-0881-08	8P	R 12	117-3341-10	1/10W 330K Ω
C 7	042-0552-02	10V 68 u F	R 1	111-1241-91	1/4WS 120K Ω	R 13	117-1811-10	1/10W 180 Ω
C 8	173-1231-10	0.012 u F J	R 2	111-1241-91	1/4WS 120K Ω	R 14	117-8211-10	1/10W 820 Ω
C 9	173-1231-10	0.012 u F J	R 3	111-1241-91	1/4WS 120K Ω	R 15	116-2231-10	1/8W 22K Ω
C 10	183-4753-51	35V 4.7 u F	R 4	111-1241-91	1/4WS 120K Ω	R 16	117-1031-10	1/10W 10K Ω
C 11	183-1043-61	50V 0.1 u F	R 5	116-1011-10	1/8W 100 Ω	R 17	117-1031-10	1/10W 10K Ω
C 12	175-5611-00	560pF CH	R 6	116-1011-10	1/8W 100 Ω			

Tape mechanism Rear PWB section (B5)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 102	178-1042-78	0.1 u F	C 113	163-4753-50	35V 4.7 u F	R 103	117-2221-10	1/10W 2.2K Ω
C 103	163-4763-30	16V 47 u F	C 116	163-4763-30	16V 47 u F	R 105	117-1031-10	1/10W 10K Ω
C 107	163-1053-60	50V 1 u F	IC 101	051-5202-00	CCCAX1552M	R 106	117-1031-10	1/10W 10K Ω
C 108	163-1053-60	50V 1 u F	IC 102	051-1014-05	TA7291F	R 107	116-2711-10	1/8WS 270 Ω
C 109	163-4763-30	16V 47 u F	P 101	076-0353-08	8P	S 101	013-3906-00	STMR17
C 110	163-2263-30	16V 22 u F	Q 107	125-2004-03	RN1403	VR 101	012-4318-06	10K Ω VR
C 111	043-0296-50	0.1 u F	R 101	117-1831-10	1/10W 18K Ω	VR 102	012-4318-06	10K Ω VR
C 112	043-0296-50	0.1 u F	R 102	117-1031-10	1/10W 10K Ω			

Tape mechanism Bottom PWB section (B6)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
REF301	051-1776-00	NJL5801K-C	SW 301	013-3953-01	SPPB32	SW302	013-3951-00	HMW0605

■ ELECTRICAL PARTS LIST:

CD mechanism (B7) section

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V 100 uF	C36	176-6801-00	68pFCH	R8	117-1041-10	1/10W 100KΩ
C3	178-1042-78	0.1 uF	C37	176-2201-00	22pFCH	R9	117-1031-10	1/10W 10KΩ
C4	178-2222-78	2200pF	C38	178-1042-78	0.1 uF	R10	117-4731-10	1/10W 47KΩ
C5	178-1042-78	0.1 uF	C39	163-4763-05	4V 47 uF	R12	117-4741-10	1/10W 470KΩ
C6	178-1042-78	0.1 uF	C44	178-2242-78	0.22 uF	R13	117-3331-10	1/10W 33KΩ
C7	178-1042-78	0.1 uF	C45	178-2242-78	0.22 uF	R14	117-3321-10	1/10W 3.3KΩ
C8	176-1501-00	15pFCH	C46	163-4763-10	6.3V 47 uF	R15	117-1031-10	1/10W 10KΩ
C9	176-1501-00	15pFCH	C47	178-8222-78	8200pF	R16	117-3321-10	1/10W 3.3KΩ
C10	176-1201-00	12pFCH	C48	178-1042-78	0.1 uF	R17	117-3321-10	1/10W 3.3KΩ
C11	178-1042-78	0.1 uF	C50	163-1073-10	6.3V 100 uF	R18	117-3321-10	1/10W 3.3KΩ
C13	178-1042-78	0.1 uF	C51	178-1042-78	0.1 uF	R19	117-3321-10	1/10W 3.3KΩ
C14	178-1042-78	0.1 uF	C52	178-2232-78	0.022 uF	R20	117-3321-10	1/10W 3.3KΩ
C15	178-1042-78	0.1 uF	C54	176-2201-00	22pFCH	R21	117-2221-10	1/10W 2.2KΩ
C16	178-1042-78	0.1 uF	C61	178-1042-78	0.1 uF	R22	117-8211-10	1/10W 820KΩ
C17	163-1073-31	16V 100 uF	C63	178-1042-78	0.1 uF	R23	117-9131-10	1/10W 91KΩ
C18	176-4701-00	47pFCH	C64	178-1042-78	0.1 uF	R24	117-1041-10	1/10W 100KΩ
C19	178-1532-78	0.015 uF	C65	178-1042-78	0.1 uF	R25	117-1041-10	1/10W 100KΩ
C20	178-1032-78	0.01 uF	D4	001-0516-00	MA111	R26	117-1841-10	1/10W 180KΩ
C21	178-2722-78	2700pF	IC1	051-5704-00	TA2096FN	R27	117-1841-10	1/10W 180KΩ
C22	178-4722-78	4700pF	IC2	051-6342-00	TC9462F	R28	117-2211-10	1/10W 220Ω
C23	178-1042-78	0.1 uF	IC3	051-6045-08	BA5984FP	R29	117-2201-10	1/10W 22Ω
C24	178-1042-78	0.1 uF	J1	074-1138-66	16P	R30	117-1041-10	1/10W 100KΩ
C25	178-1042-78	0.1 uF	J2	074-1138-06	6P	R31	117-1041-10	1/10W 100KΩ
C26	178-4712-78	470pF	L1	010-2155-93	10 uH	R32	117-1041-10	1/10W 100KΩ
C27	178-4712-78	470pF	L3	010-2199-74	10 uH J	R33	117-1041-10	1/10W 100KΩ
C28	178-4732-78	0.047 uF	Q1	101-1188-50	2SB1188PQR	R34	117-1041-10	1/10W 100KΩ
C29	178-4732-78	0.047 uF	R1	117-2211-10	1/10W 220Ω	R35	117-2241-10	1/10W 220KΩ
C30	178-4732-78	0.047 uF	R2	117-2211-10	1/10W 220Ω	R36	117-1041-10	1/10W 100KΩ
C31	178-4732-78	0.047 uF	R3	117-5611-10	1/10W 560Ω	R37	117-1041-10	1/10W 100KΩ
C32	163-4763-05	4V 47 uF	R4	117-5611-10	1/10W 560Ω	R38	117-8231-10	1/10W 82KΩ
C33	163-4763-05	4V 47 uF	R5	117-4711-10	1/10W 470Ω	R39	117-1841-10	1/10W 180KΩ
C34	176-1801-00	18pFCH	R6	117-3311-10	1/10W 330Ω	X1	061-3500-90	16.920MHz
C35	176-6097-00	6pFCH	R7	117-4721-10	1/10W 4.7KΩ			

Sensor PWB (B8) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F	Q102	060-0252-01	PT4850F	Q103	060-0252-01	PT4850F

Chuck SW PWB (B9) section

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB (B10) (Motor assy/SMA-151-100) section

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11