# 2. EXPLODED VIEWS AND PARTS LIST

*NOTES:* ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *Screws adjacent to ▼ mark on product are used for disassembly.*
● *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

## 2.1 EXTERIOR SECTION

**• Wiring Diagram**



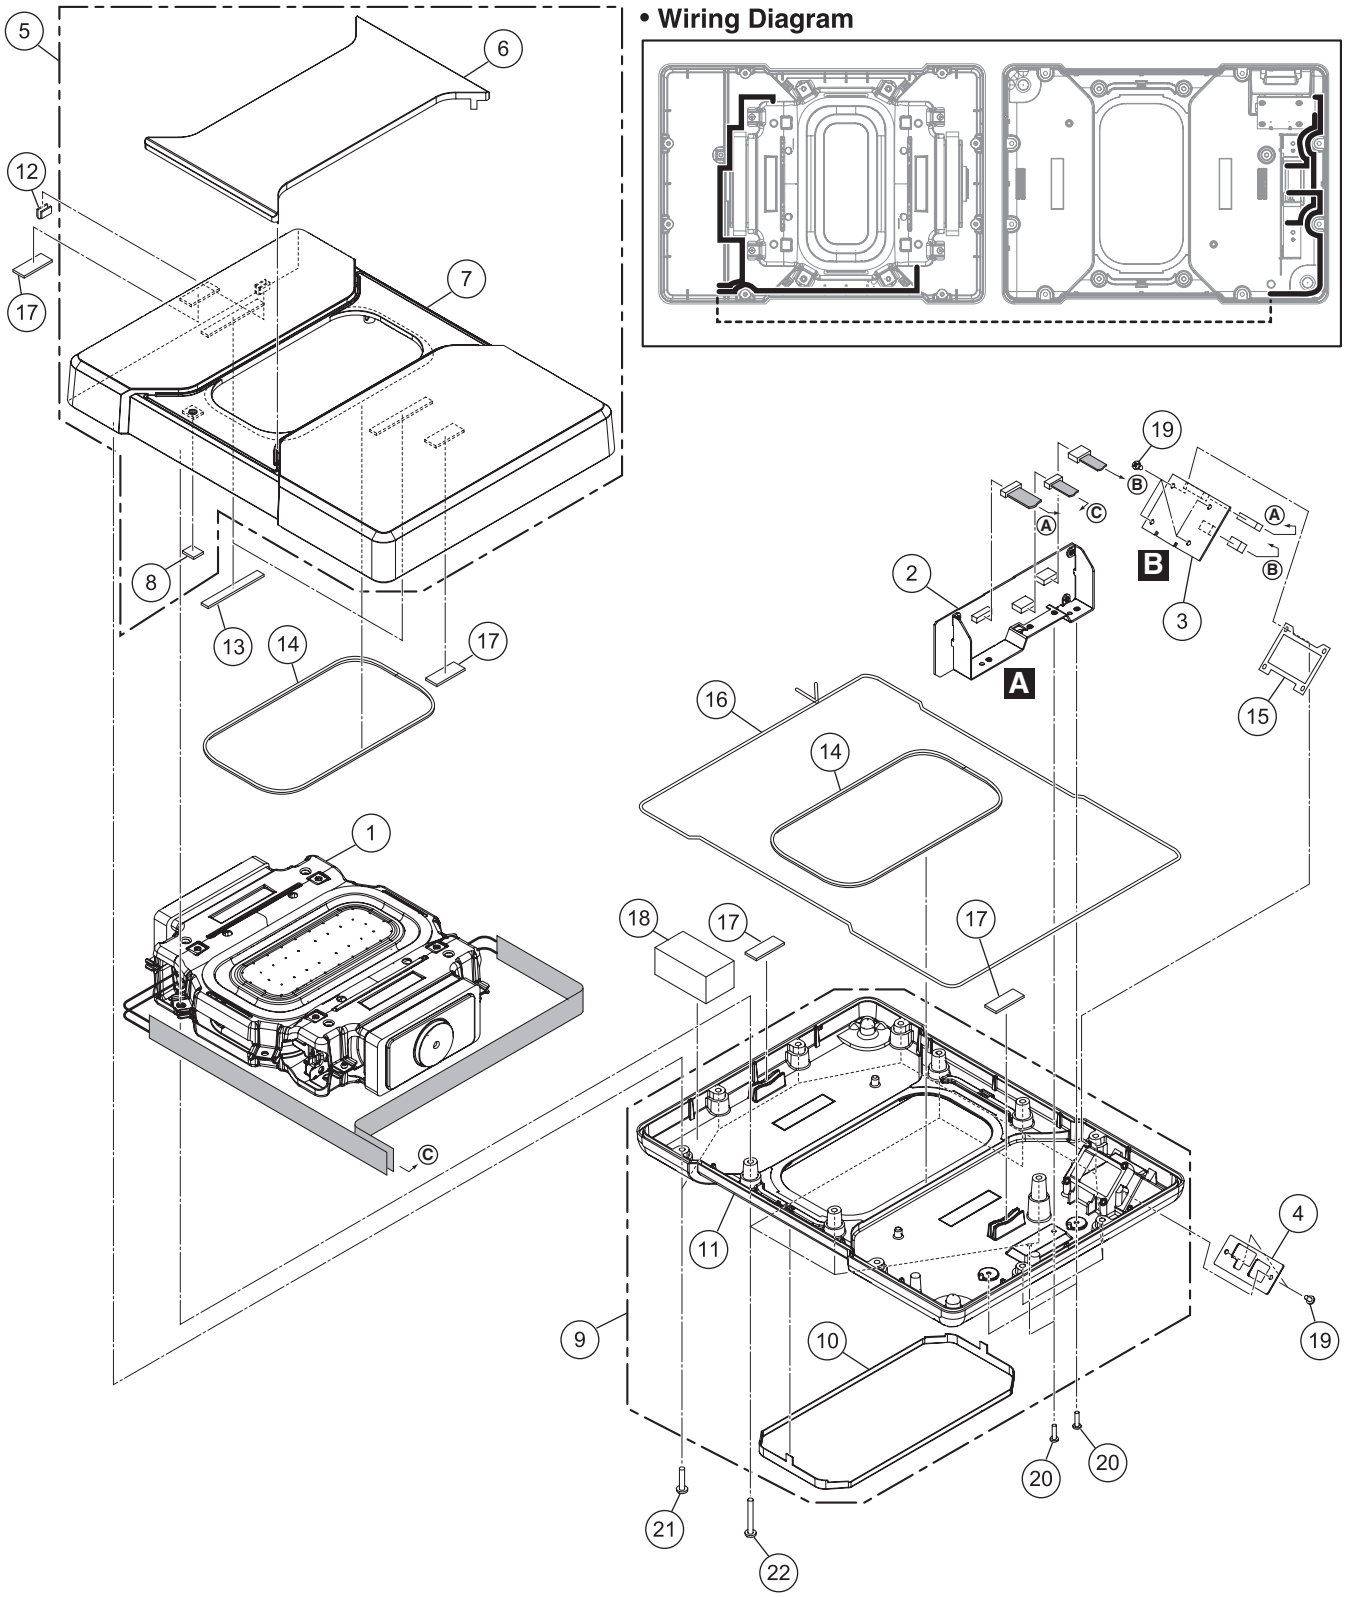

● **Component Parts**

| Mark | No. | Description | Part No. | Remarks |
|---|---|---|---|---|
| | 1 | Speaker | HX210-001CAZ/XMD | x1 |
| | 2 | AMP Unit | TWK1033 | x1 |
| | 3 | IO Unit | TWS1055 | x1 |
| NSP | 4 | Terminal Plate | TAN1207 | x1 |
| | 5 | 1..Baffle Assy | TXL1366 | x1 |
| | 6 | 2..Upper Mesh | TLL1727 | x1 |
| | 7 | 2..Upper Cabinet | TLM1974 | x1 |
| NSP | 8 | 2..Packing B | TEB1740 | x1 |
| | 9 | 1..Baffle Assy | TXL1367 | x1 |
| | 10 | 2..Bottom Mesh | TLL1728 | x1 |
| | 11 | 2..Bottom Cabinet | TLM1973 | x1 |
| | 12 | Packing C | TEB1735 | x1 |
| | 13 | Cushion | TEB1736 | x2 |
| | 14 | Packing A | TEB1738 | x2 |
| | 15 | Packing E | TEB1739 | x1 |
| | 16 | Silicon Tube | TEB1734 | x1 |
| | 17 | Packing D | TEB1742 | x4 |
| | 18 | Absorbent | TED2865 | x1 |
| | 19 | Screw | BMZ30P060FTB | x6 |
| | 20 | Screw | BMZ30P120FTB | x4 |
| | 21 | Screw | BPZ40P200FTB | x8 |
| | 22 | Screw | BPZ40P300FTB | x5 |

## 2.2 REMOTE CONTROL UNIT

● **Component Parts**

| Mark | No. | Description | Part No. | Remarks |
|---|---|---|---|---|
| | 1 | Remote Control Unit | TXC1292 | x1 |
| NSP | 2 | SWITCH Unit | TWS1048 | x1 |
| | 3 | Knob | TAA1021 | x2 |
| | 4 | Switch Knob | TAA1022 | x1 |
| | 5 | Cabinet | TLM1891 | x1 |
| | 6 | Bracket | TNA1764 | x1 |
| | 7 | Grille Assy | TXK1816 | x1 |
| NSP | 8 | Wire Clip | TEX1013 | x1 |
| | 9 | Screw | BPZ26P070FTC | x2 |
| | 10 | Screw | BPZ26P100FTB | x3 |

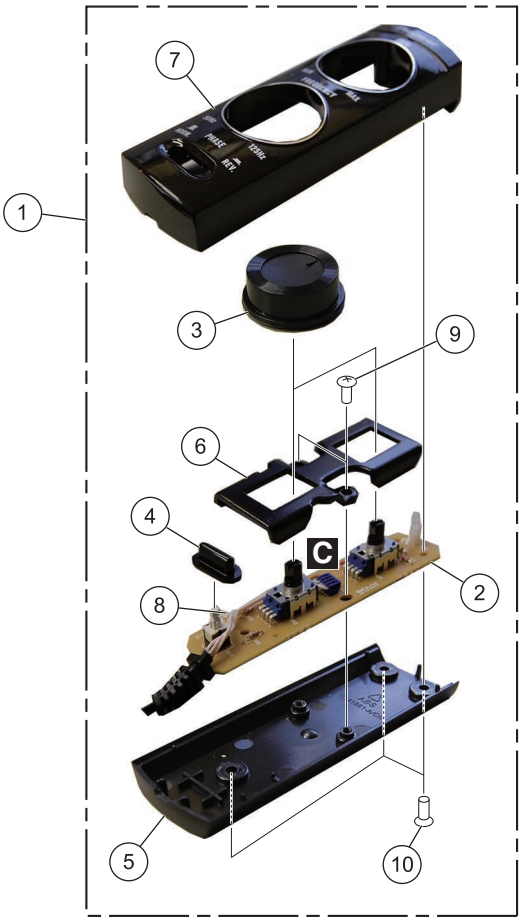

| Mark | No. | Description | Part No. | Remarks |
|---|---|---|---|---|
| | 1 | Fitting | TNA2189 | x2 |
| | 2 | Installation Kit | TEA2418 | x1 |
| | | 2-1..Screw | OMZ50P100FTB | x2 |
| | | 2-2..Screw | BNC50P180FTB | x2 |
| | | 2-3..Hook-and-Loop fastener | TED1850 | x1 |
| | | 2-4..Cord Clamper | TNA1708 | x1 |
| | | 2-5..Screw | BMZ30P080FTB | x2 |
| | 3 | Cord | TXH1812 | x1 |
| | 4 | Cord | TXH1800 | x1 |
| | | Operating Instructions | TRD1436 | x1 |
| NSP | | Warranty | CRY1376 | x1 |

● **PARTS INCLUDED**

1 ① TNA2189 ×2

2
- 2-1 ② (M5 mm×10 mm) OMZ50P100FTB ×2
- 2-2 ③ (ϕ5 mm×18 mm) BNC50P180FTB ×2
- 2-3 ⑦ TED1850  ×1
- 2-4 ⑧ TNA1708  ×1
- 2-5 ⑧ (M3 mm×8 mm) BMZ30P080FTB ×2

3 ④ 5 m TXH1812  ×1

4 ⑤ 0.4 m TXH1800 ×1

⑥ 6 m TXC1292  ×1

## 2.4 PACKING PARTS LIST

| Mark | No. | Description | Part No. | Remarks |
|---|---|---|---|---|
| | | Protector | TEC2413 | 1 pair |
| | | Packing Case | THF5638 | x1 |