

## Service Manual



DDJ-WEGO4-K

ORDER NO.  
**RRV4663**

### DJ Controller

# DDJ-WEGO4-K DDJ-WEGO4-W

This unit is designed based on the DDJ-WEGO3 model. The major difference is as follows.

- The connecting terminal to the iOS device is changed from 13 pin to USB A.  
The connecting cable to use is changed from the exclusive cable of unit accessory to the cable of iOS device accessory.
- The surface treatment of Aluminum panel and JOG plate is changed. JOG dial painting color is changed.
- EQ knob is changed from HI/MID/LOW 3 band to HI/LOW 2 band and Color FX Filter.
- The signal processing of the MIC is changed from Analog MIX to Digital MIX.

This service manual contains the difference between this model and DDJ-WEGO3 about each item separately.


Refer to the service manual of DDJ-WEGO3 about the contents that is not described in this service manual.

### THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

| Model          | Type   | Power Requirement | Remarks |
|----------------|--------|-------------------|---------|
| DDJ-WEGO4-K, W | SYXJ   | AC 220 V to 240 V |         |
| DDJ-WEGO4-K, W | UXJCB  | AC 120 V          |         |
| DDJ-WEGO4-K, W | LWPWXJ | AC 110 V to 240 V |         |
| DDJ-WEGO4-K, W | AXJ    | AC 220 V          |         |

### THIS SERVICE MANUAL SHOULD BE USED TOGETHER WITH THE FOLLOWING MANUAL(S).

| Model             | Order No. | Remarks |
|-------------------|-----------|---------|
| DDJ-WEGO3-K, W, R | RRV4567   |         |

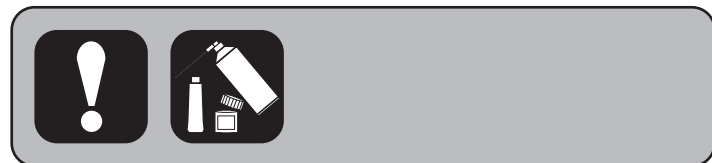

**Pioneer DJ Corporation**

6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 JAPAN

NOTES:

- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screws adjacent to ▼ mark on product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

DDJ-WEGO3-K/SYXJ5 and DDJ-WEGO4-K/SYXJ, UXJCB, LWPWXJ and AXJ are constructed the same except for the following:

| Mark | No. | Symbol and Description                                                      | DDJ-WEGO3-K/SYXJ5 | DDJ-WEGO4-K/SYXJ | DDJ-WEGO4-K/UXJCB | Remaks |
|------|-----|-----------------------------------------------------------------------------|-------------------|------------------|-------------------|--------|
| B    | 1   | Power Cord                                                                  | ADG1154           | ADG1154          | XDG3052           |        |
|      | 2   | AC Adapter                                                                  | DWR1546           | DWR1551          | DWR1552           |        |
|      | 4   | iPhone/iPad Connection Cable (Lightning)                                    | DDE1145           | Not used         | Not used          |        |
|      | 5   | Operating Instructions (DJ unit Setup) (En, Fe, De, It, NI)                 | DRH1287           | Not used         | Not used          |        |
|      | 6   | Operating Instructions (DJ unit Setup) (Es, Pt, Ru, Ko, Ja)                 | DRH1288           | Not used         | Not used          |        |
|      | 9   | Pad/L                                                                       | DHA1918           | DHA1957          | DHA1957           |        |
|      | 10  | Pad/R                                                                       | DHA1919           | DHA1958          | DHA1958           |        |
|      | 11  | Partition/ACC                                                               | DHC1086           | DHC1097          | DHC1097           |        |
|      | 12  | Packing Case                                                                | DHG3373           | Not used         | Not used          |        |
|      |     | Operating Instructions (Quick Start Guide) (En, Fr, De, It, NI, Es, Pt, Ru) | Not used          | DRH1405          | Not used          | No.17  |
|      |     | Operating Instructions (Quick Start Guide) (En)                             | Not used          | Not used         | DRH1404           | No.18  |
|      |     | Operating Instructions (Quick Start Guide) (En, Es)                         | Not used          | Not used         | Not used          | No.19  |
| C    |     | Operating Instructions (Quick Start Guide) (Zhcn)                           | Not used          | Not used         | Not used          | No.20  |
|      |     | Packing Case                                                                | Not used          | DHG3497          | DHG3497           | No.21  |
|      |     | Packing Case                                                                | Not used          | DHG3503          | DHG3498           | No.22  |
|      |     | Master carton                                                               | DHG3387           | DHG3512          | DHG3499           | No.23  |
|      | NSP | Leaflet                                                                     | DRH1376           | Not used         | Not used          | No.24  |
|      | NSP | Leaflet                                                                     | DRM1402           | DRM1410          | DRM1410           | No.25  |
|      | NSP | Leaflet                                                                     | DRM1403           | DRM1417          | DRM1417           | No.26  |
|      | NSP | Label                                                                       | DRW2690           | Not used         | Not used          | No.27  |
|      | NSP | Label                                                                       | DRW2702           | Not used         | Not used          | No.28  |
|      | NSP | Label                                                                       | Not used          | Not used         | Not used          | No.29  |
|      | NSP | Warranty                                                                    | DRY1270           | DRY1270          | Not used          | No.30  |
|      | NSP | ERRATA                                                                      | Not used          | DRM1418          | DRM1418           | No.31  |
| E    | NSP | rekordbox dj license key label                                              | Not used          | DXA2304          | DXA2304           | No.32  |
|      | NSP | VirtualDJ LE 8 license key label                                            | Not used          | DXA2328          | DXA2328           | No.33  |

| Mark | No. | Symbol and Description                                                      | DDJ-WEGO3-K/SYXJ5 | DDJ-WEGO4-K/LWPWXJ | DDJ-WEGO4-K/AXJ | Remarks |
|------|-----|-----------------------------------------------------------------------------|-------------------|--------------------|-----------------|---------|
| ⚠    | 1   | Power Cord                                                                  | ADG1154           | ADG1154            | ADG7079         |         |
|      | 2   | AC Adapter                                                                  | DWR1546           | DWR1551            | DWR1551         |         |
|      | 4   | iPhone/iPad Connection Cable (Lightning)                                    | DDE1145           | Not used           | Not used        |         |
|      | 5   | Operating Instructions (DJ unit Setup) (En, Fe, De, It, NI)                 | DRH1287           | Not used           | Not used        |         |
|      | 6   | Operating Instructions (DJ unit Setup) (Es, Pt, Ru, Ko, Ja)                 | DRH1288           | Not used           | Not used        |         |
|      | 9   | Pad/L                                                                       | DHA1918           | DHA1957            | DHA1957         |         |
|      | 10  | Pad/R                                                                       | DHA1919           | DHA1958            | DHA1958         |         |
|      | 11  | Partition/ACC                                                               | DHC1086           | DHC1097            | DHC1097         |         |
|      | 12  | Packing Case                                                                | DHG3373           | Not used           | Not used        |         |
|      |     | Operating Instructions (Quick Start Guide) (En, Fr, De, It, NI, Es, Pt, Ru) | Not used          | Not used           | Not used        | No.17   |
|      |     | Operating Instructions (Quick Start Guide) (En)                             | Not used          | Not used           | Not used        | No.18   |
|      |     | Operating Instructions (Quick Start Guide) (En, Es)                         | Not used          | DRH1407            | Not used        | No.19   |
| NSP  |     | Operating Instructions (Quick Start Guide) (Zhcn)                           | Not used          | Not used           | DRH1409         | No.20   |
|      |     | Packing Case                                                                | Not used          | DHG3497            | DHG3501         | No.21   |
|      |     | Packing Case                                                                | Not used          | DHG3504            | DHG3506         | No.22   |
|      |     | Master carton                                                               | DHG3387           | DHG3513            | DHG3515         | No.23   |
|      |     | Leaflet                                                                     | DRH1376           | Not used           | Not used        | No.24   |
|      |     | Leaflet                                                                     | DRM1402           | DRM1410            | DRM1410         | No.25   |
|      |     | Leaflet                                                                     | DRM1403           | DRM1417            | DRM1417         | No.26   |
|      |     | Label                                                                       | DRW2690           | Not used           | Not used        | No.27   |
|      |     | Label                                                                       | DRW2702           | Not used           | Not used        | No.28   |
|      |     | Label                                                                       | Not used          | Not used           | DRW2711         | No.29   |
|      |     | Warranty                                                                    | DRY1270           | Not used           | Not used        | No.30   |
|      |     | ERRATA                                                                      | Not used          | DRM1418            | DRM1418         | No.31   |
| NSP  |     | rekordbox dj license key label                                              | Not used          | DXA2304            | DXA2304         | No.32   |
|      |     | VirtualDJ LE 8 license key label                                            | Not used          | DXA2328            | DXA2328         | No.33   |

DDJ-WEGO3-W/SYXJ5 and DDJ-WEGO4-W/SYXJ, UXJCB, LWPWXJ and AXJ are constructed the same except for the following:

| Mark | No. | Symbol and Description                                                      | DDJ-WEGO3-W/SYXJ5 | DDJ-WEGO4-W/SYXJ | DDJ-WEGO4-W/UXJCB | Remaks |
|------|-----|-----------------------------------------------------------------------------|-------------------|------------------|-------------------|--------|
| A    | 1   | Power Cord                                                                  | ADG1154           | ADG1154          | XDG3052           |        |
|      | 2   | AC Adapter                                                                  | DWR1546           | DWR1551          | DWR1552           |        |
|      | 4   | iPhone/iPad Connection Cable (Lightning)                                    | DDE1145           | Not used         | Not used          |        |
|      | 5   | Operating Instructions (DJ unit Setup) (En, Fe, De, It, NI)                 | DRH1287           | Not used         | Not used          |        |
|      | 6   | Operating Instructions (DJ unit Setup) (Es, Pt, Ru, Ko, Ja)                 | DRH1288           | Not used         | Not used          |        |
|      | 9   | Pad/L                                                                       | DHA1918           | DHA1957          | DHA1957           |        |
|      | 10  | Pad/R                                                                       | DHA1919           | DHA1958          | DHA1958           |        |
|      | 11  | Partition/ACC                                                               | DHC1086           | DHC1097          | DHC1097           |        |
|      | 12  | Packing Case                                                                | DHG3369           | Not used         | Not used          |        |
|      |     | Operating Instructions (Quick Start Guide) (En, Fr, De, It, NI, Es, Pt, Ru) | Not used          | DRH1405          | Not used          | No.17  |
|      |     | Operating Instructions (Quick Start Guide) (En)                             | Not used          | Not used         | DRH1404           | No.18  |
|      |     | Operating Instructions (Quick Start Guide) (En, Es)                         | Not used          | Not used         | Not used          | No.19  |
| B    |     | Operating Instructions (Quick Start Guide) (Zhcn)                           | Not used          | Not used         | Not used          | No.20  |
|      |     | Packing Case                                                                | Not used          | DHG3500          | DHG3500           | No.21  |
|      |     | Packing Case                                                                | Not used          | DHG3508          | DHG3507           | No.22  |
|      |     | Master carton                                                               | DHG3387           | DHG3517          | DHG3516           | No.23  |
|      | NSP | Leaflet                                                                     | DRH1376           | Not used         | Not used          | No.24  |
|      | NSP | Leaflet                                                                     | DRM1402           | DRM1410          | DRM1410           | No.25  |
|      | NSP | Leaflet                                                                     | DRM1403           | DRM1417          | DRM1417           | No.26  |
|      | NSP | Label                                                                       | DRW2690           | Not used         | Not used          | No.27  |
|      | NSP | Label                                                                       | DRW2702           | Not used         | Not used          | No.28  |
|      | NSP | Label                                                                       | Not used          | Not used         | Not used          | No.29  |
|      | NSP | Warranty                                                                    | DRY1270           | DRY1270          | Not used          | No.30  |
|      | NSP | ERRATA                                                                      | Not used          | DRM1418          | DRM1418           | No.31  |
| C    | NSP | rekordbox dj license key label                                              | Not used          | DXA2304          | DXA2304           | No.32  |
|      | NSP | VirtualDJ LE 8 license key label                                            | Not used          | DXA2328          | DXA2328           | No.33  |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
| D    |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
| E    |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
| F    |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |
|      |     |                                                                             |                   |                  |                   |        |

| Mark | No. | Symbol and Description                                                      | DDJ-WEGO3-W/SYXJ5 | DDJ-WEGO4-W/LWPWXJ | DDJ-WEGO4-W/AXJ | Remarks |
|------|-----|-----------------------------------------------------------------------------|-------------------|--------------------|-----------------|---------|
| ⚠    | 1   | Power Cord                                                                  | ADG1154           | ADG1154            | ADG7079         |         |
|      | 2   | AC Adapter                                                                  | DWR1546           | DWR1551            | DWR1551         |         |
|      | 4   | iPhone/iPad Connection Cable (Lightning)                                    | DDE1145           | Not used           | Not used        |         |
|      | 5   | Operating Instructions (DJ unit Setup) (En, Fe, De, It, NI)                 | DRH1287           | Not used           | Not used        |         |
|      | 6   | Operating Instructions (DJ unit Setup) (Es, Pt, Ru, Ko, Ja)                 | DRH1288           | Not used           | Not used        |         |
|      | 9   | Pad/L                                                                       | DHA1918           | DHA1957            | DHA1957         |         |
|      | 10  | Pad/R                                                                       | DHA1919           | DHA1958            | DHA1958         |         |
|      | 11  | Partition/ACC                                                               | DHC1086           | DHC1097            | DHC1097         |         |
|      | 12  | Packing Case                                                                | DHG3369           | Not used           | Not used        |         |
|      |     | Operating Instructions (Quick Start Guide) (En, Fr, De, It, NI, Es, Pt, Ru) | Not used          | Not used           | Not used        | No.17   |
|      |     | Operating Instructions (Quick Start Guide) (En)                             | Not used          | Not used           | Not used        | No.18   |
|      |     | Operating Instructions (Quick Start Guide) (En, Es)                         | Not used          | DRH1407            | Not used        | No.19   |
| NSP  |     | Operating Instructions (Quick Start Guide) (Zhcn)                           | Not used          | Not used           | DRH1409         | No.20   |
|      |     | Packing Case                                                                | Not used          | DHG3500            | DHG3502         | No.21   |
|      |     | Packing Case                                                                | Not used          | DHG3509            | DHG3511         | No.22   |
|      |     | Master carton                                                               | DHG3387           | DHG3518            | DHG3520         | No.23   |
|      |     | Leaflet                                                                     | DRH1376           | Not used           | Not used        | No.24   |
|      |     | Leaflet                                                                     | DRM1402           | DRM1410            | DRM1410         | No.25   |
|      |     | Leaflet                                                                     | DRM1403           | DRM1417            | DRM1417         | No.26   |
|      |     | Label                                                                       | DRW2690           | Not used           | Not used        | No.27   |
|      |     | Label                                                                       | DRW2702           | Not used           | Not used        | No.28   |
|      |     | Label                                                                       | Not used          | Not used           | DRW2712         | No.29   |
|      |     | Warranty                                                                    | DRY1270           | Not used           | Not used        | No.30   |
|      |     | ERRATA                                                                      | Not used          | DRM1418            | DRM1418         | No.31   |
| NSP  |     | rekordbox dj license key label                                              | Not used          | DXA2304            | DXA2304         | No.32   |
|      |     | VirtualDJ LE 8 license key label                                            | Not used          | DXA2328            | DXA2328         | No.33   |



# 12. PCB PARTS LIST

- NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.  
 ● The  $\Delta$  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.  
 ● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560  $\Omega$   $\rightarrow$   $56 \times 10^1$   $\rightarrow$  561 ..... RD1/4PU  $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} J$   
 47 k $\Omega$   $\rightarrow$   $47 \times 10^3$   $\rightarrow$  473 ..... RD1/4PU  $\begin{bmatrix} 4 \\ 7 \end{bmatrix} \begin{bmatrix} 3 \\ 0 \end{bmatrix} J$   
 0.5  $\Omega$   $\rightarrow$  R50 ..... RN2H  $\begin{bmatrix} R \\ 5 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \end{bmatrix} K$   
 1  $\Omega$   $\rightarrow$  1R0 ..... RSIP  $\begin{bmatrix} 1 \\ R \end{bmatrix} \begin{bmatrix} 0 \\ 0 \end{bmatrix} K$

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k $\Omega$   $\rightarrow$   $562 \times 10^1$   $\rightarrow$  5621 ..... RN1/4PC  $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 2 \\ 1 \end{bmatrix} F$

| Mark No.                  | Description      | Part No. | Mark No. | Description      | Part No. |
|---------------------------|------------------|----------|----------|------------------|----------|
| <b>LIST OF ASSEMBLIES</b> |                  |          |          |                  |          |
|                           | 1..MAIN ASSY     | DWX3933  | NSP      | 1..PNL2 ASSY     | DWM2544  |
|                           |                  |          |          | 2..PNL2B ASSY *2 | DWX3595  |
| NSP                       | 1..PNL1 ASSY     | DWM2543  | NSP      | 2..JOG2 ASSY *2  | DWX3596  |
|                           | 2..PNL1B ASSY *1 | DWX3592  |          |                  |          |
| NSP                       | 2..JOG1 ASSY *1  | DWX3593  |          |                  |          |
|                           | 2..HPJK ASSY     | DWX3594  |          |                  |          |
|                           | 2..CRFD ASSY     | DWX3597  |          |                  |          |

\*1: As the PNL1B Assy and JOG1 Assy are wired with jumper leads.

If a DWX3592 (PNL1B Assy) is ordered, the PNL1B Assy and JOG1 Assy wired with jumper leads will be delivered.  
 The part supply is impossible in JOG1 Assy alone (NSP: non-service part).

\*2: As the PNL2B Assy and JOG2 Assy are wired with jumper leads.

If a DWX3595 (PNL2B Assy) is ordered, the PNL2B Assy and JOG2 Assy wired with jumper leads will be delivered.  
 The part supply is impossible in JOG2 Assy alone (NSP: non-service part).

| Mark No.              | Description       | Part No.        | Mark No.   | Description     | Part No.   |
|-----------------------|-------------------|-----------------|------------|-----------------|------------|
| <b>AF MAIN ASSY</b>   |                   |                 |            |                 |            |
| <b>SEMICONDUCTORS</b> |                   |                 |            |                 |            |
| $\Delta$              | IC 201,205        | BD9328EFJ       | Q          | 127,224,225     | RN1903S1   |
| $\Delta$              | IC 202,208,211    | MM3411A33N      | Q          | 201,205,211,218 | LTC024EEB  |
| $\Delta$              | IC 203            | S-1172B1C-U5    | Q          | 207,209,213,713 | LSAR523UB  |
| $\Delta$              | IC 204,210        | MM1856A50N      | Q          | 216,219,411,705 | LSCR523UB  |
| $\Delta$              | IC 206            | TPS2557DRB      | $\Delta$ Q | 401             | RTQ045N03  |
|                       |                   |                 | Q          | 403,406,409,704 | LTC024EEB  |
|                       |                   |                 | Q          | 407,408,412     | RN4983S1   |
| $\Delta$              | IC 207            | NJM2392M        | Q          | 413             | LTC124EUB  |
|                       | IC 209            | S-80942CNMC-G9C | Q          | 706,711         | LSCR523UB  |
| NSP                   | IC 401            | R5S72690RW266FP | Q          | 707,708         | IMX9       |
|                       | IC 402            | DYW1961         | Q          | 710,720         | LTC024EEB  |
|                       | IC 403            | H337S3959       | Q          | 712             | LTA024EEB  |
|                       | IC 404            | S-80927CNMC-G8X | D          | 101,203,206,210 | RB551VM-30 |
|                       | IC 405            | TS3USB30RSW     | D          | 104,111         | RB060M-30  |
|                       | IC 407,408        | 74VHC4051AFT    | $\Delta$ D | 106,108,112,115 | DA2J101    |
|                       | IC 701,703        | AK4387ET        | D          | 107             | RB060M-30  |
|                       | IC 702            | NJM4565MD       | D          | 110             | DZ2J150M0  |
|                       | IC 705            | NJM4580MD       | D          | 113,218         | DZ2J051M0  |
|                       | IC 706            | BH3547F         | D          | 114,214         | DAN202UM   |
|                       | IC 708            | AK5358AET       | D          | 119,202,212,215 | DA2J101    |
| Q                     | 101,115,202,206   | LSCR523UB       | D          | 123,124         | DZ2J062M0  |
| Q                     | 103,402,410,709   | LTA024EEB       | $\Delta$ D | 207-209         | RB551VM-30 |
| $\Delta$              | Q 105,112,113,203 | RTQ040P02       | D          | 216             | DZ2J075M0  |
| $\Delta$              | Q 107,116         | RSQ035P03       | D          | 217,401,404,702 | DA2J101    |
|                       | Q 108,111,114,128 | LTC024EEB       | D          | 219-221         | DZ2J056M0  |
|                       |                   |                 | D          | 222,705,708     | RB551VM-30 |
|                       |                   |                 | D          | 704             | DA2J101    |

**Mark No. Description****Part No.****Mark No. Description****Part No.****MISCELLANEOUS**

A

L 104,105 COIL ATH7015  
 L 202 INDUCTOR CTH1253  
 L 205 POWER INDUCTOR ATH7053  
 L 206 COIL CTH1475  
 L 402-405 INDUCTOR CTF1793

L 406-409 INDUCTOR CTF1545  
 L 704-709,727 INDUCTOR CTF1778  
 L 710 INDUCTOR CTF1786  
 JA 101 USB CONNECTOR DKN1237  
 JA 102 DC POWER JACK DKN1649

B

JA 106 USB JACK DKB1118  
 JA 702 PIN JACK(2P) AKB7181  
 JA 703 6.5 DIA JACK DKN1653  
 KN 106 SCREW PLATE VNE1948  
 KN 107 HOLDER DNH3290

X 401 CRYSTAL RESONATOR CSS1840  
 X 402 RESONATOR CSS1760  
 X 403 CRYSTAL(24.576MHZ) DSS1204  
 CN 101,102 39P CONNECTOR VKN2098  
 CN 103 15P CONNECTOR VKN1275

C



JH 101 7P CABLE HOLDER 51048-0700  
 JP 101 JUMPER WIRE D20PDY0720E  
 JP 102 BOARD IN JUMPER/3P DKP3957  
 P 101 PROTECTOR(1.250A) DEK1123  
 P 102 PROTECTOR(3.000A) DEK1103



P 203 PROTECTOR(0.500A) DEK1095  
 VA 103,701,702 VARISTORS EZJZ1V270RM

**RESISTORS**

R 101,110 RS1/10SR101J  
 R 103,138 RS1/10SR1801D  
 R 113,116,119,202 RS1/10SR103J  
 R 120,737,738,774 RS1/10SR473J  
 R 121,206,528 RS1/10SR104J

D

R 134,145 RS1/16SS2702D  
 R 148,153,154,208 RS1/10SR0R0J  
 R 207,250 RS1/10SR220J  
 R 218,248,401,402 RS1/10SR0R0J  
 R 219,252 RS1/4SA100J

R 221 RS1/16SS8200D  
 R 222 RS1/16SS4702D  
 R 223,242 RS1/16SS1002D  
 R 224,226 RS1/4SA1R5J  
 R 231 RS1/4SA271J

E

R 232 RS1/10SR221J  
 R 234 RS1/16SS4302D  
 R 238 RS1/16SS1201D  
 R 240 RS1/16SS7501D  
 R 241 RS1/16SS3902D

R 243,527,776,777 RS1/10SR102J  
 R 245 RS1/16SS1802F  
 R 246 RS1/16SS3901D  
 R 247,833 RS1/10SR472J  
 R 251 RS1/10SR103J

F

R 259,267 RS1/4SA0R0J  
 R 260 RS1/4SA471J  
 R 292 RS1/8SQ0R0J  
 R 304 RS1/16SS39R0D  
 R 403,405,507 RAB4CQ560J

R 450 RS1/16SS5601D  
 R 451 RS1/16SS2402D  
 R 467 RAB4CQ472J  
 R 506 RAB4CQ221J  
 R 545,761,790 RS1/10SR0R0J

R 707 RS1/10SR1501D  
 R 709 RS1/10SR6802D  
 R 710 RS1/16SS1801D  
 R 711,794 RS1/16SS3301D  
 R 722,727 RS1/10SR100J

R 724 RS1/16SS9101D  
 R 728,837 RS1/10SR7500D  
 R 740,741 RS1/10SR4701D  
 R 746,747 RS1/10SR271J  
 R 750,751 RS1/10SR1002D

R 752,753 RS1/10SR3301D  
 R 775 RS1/10SR473J  
 R 780,781,783,785 RS1/10SR331J  
 R 836 RS1/10SR1001D  
 Other Resistors RS1/16SS###J

**CAPACITORS**

C 102,116,216,220 CKSRYB103K50  
 C 104,128,204,229 DCH1201  
 C 106,107 CCSSCH470J50  
 C 109 CKSRYB474K16  
 C 111 CKSQYB474K25

C 117,701,781 CKSRYB104K50  
 C 118,122,124,126 CKSRYB104K16  
 C 120,130,254,521 CKSQYB105K25  
 C 125 CKSRYB102K50  
 C 129,201,230,261 CCH1565

C 144,148,152-157 CKSSYB102K50  
 C 145,242,249,285 CKSSYB104K10  
 C 151 CKSQYB104K25  
 C 202,203,231 CCG1221  
 C 205,213,214,218 CKSRYB104K16

C 206,210,211,215 CKSRYB105K10  
 C 209 CKSQYB105K10  
 C 217,226,232,243 CKSRYB105K10  
 C 233,235,236,240 CKSRYB104K16  
 C 234,712,721,731 CEVW470M6R3

C 239,253,255,256 DCH1201  
 C 241,714,716,720 CKSRYB104K16  
 C 244 CCSRCH121J50  
 C 245,250,727,728 CKSRYB103K50  
 C 252,267,270 CEVW471M10

C 257 CCSRCH221J50  
 C 258,719,724 CEVW101M16  
 C 262,274,280,284 CKSRYB105K10  
 C 264,422,425,430 DCH1201  
 C 269 CEVW470M16

C 286,745 CCSSCH221J50  
 C 287,290,729,742 CKSRYB105K10  
 C 401,404 CEHVW470M6R3  
 C 407-421,442,443 CKSSYB103K16  
 C 423,426,429,431 CKSSYB104K10

C 424,427,428,432 CKSSYB102K50  
 C 433,436,439,444 DCH1201  
 C 434,437,440,445 CKSSYB104K10

|      | 5   |                 | 6             | 7 |  | 8 |   |
|------|-----|-----------------|---------------|---|--|---|---|
| Mark | No. | Description     | Part No.      |   |  |   |   |
|      | C   | 435,438,441,446 | CKSSYB102K50  |   |  |   |   |
|      | C   | 448-467,487,491 | CKSSYB103K16  |   |  |   |   |
|      | C   | 468-481,483-486 | CCSSCH101J50  |   |  |   | A |
|      | C   | 482,496,513,514 | CKSSYB471K50  |   |  |   |   |
|      | C   | 492,500,501,504 | CKSSYB103K16  |   |  |   |   |
|      | C   | 493-495,522,523 | CKSSYB104K10  |   |  |   |   |
|      | C   | 497-499,502,503 | CCSSCH101J50  |   |  |   |   |
|      | C   | 505-512         | CCSSCH101J50  |   |  |   |   |
|      | C   | 515-517,519,520 | CCSSCH120J50  |   |  |   |   |
|      | C   | 518             | CCSSCH100D50  |   |  |   |   |
|      | C   | 524,526         | CKSSYB222K50  |   |  |   |   |
|      | C   | 525,527,532,540 | CKSSYB104K10  |   |  |   |   |
|      | C   | 528,529,533-538 | CKSSYB102K50  |   |  |   |   |
|      | C   | 541-546,708,709 | CKSSYB102K50  |   |  |   | B |
|      | C   | 702,715,730,734 | CCSRCH102J50  |   |  |   |   |
|      | C   | 704,749,750     | CCSRCH471J50  |   |  |   |   |
|      | C   | 705             | CKSRYB332K50  |   |  |   |   |
|      | C   | 706,710,747,748 | CKSSYB103K16  |   |  |   |   |
|      | C   | 707             | ACG1147       |   |  |   |   |
|      | C   | 717,718         | CCSRCH222J50  |   |  |   |   |
|      | C   | 722,723,725,726 | CKSRYB104K16  |   |  |   |   |
|      | C   | 732,733,765,804 | DCH1201       |   |  |   |   |
|      | C   | 735,766         | CEVW470M6R3   |   |  |   |   |
|      | C   | 739,740,773,774 | CEVW220M16    |   |  |   |   |
|      | C   | 743,785         | CKSRYB105K10  |   |  |   | C |
|      | C   | 751,752         | CCSRCH101J50  |   |  |   |   |
|      | C   | 753             | CKSQYB475K6R3 |   |  |   |   |
|      | C   | 755,761         | DCH1156       |   |  |   |   |
|      | C   | 782,786         | CCSRCH102J50  |   |  |   |   |
|      | C   | 783,814         | CKSSYB103K16  |   |  |   |   |
|      | C   | 784             | CEVW331M6R3   |   |  |   |   |
|      | C   | 806,809,811     | CKSSYB104K10  |   |  |   |   |
|      | C   | 807             | DCH1263       |   |  |   |   |
|      | C   | 808,810         | DCH1201       |   |  |   | D |