


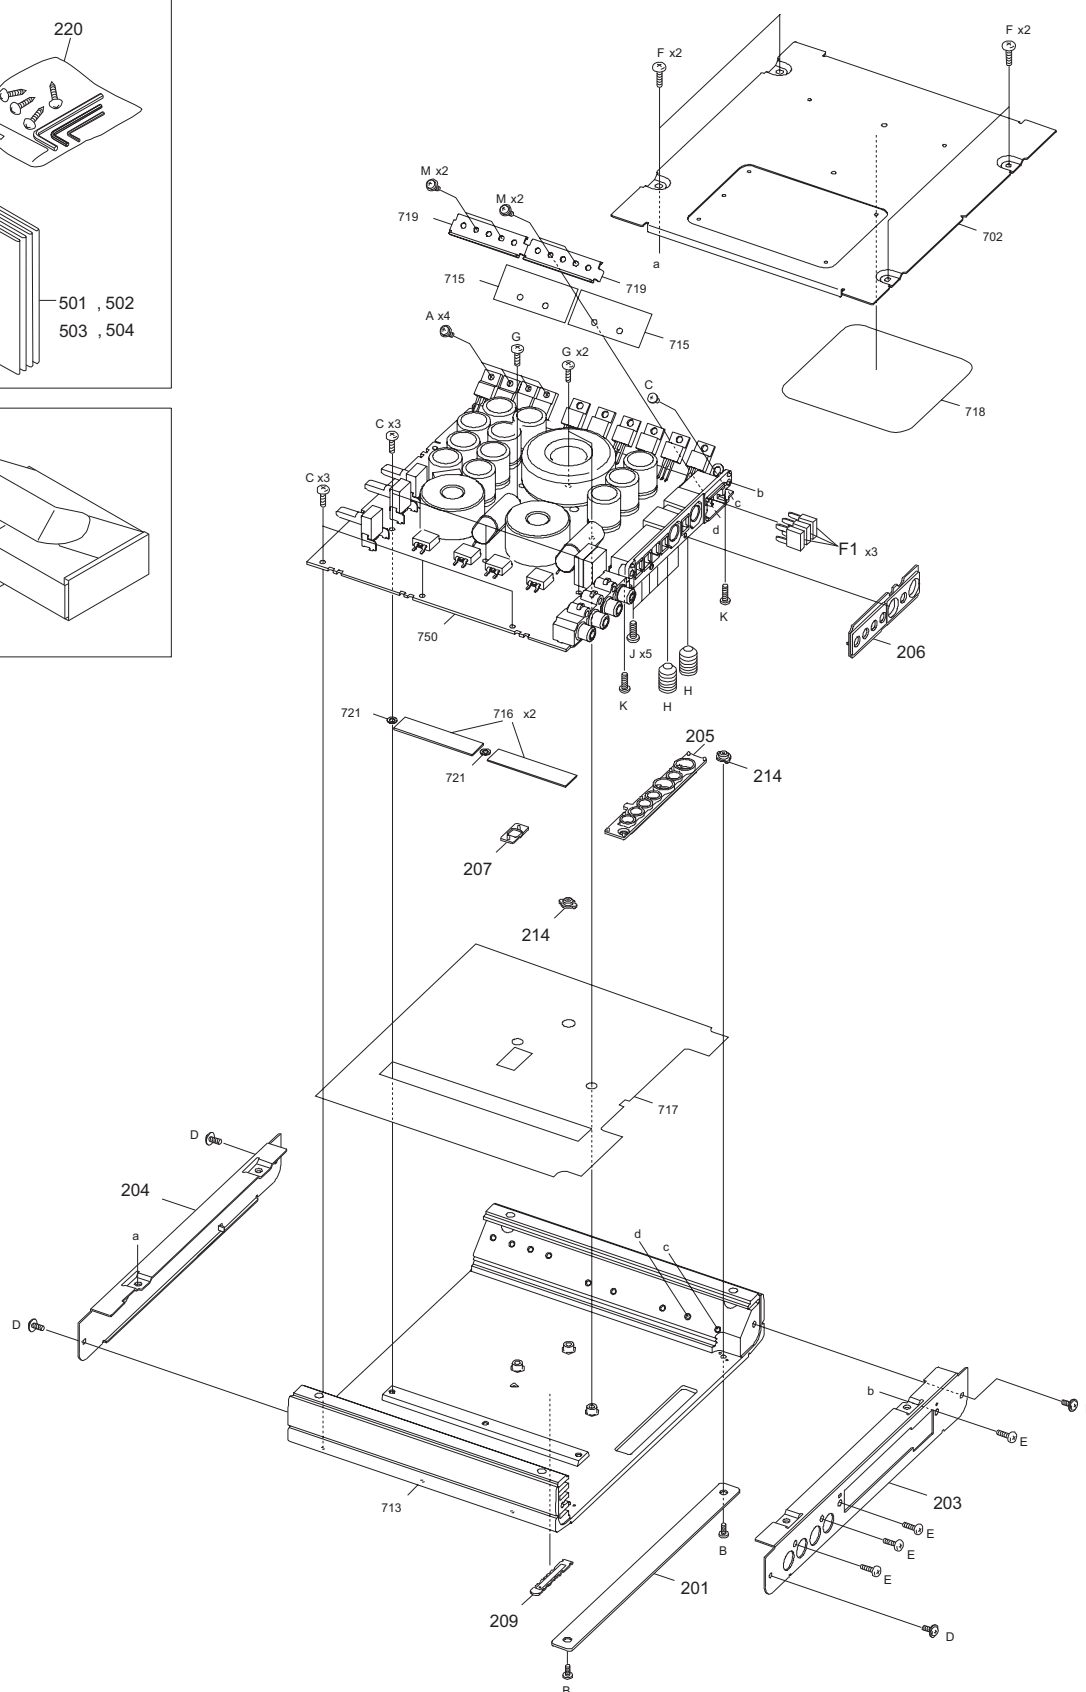

(No.WA078<Rev.001>)3/9

MODEL	MARK	MODEL	MARK
XR600-1	K0	XR600-1	W1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <200>						
△	F1	F52-0027-05	FUSE (30A)	32V 30A	3	
	A	N09-6931-05	SEMS (TAPTITE SCREW)		4	
	B	N09-6932-15	DRESSED SCREW		2	
	C	N09-6934-05	TAPTITE SCREW		7	
	D	N09-6943-05	TAPTITE SCREW		4	
	E	N80-3010-43	PAN HEAD TAPTITE SCREW		4	
	F	N83-2605-48	PAN HEAD TAPTITE SCREW		4	
	G	N89-2606-48	BINDING HEAD TAPTITE SCREW		3	
	H	N09-6947-08	THICK HEXAGONAL SCREW		2	
	J	N09-6948-08	THIN HEXAGONAL SCREW		5	
	K	N09-6447-05	TAPTITE SCREW		2	
	M	N09-6365-05	SEMS (TAPTITE SCREW)		4	
	201	A21-6882-03	DRESSING PANEL		1	
	203	A64-5402-01	PANEL (REAR)		1	
	204	A64-5403-01	PANEL (FRONT)		1	
	205	B07-3372-03	ESCUTCHEON		1	
	206	B07-3382-03	ESCUTCHEON		1	
	207	B19-2623-04	LIGHTING BOARD		1	
	209	B43-1553-04	BADGE		1	
	214	F09-3131-14	CAP		2	
	220	N99-1843-05	WRENCH KEY SET		1	
	501	B64-5074-00	INSTRUCTION MANUAL ENG FRE SPA		1	
	502	B64-5075-00	INSTRUCTION MANUAL GER DUT ITA		1	W1
	503	B64-5076-00	INSTRUCTION MANUAL POR RUS UKR		1	W1
	504	B64-5077-00	INSTRUCTION MANUAL ENG CHI		1	W1
	505	H54-5303-13	ITEM CARTON CASE		1	K0
	505	H54-5304-13	ITEM CARTON CASE		1	W1

MODEL	MARK	MODEL	MARK
XR600-1	K0	XR600-1	W1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
AUDIO UNIT (X09-9150-10) <X09>						
	IC1	NJM4565E-ZB	ANALOGUE IC		1	
	IC2	NJM4565E-ZB	ANALOGUE IC		1	
	IC3	NJM4565E-ZB	ANALOGUE IC		1	
	IC4	NJM4565E-ZB	ANALOGUE IC		1	
	IC5	NJM4565E-ZB	ANALOGUE IC		1	
	IC6	NJM4565E-ZB	ANALOGUE IC		1	
	IC7	IRS2092STRPBF	MOS-IC		1	
	IC8	IRS2092STRPBF	MOS-IC		1	
	IC9	TL494IDR	ANALOGUE IC		1	
	IC10	NJM4565E-ZB	ANALOGUE IC		1	
	IC12	BA2903F	ANALOGUE IC		1	
	Q1	2SC4154(F)	TRANSISTOR		1	
	Q2	2SAR293P	TRANSISTOR		1	
	Q3	2SC4154(F)	TRANSISTOR		1	
	Q4	RT1P141M-T111	TRANSISTOR		1	
	Q5	RT1N141M-T111	TRANSISTOR		1	
	Q6	2SC4154(F)	TRANSISTOR		1	
	Q7	ISA1602AM1(F)	TRANSISTOR		1	
	Q8	2SA1577	TRANSISTOR		1	
	Q9	2SA1577	TRANSISTOR		1	
	Q10	IRF3205PBF	FET		1	
	Q11	IRF3205PBF	FET		1	
	Q12	IRF3205PBF	FET		1	
	Q13	IRF3205PBF	FET		1	
	Q14	IRF3205PBF	FET		1	
	Q15	IRF3205PBF	FET		1	
	Q16	KTC2026-P	TRANSISTOR		1	
	Q17	KTA1046-P	TRANSISTOR		1	
	Q18	2SC4154(F)	TRANSISTOR		1	
	Q19	2SC4154(F)	TRANSISTOR		1	
	Q20	2SCR533D	TRANSISTOR		1	
	Q21	2SA1163-F	TRANSISTOR		1	
	Q22	2SA1163-F	TRANSISTOR		1	
	Q23	2SC2713-F	TRANSISTOR		1	
	Q24	2SC2713-F	TRANSISTOR		1	
	Q25	2SA1163-F	TRANSISTOR		1	
	Q26	2SA1163-F	TRANSISTOR		1	
	Q27	2SC4154(F)	TRANSISTOR		1	
	Q28	ISA1602AM1(F)	TRANSISTOR		1	
	Q31	2SC4154(F)	TRANSISTOR		1	
	Q32	2SC4154(F)	TRANSISTOR		1	
	Q33	RT1P141M-T111	TRANSISTOR		1	
	Q34	RT1N141M-T111	TRANSISTOR		1	
	Q35	RT1N141M-T111	TRANSISTOR		1	
	Q36	RT1N141M-T111	TRANSISTOR		1	
	Q37	RT1N141M-T111	TRANSISTOR		1	
	Q202	2SC4154(F)	TRANSISTOR		1	
	Q204	2SC4154(F)	TRANSISTOR		1	
	Q208	AUIRFS4410Z	FET		1	
	Q209	AUIRFS4410Z	FET		1	
	Q210	AUIRFS4410Z	FET		1	
	Q211	AUIRFS4410Z	FET		1	
	Q405	RT1N141M-T111	TRANSISTOR		1	
	Q406	RT1P141M-T111	TRANSISTOR		1	
	Q407	2SC4154(F)	TRANSISTOR		1	
	D1	RKZ6.2KG(B2)	ZENER DIODE		1	
	D2	RKZ15KG(B2)	ZENER DIODE		1	
	D3	HSU119TRF-E	DIODE		1	
	D4	HSU119TRF-E	DIODE		1	
	D5	B30-1743-05	LED(RED LED)		1	
	D6	HSU119TRF-E	DIODE		1	
	D7	HSU119TRF-E	DIODE		1	
	D8	LM1MA142WK-G	DIODE		1	
	D9	HSU119TRF-E	DIODE		1	
	D10	HSU119TRF-E	DIODE		1	
	D11	FCH20A15	SB DIODE		1	
	D12	FRH20A15	SB DIODE		1	
	D13	RKZ16KG(B2)	ZENER DIODE		1	
	D14	RKZ16KG(B2)	ZENER DIODE		1	
	D15	RKZ13KG(B2)	ZENER DIODE		1	
	D16	DA204U	MULTIPLE DIODE		1	
	D17	HSU119TRF-E	DIODE		1	
	D19	HSU119TRF-E	DIODE		1	
	D20	RKZ11KG(B2)	ZENER DIODE		1	
	D21	RKZ12KG(B2)	ZENER DIODE		1	
	D101	LM1MA142WK-G	DIODE		1	
	D102	LM1MA142WA-G	DIODE		1	
	D103	RKZ27KG(B)	ZENER DIODE		1	
	D198	RKZ6.8KG(B2)	ZENER DIODE		1	
	D199	RKZ6.8KG(B2)	ZENER DIODE		1	
	D203	HSU119TRF-E	DIODE		1	
	D205	HSU119TRF-E	DIODE		1	
	D206	HSU119TRF-E	DIODE		1	
	D207	HSU119TRF-E	DIODE		1	
	D208	RF101L2S	DIODE		1	
	D209	RF101L2S	DIODE		1	
	D214	RF101L2S	DIODE		1	
	D216	RF101L2S	DIODE		1	
	D219	RF101L2S	DIODE		1	
	D221	RF101L2S	DIODE		1	
	D401	RKZ5.1KG(B2)	ZENER DIODE		1	

MODEL		MARK		MODEL		MARK	
XR600-1		K0		XR600-1		W1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	D402	RKZ5.1KG(B2)	ZENER DIODE		1		
	C1	CK73EB1C106K	CHIP C	10UF 16V K	1		
	C2	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C3	CK73FB1C105K	CHIP C	1.0UF 16V K	1		
	C4	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C5	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C6	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C7	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C8	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C9	CD04BJ1E470M	ELECTRO	47UF 25WV M	1		
	C10	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C11	CK73GB1A105K	CHIP C	1.0UF 10V K	1		
	C12	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C13	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C14	CD04BJ1H100M	ELECTRO	10UF 50WV M	1		
	C15	C90-7030-05	ELECTRO	3900UF 16WV	1		
	C16	C90-7030-05	ELECTRO	3900UF 16WV	1		
	C17	C90-7030-05	ELECTRO	3900UF 16WV	1		
	C18	CK73GB1H682K	CHIP C	6800PF 50V K	1		
	C19	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C20	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C21	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C22	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C23	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C24	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C25	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C26	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C27	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C28	C90-7031-05	ELECTRO	1000UF 50WV	1		
	C29	CD04BJ1E470M	ELECTRO	47UF 25WV M	1		
	C30	CD04BJ1E470M	ELECTRO	47UF 25WV M	1		
	C31	CD04BJ1E101M	ELECTRO	100UF 25WV M	1		
	C32	CD04BJ1E101M	ELECTRO	100UF 25WV M	1		
	C33	CD04BJ1E470M	ELECTRO	47UF 25WV M	1		
	C34	CD04BJ1E470M	ELECTRO	47UF 25WV M	1		
	C35	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C36	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C37	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C38	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C39	CC73GCH1H151J	CHIP C	150PF 50V J	1		
	C40	CK73GB1H152K	CHIP C	1500PF 50V K	1		
	C41	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C42	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C43	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C44	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C45	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C46	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C47	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C48	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C55	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C56	CD04BJ1A101M	ELECTRO	100UF 10WV M	1		
	C57	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C58	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C59	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C60	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C61	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C91	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C92	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C93	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C94	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C95	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C96	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C98	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C99	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C101	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C102	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C103	CD04BJ1H100M	ELECTRO	10UF 50WV M	1		
	C104	CD04BJ1H100M	ELECTRO	10UF 50WV M	1		
	C105	CC73GCH1H330J	CHIP C	33PF 50V J	1		
	C106	CC73GCH1H330J	CHIP C	33PF 50V J	1		
	C107	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C108	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C109	CC73GCH1H330J	CHIP C	33PF 50V J	1		
	C110	CC73GCH1H330J	CHIP C	33PF 50V J	1		
	C111	CC73GCH1H330J	CHIP C	33PF 50V J	1		
	C112	CD04BJ1H100M	ELECTRO	10UF 50WV M	1		
	C113	CC73GCH1H221J	CHIP C	220PF 50V J	1		
	C114	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C115	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C116	CD04BJ1H010M	ELECTRO	1.0UF 50WV M	1		
	C117	CD04BJ1H010M	ELECTRO	1.0UF 50WV M	1		
	C118	CD04BJ1H010M	ELECTRO	1.0UF 50WV M	1		
	C119	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C120	CD04BJ1H4R7M	ELECTRO	4.7UF 50WV M	1		
	C121	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C122	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C123	CC73GCH1H681J	CHIP C	680PF 50V J	1		
	C124	CK73GB1H683K	CHIP C	0.068UF 50V K	1		
	C125	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C126	CK73GB1H223K	CHIP C	0.022UF 50V K	1		
	C127	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C128	CK73GB1H103K	CHIP C	0.010UF 50V K	1		

MODEL		MARK		MODEL		MARK	
XR600-1		K0		XR600-1		W1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C129	CK73GB1C224K	CHIP C	0.22UF 16V K	1		
	C130	CK73GB1H223K	CHIP C	0.022UF 50V K	1		
	C131	CK73GB1H333K	CHIP C	0.033UF 50V K	1		
	C132	CC73GCH1H471J	CHIP C	470PF 50V J	1		
	C133	CC73GCH1H221J	CHIP C	220PF 50V J	1		
	C134	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C135	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C199	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C201	CD04BJ1H220M	ELECTRO	22UF 50WV M	1		
	C202	CD04BJ1H220M	ELECTRO	22UF 50WV M	1		
	C203	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C204	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C205	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C206	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C207	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C208	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C209	CK73EB1C106K	CHIP C	10UF 16V K	1		
	C210	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C211	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C212	CK73GB1H102K	CHIP C	1000PF 50V K	1		
	C213	CK73EB1C106K	CHIP C	10UF 16V K	1		
	C214	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C216	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C218	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C220	CK73EB1C106K	CHIP C	10UF 16V K	1		
	C221	CK73EB1C106K	CHIP C	10UF 16V K	1		
	C222	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C223	CK73EB1C226M	CHIP C	22UF 16V M	1		
	C224	C90-5793-05	ELECTRO	22UF 50WV 11L	1		
	C225	C90-5793-05	ELECTRO	22UF 50WV 11L	1		
	C226	C90-5793-05	ELECTRO	22UF 50WV 11L	1		
	C227	C90-5793-05	ELECTRO	22UF 50WV 11L	1		
	C228	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C229	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C230	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C231	CK73GB1H104K	CHIP C	0.10UF 50V K	1		
	C232	CQ92FMJ1H471J	MYLAR C	470PF 50V J	1		
	C234	CQ92FMJ2A681J	MYLAR C	680PF 100V J	1		
	C235	CQ92FMJ2A681J	MYLAR C	680PF 100V J	1		
	C236	CQ92FMJ1H471J	MYLAR C	470PF 50V J	1		
	C238	CQ92FMJ2A681J	MYLAR C	680PF 100V J	1		
	C239	CQ92FMJ2A681J	MYLAR C	680PF 100V J	1		
	C240	CK73FB1H224K	CHIP C	0.22UF 50V K	1		
	C241	CK73FB1H224K	CHIP C	0.22UF 50V K	1		
	C242	CK73FB1H224K	CHIP C	0.22UF 50V K	1		
	C243	CK73FB1H224K	CHIP C	0.22UF 50V K	1		
	C244	CQ92FMJ1H152J	MYLAR C	1500P 50V J	1		
	C245	CQ92FMJ1H152J	MYLAR C	1500P 50V J	1		
	C246	C91-2304-05	FILM C	10UF 100WV J	1		
	C247	C91-2304-05	FILM C	10UF 100WV J	1		
	C252	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C253	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C254	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C255	CK73GB1H103K	CHIP C	0.010UF 50V K	1		
	C401	CD04BJ1H100M	ELECTRO	10UF 50WV M	1		
	C403	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C404	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C405	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C406	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C407	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C408	CC73GCH1H020C	CHIP C	2.0PF 50V C	1		
	C409	CD04BJ1E101M	ELECTRO	100UF 25WV M	1		
	C410	CD04BJ1E101M	ELECTRO	100UF 25WV M	1		
	R1	RK73EB2E392J	CHIP R	3.9K J 1/4W	1		
	R2	RK73EB2E392J	CHIP R	3.9K J 1/4W	1		
	R3	RK73GB2A152J	CHIP R	1.5K J 1/10W	1		
	R4	RK73GB2A392J	CHIP R	3.9K J 1/10W	1		
	R5	RK73GB2A682J	CHIP R	6.8K J 1/10W	1		
	R6	RK73GB2A392J	CHIP R	3.9K J 1/10W	1		
	R7	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R8	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R9	RK73GB2A203J	CHIP R	20K J 1/10W	1		
	R10	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R11	RK73GB2A104J	CHIP R	100K J 1/10W	1		
	R13	RK73GB2A100J	CHIP R	10 J 1/10W	1		
	R14	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R15	RK73GB2A182J	CHIP R	1.8K J 1/10W	1		
	R16	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R17	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R18	RK73GB2A104J	CHIP R	100K J 1/10W	1		
	R19	RK73EB2E152J	CHIP R	1.5K J 1/4W	1		
	R20	RK73GB2A822J	CHIP R	8.2K J 1/10W	1		
	R21	RK73GB2A273J	CHIP R	27K J 1/10W	1		
	R22	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R23	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R24	RK73GB2A333J	CHIP R	33K J 1/10W	1		
	R25	RK73GB2A753J	CHIP R	75K J 1/10W	1		
	R26	RK73GB2A101J	CHIP R	100 J 1/10W	1		
	R27	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R28	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R29	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R30	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R31	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		

MODEL		MARK		MODEL		MARK	
XR600-1		K0		XR600-1		W1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R32	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R33	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R34	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R35	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R36	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R37	RK73GB2A680J	CHIP R	68 J 1/10W	1		
	R38	RK73PB2H100J	CHIP R	10 J 1/2W	1		
	R39	RK73PB2H220J	CHIP R	22 J 1/2W	1		
	R40	RK73PB2H220J	CHIP R	22 J 1/2W	1		
	R41	RK73EB2E473J	CHIP R	47K J 1/4W	1		
	R42	RK73EB2E473J	CHIP R	47K J 1/4W	1		
	R43	RK73EB2E472J	CHIP R	4.7K J 1/4W	1		
	R44	RK73EB2E472J	CHIP R	4.7K J 1/4W	1		
	R45	RK73GB2A100J	CHIP R	10 J 1/10W	1		
	R46	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R47	RK73GB2A821J	CHIP R	820 J 1/10W	1		
	R48	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R49	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R50	RK73EB2E4R7J	CHIP R	4.7 J 1/4W	1		
	R51	RK73EB2E562J	CHIP R	5.6K J 1/4W	1		
	R52	RK73GB2A563J	CHIP R	56K J 1/10W	1		
	R53	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R54	RK73GB2A133J	CHIP R	13K J 1/10W	1		
	R55	RK73GB2A333J	CHIP R	33K J 1/10W	1		
	R56	RK73GB2A114J	CHIP R	110K J 1/10W	1		
	R57	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R58	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R59	RK73GB2A223J	CHIP R	22K J 1/10W	1		
	R60	RK73GB2A223J	CHIP R	22K J 1/10W	1		
	R61	RK73GB2A123J	CHIP R	12K J 1/10W	1		
	R62	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R63	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R64	RK73GB2A123J	CHIP R	12K J 1/10W	1		
	R65	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R66	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R67	R92-5576-05	METAL R	0.02OHM 5W	1		
	R68	R92-5576-05	METAL R	0.02OHM 5W	1		
	R69	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R70	RK73GB2A123J	CHIP R	12K J 1/10W	1		
	R71	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R72	RK73GB2A123J	CHIP R	12K J 1/10W	1		
	R73	R92-5576-05	METAL R	0.02OHM 5W	1		
	R74	RK73GB2A332J	CHIP R	3.3K J 1/10W	1		
	R75	RK73GB2A563J	CHIP R	56K J 1/10W	1		
	R76	RK73GB2A272J	CHIP R	2.7K J 1/10W	1		
	R77	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R78	RK73GB2A393J	CHIP R	39K J 1/10W	1		
	R92	RK73GB2A333J	CHIP R	33K J 1/10W	1		
	R93	RK73GB2A333J	CHIP R	33K J 1/10W	1		
	R94	RK73GB2A823J	CHIP R	82K J 1/10W	1		
	R95	RK73GB2A823J	CHIP R	82K J 1/10W	1		
	R96	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R97	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R98	RK73GB2A623J	CHIP R	62K J 1/10W	1		
	R99	RK73GB2A202J	CHIP R	2.0K J 1/10W	1		
	R100	RK73EB2E474J	CHIP R	470K J 1/4W	1		
	R101	RK73EB2E102J	CHIP R	1.0K J 1/4W	1		
	R102	RK73EB2E102J	CHIP R	1.0K J 1/4W	1		
	R103	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R104	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R105	RK73GB2A273J	CHIP R	27K J 1/10W	1		
	R106	RK73GB2A273J	CHIP R	27K J 1/10W	1		
	R107	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R108	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R109	RK73GB2A472J	CHIP R	4.7K J 1/10W	1		
	R110	RK73GH2A103D	CHIP R	10K D 1/10W	1		
	R111	RK73GH2A103D	CHIP R	10K D 1/10W	1		
	R112	RK73GH2A473D	CHIP R	47K D 1/10W	1		
	R113	RK73GH2A473D	CHIP R	47K D 1/10W	1		
	R114	RK73GB2A431J	CHIP R	430 J 1/10W	1		
	R115	RK73GB2A102J	CHIP R	1.0K J 1/10W	1		
	R116	RK73GB2A473J	CHIP R	47K J 1/10W	1		
	R117	RK73GB2A122J	CHIP R	1.2K J 1/10W	1		
	R118	RK73GB2A682J	CHIP R	6.8K J 1/10W	1		
	R119	RK73GB2A562J	CHIP R	5.6K J 1/10W	1		
	R120	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R121	RK73GB2A393J	CHIP R	39K J 1/10W	1		
	R122	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R123	RK73GB2A154J	CHIP R	150K J 1/10W	1		
	R124	RK73GB2A241J	CHIP R	240 J 1/10W	1		
	R125	RK73GB2A103J	CHIP R	10K J 1/10W	1		
	R126	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R127	RK73GB2A202J	CHIP R	2.0K J 1/10W	1		
	R128	RK73GB2A133J	CHIP R	13K J 1/10W	1		
	R129	RK73GB2A183J	CHIP R	18K J 1/10W	1		
	R130	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R131	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R132	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R133	RK73GB2A272J	CHIP R	2.7K J 1/10W	1		
	R134	RK73GB2A222J	CHIP R	2.2K J 1/10W	1		
	R135	RK73GB2A153J	CHIP R	15K J 1/10W	1		
	R136	RK73GB2A682J	CHIP R	6.8K J 1/10W	1		

MODEL			MARK	MODEL	MARK	
XR600-1			K0	XR600-1	W1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R137	RK73GB2A472J	CHIP R	4.7K J 1/10W	1	
	R138	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R139	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R140	RK73GB2A222J	CHIP R	2.2K J 1/10W	1	
	R141	RK73GB2A332J	CHIP R	3.3K J 1/10W	1	
	R201	RK73GB2A302J	CHIP R	3.0K J 1/10W	1	
	R202	RK73GB2A302J	CHIP R	3.0K J 1/10W	1	
	R203	RK73GB2A473J	CHIP R	47K J 1/10W	1	
	R204	RK73GB2A473J	CHIP R	47K J 1/10W	1	
	R205	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R206	RK73GB2A620J	CHIP R	62 J 1/10W	1	
	R207	RK73GB2A822J	CHIP R	8.2K J 1/10W	1	
	R209	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R210	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R211	RK73GB2A750J	CHIP R	75 J 1/10W	1	
	R212	RK73GB2A822J	CHIP R	8.2K J 1/10W	1	
	R214	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R217	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R218	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R219	RK73GB2A101J	CHIP R	100 J 1/10W	1	
	R220	RK73GB2A101J	CHIP R	100 J 1/10W	1	
	R222	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R223	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R225	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R226	RK73GB2A822J	CHIP R	8.2K J 1/10W	1	
	R227	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R228	RK73GB2A822J	CHIP R	8.2K J 1/10W	1	
	R231	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R232	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R233	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R234	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R235	RK73GB2A100J	CHIP R	10 J 1/10W	1	
	R236	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R237	RK73GB2A223J	CHIP R	22K J 1/10W	1	
	R238	RK73GB2A100J	CHIP R	10 J 1/10W	1	
	R239	RK73EB2E4R7J	CHIP R	4.7 J 1/4W	1	
	R240	RK73EB2E4R7J	CHIP R	4.7 J 1/4W	1	
	R241	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R243	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R246	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R248	RK73EB2E100J	CHIP R	10 J 1/4W	1	
	R249	RK73PB2H100J	CHIP R	10 J 1/2W	1	
	R250	RK73PB2H100J	CHIP R	10 J 1/2W	1	
	R251	RK73PB2H100J	CHIP R	10 J 1/2W	1	
	R252	RK73PB2H100J	CHIP R	10 J 1/2W	1	
	R253	RK73GB2A102J	CHIP R	1.0K J 1/10W	1	
	R254	RK73GB2A102J	CHIP R	1.0K J 1/10W	1	
	R255	RK73PB2H2R4J	CHIP R	2.4 J 1/2W	1	
	R256	RK73PB2H2R4J	CHIP R	2.4 J 1/2W	1	
	R257	RK73PB2H2R4J	CHIP R	2.4 J 1/2W	1	
	R258	RK73PB2H2R4J	CHIP R	2.4 J 1/2W	1	
	R259	RK73EB2E112J	CHIP R	1.1K J 1/4W	1	
	R260	RK73EB2E112J	CHIP R	1.1K J 1/4W	1	
	R261	RK73EB2E112J	CHIP R	1.1K J 1/4W	1	
	R262	RK73EB2E112J	CHIP R	1.1K J 1/4W	1	
	R401	RK73GB2A104J	CHIP R	100K J 1/10W	1	
	R402	RK73GB2A183J	CHIP R	18K J 1/10W	1	
	R404	RK73GB2A472J	CHIP R	4.7K J 1/10W	1	
	R405	RK73GB2A823J	CHIP R	82K J 1/10W	1	
	R406	RK73GB2A823J	CHIP R	82K J 1/10W	1	
	R412	RK73GB2A101J	CHIP R	100 J 1/10W	1	
	R413	RK73GB2A101J	CHIP R	100 J 1/10W	1	
	R414	RK73GB2A101J	CHIP R	100 J 1/10W	1	
	R415	RK73GB2A163J	CHIP R	16K J 1/10W	1	
	R416	RK73GB2A333J	CHIP R	33K J 1/10W	1	
	R417	RK73GB2A333J	CHIP R	33K J 1/10W	1	
	R418	RK73GB2A183J	CHIP R	18K J 1/10W	1	
	R419	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R420	RK73GB2A103J	CHIP R	10K J 1/10W	1	
	R421	RK73GB2A300J	CHIP R	30 J 1/10W	1	
	R422	RK73GB2A300J	CHIP R	30 J 1/10W	1	
	R423	RK73PB2H431J	CHIP R	430 J 1/2W	1	
	R424	RK73PB2H431J	CHIP R	430 J 1/2W	1	
	VR1	R31-0258-05	VARIABLE RESISTOR	10K(A)	1	
	VR2	R31-0274-05	VARIABLE RESISTOR	10K(C)	1	
	VR3	R31-0257-05	VARIABLE RESISTOR	50K(C)	1	
	L1	L33-3211-05	CHOKE COIL		1	
	L2	L33-3211-05	CHOKE COIL		1	
	T1	L19-0851-05	TRANSFORMER FOR CONVERTER		1	
	J1	E63-1000-05	PIN JACK		1	
	J2	E70-0873-15	SCREW TERMINAL BOARD		1	
	TH1	NCP18WB473J0S	THERMISTOR	47KOHM	1	