


9. EXPLODED VIEWS AND PARTS LIST

- NOTES:**
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to ∇ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

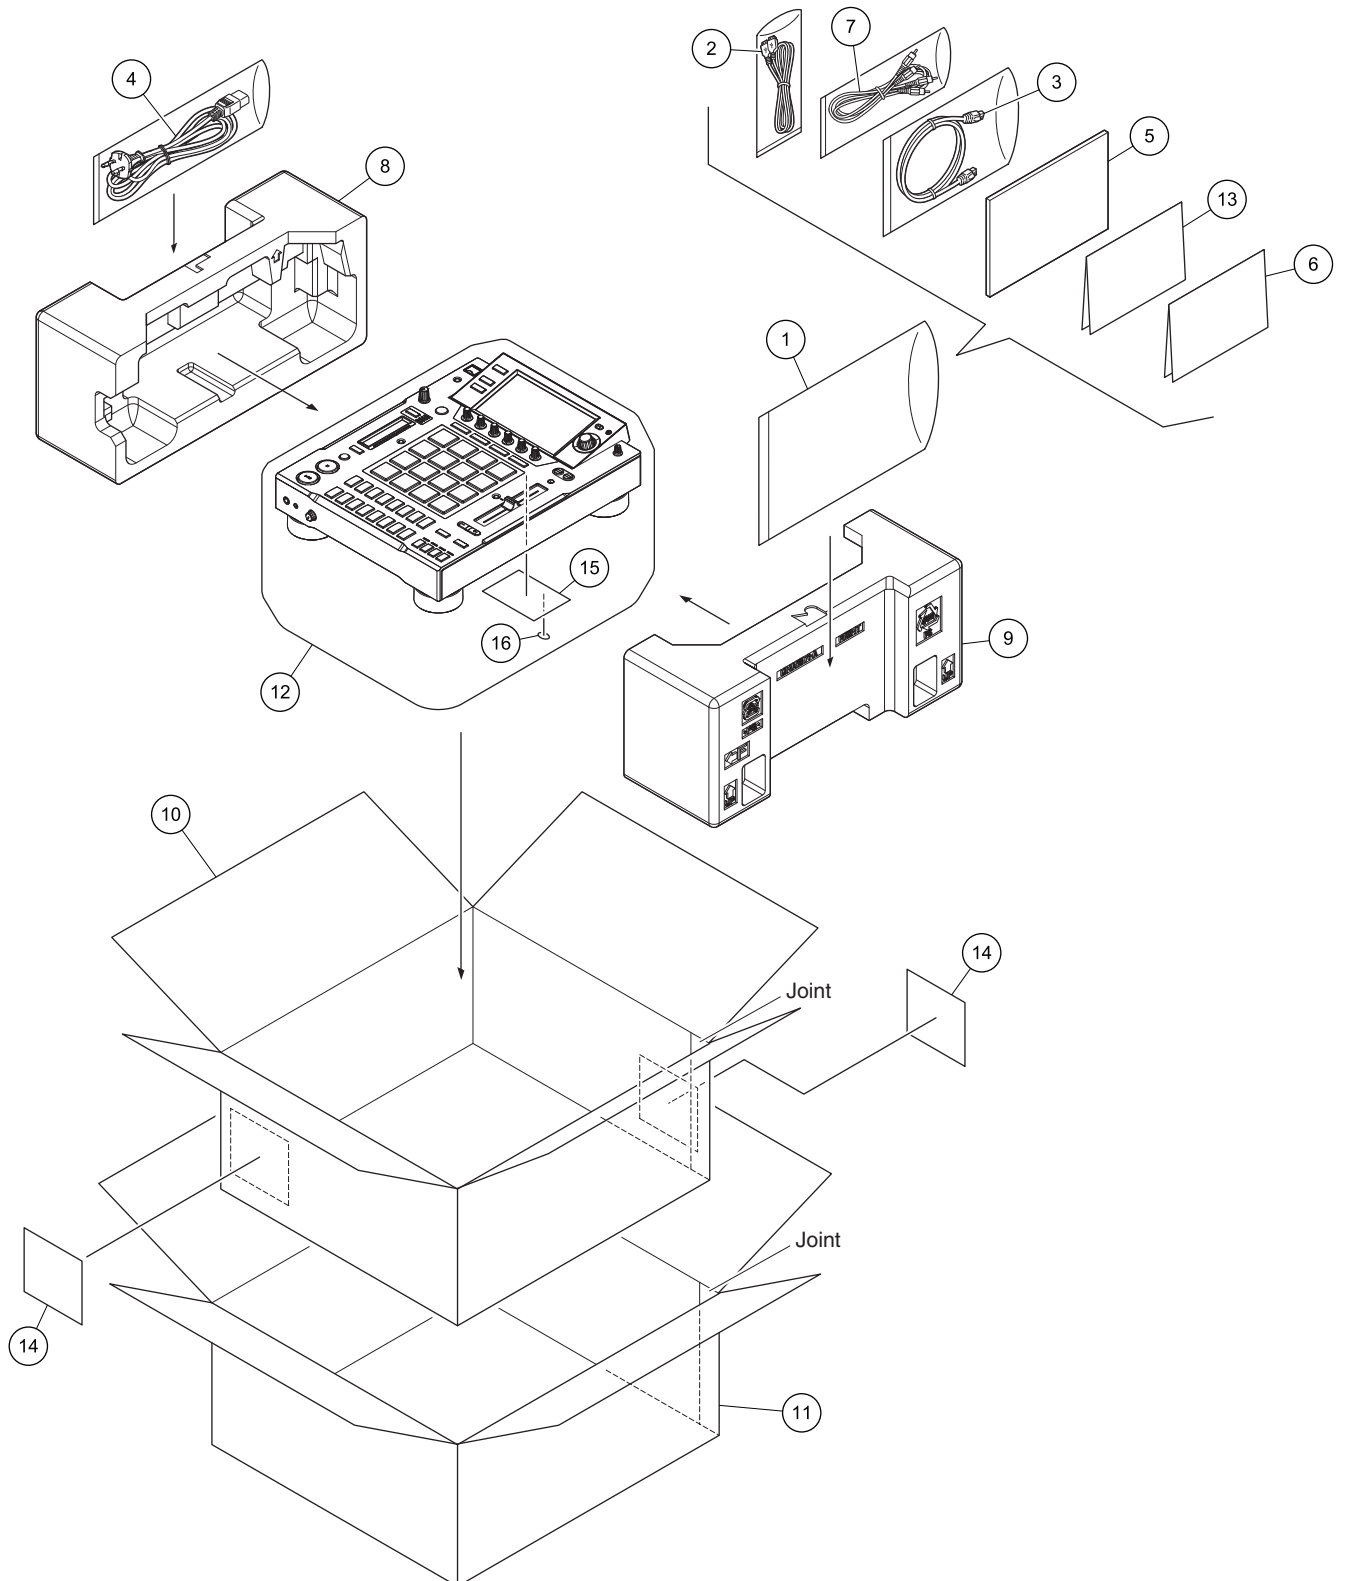

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
A	NSP 1	Polyethylene Bag	AHG7117
	2	USB Cable	DDE1128
	3	LAN Cable	DDE1141
	 4	Power Cord	See Contrast table (2)
	5	Operating Instructions (Quick Start Guide)	See Contrast table (2)
B	NSP 6	Leaflet	See Contrast table (2)
	7	RCA Pin Cable	XDE3045
	8	Packing Pad	DHA1970
	9	Packing Pad	DHA1971
	10	Packing Case	See Contrast table (2)
	11	Master Carton	See Contrast table (2)
	12	Packing Sheet	RHC1023
	NSP 13	Warranty	See Contrast table (2)
	14	Label	See Contrast table (2)
	15	Name Label	See Contrast table (2)
	16	CCC S&E Label	See Contrast table (2)

(2) CONTRAST TABLE

LSYXJ, UXJCB and AXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	LSYXJ	UXJCB	AXJ
	4	Power Cord	ADG1244	DDG1108	DDG1114
	5	Operating Instructions (Quick Start Guide)	DRH1456	DRH1455	DRH1457
	NSP 6	Leaflet	DRH1431	DRH1431	DRH1432
	10	Packing Case	DHG3607	DHG3607	DHG3606
	11	Master Carton	DHG3609	DHG3610	Not used
NSP	13	Warranty	DRY1270	Not used	Not used
	14	Label	Not used	DRW2754	Not used
	15	Name Label	Not used	Not used	DAL1353
	16	CCC S&E Label	Not used	Not used	DRW2310

9.2 EXTERIOR SECTION

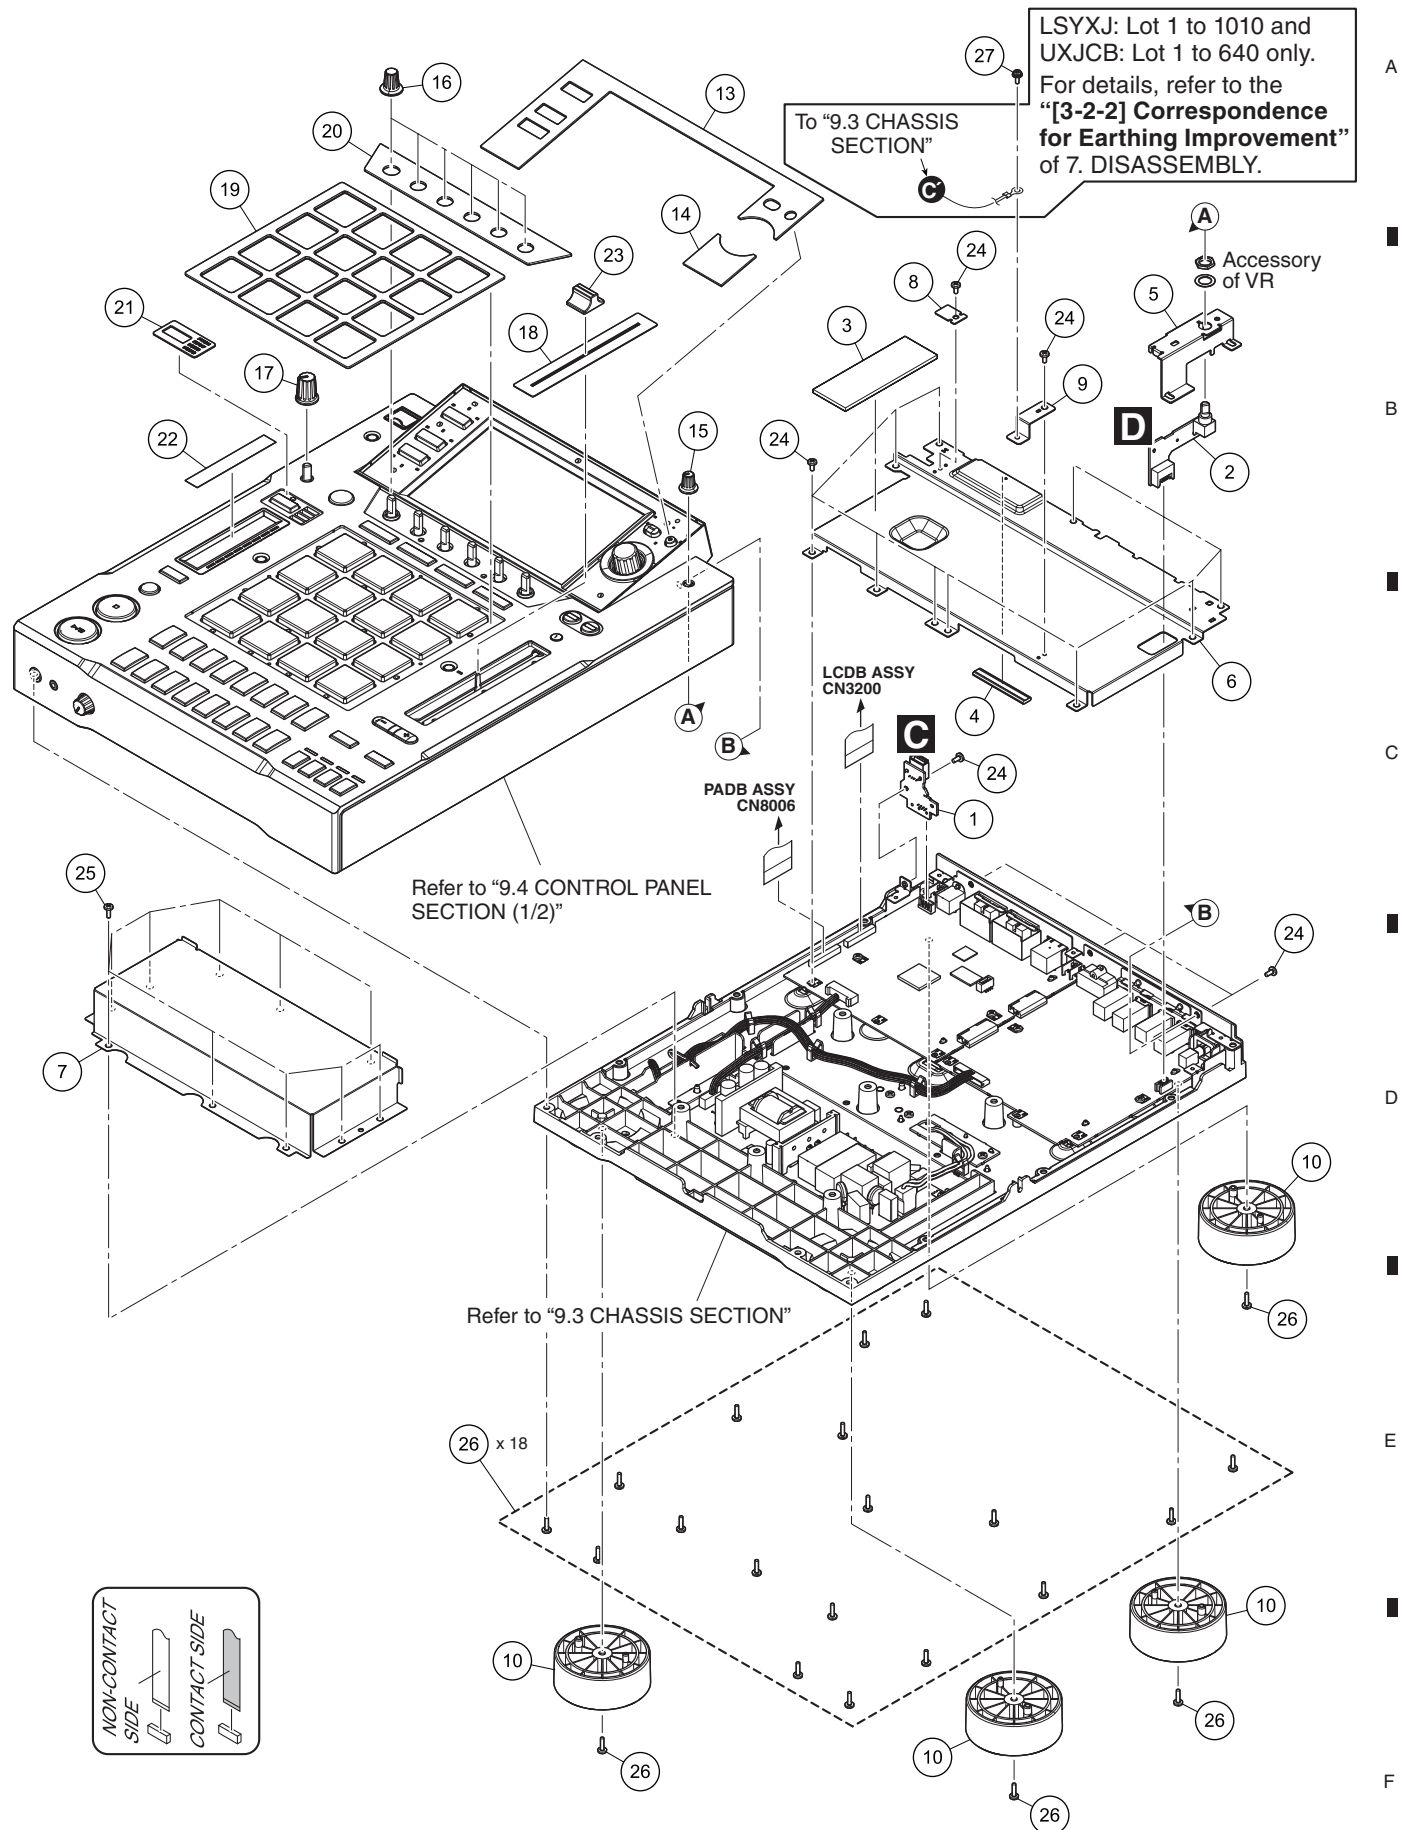

EXTERIOR SECTION PARTS LIST


Mark	No.	Description	Part No.
A	1	USBA ASSY	DWX4083
	2	INVR ASSY	DWX4097
	3	Cushion	DEC3749
	4	Gasket	DEC3782
	5	Stay	DNH3319
	6	Shield Case	DNH3322
	7	Shield Case	DNH3326
	8	Stay	DNH3328
	9	Plate	DNH3349
	10	Insulator	DXB2184
B	11	•••••	
	12	•••••	
	13	Panel	DAH3163
	14	Panel	DAH3164
	15	Knob	DAA1346
	16	Knob	DAA1358
	17	Knob	DAA1368
	18	Slide Sheet 1C	DAH2404
	19	Panel	DAH3150
	20	Panel	DAH3165
C	21	Panel	DAH3166
	22	Sheet	DEC3748
	23	Knob/Slid	DNK5981
	24	Screw	BBZ30P060FTB
	25	Screw	BPZ30P080FNI
	26	Screw	BPZ30P100FTB
	27	Screw	PMH30P080FTC

D

E

F


9.3 CHASSIS SECTION

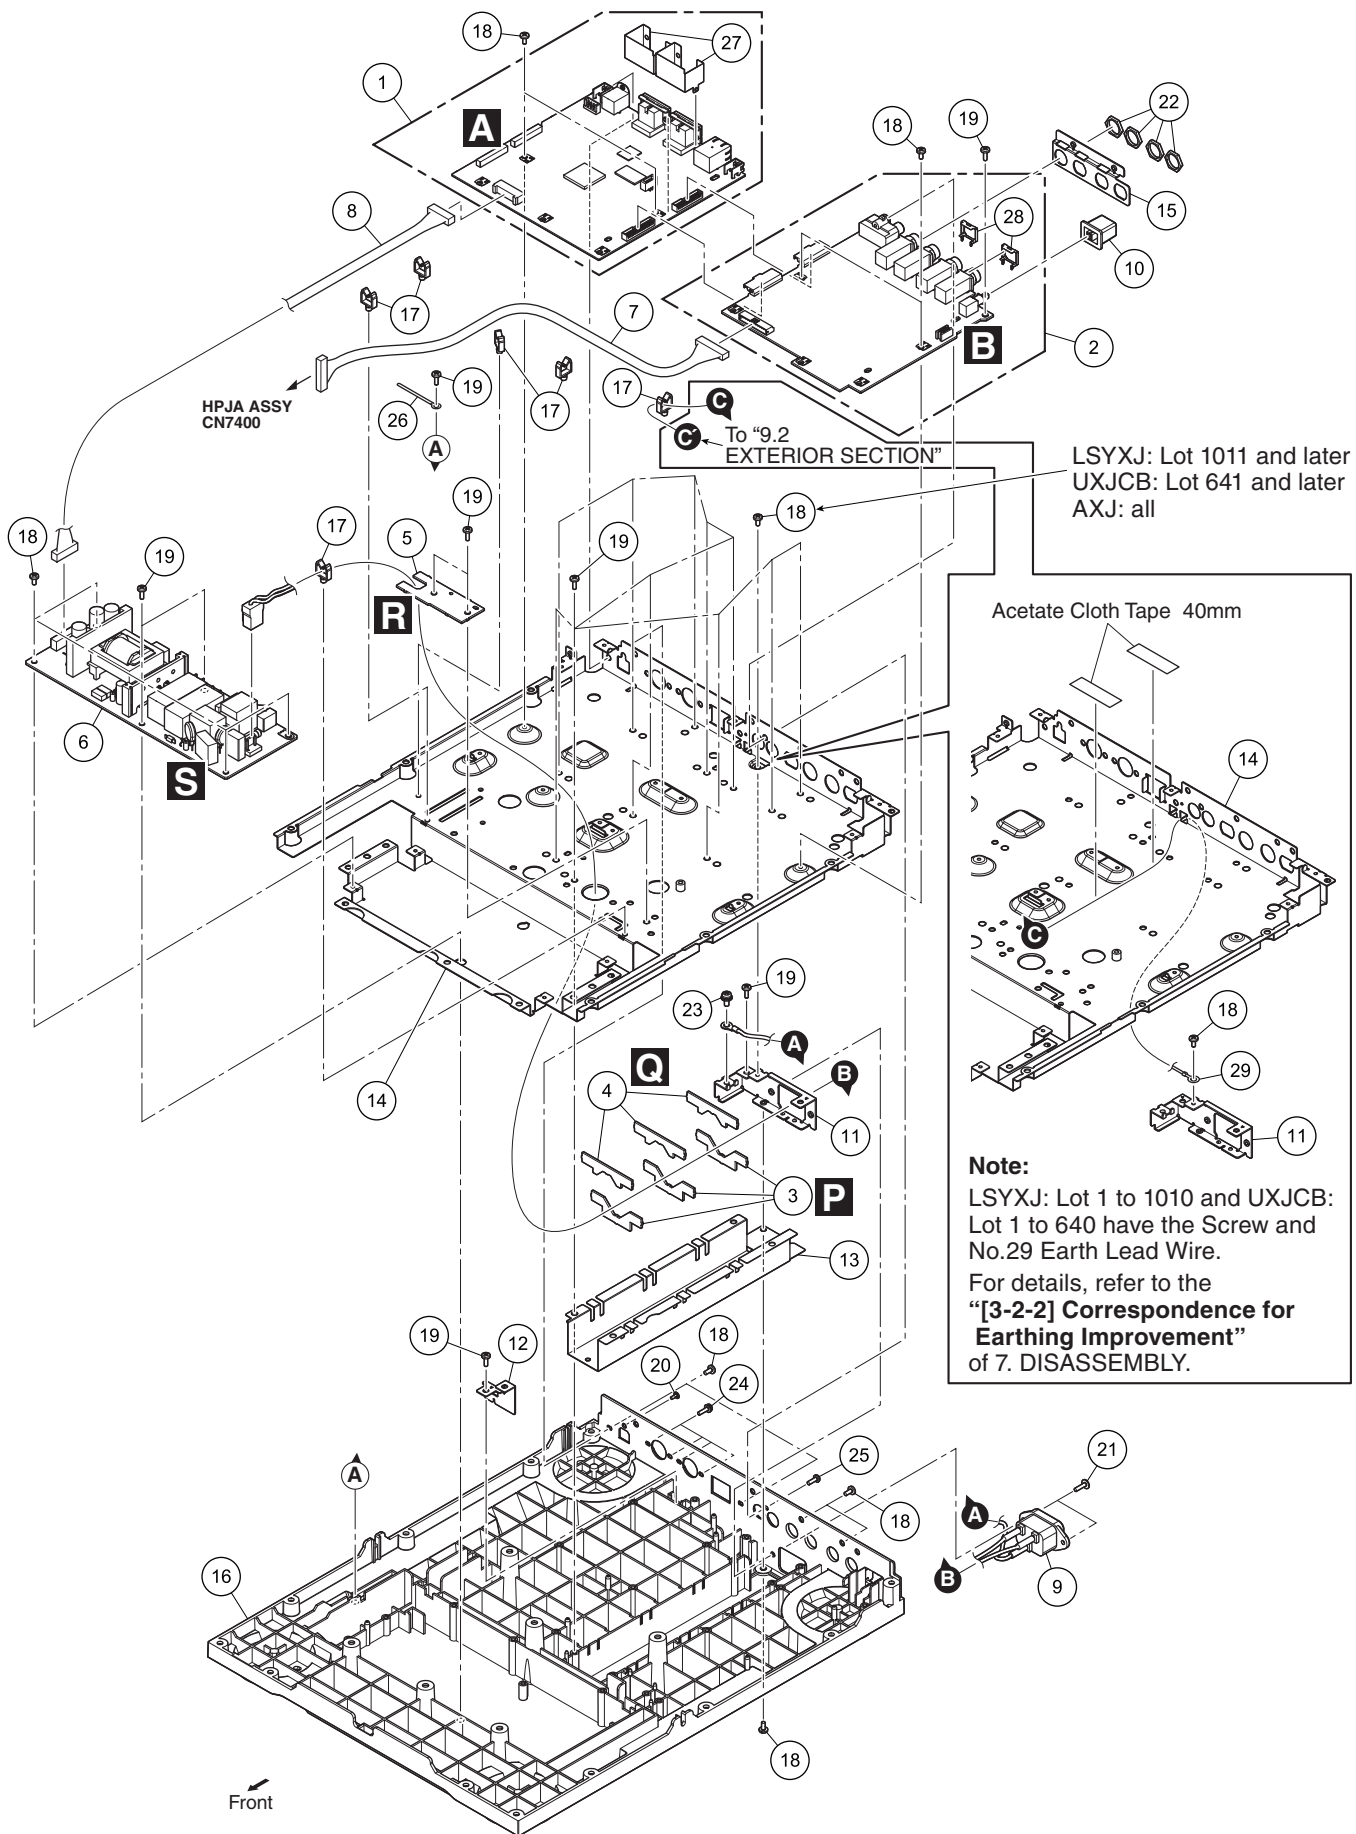

CHASSIS SECTION PARTS LIST


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 MAIN ASSY	DWX4080
	2 AUDB ASSY	DWX4082
	3 SSK1 ASSY	DWX4090
	4 SSK2 ASSY	DWX4091
	5 SSK3 ASSY	DWX4096
B	⚠ 6 SW POWER SUPPLY	DWR1548
	7 Shielded Conn-cable	DDA1081
	8 Crimp Connector	DDC1024
	⚠ 9 AC Inlet	DKP3989
	10 Power Knob	DAC2306
C	11 Bracket/ACI	DNH3020
	12 Stay/KST	DNH3021
	13 Shield Case	DNH3317
	14 Stay	DNH3323
	15 Stay	DNH3325
D	16 Chassis	DNK6701
	17 Holder	VEC1355
	18 Screw	BBZ30P060FTB
	19 Screw	BPZ30P080FNI
	20 Screw (M3x5)	DBA1340
E	21 Screw	IBZ30P100FTB
	22 Nut (M12)	NKX2FNI
	23 Screw	PMH40P080FTC
	24 Screw	PMH30P100FTB
	25 Screw	PPZ30P080FTB
F	26 Cord Clamper (Steel)	RNH-184
	27 Shield Case (MIDI)	DNH2736
	28 Phone Shield	DNF1875
	29 Earth Lead Wire	DDX1286

9.4 CONTROL PANEL SECTION (1/2)

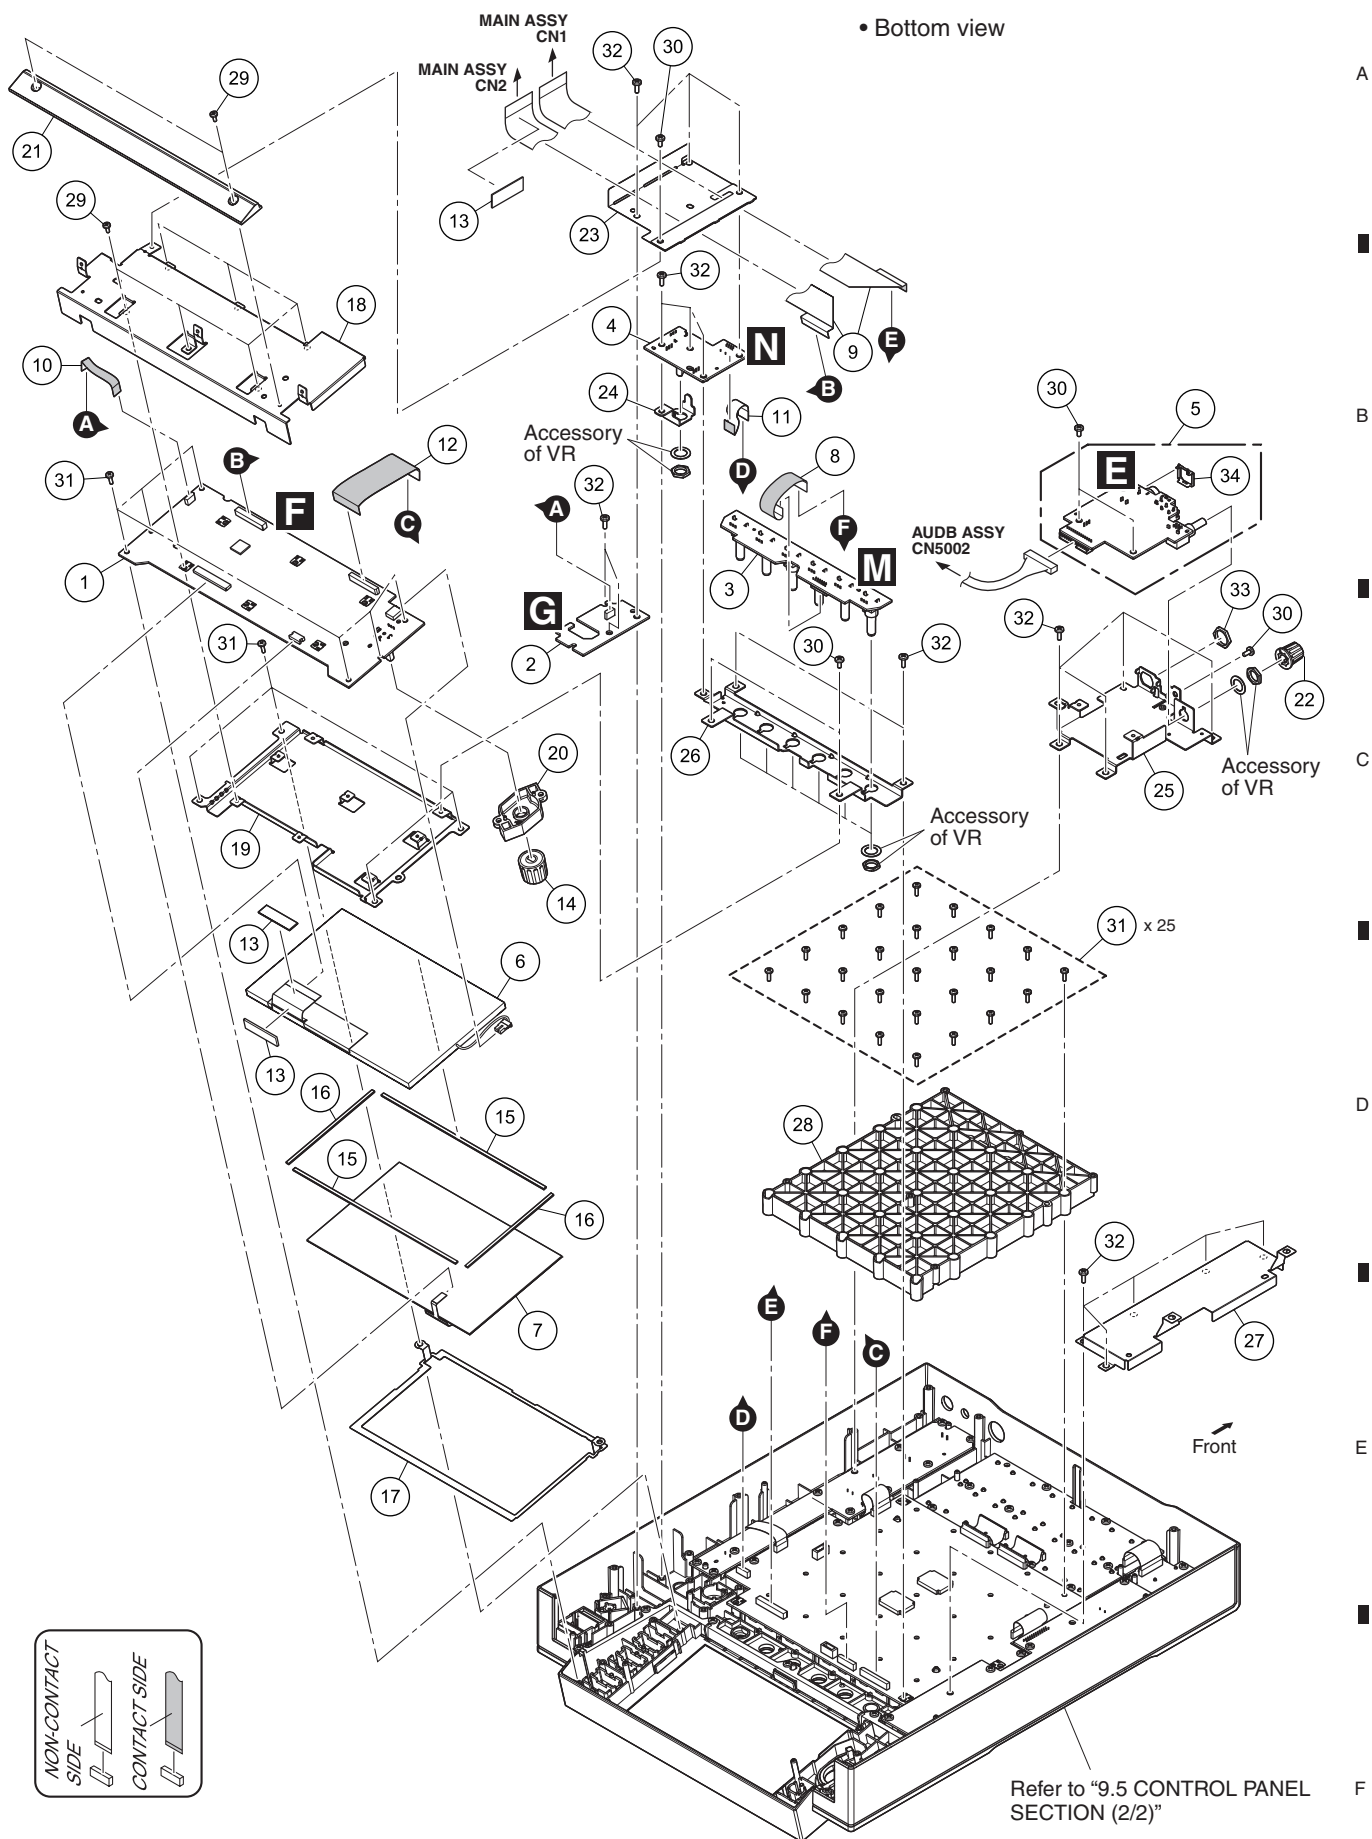

9.5 CONTROL PANEL SECTION (2/2)

• Bottom view

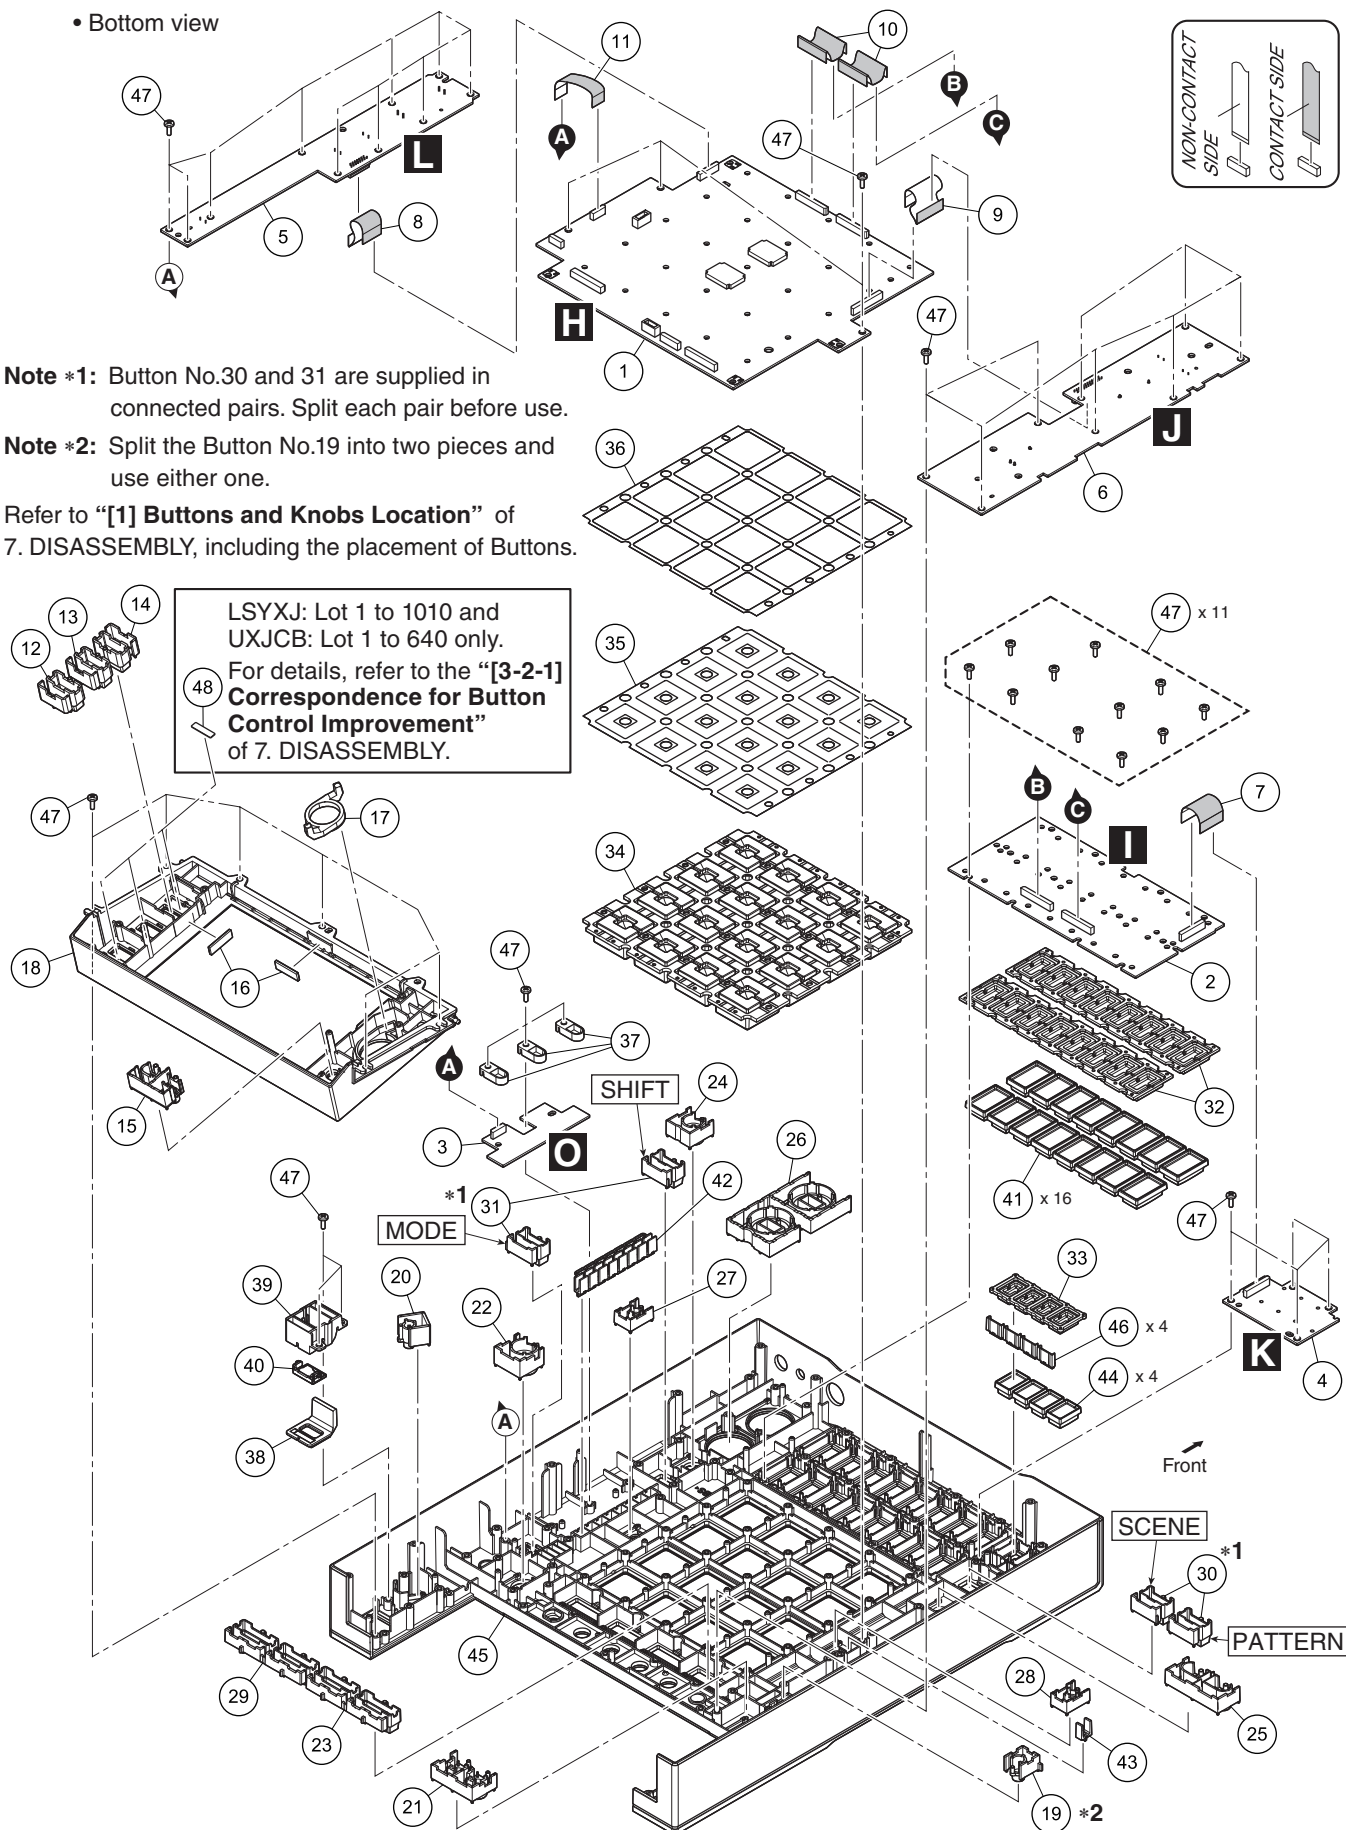

CONTROL PANEL SECTION (2/2) PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	PADB ASSY	DWX4085	26	Button	DAC3301
	2	SEQB ASSY	DWX4086	27	Button	DAC3302
	3	CDCB ASSY	DWX4087	28	Button	DAC3305
	4	BARB ASSY	DWX4089	29	Button	DAC3306
	5	KSWB ASSY	DWX4092	30	Button	DAC3307
	6	SLDB ASSY	DWX4093	31	Button	DAC3308
	7	FFC/19P	DDD1689	32	Button	DEB2033
	8	FFC	DDD1823	33	Button	DEB2039
	9	FFC	DDD1824	34	Button	DEB2050
	10	FFC	DDD1825	35	Sensor	DEC3736
B	11	FFC	DDD1827	36	Sheet	DEC3737
	12	Button	DAC3299	37	CDC Stopper	DNK5863
	13	Button	DAC3303	38	Lens	DNK6491
	14	Button	DAC3304	39	Holder	DNK6496
	15	Button	DAC3346	40	Door	DNK6497
	16	Packing/LCD	DEC3565	41	Cap	DNK6624
	17	Ring Lens (Browse)	DNK5322	42	Lens	DNK6723
	18	Control Panel	DNK6718	43	Lens	DNK6724
	19	Button/Tmp	DAC2845	44	Cap	DNK6726
	20	Button/USB	DAC3016	45	Control Panel	DNK6729
C	21	Button/Syn	DAC3032	46	Lens	DNK6756
	22	Button/Ef	DAC3040	47	Screw	BPZ30P080FNI
	23	Button	DAC3294	48	Spacer	DEC3789
	24	Button	DAC3298			
	25	Button	DAC3300			

D

E

F

12. PCB PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.

● The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω $\rightarrow$ 56×10^1 $\rightarrow$ 561 RD1/4PU $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 1 \\ J \end{bmatrix}$

47 k Ω $\rightarrow$ 47×10^3 $\rightarrow$ 473 RD1/4PU $\begin{bmatrix} 4 \\ 7 \end{bmatrix} \begin{bmatrix} 3 \\ J \end{bmatrix}$

0.5 Ω $\rightarrow$ R50 RN2H $\begin{bmatrix} R \\ 5 \end{bmatrix} \begin{bmatrix} 0 \\ K \end{bmatrix}$

1 Ω $\rightarrow$ 1R0 RS1P $\begin{bmatrix} 1 \\ R \end{bmatrix} \begin{bmatrix} 0 \\ K \end{bmatrix}$

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k Ω $\rightarrow$ 562×10^1 $\rightarrow$ 5621 RN1/4PC $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 2 \\ 1 \end{bmatrix} F$

Mark	No.	Description	Part No.
------	-----	-------------	----------

LIST OF ASSEMBLIES

	1..MAIN ASSY	DWX4080
--	--------------	---------

	1..LCDB ASSY	DWX4081
--	--------------	---------

NSP	1..AUDIO ASSY	DWM2665
	2..AUDB ASSY	DWX4082
	2..USBA ASSY	DWX4083

NSP	1..PAD ASSY	DWM2666
	2..PADB ASSY	DWX4085
	2..SEQB ASSY	DWX4086
	2..CDCB ASSY	DWX4087
	2..ILMB ASSY	DWX4088
	2..BARB ASSY	DWX4089
	2..SSK1 ASSY(×3)	DWX4090
	2..SSK2 ASSY(×3)	DWX4091

NSP	1..PANEL ASSY	DWM2667
	2..KSWB ASSY	DWX4092
	2..SLDB ASSY	DWX4093
	2..PARA ASSY	DWX4094
	2..DPTH ASSY	DWX4095
	2..SSK3 ASSY	DWX4096
	2..INVR ASSY	DWX4097
	2..HPJA ASSY	DWX4098

Δ	1..SW POWER SUPPLY	DWR1548
----------	--------------------	---------

Mark	No.	Description	Part No.
------	-----	-------------	----------

A

Unit Number: DWX4080

Unit Name: MAIN ASSY

SEMICONDUCTORS

Δ	IC	200 Regulator IC	MM1856A50N
Δ	IC	201,202,400 DC/DC CONV IC	MM3543BH
Δ	IC	203 Regulator IC	NJM2872BF33
	IC	204,401 IC	TPS2557DRB
Δ	IC	402 Driver IC	BD81A04EFV-M
	IC	403 Logic IC	74VHC4066AFT
Δ	IC	600 Power Supply IC	MMPF0100F0AEP
	IC	1000,1001 RAM IC	K4B4G1646E-BCMA
NSP	IC	1200 Flash ROM	DYW2034*
		*Part number of the initial firmware equipped	
	IC	1400,1401,2203 Logic IC	TC7SH08FUS2

Mark	No.	Description	Part No.
------	-----	-------------	----------

IC	1600 Logic IC	74VHC00FT
IC	1802 Logic IC	TC7SZU04FUS2
IC	2000 U-PRO IC	MCIMX6Q6AVT10AD
IC	2001 Flash Memory IC	THGBMHG6C1LBAWL
IC	2200 Interface IC	RTL8152B-VB-CG

IC	2201 Interface IC	USB2512B-AEZG-TR
IC	2202 Interface IC	RTL8304E-CG
Q	200,201,202,203 Bipolar TR	LSAR523UB
Q	204,208,210,211 Bipolar TR	LSCR523UB
Q	205,212 Resistor Built-IN TR	LTC024EEB

Q	206,207 Resistor Built-IN TR	LTC014EEB
Q	209,216,404,1600 Bipolar TR	LSAR523UB
Q	213 Resistor Built-IN TR	LTA024EEB
Q	214 Resistor Built-IN TR	LTC024EEB
Q	400,401,405,1601 Bipolar TR	LSCR523UB

Q	402 Resistor Built-IN TR	LTC023JEB
Q	403 FET	RTQ045N03
Q	1400 Resistor Built-IN TR	LTA024EEB
Q	1800 Resistor Built-IN TR	LTC014EEB
Q	2200 Resistor Built-IN TR	LTC023JEB

Q	2201 Transistor	2SB1188
Q	2202 Resistor Built-IN TR	LTA024EEB
D	200,201,202 Switching Diode	1SS355VM
D	203,204 Schottky Diode	RB162M-40
D	205,206,207 Switching Diode	1SS355VM

D	208,209,1600 Switching Diode	1SS355VM
D	210,402 Zener Diode	DZ2J056M0
D	400,401 Diode	RB060M-30
D	1603,1604 Switching Diode	1SS355VM
D	1605,1606 Switching Diode	1SS355VM

D	2200 Diode	RR264M-400
---	------------	------------

MISCELLANEOUS

L	1 Chip Beeds Filter	BTX1042
L	200,201 SMD SPL Inductor	CTH1524
L	400 Choke Coil	CTH1561
L	401,2205 Coil	ATH7015
L	403 SMD SPL Inductor	CTH1527

L	601,602,603 SMD SPL Inductor	CTH1530
L	604,605,606 SMD SPL Inductor	CTH1530
L	2203,2204 Choke Coil	ATH7098
X	1800 Resonator	CSS1807
X	1801 Crystal Transducer	DSS1208

X	2200,2202 Crystal(25MHz)	DSS1205
X	2201 Resonator	CSS1773

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	
	F	2200,2201,2202 EMI Filter	CCG1352	R	403		RS1/16SS1000D	
	F	2203,2204 EMI Filter	CCG1352	R	406		RS1/16SS8202D	
	KN	200,201 Screw Plate	VNE1948	R	407,417,420		RS1/16SS101J	A
				R	410		RS1/10SR331J	
	KN	202,203 Wrapping Terminal	CKF1089					
	KN	204,205 Wrapping Terminal	CKF1089	R	413		RS1/16SS473J	
	KN	206 Wrapping Terminal	CKF1089	R	418		RS1/16SS104J	
	PC	1600 Photo Coupler	TLP2368	R	419		RS1/16SS154J	
	VA	2200,2201,2202 SMD Varistor	EZJZ0V80010	R	421		RS1/16SS183J	
				R	422		RS1/4SA0R0J	
	CN	1,2 FFC/FPC Connector	DKP3953					
	CN	3 21P Connector	21R-1.25FJ	R	424		RS1/16SS221J	
	CN	4 19P Connector	19R-1.25FJ	R	426		RS1/16SS5100F	
	CN	200 Connector	DKN1661	R	427,430		RS1/16SS332J	
	CN	400 B To B 7Pin Plug	AKM7099	R	428,429,431,433		RS1/4SA2R7J	
				R	432		RS1/16SS4R7J	B
	JA	1600,1601 Connector	DKN1188					
	JA	2200 RJ45 Connector	AKN7115	R	434,438,451		RS1/16SS1203D	
	JA	2201 USB Connector	DKN1237	R	435		RS1/16SS1303D	
				R	436		RS1/16SS3902D	
				R	437,442		RS1/16SS4702D	
				R	439,444,445		RS1/16SS472J	

RESISTORS

R	1,2,3,4,5,6,7,8,9,10,11	RS1/16SS0R0J						
R	12,13,14,15,16,17,18,21	RS1/16SS0R0J						
R	19,20,24,27,28,29,31,35	RS1/16SS560J		R	440,446,449,605,609		RS1/16SS220J	
R	22,23,25,26,30,32,33,34	RS1/16SS0R0J		R	441		RS1/16SS3302D	
R	36,37,38,39,41,42,43,44	RS1/16SS0R0J		R	443		RS1/16SS1003D	
				R	450,800		RS1/16SS0R0J	
				R	452		RS1/16SS1602D	
R	40,205	RS1/16SS332J						
R	45,46,47,48,49,207,213	RS1/16SS0R0J		R	453,454		RS1/10SR152J	C
R	200,201,202,203,204	RS1/8SQ0R0J		R	455		RS1/10SR132J	
R	206,210	RS1/16SS2201D		R	456,457,612,613,614		RS1/4SA0R0J	
R	208	RS1/16SS2701D		R	458,604,607		RS1/16SS473J	
				R	460,601,610,812		RS1/16SS103J	
R	209	RS1/16SS4700D						
R	211	RS1/16SS2200D		R	600		RS1/16SS101J	
R	212	RS1/16SS1502D		R	602,603,1204,1205,1206		RS1/16SS470J	
R	214,218,219	RS1/16SS0R0J		R	608,611,615,616,806		RS1/10SR0R0J	
R	215,220	RS1/16SS3301D		R	807,1004,1007		RS1/16SS2400F	
				R	1000,1006		RS1/16SS102J	
R	216	RS1/16SS561J						
R	217	RS1/16SS2202D		R	1002,1003		RS1/16SS1001D	D
R	221	RS1/16SS2400D		R	1201,1202,1203,1222		RS1/16SS680J	
R	222,223,227,245	RS1/16SS103J		R	1207,1208,1209,1210,1211		RS1/16SS470J	
R	224,225	RS1/16SS513J		R	1212,1223		RAB4CQ680J	
				R	1213		RS1/16SS390J	
R	226,247	RS1/16SS333J						
R	228,236,237,244,258	RS1/16SS472J		R	1214,1224,1225,1226		RS1/16SS332J	
R	229,230,231,232	RS1/4SA2R7J		R	1216,1217,1218,1219,1220		RS1/16SS470J	
R	233	RS1/16SS473J		R	1221,1235,1236,1237,1400		RS1/16SS470J	
R	234,235	RS1/16SS220J		R	1227,1403,1404,1405,1411		RS1/16SS220J	
				R	1228		RS1/8SQ0R0J	
R	238,239,240,254,255,257	RS1/8SQ0R0J						
R	243,400	RS1/16SS273J		R	1229,1230		RAB4CQ220J	
R	246,401	RS1/16SS393J		R	1234,1240,1406,1407,1408		RS1/16SS101J	E
R	248,251	RS1/16SS1002D		R	1243		RS1/16SS472J	
R	249	RS1/16SS1801D		R	1245		RS1/16SS0R0J	
				R	1401,1413,1414,1415,1425		RS1/16SS470J	
R	250,404,405	RS1/16SS2201D						
R	252	RS1/16SS1501D		R	1402		RS1/16SS222J	
R	253	RS1/16SS2701D		R	1409,1410,1420,1421,1422		RS1/16SS101J	
R	256	RS1/8SQ561J		R	1412,1419,1424,1435,1439		RS1/16SS680J	
R	259,264	RS1/16SS0R0J		R	1416,1417,1418		RS1/16SS220J	
				R	1423		RS1/16SS101J	
R	260	RS1/16SS4702D						
R	261,265,408,412	RS1/16SS472J		R	1426,1427,1428,1429,1430		RS1/16SS470J	
R	267	RS1/16SS333J		R	1431,1432,1433,1434,1436		RS1/16SS470J	
R	268,409,415,416,425	RS1/16SS103J		R	1437,1443		RS1/16SS332J	F
R	269,414	RS1/16SS222J		R	1438,1440,1441,1442,1444		RS1/16SS470J	
				R	1445,1447,1448,1449,1450		RS1/16SS470J	
R	402	RS1/16SS1202D						

Mark	No.	Description	Part No.
A	R	1446	RS1/16SS104J
	R	1451,1452,1453,1454,1457	RS1/16SS470J
	R	1458,1460,1608,1609,1610	RS1/16SS470J
	R	1600,1601,1602,1603,1604	RS1/16SS153J
	R	1605,1606,1613,1614,1615	RS1/16SS153J
■	R	1607	RS1/10SR0R0J
	R	1611	RS1/16SS332J
	R	1612,1621,1626	RS1/16SS223J
	R	1616,1625	RS1/16SS472J
	R	1617,1618,1619,1620,1627	RS1/16SS153J
B	R	1622,1623	RS1/16SS151J
	R	1628	RS1/16SS153J
	R	1629,1630,1631,1632	RAB4CQ472J
	R	1633,1635,1641,1642,1645	RS1/16SS0R0J
	R	1634,1639,1644,1649	RAB4CQ103J
■	R	1647	RS1/16SS0R0J
	R	1653,1654,1655,1656,1660	RS1/10SR0R0J
	R	1657,1658,1659	RS1/4SA221J
	R	1661	RS1/16SS271J
	R	1662,1663,1802,1816	RS1/10SR0R0J
C	R	1664	RS1/16SS332J
	R	1803	RS1/16SS104J
	R	1804	RS1/16SS225J
	R	1805,1823,1827	RS1/16SS220J
	R	1807,1808,1815,1817	RS1/16SS103J
■	R	1810,2001	RS1/16SS472J
	R	1812,1814	RS1/16SS470J
	R	1818	RS1/16SS102J
	R	1821,1828,1830,1831,2016	RS1/16SS0R0J
	R	1824,1825,2002	RS1/16SS101J
D	R	2000,2004,2006,2008,2010	RS1/16SS473J
	R	2003,2005,2007,2009,2011	RS1/16SS680J
	R	2012,2014,2017,2019	RS1/16SS473J
	R	2013,2015,2018,2020	RS1/16SS680J
	R	2021,2232	RS1/16SS332J
■	R	2202,2205,2206,2207,2208	RS1/16SS0R0J
	R	2209,2210,2211,2234,2249	RS1/16SS0R0J
	R	2221	RS1/16SS471J
	R	2224,2227,2230,2231,2237	RS1/16SS472J
	R	2225	RS1/16SS91R0F
E	R	2226	RS1/16SS2401D
	R	2233	RS1/16SS1202D
	R	2235,2240	RS1/16SS103J
	R	2238	RS1/16SS331J
	R	2239	RS1/16SS104J
■	R	2241,2242,2246,2258,2261	RS1/16SS472J
	R	2244	RS1/16SS473J
	R	2247	RS1/16SS101J
	R	2248,2252	RS1/16SS220J
	R	2250,2259,2260,2287,2288	RS1/16SS0R0J
F	R	2251,2253,2254,2255	RS1/16SS49R9F
	R	2256,2257	RS1/16SS3901D
	R	2263,2272,2273,2276,2295	RS1/16SS472J
	R	2264,2271	RAB4CQ220J
	R	2269	RAB4CQ472J
■	R	2270	RS1/16SS390J
	R	2277,2278,2296	RS1/16SS470J
	R	2279,2280,2282,2283	RS1/10SR49R9F
	R	2284,2294	RS1/16SS332J
	R	2285	RS1/10SR0R0J

Mark	No.	Description	Part No.
■	R	2286	RS1/16SS223J
	R	2289	RS1/16SS101J
	R	2290	RS1/16SS822J
	R	2291	RS1/16SS103J
	R	2292	RS1/16SS220J
CAPACITORS			
■	C	1,3,4,5,7,8,9,11,17,24	CKSSYB104K16
	C	10,12,16,18,19,20,21,22	CCSSCH102J50
	C	23,207	CCSSCH102J50
	C	200,201	CKSSYB104K10
	C	202,203,204,213,215,216	CKSSYB104K16
■	C	206	CCSSCH101J50
	C	208	ACE7113
	C	209	ACE7100
	C	210	ACE7129
	C	211,219	CCH1565
■	C	214,220	CKSRYB474K16
	C	217,218,227,228,236,237	CKSSYB104K16
	C	221,222,226,229	CCSSCH331J50
	C	223	CKSRYB105K10
	C	224,225,260,261,262,263	DCH1263
■	C	230,231,254,255	CCSSCH102J50
	C	232,256	CCH2090
	C	235	CCSSCH470J50
	C	238	ACE7114
	C	239,240,402	CKSSYB153K16
■	C	242,259,273,274,401,412	CKSSYB104K16
	C	243,271,403,414,424	CKSSYB103K25
	C	245,404	CCSSCH561J50
	C	246	CCSSCH681J50
	C	253	CEVW221M16
■	C	257,258,419,422	CKSSYB104K10
	C	265,410	CCH1565
	C	270,602,605	CKSRYB105K10
	C	272,400,407,408,411,413	DCH1263
	C	415,436,604,607,611,614	CKSSYB104K16
■	C	416,418	CCSSCH102J50
	C	425	CCSQCH472J50
	C	426,427	CKSQYB225K16
	C	428,429,430,431,608	DCH1263
	C	603,613	CKSRYB474K16
■	C	606	CKSRYB224K16
	C	609	CKSRYB105K10
	C	610,612,615,617,620,621	CCG1201
	C	616,618,619,623,625,627	CKSSYB104K16
	C	624,638,642	CCG1201
■	C	626,628,629,630,631,634	DCH1256
	C	632,635	CKSSYB104K16
	C	636,637,639,640,647,649	DCH1256
	C	800,802,803,804,805,806	CKSSYB224K6R3
	C	801,810,814,818,827,833	DCH1256
■	C	807,808,809,811,812,813	CKSSYB224K6R3
	C	815,816,817,819,820,822	CKSSYB224K6R3
	C	821	DCH1263
	C	823,824,825,826,828,829	CKSSYB224K6R3
	C	830,831,832,834,835,836	CKSSYB224K6R3
■	C	837,838,840,842,844,845	CKSSYB224K6R3
	C	839,1006,1010,1011	CKSSYB104K16

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	C	841,843,847,849	DCH1256	⚠	IC	5008 DC/DC CONV IC	NJW4155GM1-A
	C	846,848,850,851,852,853	CKSSYB224K6R3	⚠	IC	5009 LDO Regulator(3.3V)	NJM2831F33
	C	854,855,1000,1001,1002	CKSSYB224K6R3	⚠	IC	5010 DC/DC CONV IC	NJW1933F1
	C	1003,1004,1005,1012,1013	CKSSYB224K6R3	IC	5200,5201,5205,5206	Logic IC	TC7SH08FUS2
	C	1007,1025	DCH1263	IC	5204	Logic IC	TC7SZ08FUS2
	C	1008,1009	CKSRYB105K10	IC	5207	Logic IC	TC7SH08FUS2
	C	1014,1015,1016,1017,1018	CKSSYB224K6R3	IC	5300,5301,5302,5501,5502	IC	NJM4580MD
	C	1019,1020,1021,1022,1023	CKSSYB224K6R3	IC	5303	CONV IC	AK5386VT
	C	1024,1400,1401,1404,1600	CKSSYB104K16	IC	5500,5700	CONV IC	AK4452VN
	C	1026,1027,1028,1029,1030	CKSSYB224K6R3	IC	5503,5504	Switched OP-AMP	NJM2121MD
	C	1031,1200	CKSSYB224K6R3	IC	5701	IC	NJM4580MD
	C	1201,1202,1813,1816	CCSSCH102J50	Q	5000,5002,5007	Bipolar TR	LSAR523UB
	C	1205	CCSSCH470J50	Q	5001,5006,5008	Bipolar TR	LSCR523UB
	C	1601	CKSSYB471K50	Q	5003	Resistor Built-IN TR	LTC014EEB
	C	1602,1603,1604,1605,1803	CKSSYB103K25	⚠	Q	5005 FET	RTQ040P02
	C	1800,1805,2004,2005,2006	CKSSYB104K16	Q	5300	Transistor	LTC124EUB
	C	1801,1809	CCSSCK1R0C50	Q	5301,5302	Chip FET	2SK209
	C	1804,1808,1811,2200,2201	CKSSYB104K10	Q	5500	Transistor	LTC114EUB
	C	1806,1807	CCSSCH9R0D50	Q	5501,5502	Chip Transistor	INC2002AC1
	C	1810,1812,1817,2009	CKSSYB103K25	Q	5503,5504	Chip Transistor	INC2002AC1
	C	1814,1815	CCSSCH101J50	Q	5505,5506	Chip Transistor	INC2002AC1
	C	2000,2001,2002	CCG1218	Q	5507,5508	Chip Transistor	INC2002AC1
	C	2003,2225,2226,2229	CKSRYB105K10	D	5000,5002	Switching Diode	1SS355VM
	C	2007,2008,2010	CKSSYB104K16	D	5001	Rectifier Diode	DAN202UM
	C	2202,2203,2218,2219,2220	CKSSYB104K10	D	5003,5004	Schottky Diode	RB501VM-40
	C	2215,2217,2232	CCSSCH100D50	D	5005,5006	Schottky Diode	RB501VM-40
	C	2216,2230	DCH1263	D	5007,5009	Schottky Diode	RB501VM-40
	C	2221,2222,2224,2227,2228	CKSSYB104K10	D	5010,5011	Schottky Diode	RB501VM-40
	C	2231,2233,2234,2235,2236	CKSSYB104K10	D	5012,5013	Schottky Diode	RB501VM-40
	C	2238,2241,2243,2245,2247	CKSSYB104K10	D	5014,5300	Schottky Diode	RB501VM-40
	C	2239	CKSRYB105K10	D	5016,5019	Switching Diode	1SS355VM
	C	2242	CCSSCH120J50	D	5017	Schottky Diode	RB162M-40
	C	2244,2253	CKSSYB103K25	D	5018	Diode	RB060M-30
	C	2246	CKSSYB332K50	D	5020,5304	Switching Diode	1SS355VM
	C	2248,2250,2251,2254,2255	CKSSYB104K10	D	5301,5302	Schottky Diode	RB501VM-40
	C	2249	CEHVAW470M6R3	D	5303,5314	Schottky Diode	RB501VM-40
	C	2252,2262	DCH1263	D	5305,5306	Switching Diode	1SS355VM
	C	2256,2258,2259,2261,2263	CKSSYB104K10	D	5307,5310	Switching Diode	1SS355VM
	C	2257,2260	CCSSCH100D50	D	5308,5309	Rectifier Diode	DA2J101
	C	2264,2268,2269,2270,2272	CKSSYB104K10	D	5311,5312	Switching Diode	1SS355VM
	C	2271	CCG1218	D	5313	Switching Diode	1SS355VM
				D	5315,5316	Schottky Diode	RB501VM-40
				D	5317	Schottky Diode	RB501VM-40

AUDIO ASSY

Consist of

AUDB ASSY

USBA ASSY

BC

Unit Number: DWM2665

Unit Name: AUDIO ASSY

SEMICONDUCTORS

⚠	IC	5000,5002,5003	Regulator IC	NJM78M09DL1A
⚠	IC	5001,5007	Regulator IC	NJM79M09DL1A
⚠	IC	5004	Regulator IC	NJM7805DL1A
⚠	IC	5005	IC	UA78M05IKVURG3
⚠	IC	5006	Regulator IC	UA78M33IKVUG3

MISCELLANEOUS

L	5000	Power Inductor	ATH7053
L	5001	SMD SPL Inductor	CTH1527
L	5201	Chip Beads	VTL1126
X	5200	Crystal Oscillator	DSS1215
KN	5000,5001	Wrapping Terminal	CKF1089
KN	5002,5003	Wrapping Terminal	CKF1089
KN	5004,5800	Wrapping Terminal	CKF1089
S	5000	Push SW	ASG1102
VA	5300,5303,5502	Varistors	EZJZ1V270RM
VA	5503,5509	Varistors	EZJZ1V270RM
VA	5800,5801,5802	SMD Varistor	EZJZ0V80010
CN	5000	21P Connector	21P-1.25FJ
CN	5001	19P Connector	19P-1.25FJ
CN	5002	L-plug(13P)	KM200NA13L
CN	5300	Connector	CKS3561

Mark	No.	Description	Part No.
A	CN	5800 B To B 7Pin Jack	AKN7065
	JA	5300,5301,5500,5501 Mic Jack	DKN1614
	JA	5502 RCA Jack	DKB1120
	JA	5800 USB Jack	DKB1118

RESISTORS

■	R	5000	RS1/16SS5601D
	R	5001	RS1/16SS8200D
	R	5002	RS1/16SS1002D
	R	5003,5005,5006,5015,5021	RS1/16SS0R0J
	R	5004,5027,5028	RS1/10SR0R0J
B	R	5007	RS1/16SS221J
	R	5009,5011	RS1/10SR513J
	R	5012,5025	RS1/16SS8201D
	R	5013,5052	RS1/16SS1001D
	R	5014,5053	RS1/16SS2202D
■	R	5016,5019	RS1/16SS470J
	R	5017,5018	RS1/16SS220J
	R	5020,5033,5055	RS1/16SS103J
	R	5023,5029,5047,5051	RS1/4SA0R0J
	R	5026	RS1/16SS472J
C	R	5034	RS1/16SS104J
	R	5036,5059	RS1/16SS2701D
	R	5037,5039	RS1/16SS1202D
	R	5038	RS1/16SS243J
	R	5041	RS1/16SS1801D
■	R	5042	RS1/16SS2201D
	R	5043	RS1/16SS5602D
	R	5054,5056,5058,5200,5205	RS1/16SS0R0J
	R	5057	RS1/16SS1502D
	R	5060	RS1/16SS4700D
D	R	5061	RS1/16SS153J
	R	5063,5064	RS1/10SR513J
	R	5065	RS1/8SQ0R0J
	R	5201,5202,5203,5217,5218	RS1/16SS220J
	R	5204	RS1/16SS181J
■	R	5206,5207,5211,5213,5215	RS1/16SS0R0J
	R	5216,5221,5222,5223,5224	RS1/16SS470J
	R	5219,5220	RS1/16SS680J
	R	5300,5301	RS1/10SR1000D
	R	5302,5303	RS1/10SR1200D
E	R	5304,5305,5306,5307	RS1/10SR6802D
	R	5308,5309,5312,5313,5326	RS1/10SR0R0J
	R	5314,5315	RS1/10SR4702D
	R	5316,5317,5322,5323	RS1/10SR1002D
	R	5318,5319	RS1/10SR3302D
■	R	5320,5321	RS1/10SR2002D
	R	5324,5325	RS1/16SS473J
	R	5327,5328,5329,5332,5333	RS1/10SR0R0J
	R	5330,5331	RS1/16SS105J
	R	5336,5337	RS1/10SR1000D
F	R	5339,5341,5500,5501	RS1/16SS0R0J
	R	5342,5343	RS1/16SS560J
	R	5344,5345	RS1/16SS101J
	R	5503	RS1/16SS220J
	R	5504	RAB4CQ103J
	R	5505	RS1/16SS103J
	R	5508,5509,5510,5511	RN1/16SE2200D
	R	5512,5513,5514,5515	RN1/16SE3301D

Mark	No.	Description	Part No.
R	5516,5517,5518,5519		RN1/16SE3901D
R	5520,5521,5522,5523		RN1/16SE1801D
R	5524,5527,5528,5529,5538		RS1/10SR473J
R	5530,5531		RS1/10SR1002D
R	5532,5533		RS1/10SR6200D
R	5534,5535,5558,5559		RS1/10SR0R0J
R	5539,5540,5541		RS1/10SR473J
R	5542,5543,5546,5547,5550		RS1/16SS153J
R	5544,5545,5548,5549,5552		RN1/16SE2700D
R	5551,5554,5555		RS1/16SS153J
R	5553,5556,5557		RN1/16SE2700D
R	5700		RS1/16SS101J
R	5701,5704,5705		RS1/16SS0R0J
R	5702,5703,5706		RS1/16SS560J
R	5707,5709,5710,5711,5712		RS1/16SS103J
R	5714,5715,5716,5717		RS1/10SR5601D
R	5718,5719,5720,5721		RS1/10SR1502D
R	5722,5723,5724,5725		RS1/10SR3901D
R	5726,5727		RS1/10SR1002D

CAPACITORS

C	5000	CKSSYB104K16
C	5001,5004,5005,5008	CKSSYB104K10
C	5002,5003	CCH1565
C	5009,5015,5024,5026,5027	CKSQYB334K50
C	5010,5025	CKSQYB225K16
C	5013,5014	ACE7097
C	5018,5019,5043,5044,5055	CCSSCH102J50
C	5022,5029,5030,5031,5032	CKSRYB104K25
C	5028	CKSQYB334K50
C	5033,5070	CKSRYB104K25
C	5036,5037,5059	CKSQYB105K16
C	5041,5042	CKSRYB103K50
C	5047,5062,5075	CCH1565
C	5048,5050	DCH1263
C	5051,5069	CCG1321
C	5053,5065	CCG1318
C	5054,5124	CKSSYB104K16
C	5057	CKSQYB224K50
C	5058	CCG1288
C	5060,5119	CCSSCH101J50
C	5061	CCG1218
C	5063,5120	CCSSCH102J50
C	5064	CKSSYB103K16
C	5066	CCSSCH820J50
C	5067,5122,5123	CKSSYB104K10
C	5074,5076	CCG1254
C	5096,5098	ACE7100
C	5100,5101	ACE7114
C	5102,5103,5115	ACE7129
C	5125,5128,5131,5134,5137	CCSRCH331J50
C	5126,5129,5132,5135,5138	CCSRCH101J50
C	5127,5130,5133,5136,5139	CCSRCH102J50
C	5140,5143,5146,5149,5152	CCSRCH331J50
C	5141,5144,5147,5150,5153	CCSRCH101J50
C	5142,5145,5148,5151,5154	CCSRCH102J50
C	5155,5159	CCSRCH102J50
C	5156	CKSRYB104K25
C	5157,5302	CCSRCH101J50

5

6

7

8

Mark	No.	Description	Part No.
C	5158,5300		CCSRCH331J50
C	5200,5212,5213		CKSSYB104K10
C	5201		CKSSYB103K16
C	5202,5208,5209,5220,5221		CCSSCH102J50
C	5203,5204,5205		CCSSCH101J50
C	5216		CCSSCH220J50
C	5218		ACE7100
C	5219		ACE7113
C	5222,5223		CCSSCH102J50
C	5224,5225,5226,5227,5326		CKSSYB104K16
C	5301,5303,5304,5333		CCSRCH102J50
C	5305,5306		CCSRCH101J50
C	5307,5308,5313,5314,5321		CEVW220M16
C	5309,5310		CEVW101M16
C	5311,5312,5315,5316,5317		CKSRYB104K25
C	5318,5340,5341		CKSRYB104K25
C	5322		CEVW220M16
C	5324		CEVW220M6R3
C	5325,5331		CEVW470M6R3
C	5327,5330,5505		CKSSYB104K16
C	5328,5329,5507,5508,5512		CCSSCH102J50
C	5336,5500		CKSSYB103K16
C	5337		CCSRCH331J50
C	5338		CCSRCH102J50
C	5339		CCSRCH101J50
C	5501,5523,5532,5535		CCH1565
C	5502		ACE7129
C	5503,5516,5517		ACE7100
C	5506,5514,5515		ACE7113
C	5509,5510,5511		CCSSCH101J50
C	5513		CCSSCH102J50
C	5518,5519		ACE7114
C	5520,5521		DCE1029
C	5522,5537,5540,5554,5555		CCH2090
C	5525,5526		CCSSCH471J50
C	5527,5528,5529,5530		CCSSCH331J50
C	5539,5564,5567		CCSRCH331J50
C	5541,5579,5580,5581		CKSRYB104K25
C	5543,5546,5548,5553		CCH1565
C	5556,5557		CCH2090
C	5558,5559,5560,5561		ACE7099
C	5565,5568,5572,5575,5709		CCSRCH102J50
C	5566,5569,5577		CCSRCH101J50
C	5700		CKSSYB103K16
C	5701		CKSRYB105K10
C	5702,5705,5713,5714		CKSSYB104K16
C	5703,5715,5716		CEVW470M6R3
C	5704,5706,5711,5712,5803		CCSSCH102J50
C	5718,5719		CCSRCH271J50
C	5720,5721,5722,5723		CCSRCH121J50
C	5724,5726		CEVW101M16
C	5725,5727		CKSRYB104K25
C	5728,5729		CEVW220M16
C	5801		DCH1263
C	5802		CKSSYB103K25

Mark	No.	Description	Part No.
PANEL ASSY			
Consist of			
KSWP ASSY			
SLDB ASSY			
PARA ASSY			
DPTH ASSY			
SSK3 ASSY			
INVR ASSY			
HPJA ASSY			
DEJLMNR			
Unit Number: DWM2667			
Unit Name: PANEL ASSY			
SEMICONDUCTORS			
IC	7400 IC		NJM4580MD
Q	7101,7102,7103 Transistor		LTC114YUB
Q	7104,7251,8501 Transistor		LTC114YUB
Q	7400,7401 Chip FET		2SK209
Q	7402,7403 Chip Transistor		INC2002AC1
Q	7404,7406 Bipolar TR		LSCR523UB
Q	7405,7407 Bipolar TR		LSAR523UB
Q	7408,7410 Bipolar TR		KTC3209
Q	7409,7411 Bipolar TR		KTA1281
Q	7412,7413 Chip Transistor		INC2002AC1
Q	8502,8503 Transistor		LTC114YUB
D	7101,7103 Rectifier Diode		DA2J101
D	7102,7106,7107 LED(White)		SLR343WBC7T(MN)
D	7104,7108,7110 LED		LTL17KSL5D
D	7105,7109 Rectifier Diode		DA2J101
D	7111,7400 Rectifier Diode		DA2J101
D	7112,7113,8502 LED(White)		SLR343WBC7T(MN)
D	7251,7252 Blue LED		SLR343BD2T(NP)
D	7401,7402 Rectifier Diode		DA2J101
D	7403,8503 Rectifier Diode		DA2J101
D	8501 LED		LTL17KCGP4J
D	8504,8505 Rectifier Diode		DA2J101
D	8506 LED		LTL17KRH5D
MISCELLANEOUS			
KN	7251,7252 Earth Terminal		AKF7002
KN	7400 Earth Terminal		AKF7002
KN	7401 Screw Plate		VNE1948
S	7101,7102,7103 Tact Switch		DSG1089
S	7104,7106,7251 Tact Switch		DSG1079
S	7105,7107,8503 Tact Switch		DSG1089
S	7201,7202 Rotary Encoder		DSX1136
S	7203,7204 Rotary Encoder		DSX1136
S	7205,7206 Rotary Encoder		DSX1136
S	8501,8502 Tact Switch		DSG1117
S	8504,8505 Tact Switch		DSG1089
VA	7404,7405 Varistors		EZJZ1V270RM
VR	7101 Slide VR		DCV1032
VR	7102 Variable Resistor		DCP1107
VR	7251 Rotary VR		DCS1104
VR	7301 Rotary VR		DCS1133
VR	7400 Rotary VR		DCS1071
CN	7101 24P Connector		VKN1255
CN	7201 13P Connector		VKN1244
CN	7251 8P Connector		VKN1239

DJS-1000

57

Mark	No.	Description	Part No.
A	CN	7301 Plug	CKS3533
	CN	7400 L-plug(13P)	KM200NA13L
	CN	8502 15P Connector	VKN1246
	JA	7400 Headphone Jack	DKN1622
	JA	7401 Stereo Mini Jack	XKN3017

Mark	No.	Description	Part No.
Q	3003,3004,3601	Bipolar TR	HN1A01FUS1
Q	3400	Transistor	2SAR502UB
D	3000,3019,3020,3021	LED	FC-1608HGK-572C
D	3001	LED	NHSW157B-A17842

RESISTORS

R	7101,7102	RS1/10SR152J
R	7103	RS1/10SR681J
R	7104,7108	RS1/10SR222J
R	7106,7107	RS1/10SR221J
R	7110,7111	RS1/10SR362J

R	7201,7202,7203,7204,7205	RS1/10SR101J
R	7206,7207,7208,7209,7210	RS1/10SR101J
R	7211,7212	RS1/10SR101J
R	7251,7252,7253	RS1/10SR102J
R	7400,7401,7402,7403	RS1/10SR1002D

R	7404,7405	RS1/10SR105J
R	7406,7407	RS1/10SR183J
R	7408,7409	RS1/4SA680J
R	7410,7411,7412,7413	RS1/10SR332J
R	7414,7415,7416,7417	RS1/10SR1001D

R	7418,7419,7420,7421	RS1/10SR3901D
R	7422,7423,7424,7425,7426	RS1/4SA390J
R	7427,7428,7429	RS1/4SA390J
R	7430,7431	RS1/10SR392J
R	7432,7433	RS1/10SR102J

R	7434,7435	RS1/10SR0R0J
R	8509,8510	RS1/10SR122J
R	8511	RS1/10SR561J
R	8513	RS1/10SR161J

CAPACITORS

C	7101,7102,7103,7106,7251	CKSRYB104K25
C	7107	CEJQ470M16
C	7252,7253,7405,7407,7414	CKSRYB104K25
C	7403,7408	CEAT101M16
C	7404,7406	CCSRCH330J50

C	7415,7416,7417,8508,8509	CKSRYB104K25
C	7419,7420,7421,7422	DCH1344
C	7423,7424,7425,7426	ACE7113
C	7427,7430,7433	CCSRCH331J50
C	7428,7431,7434	CCSRCH102J50

C	7429,7432,7435	CCSRCH101J50
C	8510,8511	CKSRYB104K25

F

Unit Number: DWX4081

Unit Name: LCDB ASSY

SEMICONDUCTORS

IC	3200 Interface IC	BU90R104
IC	3400 DC/DC CONV IC	R1290K103A
IC	3600,3601,3602 Logic IC	74LCX541FT
Q	3000 Resistor Built-IN TR	LTC023JEB
Q	3001 Resistor Built-IN TR	LTC023JEB

Q	3002 Resistor Built-IN TR	LTC023JEB
---	---------------------------	-----------

MISCELLANEOUS

L	3200 Chip Beeds Filter	BTX1047
L	3201 Chip Solid Inductor	XTL3010
L	3202 Chip Solid Inductor	XTL3010
L	3203,3602,3604 Chip Beads	VTL1126
L	3401 Choke Coil	CTH1426

L	3402,3611 Chip Beeds Filter	BTX1042
L	3600 Inductor	CTF1635
L	3601 Chip Coil	BTH1102
L	3605,3606,3607 Chip Beads	VTL1126
L	3608,3612,3613 Chip Beads	VTL1126

L	3609 Inductor	LCTAW101J2520
L	3610 Chip Inductor(10u)	DTL1105
L	3614,3615,3616 Chip Beads	VTL1126
L	3617,3618,3619 Chip Beads	VTL1126
L	3620,3621,3622 Chip Beads	VTL1126

L	3623,3624,3625 Chip Beads	VTL1126
KN	3200,3201 Wrapping Terminal	CKF1089
KN	3202,3203 Wrapping Terminal	CKF1089
KN	3204,3205 Wrapping Terminal	CKF1089
S	3000,3002,3003 Tact Switch	DSG1134

S	3001 Encoder SW	DSX1080
S	3004,3005 Tact Switch	DSG1134
NSP	CN	3000 Connector
NSP	CN	3001 Connector
CN	3002 FFC/FPC Connector	CKS6625

CN	3200 FFC/FPC Connector	DKP3953
CN	3600 Connector	CKS4428
CN	3601 FFC/FPC Connector	CKS6646

RESISTORS

R	3000	RS1/10SR151J
R	3001,3002	RS1/10SR331J
R	3003	RS1/16SS111J
R	3004	RS1/10SR470J
R	3005	RS1/10SR471J

R	3006,3007	RS1/16SS101J
R	3008,3009	RS1/10SR360J
R	3010,3011,3012,3013,3014	RS1/16SS0R0J
R	3015,3016,3017,3018,3019	RS1/16SS0R0J
R	3020,3021,3022,3023,3024	RS1/16SS0R0J

5			6			7			8			
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.		Mark	No.	Description	Part No.
R	3025,3026,3027,3028,3029		RS1/16SS0R0J	C	3002,3003,3004,3005,3006		CCSSCH102J50					
R	3030,3031,3032,3033,3037		RS1/16SS0R0J	C	3007,3008,3009,3202		CCSSCH102J50					
R	3034,3035,3036		RS1/10SR151J	C	3200,3201,3209,3212,3213		CKSSYB104K16					A
R	3039,3204,3205		RS1/16SS0R0J	C	3206		DCH1263					
R	3200,3201,3202,3203		RS1/16SS1000D	C	3208,3210,3211,3214,3222		CKSSYB103K25					
R	3206,3207,3210,3213,3400		RS1/16SS103J	C	3217		CCG1218					
R	3208,3225		RS1/16SS221J	C	3224,3226,3233,3412,3421		CKSSYB104K16					
R	3209,3211,3212,3214,3216		RS1/16SS220J	C	3228,3234,3419,3606,3607		CKSSYB103K25					
R	3217,3218,3219,3220,3221		RS1/16SS220J	C	3401,3417,3424		CKSSYB102K50					
R	3222,3223,3224,3226,3227		RS1/16SS220J	C	3402,3403,3413,3614,3615		CKSRYB105K10					
R	3228,3229,3230,3231,3232		RS1/16SS220J	C	3405,3406		CKSQYB105K25					
R	3401		RS1/16SS3603D	C	3407		CCG1201					
R	3402		RS1/16SS6802D	C	3409		CKSQYB104K50					
R	3403		RS1/16SS3901D	C	3410,3411		CKSQYB474K25					B
R	3404		RS1/16SS203J	C	3415		CKSSYB224K6R3					
R	3405		RS1/16SS104J	C	3416,3610		CCG1222					
R	3406		RS1/16SS103J	C	3418		CKSSYB561K50					
R	3407,3420		RS1/16SS472J	C	3420		CKSSYB332K50					
R	3408,3414		RS1/16SS1502D	C	3422,3423,3632		CCG1236					
R	3409,3412,3421,3422,3423		RS1/16SS0R0J	C	3602,3603,3605,3611,3612		CKSSYB104K16					
R	3410		RS1/16SS1103D	C	3608,3609,3648,3657		CKSSYB103K25					
R	3411		RS1/16SS1002D	C	3613,3616,3617,3618,3620		CKSSYB104K16					
R	3413		RS1/16SS8201D	C	3619,3671		CKSRYB105K10					
R	3415,3601		RS1/16SS2R2J	C	3622,3635,3636,3644,3656		CKSSYB104K16					
R	3416,3612		RS1/10SR0R0J	C	3627,3638,3639		CKSSYB102K50					C
R	3417		RS1/16SS3303D	C	3633,3678		DCH1263					
R	3418		RS1/16SS5601D	C	3647		CKSQYB225K16					
R	3419		RS1/16SS3902D	C	3649		CCG1236					
R	3424,3425,3426,3603,3608		RS1/16SS0R0J	C	3654		CCG1201					
R	3600,3615		RS1/16SS39R0D	C	3655		CKSQYB334K50					
R	3602,3619		RS1/16SS47R0D	C	3660		CKSSYB104K16					
R	3604		RS1/16SS1R2J	C	3667,3668,3669,3670,3672		CCSSCH102J50					
R	3605		RS1/16SS1R5J	C	3676,3677		CCSSCH102J50					
R	3606,3616		RS1/16SS75R0F									
R	3607		RS1/16SS200J									
R	3609,3610,3611		RS1/16SS0R0J									D
R	3613,3617		RS1/16SS1300D									
R	3614		RS1/16SS51R0D									
R	3618,3622		RS1/16SS82R0D									
R	3620		RS1/16SS56R0D									
R	3621		RS1/16SS1800D									
R	3623,3625,3626,3627,3628		RS1/16SS561J									
R	3629,3631,3632,3633,3634		RS1/16SS561J									
R	3630,3639		RS1/10SR0R0J									
R	3635,3636,3637,3638,3645		RS1/16SS561J									
R	3640		RS1/16SS1001D									
R	3641		RS1/16SS390J									
R	3642		RS1/16SS8200D									
R	3643,3653		RS1/16SS0R0J									
R	3646,3647,3649,3650,3651		RS1/16SS561J									
R	3648		RS1/16SS101J									
R	3654		RS1/16SS223J									
R	3655,3657,3658,3660,3662		RS1/16SS472J									
R	3665		RS1/16SS472J									
R	3666		RS1/10SR820J									
R	3667		RS1/10SR471J									
R	3668		RS1/10SR470J									
CAPACITORS				PAD ASSY Consist of PADB ASSY SEQB ASSY CDCB ASSY ILMB ASSY BARB ASSY SSK1 ASSY SSK2 ASSY GHIKOPQ Unit Number: DWM2666 Unit Name: PAD ASSY SEMICONDUCTORS								
R	3648		RS1/16SS101J	IC	7700 CDC IC		AD7147ACPZ500RL7					
R	3654		RS1/16SS223J	IC	7701,8001,8002,8004 Logic IC		TC7SH08FUS2					
R	3655,3657,3658,3660,3662		RS1/16SS472J	IC	8003 Logic IC		TC7SHU04FUS2					
R	3665		RS1/16SS472J	IC	8005 Flash ROM		DYW2036*					
R	3666		RS1/10SR820J		*Part number of the initial firmware equipped							
R	3667		RS1/10SR471J	IC	8006 IC		S-80927CNMC-G8X					
R	3668		RS1/10SR470J	IC	8007 Logic IC		TC7SH08FUS2					F
				IC	8008 Flash ROM		DYW2037*					
					*Part number of the initial firmware equipped							
				Q	7501 Resistor Built-IN TR		LTC023JEB					

CAPACITORS

Mark No. Description Part No.

A	Q	7502 Resistor Built-IN TR	LTC023JEB
	Q	7503 Resistor Built-IN TR	LTC023JEB
	Q	7504 Resistor Built-IN TR	LTC023JEB
	Q	7601,7602,7603 Bipolar TR	LSAR523UB
	Q	7604 Resistor Built-IN TR	LTC023JEB
■	Q	7801,7802,7803 Bipolar TR	LSCR523UB
	Q	7804,7805,7806 Bipolar TR	LSCR523UB
	Q	7807,7808,7809 Bipolar TR	LSCR523UB
	Q	7810,7811,7812 Bipolar TR	LSCR523UB
	Q	7813,7814,7815 Bipolar TR	LSCR523UB
B	Q	7816,7817,7818 Bipolar TR	LSCR523UB
	Q	7819,7820,7821 Bipolar TR	HN1A01FUS1
	Q	7822,7823,7824 Bipolar TR	HN1A01FUS1
	Q	7825,7826,7827 Bipolar TR	HN1A01FUS1
	Q	7828,7829,7830 Bipolar TR	HN1A01FUS1
■	Q	7831,7832,7833 Bipolar TR	HN1A01FUS1
	Q	7834,7835,7836 Bipolar TR	HN1A01FUS1
	Q	7837,7838,7839 Bipolar TR	HN1A01FUS1
	Q	7840,7841,7842 Bipolar TR	HN1A01FUS1
	Q	7843,7844,7845 Bipolar TR	HN1A01FUS1
C	Q	7846,7847,7848 Bipolar TR	HN1A01FUS1
	Q	7849,7850,8016 Bipolar TR	HN1A01FUS1
	Q	8001,8002 Chip Transistor	2SB1689
	Q	8003,8011,8029 Transistor	LTC124EUB
	Q	8004 Resistor Built-IN TR	LTA024EEB
■	Q	8005 Resistor Built-IN TR	LTC024EEB
	Q	8006,8007 Chip Transistor	2SB1689
	Q	8008 Resistor Built-IN TR	LTC023JEB
	Q	8009,8012 Chip Transistor	2SB1689
	Q	8010 Resistor Built-IN TR	LTC023JEB
D	Q	8013 Resistor Built-IN TR	LTC023JEB
	Q	8014 Resistor Built-IN TR	LTC023JEB
	Q	8015 Resistor Built-IN TR	LTC023JEB
	Q	8017,8018,8019 Bipolar TR	HN1A01FUS1
	Q	8020 Bipolar TR	HN1A01FUS1
■	Q	8021 Resistor Built-IN TR	LTA023JEB
	Q	8022 Transistor	RT1N141M-11
	Q	8023 Resistor Built-IN TR	LTA023JEB
	Q	8024 Resistor Built-IN TR	LTA023JEB
	Q	8025 Resistor Built-IN TR	LTC024EEB
E	Q	8026 Resistor Built-IN TR	LTC024EEB
	Q	8027 Resistor Built-IN TR	LTC023JEB
	Q	8028 Resistor Built-IN TR	LTC023JEB
	Q	8030,8031,8032 Transistor	LTC124EUB
	Q	8033,8034,8035 Transistor	LTC124EUB
■	Q	8036,8037,8038 Transistor	LTC124EUB
	Q	8039,8040 Transistor	LTC124EUB
	Q	8043,8045,8046 Bipolar TR	LSCR523UB
	Q	8044 Resistor Built-IN TR	RN1903S1
	Q	8047,8048,8049 Bipolar TR	LSAR523UB
F	Q	8050,8051,8052 Bipolar TR	LSAR523UB
	Q	8053,8054,8055 Bipolar TR	LSAR523UB
	Q	8056,8057,8058 Bipolar TR	LSAR523UB
	Q	8059,8060,8061 Bipolar TR	LSAR523UB
	Q	8062,8063,8064 Bipolar TR	LSAR523UB
■	Q	8065,8066,8067 Bipolar TR	LSAR523UB
	Q	8068,8069,8070 Bipolar TR	LSAR523UB
	Q	8071 Resistor Built-IN TR	RN1903S1
	Q	8072,8073,8074 Bipolar TR	LSCR523UB

Mark No. Description Part No.

Q	8075,8076,8077 Bipolar TR	LSCR523UB
Q	8078,8079,8080 Bipolar TR	LSCR523UB
Q	8081,8091 Chip Transistor	2SB1689
Q	8082,8083,8084 Bipolar TR	LSCR523UB
Q	8085,8086,8087 Bipolar TR	LSCR523UB
Q	8088,8089,8090 Bipolar TR	LSCR523UB
Q	8092,8093,8094 Bipolar TR	HN1A01FUS1
Q	8095,8097,8098 Bipolar TR	HN1A01FUS1
Q	8096 Resistor Built-IN TR	RN1903S1
Q	8099,8100,8102 Bipolar TR	HN1A01FUS1
Q	8101,8110 Chip Transistor	2SB1689
Q	8103,8104,8105 Bipolar TR	HN1A01FUS1
Q	8106,8107,8108 Bipolar TR	HN1A01FUS1
Q	8109,8111,8112 Bipolar TR	HN1A01FUS1
Q	8113,8114,8116 Bipolar TR	HN1A01FUS1
Q	8115 Resistor Built-IN TR	RN1903S1
Q	8117,8118,8119 Bipolar TR	HN1A01FUS1
Q	8120,8129 Chip Transistor	2SB1689
Q	8121,8122,8123 Bipolar TR	HN1A01FUS1
Q	8124,8125,8126 Bipolar TR	HN1A01FUS1
Q	8127,8128 Bipolar TR	HN1A01FUS1
Q	8135 Resistor Built-IN TR	RN1903S1
D	7501,7504,7506,7508,7511 LED	FC-1608HGK-572C
D	7502,7505,7507,7509,7512 LED	FC-F1608BAK5
D	7503,7510 Rectifier Diode	DA2J101
D	7513,7515,7518,7520,7522 LED	FC-1608HGK-572C
D	7514,7516,7519,7521,7523 LED	FC-F1608BAK5
D	7517,7524 Rectifier Diode	DA2J101
D	7525,7527 LED	FC-1608HGK-572C
D	7526,7528 LED	FC-F1608BAK5
D	7601,7602 LED	NHSW157B-A17842
D	7700 Zener Diode	DZ2J056M0
D	7801,7802 Rectifier Diode	DA2J101
D	7803,7804,7807,7808,7811 LED	NSSM124F-A21107
D	7805,7806 Rectifier Diode	DA2J101
D	7809,7810 Rectifier Diode	DA2J101
D	7812,7815,7816,7819,7820 LED	NSSM124F-A21107
D	7813,7814 Rectifier Diode	DA2J101
D	7817,7818 Rectifier Diode	DA2J101
D	7821,7822 Rectifier Diode	DA2J101
D	7823,7824,7827,7828,7831 LED	NSSM124F-A21107
D	7825,7826 Rectifier Diode	DA2J101
D	7829,7830 Rectifier Diode	DA2J101
D	7832 LED	NSSM124F-A21107
D	8001,8004 Rectifier Diode	DA2J101
D	8002,8003,8005,8007,8009 LED	NHSW157B-A17842
D	8006,8008 Rectifier Diode	DA2J101
D	8010,8012 Rectifier Diode	DA2J101
D	8011,8029,8030,8031,8032 LED	FC-1608HGK-572C
D	8013,8014,8015,8016,8017 LED	FC-F1608BAK5
D	8018,8019,8020,8021,8022 LED	FC-F1608BAK5
D	8023,8024,8025,8026,8027 LED	FC-F1608BAK5
D	8028 LED	FC-F1608BAK5
D	8033,8034,8035,8036,8037 LED	FC-1608HGK-572C
D	8038,8039,8040,8057,8058 LED	FC-1608HGK-572C
D	8041,8042,8043,8044,8045 LED	NSSM124F-A21107
D	8046,8047,8048,8049,8050 LED	NSSM124F-A21107
D	8051,8052,8053,8054,8055 LED	NSSM124F-A21107
D	8056 LED	NSSM124F-A21107

5				6				7				8			
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	D	8059,8060,8061,8062,8063 LED	FC-1608HGK-572C		R	7884,7898,7900,7914,7916	RS1/10SR471J								
					R	7894,7907,7908,7909,7910	RS1/10SR121J								
					R	7903,7917,7919,7933,7935	RS1/16SS470J								
					R	7904,7918,7920,7934,7936	RS1/16SS471J								
MISCELLANEOUS															
	L	7700 Chip Solid Inductor	XTL3010		R	7906,7921,7922,7937,7938	RS1/10SR150J								
	L	8001 Chip Coil	LCTAW330J2520		R	7923,7924,7925,7926,7939	RS1/10SR121J								
	X	8001 Crystal Resonator	BSS1146		R	7927,7928,7943,7944,7959	RS1/10SR120J								
	KN	8001,8002 Wrapping Terminal	CKF1089		R	7929,7931,7945,7947,7961	RS1/10SR470J								
	KN	8003,8004 Wrapping Terminal	CKF1089		R	7930,7932,7946,7948,7962	RS1/10SR471J								
	S	7601,8001,8006 Tact Switch	DSG1134		R	7940,7941,7942,7955,7956	RS1/10SR121J								
	S	8002,8003,8004 Push Switch	CSG1155		R	7949,7951,8003,8004,8005	RS1/16SS470J								
	S	8005 Push Switch	CSG1155		R	7950,7952	RS1/16SS471J								
NSP	CN	7501,7803 Connector	CKS3860		R	7953,7954	RS1/10SR150J								
NSP	CN	7601 Connector	CKS3846		R	7957,7958	RS1/10SR121J								
NSP	CN	7700,8001 Connector	CKS3850		R	7960	RS1/10SR120J								
NSP	CN	7801,7802,8004 Connector	CKS3865		R	7963	RS1/10SR470J								
	CN	8002 Connector	CKS3849		R	7964	RS1/10SR471J								
NSP	CN	8003 Connector	CKS3856		R	8001,8006,8012,8020,8025	RS1/16SS223J								
NSP	CN	8005,8008,8009 Connector	CKS3865		R	8002,8007,8013,8021,8026	RS1/16SS331J								
	CN	8006 FFC/FPC Connector	DKP3953		R	8008	RS1/16SS103J								
NSP	CN	8007 Connector	CKS3854		R	8009,8010,8017,8018,8019	RS1/16SS470J								
					R	8014,8015,8016,8030,8032	RS1/16SS563J								
					R	8022,8023,8024,8027,8031	RS1/16SS470J								
					R	8028	RS1/16SS223J								
	R	7501,7502,7504,7506,7507	RS1/10SR241J		R	8029	RS1/16SS331J								
	R	7503,7505,7508,7512,7514	RS1/10SR331J		R	8033,8035,8036,8037,8040	RS1/16SS470J								
	R	7509,7510,7511,7513,7515	RS1/10SR241J		R	8034	RS1/16SS563J								
	R	7516,7518,7519,7520,7522	RS1/10SR241J		R	8038,8045,8052,8059,8066	RS1/10SR470J								
	R	7517,7521,7523,7526,7530	RS1/10SR331J		R	8039,8046,8053,8060,8067	RS1/10SR471J								
	R	7524,7525,7527,7528,7529	RS1/10SR241J		R	8041,8042,8044	RS1/16SS470J								
	R	7531,7533,7534,7536	RS1/10SR241J		R	8043	RS1/10SR681J								
	R	7532,7535	RS1/10SR331J		R	8047,8048,8049,8050,8054	RS1/16SS3301D								
	R	7601,7602	RS1/10SR820J		R	8051,8058,8065,8072	RS1/10SR221J								
	R	7603	RS1/10SR470J		R	8055,8056,8057,8061,8062	RS1/16SS3301D								
	R	7604	RS1/10SR471J		R	8063,8064,8068,8069,8070	RS1/16SS3301D								
	R	7703	RS1/16SS0R0J		R	8071	RS1/16SS3301D								
	R	7704	RS1/16SS560J		R	8073,8074	RS1/10SR241J								
	R	7705	RS1/16SS472J		R	8075,8080	RS1/10SR0R0J								
	R	7801,7802,7803,7804,7805	RS1/16SS102J		R	8076,8077,8078,8079	RS1/16SS0R0J								
	R	7806,7807,7808,7809,7810	RS1/16SS102J		R	8081	RS1/10SR105J								
	R	7811,7812,7813,7814,7815	RS1/16SS102J		R	8082	RS1/16SS152J								
	R	7816,7817,7818	RS1/16SS102J		R	8083,8084	RS1/16SS220J								
	R	7819,7820,7821,7822,7823	RS1/16SS473J		R	8085,8086,8087,8088,8089	RS1/16SS560J								
	R	7824,7825,7826,7827,7828	RS1/16SS473J		R	8090,8091,8092,8093,8094	RS1/16SS560J								
	R	7829,7830,7831,7832,7833	RS1/16SS473J		R	8095,8096,8097,8098,8099	RS1/16SS560J								
	R	7834,7835,7836	RS1/16SS473J		R	8100,8101,8102,8103,8104	RS1/16SS560J								
	R	7837,7839,7853,7855	RS1/16SS470J		R	8105,8106,8107,8110,8111	RS1/16SS560J								
	R	7838,7840,7854,7856	RS1/16SS471J		R	8109,8113,8120	RS1/16SS472J								
	R	7841,7842,7857,7858	RS1/10SR150J		R	8114,8115,8116,8117,8118	RS1/16SS560J								
	R	7843,7844,7845,7846,7859	RS1/10SR121J		R	8119,8121,8123,8124,8125	RS1/16SS560J								
	R	7847,7848,7863,7864,7879	RS1/10SR120J		R	8122	RS1/16SS154J								
	R	7849,7851,7865,7867,7881	RS1/10SR470J		R	8126,8128,8129,8130,8131	RS1/16SS560J								
	R	7850,7852,7866,7868,7882	RS1/10SR471J		R	8127	RS1/16SS101J								
	R	7860,7861,7862,7875,7876	RS1/10SR121J		R	8132	RS1/16SS223J								
	R	7869,7871,7885,7887,7901	RS1/16SS470J		R	8133,8134,8135,8136,8137	RS1/16SS560J								
	R	7870,7872,7886,7888,7902	RS1/16SS471J		R	8138,8139,8140,8141,8143	RS1/16SS560J								
	R	7873,7874,7889,7890,7905	RS1/10SR150J		R	8142,8159,8161	RS1/16SS472J								
	R	7877,7878,7891,7892,7893	RS1/10SR121J		R	8144,8145,8147,8148,8150	RS1/16SS560J								
	R	7880,7895,7896,7911,7912	RS1/10SR120J		R	8146	RS1/16SS222J								
	R	7883,7897,7899,7913,7915	RS1/10SR470J												

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
R	8149		RS1/16SS103J	R	8393,8394,8395		RS1/10SR121J
	8151,8152,8153,8154,8155		RS1/16SS560J		8396,8397,8398,8399		RS1/10SR120J
	8156,8157,8162,8163,8164		RS1/16SS560J		8400		RS1/16SS331J
	8158,8183,8184,8185,8186		RS1/16SS101J		8401,8403,8405,8407		RS1/10SR470J
	8165,8166,8167,8168,8169		RS1/16SS560J		8402,8404,8406,8408		RS1/10SR471J
R	8170,8171,8172,8173,8174		RS1/16SS560J	R	8409		RS1/16SS223J
	8175,8176,8177,8178,8179		RS1/16SS560J		8410		RS1/16SS563J
	8180,8205,8207,8209,8211		RS1/16SS560J		8411,8413,8415,8417		RS1/16SS470J
	8181,8182		RS1/10SR0R0J		8412,8414,8416,8418		RS1/16SS471J
	8187,8188,8189,8192,8193		RS1/16SS101J		8419,8420,8421,8422		RS1/10SR150J
R	8190,8191		RS1/16SS105J	R	8423,8424,8425,8426,8427		RS1/10SR121J
	8194,8195,8196,8197,8198		RS1/16SS101J		8428,8429,8430		RS1/10SR121J
	8199,8200,8203,8215,8216		RS1/16SS101J		8431,8432,8433,8434		RS1/10SR120J
	8201,8202		RS1/16SS331J		8435		RS1/16SS331J
	8206		RS1/16SS220J		8436,8438,8440,8442		RS1/10SR470J
R	8208,8210,8236,8238,8239		RS1/16SS472J	R	8437,8439,8441,8443		RS1/10SR471J
	8212		RS1/16SS154J		8444		RS1/16SS223J
	8217		RS1/16SS473J		8445		RS1/16SS563J
	8218,8219		RS1/16SS101J		8446,8448,8450,8452		RS1/16SS470J
	8220		RS1/16SS223J		8447,8449,8451,8453		RS1/16SS471J
R	8222,8223,8225,8227,8229		RS1/16SS560J	R	8454,8455,8456,8457		RS1/10SR150J
	8224,8226,8228,8230,8232		RS1/16SS151J		8458,8459,8460,8461,8462		RS1/10SR121J
	8231,8234,8235,8242,8243		RS1/16SS560J		8463,8464,8465		RS1/10SR121J
	8233,8244,8245,8246,8248		RS1/16SS151J		8466,8467,8468,8469		RS1/10SR120J
	8240,8241		RS1/16SS472J		8470		RS1/16SS331J
R	8247,8249,8250,8251,8252		RS1/16SS560J	R	8471,8473,8475,8477		RS1/10SR470J
	8253,8257,8259,8260,8261		RS1/16SS560J		8472,8474,8476,8478		RS1/10SR471J
	8254,8255,8256,8258		RS1/16SS151J		8479		RS1/16SS223J
	8262,8263,8264,8265,8266		RS1/16SS560J		8480		RS1/16SS563J
	8267,8268,8269		RS1/16SS560J		8481,8483,8485,8487		RS1/16SS470J
R	8270,8271,8272,8273,8274		RS1/10SR223J	R	8482,8484,8486,8488		RS1/16SS471J
	8275,8276,8277,8278,8279		RS1/10SR223J		8489,8490,8491,8492		RS1/10SR150J
	8282,8283,8284		RS1/16SS102J		8493,8494,8495,8496,8497		RS1/10SR121J
	8287,8288,8289		RS1/16SS473J		8498,8499,8500		RS1/10SR121J
	8290,8291,8292,8293,8294		RS1/16SS220J		8501,8502,8503,8504		RS1/10SR120J
R	8295,8296,8297,8298,8299		RS1/16SS220J	R	8505		RS1/16SS331J
	8300,8301,8302,8303,8304		RS1/16SS220J		8506,8508,8510,8512		RS1/10SR470J
	8305		RS1/16SS220J		8507,8509,8511,8513		RS1/10SR471J
	8306,8307,8308,8309,8310		RS1/16SS241J		8514		RS1/16SS223J
	8311,8312,8313,8314,8315		RS1/16SS241J		8515		RS1/16SS563J
R	8316,8317		RS1/16SS241J	R	8516,8517,8518,8519,8520		RS1/10SR241J
	8318,8320,8322,8324,8326		RS1/10SR470J		8521		RS1/10SR241J
	8319,8321,8323,8325,8327		RS1/10SR471J		8522,8523,8524,8525,8526		RS1/16SS241J
	8328,8330,8332		RS1/10SR470J		8527,8528,8529,8530,8531		RS1/16SS241J
	8329,8331,8333		RS1/10SR471J		8532,8533,8534,8535,8536		RS1/16SS241J
R	8334,8335,8336,8337,8338		RS1/16SS102J	R	8537,8538,8539,8540,8541		RS1/16SS241J
	8339,8340,8341,8342,8355		RS1/16SS102J				
	8343,8344,8345,8346,8347		RS1/16SS473J				
	8348,8349,8350,8351,8364		RS1/16SS473J				
	8352,8373		RS1/16SS331J				
				CAPACITORS			
R	8353,8374		RS1/16SS223J	C	7501,7703,7805,7807		CCG1192
	8354,8375		RS1/16SS563J	C	7602		CKSRYB104K25
	8356,8357,8358,8359,8360		RS1/16SS102J	C	7701		CKSSYB103K16
	8361,8362,8363		RS1/16SS102J	C	7702,7709,8001,8002,8003		CKSSYB104K16
	8365,8366,8367,8368,8369		RS1/16SS473J	C	7704		CCSSCH221J50
R	8370,8371,8372		RS1/16SS473J	C	7708		CCSSCH101J50
	8376,8378,8380,8382		RS1/16SS470J	C	8004,8005,8007,8008,8009		CKSSYB104K16
	8377,8379,8381,8383		RS1/16SS471J	C	8006,8010		ACG1142
	8384,8385,8386,8387		RS1/10SR150J	C	8011,8012,8013,8016,8019		CKSSYB104K16
	8388,8389,8390,8391,8392		RS1/10SR121J	C	8014,8015		CEHVW101M6R3

CAPACITORS

Mark	No.	Description	Part No.
C	8017,8018		CKSRYB474K10
C	8020,8021,8023,8028,8030		CKSSYB104K16
C	8024,8027,8034,8036,8038		CKSSYB102K50
C	8025		CCSSCH150J50
C	8026		CCSSCH120J50
C	8029,8049		DCH1256
C	8031,8033,8035		CKSRYB104K25
C	8032,8041,8050,8053,8054		CKSSYB103K16
C	8037,8047,8052,8068,8070		CKSSYB104K16
C	8039,8043,8045,8069		CKSSYB102K50
C	8040		CKSRYB473K50
C	8046		CEHVV101M6R3
C	8048,8071,8072,8074,8075		CKSSYB471K50
C	8051		CCG1192
C	8055,8056,8057,8058,8059		CKSSYB103K16
C	8060,8061,8062,8063,8064		CKSSYB103K16
C	8065,8066,8067,8073		CKSSYB103K16
C	8076,8078		CKSRYB104K25
C	8077,8095		CKSSYB471K50
C	8079,8080,8081,8082,8083		CKSSYB102K50
C	8084,8085,8086,8087,8088		CKSSYB102K50
C	8089,8090,8091,8092		CKSSYB102K50
C	8094		CCG1192



Unit Number: DWR1548

Unit Name: SW POWER SUPPLY

SW POWER SUPPLY because of only PCB replacement, parts are not serviced.

SW POWER SUPPLY は基板交換のみとなる為、部品はサービスされません。