

Frequency response: 17Hz to 20kHz(CD)(+3/-3dB)
 Separation: 60dB
 Distortion: 0.5%

MP3 / WMA

Sampling rate: MPEG1 44.1kHz/48kHz/32kHz
 MPEG2 22.05kHz/24kHz/16kHz

Bit rate: MPEG1 32kbps to 320kbps
 MPEG2 8kbps to 160kbps
 (VBR)

Logical Format: ISO9660 level1, 2
 JOLIET or Romeo

Audio Amplifier

Maximum power output: 50W x 4ch

LCD Monitor


Screen size: 7-inch wide type
 154.0mm Width X 86.6mm Height
 Display method: Transmission type TN QVGA TFT LCD
 Drive method: TFT(thin-film transistor)
 active matrix driving
 Pixels: 336,960 (1440 x 234)

General

Power source voltage: 14.4V DC
 (10.8 to 15.6V allowable)
 Ground: Negative
 Current consumption: 4.0A(1W)
 Auto antenna rated current: 500mA less
 Dimension of the Main Unit: 178mm (W) x 50mm (H) x 160mm (D)
 Weight of the Main Unit: 2.5kg
 Dimension of the Remote Control Unit:
 53mm(W) x 21mm (H) x 165mm (D)
 Weight of the Remote control Unit:90g (including battery)

COMPONENTS



1	Main unit	#QC6825K-A H	1
2	Manuals		1
2-1.	Owner's Manual & Instalation manuals		
		6311-682-001	1
3	Power supply lead(For the main unit)		
		2141-682-005	1
4	RCA lead	2141-682-003	1
5	Bag for accessories of the main unit(No.1)		
		6131-682-003	1
5-1.	Flathead screw(M5x8)	5612-350-080	4
5-2.	Sems hexagonal bolt(M5x8)	5616-350-080	5
5-3	Electro tap	6459-682-001	1
5-4.	Machine screw(M4x3)	5616-340-030	4
6	Bag for accessories of the main unit(No.2)		
		6131-682-003	1
6-1.	Hook plate	5229-682-002	2
6-2.	Cord clamp	2179-000-001	1
7	Universal mounting bracket	5229-682-001	1
8	Remote control unit	6425-682-001	1
9	Bag for accessories	6131-682-005	1
9-1.	Battery(SMU-4)	2211-000-001	1
10	Outher Escutcheon	5189-682-001	1
11	DCP Case	5119-682-001	1

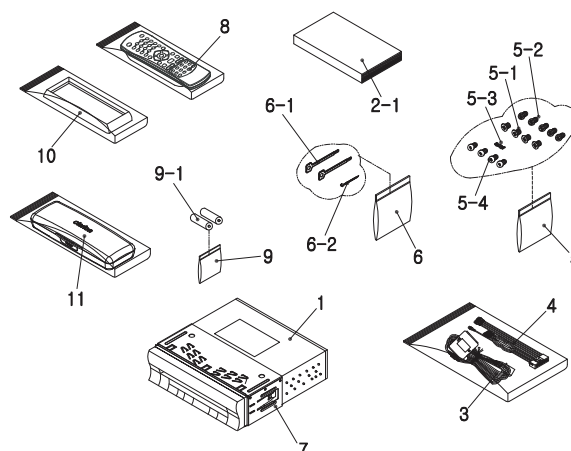


CAUTIONS

Use of controls, adjustment or performance of procedures other than those specified herein, may result in hazardous radiation exposure.

The compact disc player should not be adjusted or repaired by anyone except properly qualified service personnel.

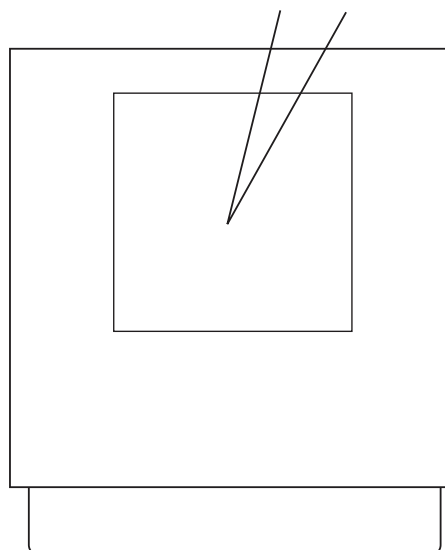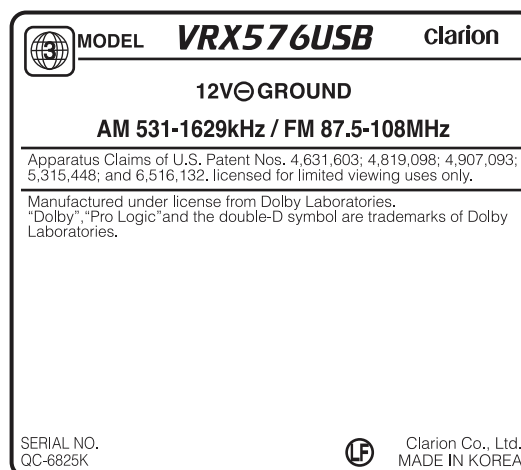

EXPLODED VIEW / PARTS LIST

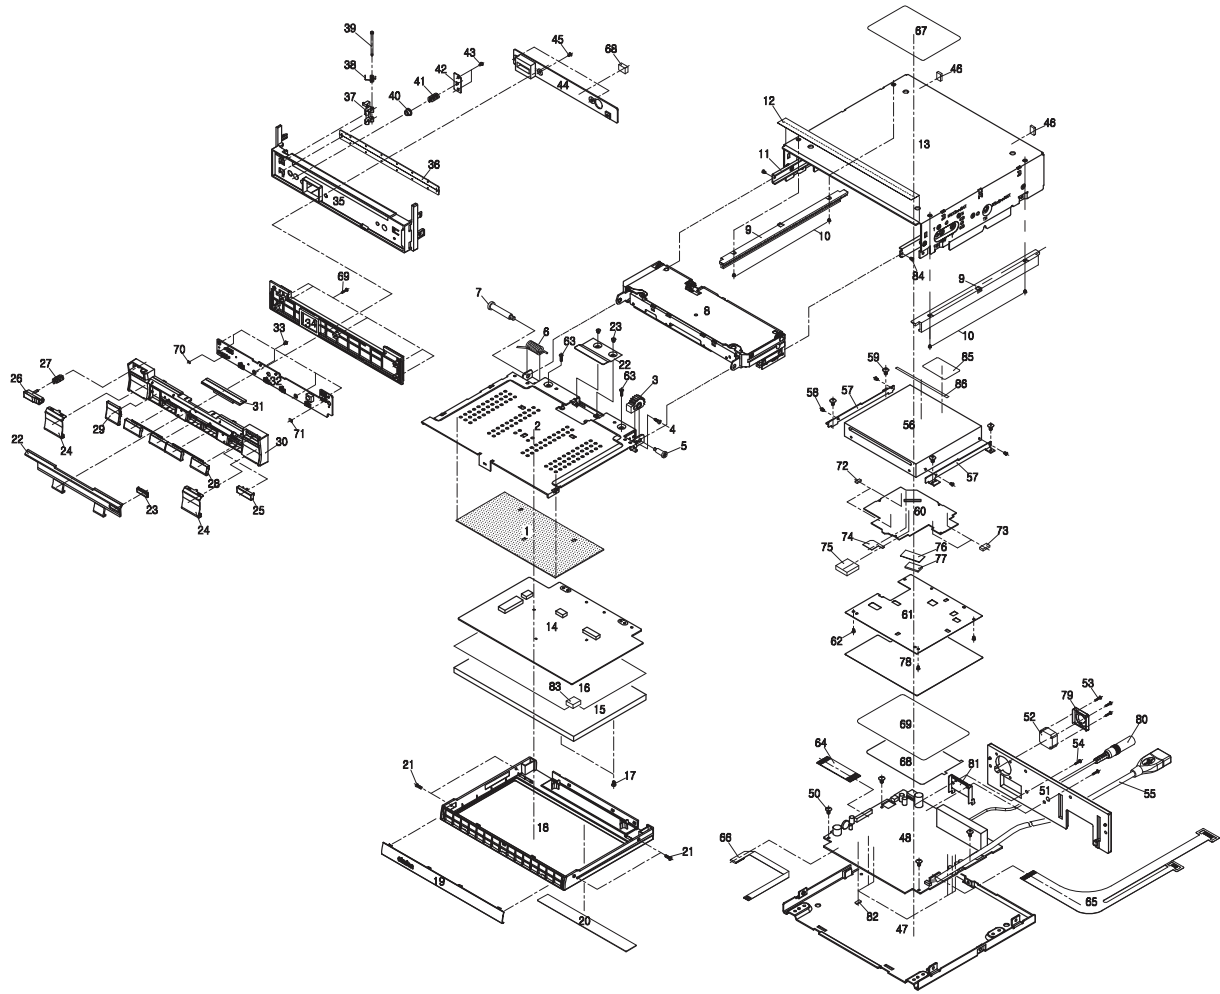

NO.	PARTS	CODE NO.	MATERIAL	Q'TY	REMARKS
1	MONITOR REAR FELT	5461-682-001	FELT 0.2L 142x74	1	
2	MONITOR REAR CH.	5213-682-002	CR 1.0L BK	1	
3	GEAR MONITOR	5184-682-001	"M62700115"	1	
4	SCREW (MACHINE)	5619-320-060	CH M2x6, NI(Ø3.5)	1	
5	SCREW MONITOR	5610-326-087	M2.6x8.7x3.5	1	
6	SPRING MONITOR	5361-682-003	Ø7.6x16.3xØ1.4	1	
7	SCREW LCD	5610-326-266	"M8SPSS026-005"	1	
8	TILT MECHA	2054-270-301	"SHT-2703-IDIN"	1	
9	RACK LOAD-L/R	5179-682-003	POM, MILKY	1	
10	SCREW (MACHINE)	5619-320-025	CH M2x2.5(Ø3), NI	4	
11	MECHA GUIDE BRKT-L/R	5222-682-002/003	EGI 1.0L (149x10x3.5)	1	
12	CH TOP SHEET	5554-682-005	PVC 0.08L BK	1	
13	TOP CHASSIS	5213-682-001	EGI 1.0L	1	
14	LCD PCB	0114-682-030	QC6825K-A	1	
15	LCD MODULE	1273-682-001	AU "A070FW03"	1	
16	PANEL SHEET	5554-682-002	PET 0.2L, 투명	1	
17	SCREW	5619-320-030	CH M2x3(Ø3), NI	2	
18	MONITOR FRONT	5114-682-003	PC+ABS, BK	1	
19	MONITOR BRAND PLATE	5215-682-003	AL 0.5L BK(ASIA)	1	VRX576USB
20	MONITOR BRAND SHEET	5554-682-003	PC 0.5L, SILVER	1	
21	SCREW (MACHINE)	5619-220-030	CH M2x3, BK	4	
22	ES FRONT DECO.	5122-682-002	PC+ABS, SILVER	1	
23	SENSOR FILTER	5142-682-001	PC SENSOR	1	
24	ES AL PLATE-L	5215-682-001	AL 0.5L, BLACK	2	
25	CD EJECT BUTTON	5134-682-005	PC+ABS, SILVER	1	
26	RELEASE BUTTON	5134-682-004	PC+ABS, SILVER	1	
27	RELEASE SPRING	5361-682-001	COMPRESS SPRING	1	120gf
28	FUNCTION KNOB-L/R	5134-682-002/003	PC MILKY	1	
29	VOLUME KNOB	5134-682-001	PC MILKY	1	
30	ESCUTCHEON FRONT	5114-682-002	PC+ABS, BK	1	
31	REFLECTOR TRIM	5176-682-001	PC MILKY	1	
32	KEY PCB	0114-682-040	QC6825K-A	1	
33	SCREW (TAPPING)	5621-320-050	WPH2T 2x5, NI	5	
34	ESCUTCHEON REAR	5214-682-002	PC+ABS, BK	1	
35	ESCUTCHEON	5114-682-001	PC+ABS, BK	1	
36	CHAMFIDE FELT(7")	5469-682-001	0.5L+PVC 0.3L	1	
37	OPEN LOCK	5179-682-001	PC+ABS, BK	1	
38	OPEN LOCK SPRING	5361-682-002	Ø3.4x6.8xØ0.6	1	
39	OPEN LOCK PIN	5331-682-001	BS, BLSC	1	
40	OPEN TENSION	5179-682-002	PC+ABS, BK	1	
41	RELEASE SPRING	5361-682-001	COMPRESS SPRING	1	
42	OPEN TENSION BRKT	5222-682-001	EGI 0.5L	1	
43	SCREW (TAPPING)	5629-320-040	CHT2 2x4(Ø3), NI	2	

NO.	PARTS	CODE NO.	MATERIAL	Q'TY	REMARKS
44	FRONT PCB	0114-682-050	QC6825K-A	1	
45	SCRW (MACHINE)	5618-220-030	WPH M2x3, BK	3	
46	CUSHION MECHA	6161-682-003	PORON 2L	2	
47	CHASSIS BOTTOM	5461-682-003	EGI T1.0	1	
48	MAIN PCB ASSY	0114-682-010	QC6825K-A	1	
49	MAIN PCB SHEET	5554-682-006	PET T0.2, 투명	1	
50	SCREW (MACHINE)	5472-682-001	BH M2.6 X 4NI	4	
51	HEAT SINK	5241-682-001	DIE-CASTING T5	1	
52	FAN	2081-682-001	F2510CT-05UCV	1	
53	SCREW (MACHINE)	5611-326-150	BH M2.6 x 15NI	3	FAN FIX
54	SCREW MACHINE	5611-326-120	BH M2.6 x 12NI	2	POWER IC FIX
55	CABLE USB	2141-682-004	"JT-USAB004-010"	1	
56	DECK ASSY	1914-700-001	"DVX-700"	1	
57	DECK BRACKET L/R	5221-700-001/002	EGI T1.0	1	
58	SCREW (MACHINE)	5472-682-001	BH M2.6 x 4NI	4	BRCK FIX
59	SCREW (MACHINE)	5472-682-001	BH M2.6 x 4NI	4	DECK FIX
60	DECK PCB	0114-682-020	QC6825K-A	1	
61	DECK PCB COVER	5154-700-001	ET0.3T	1	
62	SCREW (MACHINE)	5612-326-020	M2.6x2H(0.6T)	4	COVER FIX
63	SCREW (TAPPING)	5629-220-060	CH 2x6(Ø3.5), BK	4	
64	FLEXIBLE CABLE(28P)	2133-682-281	1.0P, L=70mm	1	
65	FPC CABLE	2149-700-001	107x209x0.08L	1	
66	FLEXIBLE CABLE(10P)	2133-682-101	0.5P, L=150mm	1	
67	SPEC PLATE(ASIA)	6234-682-001	ART PAPER 0.1(WHITE)	1	
68	EMI GASKET-1	5479-682-003	FABRIC FOAM(9x10x60)	1	
69	SCREW (TAPPING)	5629-220-050	CH 2x5(Ø3.5), BK	5	
70	VOLT TACT SHEET	5554-682-004	PET 0.2L, BK	1	
71	EMI GASKET-3	5479-682-005	FABRIC FOAM(3x3x10)	1	
72	THERMAL PAD-4	6151-700-003	(3x5x11)	2	
73	THERMAL PAD-2	6151-700-002	(5x15x11)	2	
74	DECK PCB SHEET-2	5531-700-003	PC 0.18T, BK(25x17)	1	
75	THERMAL PAD-1	6151-700-001	(20x20x21)	1	
76	DECK PCB SHEET-1	5531-700-002	PC 0.18T, BK(15x30)	1	
77	DECK CUSHION(EVA)	6161-682-005	EVA 2.5L(10x20)	1	
78	DECK COVER SHEET	5531-700-004	PET 0.2T(139x127.6)	1	
79	FAN BRACKET	5222-682-004	EGI 0.5L(26.6x26.6x5)	1	
80	ANT. CABLE ASSY	2141-682-002	PVE, 200mm	1	
81	POWER IC BRKT	5222-682-005	EGI 0.8L(31x24.5)	1	
82	THERMAL PAD-3	5421-682-001	(5x7x2.5)	6	
83	EMI GASKET-2	5479-682-002	FABRIC FOAM(5x5x30)	1	
84	SCREW (MACHINE)	5619-320-035	CH M2x3.5, NI(Ø3.5)	2	
85	DECK TOP SHEET	5531-700-001	PC 0.5L, BK(40x30)	1	
86	FPC CABLE SHEET	8931-700-002	PC 0.5L, BK(7x100)	1	

EXPLODED VEIW / PARTS LIST

PART CODE	DESCRIPTION	Q'TY	REF No.
MAIN PWB(B1) SECTION			
0114-682-010	MAIN PWB ASSY	1	
9114-682-010	MAIN PWB T/UP ASSY	1	
1253-141-001	DIODE WSP-141N	1	D12
1291-840-001	TUNER AM/FM CET-8400JT, TBK	1	TUNER1
1862-224-921	TAP, 5.5V, 0.22F-M, SCDCS5R5224	1	C158
1862-228-961	KMG25VN2200M, 25V 2200uF 12.5*25 105°C	1	C8
1961-121-201	BUZZER HSE-1212S	1	BZ1
2115-200-034	CONN, R-Angle,2.0, SMAW200-34C, YEONHO	1	J2
2141-254-001	CONNECTOR-POWER WS25401615 , JOINTEC	1	J1
0124-682-010	MAIN PWB REF ASSY	1	
1114-682-010	MAIN PWB(WITHOUT COMPONENT)	1	
1211-033-001	IC Voltage Regulator, BA033CC0FP, ROHM	1	U29
1211-050-001	IC Voltage Regulator, BA05CC0FP, ROHM	1	U8
1211-111-718	IC LDO REGULATORS,1.8V/1A, AMS1117-1.8, AMS	1	U15
1211-457-001	IC Voltage Regulator, MIC4576WU, MICREL	1	U24
1211-500-001	IC Voltage Regulator, BA50DD0WHFP, ROHM	2	U26, U27
1211-900-001	IC Voltage Regulator, BA90DD0WHFP, ROHM	4	U16,U19,U22,U25
1212-290-001	IC AUDIO POWER, TB2906HQ, TOSHIBA	1	U80
1213-154-001	IC VIDEO LINE DRIVER, TK15420MI, TOKO	1	U14
1213-205-001	IC QUAD OP AMP, NJM2058V, JRC	1	U49
1213-240-001	IC EEPROM, BR24L04FV-W, ROHM	1	U46
1213-312-001	IC Ground Isolation AMP, BA3121F, ROHM	1	U32
1213-390-001	IC SST39VF1601-70-4I-EKE, FLASH-ROM, SST	1	U36
1213-405-001	IC 4-CH MULTIPLEXER, NJU4052BV, JRC	1	U45
1213-405-002	IC 2-CH MULTIPLEXER, NJU4053BV, JRC	1	U48
1213-453-001	IC 2-CH MULT/Demultiplexer,TC4W53F,TOSHIBA	1	U47
1213-456-001	IC OP AMP, BA4560RFVM, ROHM	1	U6
1213-458-001	IC DUAL OP AMP, NJM4580V, JRC	8	U10,U11,U13,U17,U21,U28,U30,U33
1213-570-001	IC ANALOG SEMI CUSTOM LSI, UPC5701GR, NEC	1	U23
1213-615-001	IC ELECTRONIC Volume, M61523FP, RENESAS	1	U1
1213-640-001	IC SDRAM,64MB, IS42S16400D-7TLI, ISSI	1	U18
1213-700-001	IC 2-INPUT NAND GATE, KIC7S00FU, KEC	1	U38
1213-702-501	IC LDO REGULATORS, KIA7025AT, KEC	1	Q17
1213-704-201	IC LDO REGULATORS, KIA7042AT, KEC	1	Q54
1213-708-001	IC AND GATE, TC7S08FU, TOSHIBA	2	U31, U43
1213-732-001	IC 2-INPUT OR GATE, KIC7S32FU, KEC	1	U37
1213-761-001	IC VIDEO, BA7613F, ROHM	1	U2
1213-765-001	IC VIDEO, BA7652AF, ROHM	1	U3
1213-780-051	IC LDO REGULATORS, KIA78L05F, KEC	1	U40
1213-852-001	IC STEREO DAC, WM8521H9, WOLFSON	1	U9
1213-862-001	IC POWER SWITCH, RYC8620-2M, TYCO	1	U39
1213-925-001	IC DTS PLL, TC9257F, TOSHIBA	1	U4
1214-780-001	IC MICOM, RF8879-627, UPD78F1165.14*20, NEC	1	U5
1214-860-001	IC MICOM FOR HOST PLAYER, TCC8600, TELECHIPS	1	U7
1245-106-001	TR-CHIP KRC106S, NPN TR, KEC	9	Q2,Q11,Q14,Q32,Q38,Q41,Q50,Q65,Q66
1245-202-201	TR-CHIP KTC2022D, NPN TR, KEC	5	Q5,Q10,Q29,Q43,Q49
1245-222-202	TR-CHIP KTN2222S, NPN TR, KEC	2	Q9,Q37
1245-231-001	TR-CHIP KRC231S, NPN TR, KEC	8	Q18,Q19,Q23,Q24,Q25,Q26,Q44,Q45
1245-387-501	TR-CHIP KTC3875, NPN TR, KEC	10	Q1,Q4,Q6,Q8,Q15,Q20,Q21,Q22,Q28,Q39
1246-103-002	TR-CHIP KRA103S, PNP TR, KEC	3	Q36,Q61,Q63
1246-104-201	TR-CHIP KTA1042D, PNP TR, KEC	1	Q40
1246-106-001	TR-CHIP KRA106S, PNP TR, KEC	4	Q3,Q46,Q47,Q48
1246-150-401	TR-CHIP KTA1504, PNP TR, KEC	2	Q7, Q35
1246-166-301	TR-CHIP KTA1663, PNP TR, KEC	4	Q12,Q13,Q34,Q42
1246-173-001	TR-CHIP 2SA1736, PNP TR, TOSHIBA	2	Q67,Q68
1247-220-001	TR-CHIP UMD22N, DUAL DIGITAL TR, ROHM	1	Q27
1247-300-001	TR-CHIP UMH3N, DUAL DIGITAL TR, ROHM	1	Q16
1251-111-001	DIODE SMALL S-MINI TYPE, MA111, PANASONIC	1	D9
1251-154-400	DIODE 1SR154 400, ROHM	2	D10,D89
1251-184-001	DIODE KDS184, KEC	1	D62
1251-245-001	DIODE RLS245, ROHM	9	D2,D4,D5,D7,D20,D21,D32,D86,D88
1251-355-001	DIODE 1SS355, ROHM	17	D11,D28,D29,D40,D50,D52,D73,D85,D87,D92,D93,D94,D95,D96,D97,D98,D99
1252-100-001	DIODE ZENER UDZS10B, ROHM	1	D78
1252-110-001	DIODE ZENER UDZS11B, ROHM	1	D8
1252-470-001	DIODE ZENER UDZS4.7B, ROHM	1	D15
1252-560-001	DIODE ZENER UDZS5.6B, ROHM	2	D16,D18
1252-620-001	DIODE ZENER UDZS6.2B, ROHM	26	D17,D35,D54,D55,D56,D57,D58,D59,D60,D61,D63,D64,D65,D66,D67,D68,D69,D70,D71,D72,D76,D79,D80,D81,D82,D83
1252-750-001	DIODE ZENER UDZS7.5B, ROHM	12	D3,D30,D31,D38,D39,D41,D42,D47,D48,D49,D53,D74
1252-910-001	DIODE ZENER UDZS9.1B, ROHM	2	D13, D91
1255-214-001	DIODE DO-214AC, FORWARD CURRENT, SK38A	1	D14
1255-729-001	DIODE KDR729, KEC	5	D1,D19,D51,D59,D75
1351-072-001	X-TAL 7.2MHz, HC-49US, 18pF ±30PPM,	1	Y1
1351-120-001	X-TAL 12MHz, 18pF ±20PPM,	1	Y6
1351-200-001	X-TAL 20MHz, 18pF ±30PPM,	1	Y3
1351-327-681	X-TAL 32.768KHz, SSP-T7-F, SEIKO	1	Y5
1416-121-001	FERRITE BEAD-CHIP CIM21U121NE, SEM	2	BD77,BD80
1416-601-001	FERRITE BEAD-CHIP CIM21U601NE, SEM,	39	BD3,BD4,BD5,BD6,BD7,BD9,BD10,BD11,BD12,BD13,BD14,BD15,BD16,BD32,BD34,BD35,BD43,BD45,BD46,BD48B,D50,BD51BD54,BD55,BD56,BD57,BD58,BD59,BD60,BD66,BD67,BD68,BD70,BD71,BD72,BD73,BD74,BD75,BD82
1416-601-002	FERRITE BEAD-CHIP MPZ2012S601A, TDK	3	BD22,BD44,BD47
1417-310-001	FERRITE BEAD-CHIP CIB31P310NE, SEM	1	BD39
1417-601-001	FERRITE BEAD-CHIP CIM31U601NE, SEM	7	BD37,BD38,BD40,BD63,BD64,BD65
1448-106-701	INDUCTOR-CHIP NLV32T-100J, TDK	1	L7
1448-107-701	INDUCTOR-CHIP NLV32T-101J, TDK	2	L17, L26
1448-335-701	INDUCTOR-CHIP NLV32T-3R3J, TDK	3	L1,L3,L4
1448-564-701	INDUCTOR-CHIP NLV32T-R56J, TDK	4	L27,L28,L29,30
1449-107-002	INDUCTOR-POWER 100uH, SM1208MCR,C&T Korea	1	L6

PART CODE	DESCRIPTION	Q'TY	REF No.
1745-000-001	1608, 1/16, 0-F	44	R21,R22,R53,R59,R60,R64,R69,R70,R72,R116,R124,R171,R212,R215,R216,R222,R223,R240,R242,R243,R258,R259,R269 R317,R377,R378,R392,R393,R397,R491,R492,R493,R497,R499,R500,R501,R545,R700,R701,R702,R703,R718,R719,R295
1745-100-711	1608, 1/16, 10-J	3	R35,R324,R414
1745-101-711	1608, 1/16, 100-J	38	R1,R51,R67,R104,R105,R113,R133,R137,R138,R153,R154,R170,R172,R174,R183,R184,R197,R217,R218,R220,R221 R225,R226,R228,R270,R275,R294,R302,R303,R333,R337,R385,R386,R387,R437,R439,R464,R518
1745-102-711	1608, 1/16, 1K-J	60	R2,R6,R10,R13,R27,R38,R56,R97,R119,R120,R121,R122,R130,R135,R143,R144,R151,R155,R159,R160,R164,R165,R188,R189,R224,R252,R253,R299,R300,R307 R308,R314,R319,R330,R331,R336,R339,R342,R350,R351,R358,R359,R360,R364,R365,R370,R371,R383,R384,R389,R390,R434,R435,R450,R451,R452,R453,R454,R463,R546
1745-103-711	1608, 1/16, 10K-J	45	R9,R16,R17,R25,R26,R43,R57,R73,R74,R75,R76,R85,R195,R206,R207,R210,R268,R276,R278,R285,R286,R292,R316 R323,R325,R326,R329,R432,R433,R446,R447,R448,R449,R459,R460,R469,R472,R494,R503,R505,R508,R509,R511,R514,R528
1745-104-711	1608, 1/16, 100K-J	18	R7,R48,R102,R117,R132,R201,R272,R273,R279,R290,R318,R356,R357,R388,R423,R486,R487,R515
1745-105-711	1608, 1/16, 1M-J	4	R29,R166,R232,,R297
1745-122-711	1608, 1/16, 1.2K-J	14	R111,R112,R229,R254,R255,R256,R257,R265,R341,R343,R456,R457,R482,R483
1745-123-711	1608, 1/16, 12K-J	1	R373
1745-124-711	1608, 1/16, 120K-J	1	R28
1745-151-711	1608, 1/16, 150-J	2	R173,R321
1745-152-711	1608, 1/16, 1.5K-J	5	R175,R177,R361,R362,R496
1745-153-711	1608, 1/16, 15K-J	2	R114,R150
1745-183-711	1608, 1/16, 18K-J	2	R436,R470
1745-202-711	1608, 1/16, 2K-J	1	R322
1745-203-711	1608, 1/16, 20K-J	2	R455,R458
1745-220-711	1608, 1/16, 22-J	4	R379,R380,R405,R406
1745-222-711	1608, 1/16, 2.2K-J	10	R24,R46,R199,R204,R238,R274,R332,R334,R368,R369
1745-223-711	1608, 1/16, 22K-J	16	R8,R91,R92,R93,R94,R95,R96,R106,R107,R262,R263,R502,R504,R506,R507,R526
1745-224-711	1608, 1/16, 220K-J	4	R108,R348,R349,R381
1745-273-711	1608, 1/16, 27K-J	1	R40
1745-330-711	1608, 1/16, 33-J	2	R398,R399
1745-331-711	1608, 1/16, 330-J	12	R30,R50,R180,R181,R211,R233,R400,R401,R402,R403,R404,R425
1745-332-711	1608, 1/16, 3.3K-J	9	R66,R250,R251,R442,R443,R444,R445,R524,R525
1745-334-711	1608, 1/16, 330K-J	1	R327
1745-392-711	1608, 1/16, 3.9K-J	2	R363,R366
1745-393-711	1608, 1/16, 39K-J	1	R335
1745-430-711	1608, 1/16, 43-J	1	R62
1745-471-711	1608, 1/16, 470-J	3	R213,R214,R320
1745-472-711	1608, 1/16, 4.7K-J	39	R5,R19,R45,R54,R77,R78,R79,R80,R88,R118,R125,R134,R176,R198,R205,R208,R230,R231,R234,R235,R245,R264 R277,R283,R340,R344,R345,R346,R347,R367,R372,R374,R375,R395,R471,R473,R474,R476,R495
1745-473-711	1608, 1/16, 47K-J	53	R3,R4,R14,R15,R36,R37,R42,R47,R49,R55,R65,R68,R71,R89,R90,R103,R126,R127,R128,R131,R147,R148,R163,R169,R178,R192,R193,R219,R227 R266,R267,R281,R284,R289,R291,R296,R311,R312,R354,R355,R394,R412,R416,R418,R419,R426,R461,R462,R467,R478,R521,R522,R123
1745-515-711	1608, 1/16, 5.1M-J	1	R413
1745-561-711	1608, 1/16, 560-J	3	R98,R200,R328
1745-562-711	1608, 1/16, 5.6K-J	18	R141,R142,R145,R146,R157,R158,R161,R162,R186,R187,R190,R191,R304,R305,R306,R310,R484,R485
1745-622-711	1608, 1/16, 6.2K-J	8	R136,R139,R152,R156,R182,R185,R301,R309
1745-625-711	1608, 1/16, 6.2M-J	1	R417
1745-680-711	1608, 1/16, 68-J	1	R298
1745-681-711	1608, 1/16, 680-J	1	R396
1745-750-711	1608, 1/16, 75-J	3	R86,R109,R376
1745-752-711	1608, 1/16, 7.5K-J	1	R287
1745-822-711	1608, 1/16, 8.2K-J	1	R481
1745-823-711	1608, 1/16, 82K-J	4	R260,R261,R352,R353
1746-000-722	2012, 0Ω, 1/8W, MCR10EZPJ000	12	BD69,R704,R705,R706,R707,R708,R709,R710,R711,R712,R713,R720
1747-000-732	3216, 0Ω, 1/4W, MCR18EZPJ000	4	R99,R715,R716,R717
1747-102-732	3216, 1K, 1/4W, MCR18EZPJ102	8	R23,R167,R168,R271,R315,R407,R408,R411
1747-103-732	3216, 10K, 1/4W, MCR18EZPJ103	3	R32,R33,R44
1747-122-732	3216, 1.2K, 1/4W, MCR18EZPJ122	4	R424,R427,R527,R529
1747-1R5-732	3216, 1.5J, 1/4W, MCR18EZPJ1R5	8	R11,R12,R61,R140,R288,R293,R519,R520
1747-222-732	3216, 2.2K-J, 1/4W, MCR18EZPJ222	4	R415,R420,R421,R422
1747-750-732	3216, 75-J, 1/4W, MCR18EZPJ750	1	R209
1749-2R2-742	5025, 2.2, 1/2W, MCR50JZHJ2R2	1	R722
1749-2R7-742	5025, 2.7, 1/2W, MCR50JZHJ2R7	1	R723
1789-101-711	MNR14EOAPJ100, 100-J, ROHM	11	NR8,NR9,NR14,NR15,NR16,NR17,NR18,NR19,NR20,NR21,NR22
1789-102-711	MNR14EOAPJ102, 1K-J, ROHM	7	NR4,NR5,NR6,NR7,NR10,NR13,NR23
1789-224-791	30, 220K, PVZ3G224C01,MURATA	1	R58
1795-472-576	1608, 4.7K, PRF18BG471QS2RB, MURATA	1	TS1
1845-030-791	1608, 50V, CH, 3pF-Z	1	C145
1845-070-791	1608, 50V, C0G, 7pF-J	2	C332,C333
1845-100-791	1608, 50V, C0G, 10pF-J	2	C205,C206
1845-102-791	1608, 50V, C0G, 1nF-J	18	C123,C124,C125,C330,C501,C502,C503,C504,C505,C507,C510,C511,C512,C513,C514,C515,C516,C517
1845-103-791	1608, 50V, C0G, 10nF-J	7	C20,C25,C28,C66,C130,C261,C386
1845-104-791	1608, 50V, C0G, 100nF-J	99	C4,C6,C10,C13,C17,C29,C30,C31,C35,C36,C37,C39,C40,C45,C46,C47,C55,C56,C60,C64,C73,C119,C134,C140,C146,C149,C150,C151,C156,C159,C161,C162,C165,C166,C170,C172,C173 C175,C179,C194,C199,C202C208,C220,C221,C222,C223,C224,C225,C229,C230,C231,C232,C238,C239,C240,C246,C252,C256,C257,C260,C264,C266,C267,C268,C269,C280,C284,C309,C310 C312,C313,C314,C315,C316,C317,C320,C322,C324,C326,C327C328,C329,C350,C374,C389,C394,C395,C396,C397,C398,C399,C400,C401,C402,C403,C404,C405,C500C268,C269,C280,C284,C309 C310,C312,C313,C314,C315,C316,C317,C320,C322,C324,C326,C327,C328,C329,C350,C374,C389,C394,C395,C396,C397,C398,C399,C400,C401,C402,C403,C404,C405,C500C268,C269,C280,C284,C309 C310,C312,C313,C314,C315,C316,C317,C320,C322,C324,C326,C327,C328,C329,C350,C374,C389,C394,C395,C396,C397,C398,C399,C400,C401,C402,C403,C404,C405,C500

PART CODE	DESCRIPTION	Q'TY	REF No.
1845-105-791	1608, 50V, C0G, 1uF-J	1	C336
1845-106-791	1608, 50V, C0G, 10uF-J	2	C187,C200
1845-120-791	1608, 50V, C0G, 12pF-J	2	C241,C242
1845-122-791	1608, 50V, C0G, 1.2nF-J	1	C341
1845-220-791	1608, 50V, C0G, 22pF-J	9	C19,C127,C128,C167,C168,C249,C250,C337,C338
1845-222-791	1608, 50V, C0G, 2.2nF-J	2	C163,C164
1845-223-791	1608, 50V, C0G, 22nF-J	27	C26,C27,C34,C59,C63,C84,C110,C118,C122,C139,C157,C183,C216,C219,C228,C234,C235,C245,C253,C279,C281,C283,C285,C287,C385,C388,C391
1845-270-791	1608, 50V, C0G, 27pF-J	17	C210,C212,C213,C214,C215,C227,C259,C270,C271,C274,C288,C289,C290,C291,C292,C294,C295
1845-361-791	1608, 50V, C0G, 360pF-J	1	C263
1845-470-791	1608, 50V, C0G, 47pF-J	10	C42,C68,C106,C109,C114,C115,C135,C136,C299,C302
1845-472-791	1608, 50V, C0G, 4.7nF-J	4	C32,C33,C190,C191
1857-105-981	3216, 35V, 1uF-M	3	C18,C57,C169
1857-106-951	3216, 16V, 10uF-M	20	C15,C41,C78,C79,C80,C81,C99,C132,C133,C148,C171,C174,C203,C204,C207,C254,C304,C321,C331,C349
1857-224-981	3216, 35V, 0.22uF-M	1	C262
1857-225-951	3216, 16V, 2.2uF-M	4	C14,C16,C67,C129
1857-475-951	3216, 16V, 4.7uF-M	62	C61,C72,C74,C75,C76,C77,C85,C86,C87,C88,C89,C90,C91,C92,C93,C94,C95,C96,C97,C98,C104,C105,C107,C108,C112,C113,C116,C117,C120,C121,C137,C138,C166,C169,C193,C196,C243,C244,C247,C248,C273,C276,C277,C278,C279,C280,C301,C305,C306,C307,C308,C371,C372,C393,C406,C407,C408,C409,C410,C411,C412
1859-106-986	6032, 35V, 10uF-M	2	C11,C311
1859-107-936	6032, 10V, 100uF-M	5	C5,C44,C323,C344,C345
1859-107-957	7343, 16V, 100uF-M	13	C1,C21,C22,C23,C58,C62,C154,C155,C160,C176,C184,C265,C286
1859-226-953	3528, 16V, 22uF-M	7	C2,C43,C70,C82,C142,C144,C293
1859-227-937	7343, 10V, 220uF-M	7	C12,C71,C102,C152,C233,C237,C251
1859-476-933	3528, 10V, 47uF-M	5	C24,C131,C143,C201,C325
1859-476-956	6032, 16V, 47uF-M	5	C69,C83,C100,C185,C209
1861-104-991	4*5, 50V 0.1uF, MVG50VCR1MD56	1	C38
1861-106-951	4*5, 16V, 10uF, MVG35VC10MD56	2	C9,C153
1861-106-981	4*5, 35V 10uF, MVG35VC10MD56	2	C318,C319
1861-336-961	5*5, 25V 33uF, MVG25VC33ME56	1	C7
1862-227-951	10.3mm, 16V, 220uF, MVG16VC10MD56	1	C258
1862-227-961	8*10, 25V 220uF, MVG25VC220MH10	2	C217,C255
1862-337-961	10.3mm, 25V, 330uF, MVG25VC330MD56	2	C3,C218
1862-477-931	8*10, 10V 470uF, MVG16VC470MH10	2	C147,C226
2113-545-501	CONN, ZIF, R/Angle,10P, 0.5, 54550-1094, MOLEX	1	J13
2113-622-428	CONN, ZIF R/Angle,28P, 6224-028-001-800, KYO	1	J3
2113-627-440	CONN, ZIF, 40P, 0.5, 04-6274-040-000-800, KYO	1	J8
2115-125-051	CONN, 5P, 1.25, 12505WS-05, YOENHO	1	J5
2115-533-914	CONN,14P, 1.25, 53398-1471,MOLEX	1	J11
2115-533-982	CONN, 2P, 1.25, 53398-0271,MOLEX	1	J4
2115-533-987	CONN, 7P, 1.25, 53398-0771,MOLEX	1	J6
MONITOR PWB(B2) SECTION			
0164-682-010	MONITOR ASSY	1	
0144-682-030	MONITOR PWB T/UP ASSY	1	
5114-682-003	CASE MONITOR FRONT	1	
5215-682-003	PLATE MONITOR BRAND-ASIA/AUSTRILIA	1	HAIR-LINE,ANODIGING,DIE-CUTTING
5514-682-001	SHEET LCD 7" PROTECTION	1	
5554-682-003	SHEET MONITOR BRAND ASIA/AUSTRILIA	1	SPRAY 1DEGREE ,SILKPRINT 1DEGREE(DIGITAL VIDEO)
5619-220-030	SCREW-M	4	MONITOR FRONT+MONITOR REAR CH.(4)
5619-320-035	SCREW-M	2	MECHA ASS'Y FOR SECESSION CHECK(2)
5629-220-060	SCREW-TAP	2	MONITOR FRONT+MONITOR REAR CH.(2)
9164-682-010	LCD ASSY	1	
1273-682-001	DISPLAY-LCD	1	FROM V1, CHANGE TO V6
2091-682-001	TOUCH SCREEN 7"	1	
2141-682-001	CABLE LCD GROUND 7"	1	
5479-682-002	GASKET EMI	1	
5479-682-003	GASKET EMI	1	FOR MONITOR PWB
5554-682-001	SHEET-INSULATOR	1	
5554-682-002	SHEET PANEL	1	
5619-320-020	SCREW-M	1	GROUND WIRE+LCD DISPLAY
5619-320-030	SCREW-M	2	MONITOR REAR CH.+MONITOR PWB(2)
0114-682-030	MONITOR PWB REF ASSY	1	
1114-682-030	MONITOR PWB(WITHOUT COMPONENT)	1	
1211-111-718	IC LDO REGULATORS,1.8V/1A, AMS1117-1.8, AMS	1	U4
1211-111-733	IC LDO REGULATORS,3.3V/1A, AMS1117-3.3, AMS	2	U3,U6
1211-111-750	IC LDO REGULATORS, 5V/1A, AMS1117-5.0, AMS	1	U2
1212-236-001	IC DC/DC Converter, NJM2360AM, JRC	1	U5
1213-371-501	IC PWM Controller, BIT3715, BIT	1	U8
1213-704-201	IC LDO REGULATORS, KIA7042AT, KEC	1	Q13
1214-880-601	IC LCD Controler, TW8806, TECHWELL	1	U1
1245-222-204	TR MMBT2222, FIRECHILD	2	Q4,Q6
1246-290-701	TR MMBT2907, FAIRCHILD	2	Q3,Q5
1247-220-001	TR UMD22N, DUAL DIGITAL TR, ROHM	1	Q14
1247-230-001	TR APM2301	1	Q1
1247-241-001	TR 2SC2412K, ROHM	5	Q2,Q7,Q8,Q9,Q11
1247-450-001	TR AP4503GM, APEC	1	Q12
1248-303-001	TR FDV303N, FAIRCHILD	2	Q15,Q16
1251-217-001	DIODE DAN217U, ROHM	1	D2
1251-355-001	DIODE 1SS355, ROHM	6	D1,D5,D12,D13,D14,D15
1252-100-001	DIODE UDZS10B, ROHM	1	D3
1252-150-001	DIODE UDZS15B, ROHM	1	D11
1252-620-001	DIODE UDZS6.2B, ROHM	9	D6,D7,D8,D9,D10,ZD3,ZD4,ZD5,ZD6
1252-750-001	DIODE UDZS7.5B, ROHM	2	ZD1,ZD2
1336-500-001	MEM2012T50R0T, TDK	1	FT1
1351-270-001	X-TAL 27MHz,HC-49, ±20PPM	1	X1
1416-330-001	FERRITE BEAD-CHIP CIB21P330NE, SEM	10	BD1,BD2,BD3,BD4,BD8,BD11,BD12,BD13,BD14, BD15
1416-601-002	FERRITE BEAD-CHIP MPZ2012S601A, TDK	3	BD6,BD7,BD17
1448-107-801	INDUCTOR-CHIP NLCV32T-101K, TDK	1	L1
1448-125-701	INDUCTOR-CHIP NLV32T-1R2J, TDK	1	L8

PART CODE	DESCRIPTION	Q'TY	REF No.
1448-226-801	INDUCTOR-CHIP NLCV32T-220K, TDK	3	L2,L3,L4
1448-335-901	INDUCTOR-CHIP NLCV32T-3R3K, TDK	2	L10, L11
1448-476-801	INDUCTOR-CHIP NLCV32T-470K, TDK	1	L7
1449-157-901	INDUCTOR-POWER YP-1035R-151M, YEWON	4	L5,L6,L15,L16
1471-700-401	TRANS-INVERTER M-7004WI, 1:18, 2:2200, WorldElec	1	T1
1745-000-001	1608, 1/16, 0-F	15	R1,R5,R11,R21,R24,R25,R28,R29,R35,R60,R73,R74,R75,R103,R156
1745-101-711	1608, 1/16, 100-J	17	R141,R142,R143,R144,R145,R146,R147,R148,R149,R151,R152,R153,R154,R155,R80,R88,R95
1745-102-711	1608, 1/16, 1K-J	5	R6,R18,R105,R114,R136
1745-103-711	1608, 1/16, 10K-J	8	R4,R17,R33,R63,R64,R69,R72,R133
1745-105-711	1608, 1/16, 1M-J	1	R32
1745-122-711	1608, 1/16, 1.2K-J	1	R118
1745-153-711	1608, 1/16, 15K-J	1	R15
1745-200-711	1608, 1/16, 20-J	2	R157,R158
1745-202-711	1608, 1/16, 2K-J	1	R8
1745-203-711	1608, 1/16, 20K-J	1	R65
1745-221-711	1608, 1/16, 220-J	1	R119
1745-223-711	1608, 1/16, 22K-J	4	R79,R87,R94,R128
1745-224-511	1608, 1/16, 220K-F	1	R123
1745-243-711	1608, 1/16, 24K-J	1	R9
1745-272-711	1608, 1/16, 2.7K-J	1	R31
1745-303-511	1608, 1/16, 30K-F	1	R115
1745-330-711	1608, 1/16, 33-J	1	R150
1745-331-711	1608, 1/16, 330-J	3	R76,R84,R91
1745-333-711	1608, 1/16, 33K-J	1	R121
1745-390-711	1608, 1/16, 39-J	1	R62
1745-471-711	1608, 1/16, 470-J	3	R38,R39,134
1745-472-711	1608, 1/16, 4.7K-J	16	R19,R20,R22,R23,R36,R37,R40,R41,R81,R82,R85,R89,R92,R96,R106,R107
1745-473-711	1608, 1/16, 47K-J	5	R42,R43,R77,R83,R90
1745-474-711	1608, 1/16, 470K-J	1	R132
1745-561-711	1608, 1/16, 560-J	4	R78,R86,R93,R135
1745-683-511	1608, 1/16, 68K-F	1	R117
1745-683-711	1608, 1/16, 68K-J	1	R122
1745-750-711	1608, 1/16, 75-J	2	R27,R30
1745-820-711	1608, 1/16, 82-J	1	R125
1745-822-711	1608, 1/16, 8.2K-J	1	R16
1746-000-001	2012, 1/8, 0-F	2	R3,R139
1789-102-711	MNR14EOAPJ102, 1K-J, ROHM	7	AR1,AR2,AR3,AR4,AR5,AR6,AR13
1789-103-791	30, 10K, PVZ3G103C01,MURATA	1	R66
1789-303-791	30, 33K, PVZ3G333C01,MURATA	1	R68
1789-472-711	MNR14EOAPJ472, 4.7K-J, ROHM	5	AR8,AR9,AR10,AR11,AR12
1845-070-861	1608, 25V, CH, 7pF-K	3	C38,C39,C40
1845-101-861	1608, 25V, CH, 100pF-K	10	C80,C82,C85,C87,C89,C91,C127,C136,C137,C138
1845-102-861	1608, 25V, CH, 1nF-K	1	C131
1845-103-861	1608, 25V, CH, 10nF-K	2	C68,C69
1845-104-951	1608, 16V, X7R, 100nF-M	46	C12,C13,C14,C15,C16,C19,C20,C21,C23,C26,C27,C28,C29,C30,C41,C46,C48,C49,C50,C51,C52
1845-105-851	1608, 16V, CH, 1uF-K	5	C104,C105,C106,C118,C132
1845-153-861	1608, 25V, X7R, 15nF-K	1	C117
1845-180-861	1608, 25V, CH, 18pF-K	1	C44
1845-220-861	1608, 25V, CH, 22pF-K	2	C65,C66
1845-221-861	1608, 25V, CH, 220pF-K	1	C36
1845-223-861	1608, 25V, X7R, 22nF-K	3	C71,C121,C129
1845-270-861	1608, 25V, CH, 27pF-K	1	C139
1845-301-861	1608, 25V, CH, 300pF-K	1	C17
1845-331-861	1608, 25V, CH, 330pF-K	4	C54,C55,C56,C57
1845-392-861	1608, 25V, CH, 3.9nF-K	1	C130
1845-471-861	1608, 25V, CH, 470pF-K	4	C107,C108,C109,C110
1845-823-961	1608, 25V, X7R, 82nF-M	2	C63,C64
1846-105-862	2012, 25V, CH, 1uF-K, TDK	3	C31,C33,C35
1846-474-851	2012, 16V, CH, 470nF-K	3	C119,C123,C126
1846-475-951	2012, 16V, CH, 4.7uF-M	1	C24
1847-475-862	3216, 25V, X7R, 4.7uF-K, TDK	1	C124
1849-150-904	4520,3000V, CH, 15pF-K	1	C122
1857-106-951	3216, 16V, 10uF-M	21	C6,C7,C8,C25,C37,C45,,C70,C72,C76,C78,C79,C81,,C83,C84,C86,C88,C90,C92,C112,C114,C115
1859-106-953	3528, 16V, 10uF-M	7	C9,C10,C11,C47,C67,C93,C97
1859-107-957	7343, 16V, 100uF-M	13	C1,C2,C3,C4,C5,C18,C32,C42,C43,C74,C125,C142,C143
1859-226-966	6032, 25V, 22uF-M	2	C22,C34
2113-040-711	CONN, ZIF, R/ Angle, 4P, 1.0, 52271-0471,MOLEX	1	CON4
2113-260-051	CONN, ZIF, R/ Angle, 26P, 0.5, 52435-2672,MOLEX	1	CON1
2113-260-052	CONN, ZIF, R/ Angle, 26P, 0.5, 52437-2671,MOLEX	1	CON3
2135-040-351	CONN, ZIF, R/ Angle, 2P, 3.5, SM02B-BHSS-1-TB	1	CON5
DVD MECH ASSY / DVD PWB(B3) SECTION			
0134-682-010	DVD MECH ASSY	1	
9134-682-010	DVD PWB T/UP ASSY	1	
1914-700-001	DVD DECK DVX-700, KOMEC	1	
2149-700-001	CABLE-FPC	1	
5154-682-001	COVER MONITOR REAR CH	1	
5154-700-001	COVER-DECK PWB	1	
5221-700-001	DECK-BRACKET L	1	
5221-700-002	DECK-BRACKET R	1	
5421-700-001	PAD THERMAL	1	FOR DECK PWB(U2)
5421-700-002	PAD THERMAL	2	FOR DECK PWB(U4,U5)
5421-700-003	PAD THERMAL	2	FOR DECK PWB(U1,U12)
5441-682-004	CUSHION-DECK(EVA)	1	FOR DECK SHEET
5531-700-001	SHEET-DECK TOP	1	FOR UPSIDE DECK
5531-700-002	SHEET-DECK PWB-1	1	FOR DECK PWB
5531-700-005	SHEET FPC CABLE	1	FOR UPSIDE DECK, FOR FPC CABLE
5610-326-020	SCREW-M	4	DECK+DECK PWB COVER(4)

PART CODE	DESCRIPTION	Q'TY	REF No.
5616-226-050	SCREW-M	2	ESCUTCHEON+DECK ASS'Y(2)
5616-326-040	SCREW-M	12	DECK+DECK BRK'T(4),DECK BRK'T+CH.BOTTOM(4),CH.TOP+CH.BOTTOM(4)
5616-326-060	SCREW-M	4	CHASSIS TOP+HEAT-SINK(4)
5619-220-030	SCREW-M	2	MONITOR REAR CH.+MONITOR REAR CH.COVER(2)
5619-220-035	SCREW-M	2	ESCUTCHEON+CHASSIS TOP LEFT/RIGHT(2)
5619-320-030	SCREW-M	4	DECK+DECK PWB(4)
8931-700-002	TAPE-FPC CABLE	1	FOR FPC CABLE
0114-682-020	DVD PWB REF ASSY	1	
1114-682-020	DVD PWB(WITHOUT COMPONENT)	1	
1211-111-002	IC LDO REGULATORS, IP1117L ADJ. INTERPION	2	U1,U12
1212-240-001	IC EEPROM, AT24C02-2KB, ATMEL	1	U9
1213-080-001	IC FLASH-ROM, 8MB, EN29LV800BB70TIP, EON	1	U6
1213-340-001	IC DUAL OP AMP, NJM3404AM, JRC	1	U3
1213-450-001	IC 5-CH MOTOR DRIVER, IP4504AL, IITERPION	1	U5
1213-640-001	IC SDRAM,64MB, IS42S16400D-7TLL, ISSI	1	U7
1213-684-001	IC MOTOR DRIVER, BA6849FP, ROHM	1	U4
1214-500-001	IC MPEG CHIP, S5L5009, SAMSUNG	1	U2
1245-162-301	TR-CHIP KSC1623GMTF, NPN TR, FAIRCHILD	6	Q1,Q5,Q6,Q7,Q10,Q12
1246-103-001	TR-CHIP KRC103S, PNP TR, KEC	3	Q2,Q3,Q4
1246-103-002	TR-CHIP KRA103S, PNP TR, KEC	1	Q11
1246-118-201	TR-CHIP KSA1182YMTF, PNP TR, FAIRCHILD	2	Q8,Q9
1251-154-400	DIODE 1SR154.400, ROHM	2	D2,D5
1251-160-001	DIODE KDS160, USC, KEC	2	D6,D7
1275-152-001	IR15-21C/L10,IR-LED 2012 EVERLIGHT	2	D3,D4
1351-270-001	X-TAL 27MHz,HC-49,±20PPM	1	X1
1415-330-001	FERRITE BEAD-CHIP CIB10P330NC, SEM	2	FB1, R135
1416-330-001	FERRITE BEAD-CHIP CIB21P330NE, SEM	5	L1,L2,L6,L7,L17
1446-106-801	INDUCTOR-CHIP MLF2012E1000KT000, TDK	5	L3,L4,L5,L19,L20
1745-000-001	1608, 1/16, 0-F	12	R34,R35,R47,R59,R68,R69,R106,R122,R123,R124,BD1,BD2
1745-100-511	1608, 1/16, 10-F	4	R82,R83,R87,R88
1745-101-711	1608, 1/16, 100-J	8	R100,R102,R113,R128,R129,R130,R132,R133
1745-102-511	1608, 1/16, 1K-F	4	R30,R40,R42,R126
1745-102-711	1608, 1/16, 1K-J	2	R60,R64
1745-103-511	1608, 1/16, 10K-F	5	R11,R27,R28,R33,R38
1745-103-711	1608, 1/16, 10K-J	11	R3,R24,R25,R96,R97,R104,R107,R108,R109,R110,R134
1745-104-711	1608, 1/16, 100K-J	7	R8,R32,R48,R53,R54,R85,R105
1745-105-711	1608, 1/16, 1M-J	1	R95
1745-113-711	1608, 1/16, 11K-J	4	R37,R86,R89,R93
1745-121-711	1608, 1/16, 120-J	3	R80,R81,R118
1745-152-711	1608, 1/16, 1.5K-J	1	R94
1745-153-511	1608, 1/16, 15K-F	1	R67
1745-153-711	1608, 1/16, 15K-J	3	R22,R114,R115
1745-1R1-511	1608, 1/16, 1-F	6	R41,R44,R45,R46,R77,R111
1745-221-511	1608, 1/16, 220-F	2	R55,R58
1745-222-711	1608, 1/16, 2.2K-J	5	R31,R50,R51,R62,R66
1745-223-711	1608, 1/16, 22K-J	2	R6,R92
1745-241-711	1608, 1/16, 240-J	2	R78,R79
1745-303-511	1608, 1/16, 30K-F	4	R43,R56,R57,R63
1745-331-711	1608, 1/16, 330-J	1	R120
1745-332-711	1608, 1/16, 3.3K-J	6	R4,R16,R19,R21,R90,R121
1745-333-511	1608, 1/16, 33K-F	2	R10,R26
1745-391-711	1608, 1/16, 390-J	1	R29
1745-393-711	1608, 1/16, 39K-J	1	R49
1745-471-511	1608, 1/16, 470-F	2	R84,R91
1745-471-711	1608, 1/16, 470-J	1	R119
1745-472-511	1608, 1/16, 4.7K-F	1	R112
1745-472-711	1608, 1/16, 4.7K-J	8	R2,R7,R13,R17,R23,R98,R99,R103
1745-473-511	1608, 1/16, 4.7K-F	3	R1,R39,R52
1745-473-711	1608, 1/16, 4.7K-J	3	R12,R61,R65
1745-510-711	1608, 1/16, 51-J	1	R117
1745-512-711	1608, 1/16, 5.1K-J	2	R18,R20
1745-750-711	1608, 1/16, 75-J	4	R70,R71,R72,R131
1745-822-711	1608, 1/16, 8.2K-J	2	R5,R15
1745-823-711	1608, 1/16, 82K-J	2	R9,R116
1845-101-791	1608, 50V, C0G, 100pF-J	2	C15,C45
1845-102-791	1608, 50V, C0G, 1nF-J	12	C3,C4,C51,C53,C54,C55,C59,C74,C75,C87,C89,C134
1845-103-791	1608, 50V, C0G, 10nF-J	2	C19,C22
1845-104-791	1608, 50V, C0G, 100nF-J	57	C2,C5,C6,C7,C8,C10,C11,C13,C16,C17,C18,C20,C21,C25,C26,C27,C28,C29,C31,C32,C33,C34,C35,C36,C37,C38,C39,C40,C41 C42,C43,C44,C47,C48,C57,C58,C60,C61,C63,C68,C69,C70,C71,C72,C73,C76,C77,C78,C81,C83,C85,C90,C96,C97,C102,C107,C133
1845-151-791	1608, 50V, C0G, 150pF-J	2	C86,C88
1845-152-891	1608, 50V, X7R, 1.5nF-K	2	C64,C67
1845-180-711	1608, 50V, CH, 18pF-K	1	C129
1845-182-891	1608, 50V, X7R, 1.8nF-K	1	C62
1845-202-891	1608, 50V, X7R, 2.0nF-K	2	C49,C52
1845-222-791	1608, 50V, C0G, 2.2nF-J	3	C1,C23,C24
1845-224-891	1608, 50V, X7R, 220nF-K	2	C46,C66
1845-270-711	1608, 50V, CH, 27pF-K	2	C79,C80
1845-272-891	1608, 50V, X7R, 2.7nF-K	1	C84
1845-333-891	1608, 50V, X7R, 33nF-K	1	C50
1845-334-891	1608, 50V, X7R, 330nF-K	1	C65
1845-472-791	1608, 50V, C0G, 4.7nF-J	1	C14
1845-821-891	1608, 50V, X7R, 820pF-K	1	C56
1857-106-951	3216, 16V, 10uF-M	2	CPE14,CPE15
1859-106-953	3528, 16V, 10uF-M	6	CPE9,CPE11,CPE13,CPE20,CPE22,CPE23
1859-107-857	7343, 16V, 100uF-K	4	CPE3,CPE10,CPE16,CPE17
1859-476-833	3528, 10V, 47uF-K	1	CPE12
1859-476-933	3528, 10V, 47uF-M	6	CPE1,CPE2,CPE4,CPE5,CPE6,CPE7
1859-476-956	6032, 16V, 47uF-M	1	CPE8
2113-201-050	CONN, ZIF,R/ Angle,20P,0.5,SFV20R-1STE1LF, FCI	1	CN10
2113-242-050	CONN, ZIF,R/ Angle,24P,0.5,SFV24R-2STE1LF, FCI	1	CN2
2113-622-406	CONN, ZIF R/ Angle,6P, 6224-006-001-800 KYO	1	CN4
2113-622-428	CONN, ZIF R/ Angle,28P, 6224-028-001-800, KYO	1	CN1

PART CODE	DESCRIPTION	Q'TY	REF No.
FRONT PWB(B4) SECTION			
0144-682-010	FRONT ASSY	1	
9144-682-010	FRONT PWB T/UP ASSY	1	
5114-682-001	ESCUTCHEON	1	
5179-682-001	LOCK OPEN	1	
5179-682-002	TENSION OPEN	1	
5222-682-001	BRACKET OPEN TENSION	1	
5331-682-001	PIN OPEN LOCK	1	FOR OPEN LOCK(1)
5361-682-001	SPRING-RELEASE	1	
5361-682-002	SPRING-OPEN LOCK	1	
5469-682-001	FELT-CHAMUDE 7"	1	
5479-682-003	GASKET EMI	1	FOR FRONT PWB
5618-220-030	SCREW-M	3	ESCUTCHEON+FRONT PWB(3)
5629-320-040	SCREW-TAP	2	ESCUTCHEON+OPEN TENSION BRK'T(2)
0114-682-050	FRONT PWB REF ASSY	1	
1114-682-050	FRONT PWB(WITHOUT COMPONENT)	1	
1252-620-001	DIODE ZENER UDZS6.2B, ROHM	1	D1
1675-010-002	SW-TACT SKQGABE010, ALPS	1	SW1
1845-104-951	1608, 16V, X7R, 100nF-M	1	C1
2113-545-501	CONN, ZIF, R/Angle,10P, 0.5, 54550-1094, MOLEX	1	J1
2141-144-402	CONN, 12FPP1443X, JOINTEC	1	J3
KEY PWB(B4) SECTION			
0154-682-020	KEY ASSY	1	
9154-682-020	KEY PWB T/UP ASSY	1	
5114-682-002	ESCUTCHEON FRONT	1	
5116-682-001	ESCUTCHEON REAR	1	
5122-682-002	DECO ESCUTCHEON FRONT	1	
5134-682-001	KNOB VOLUME SEESAW TYPE	1	
5134-682-002	KNOB FUNCTION L	1	FOR SOUND/ADJ. URETHANE COATING
5134-682-003	KNOB FUNCTION R	1	FOR SOURCE/OPEN, URETHANE COATING
5134-682-004	BUTTON RELEASE	1	
5134-682-005	BUTTON CD EJECT	1	
5142-682-001	FILTER-SENSOR	1	
5176-682-001	REFLECTOR TRIM	1	
5215-682-001	PLATE-ES AL-L NON PRINT	2	HAIR-LINE,ANODIZONG
5361-682-001	SPRING-RELEASE	1	
5479-682-005	GASKET EMI	1	FOR KEY PWB
5554-682-004	SHEET-VOL TACT	1	
5621-320-050	SCREW-TAP	5	ES FRONT+KEY PWB(5)
5629-220-050	SCREW-TAP	5	ES FRONT+ES REAR(5)
0114-682-040	KEY PWB REF ASSY	1	
1114-682-040	KEY PWB(WITHOUT COMPONENT)	1	
1252-820-001	DIODE ZENER UDZS8.2B, ROHM	3	D1,D2,D3
1264-938-001	IR SENSOR, HIR-938HF2, HANSE	1	J1
1275-194-501	LED-CHIP YTN-194SW-5M	8	D5,D6,D7,D8,D9,D10,D11,D12
1448-107-801	INDUCTOR-CHIP NLCV32T-101K, TDK	2	L1,L2
1675-010-001	SW-TACT, SKQYPBE010, ALPS	7	SW1,SW2,SW3,SW4,SW5,SW6,SW7
1745-000-001	1608, 1/16, 0-F	2	R1,R2
1745-100-711	1608, 1/16, 10-J	1	R14
1745-102-711	1608, 1/16, 1K-J	1	R16
1745-123-711	1608, 1/16, 12K-J	1	R19
1745-152-711	1608, 1/16, 1.5K-J	1	R22
1745-181-711	1608, 1/16, 180-J	2	R12,R24
1745-203-711	1608, 1/16, 20K-J	1	R20
1745-221-711	1608, 1/16, 220-J	1	R13
1745-222-711	1608, 1/16, 2.2K-J	2	R18,R23
1745-272-711	1608, 1/16, 2.7K-J	1	R21
1745-301-711	1608, 1/16, 300-J	8	R3,R4,R5,R6,R7,R8,R9,R10
1745-471-711	1608, 1/16, 470-J	1	R15
1745-472-711	1608, 1/16, 4.7K-J	1	R17
1845-104-951	1608, 16V, X7R, 100nF-M	5	C1,C2,C3,C6,C8
1857-106-951	3216, 16V, 10uF-M	3	C4,C5,C7
2141-144-401	CONN, 12FPP1444HD, JOINTEC	1	J2