

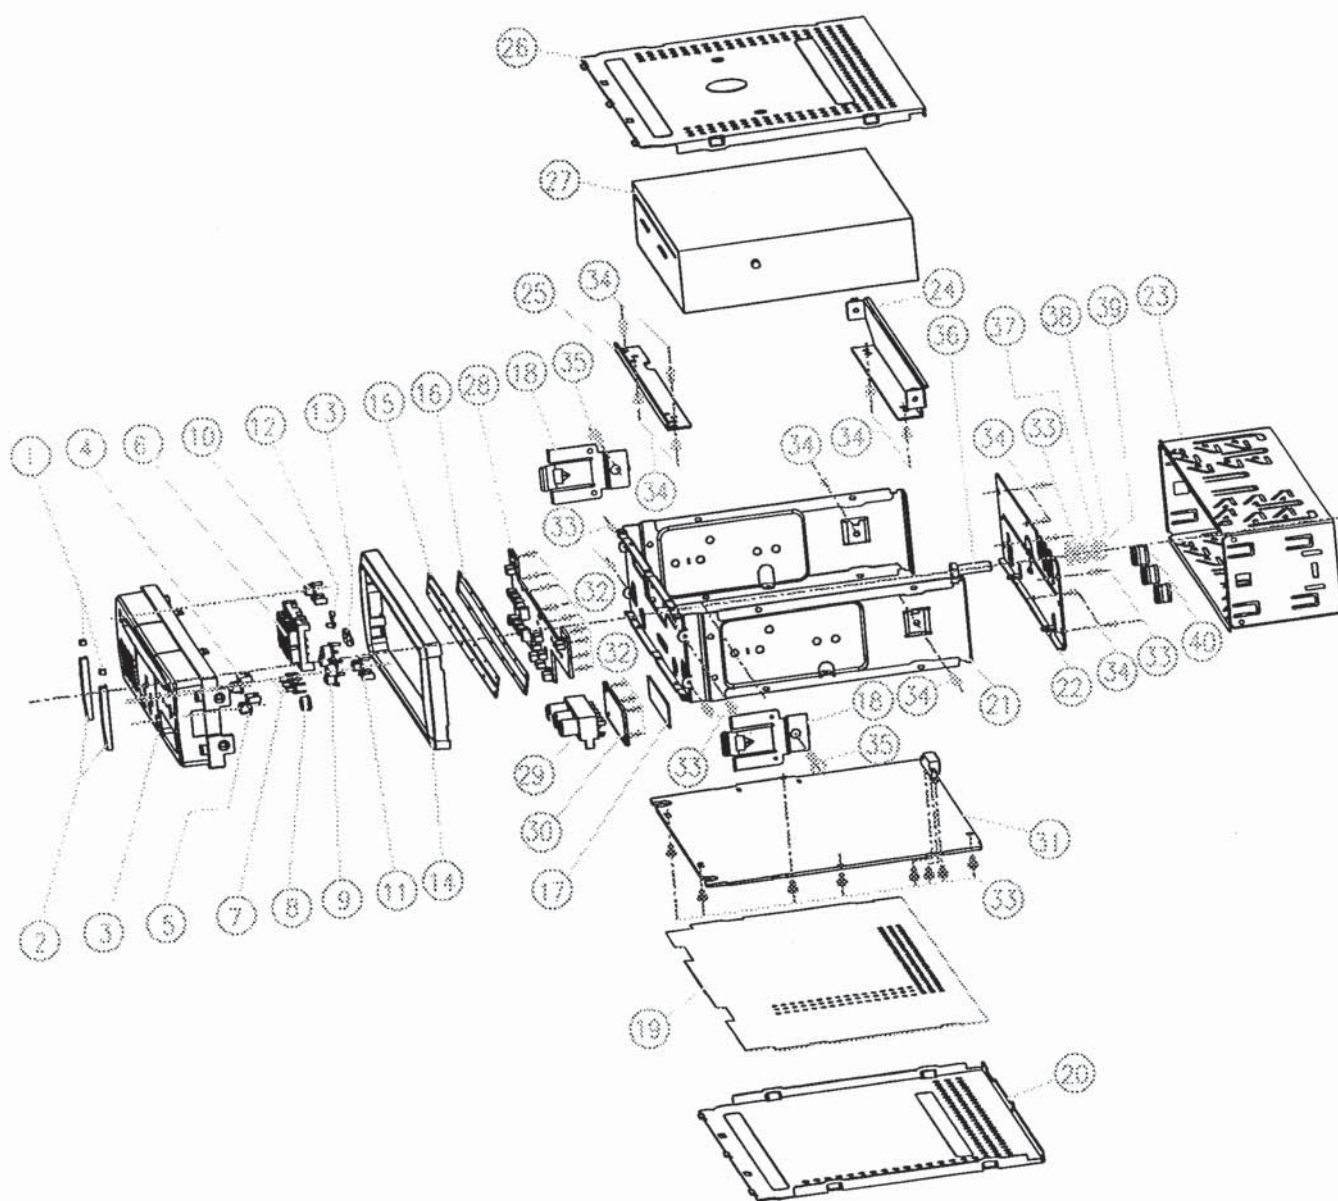


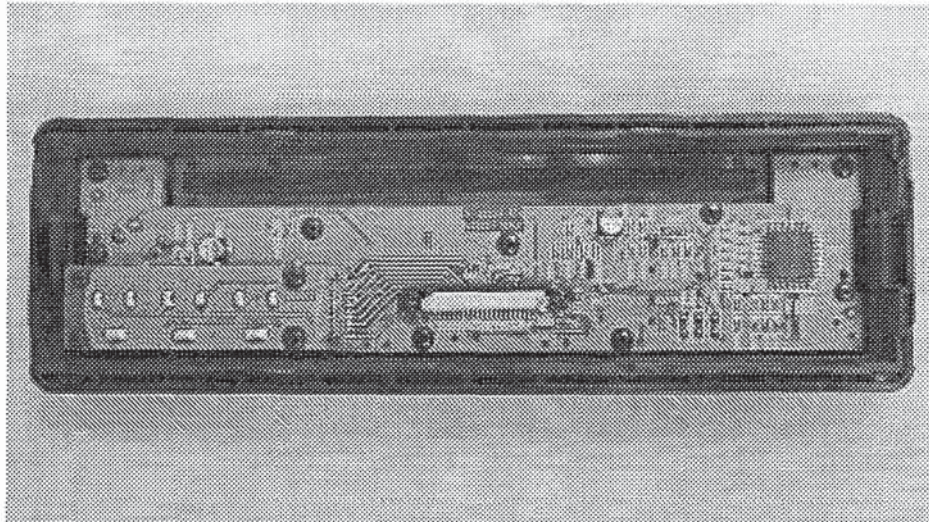


BOM

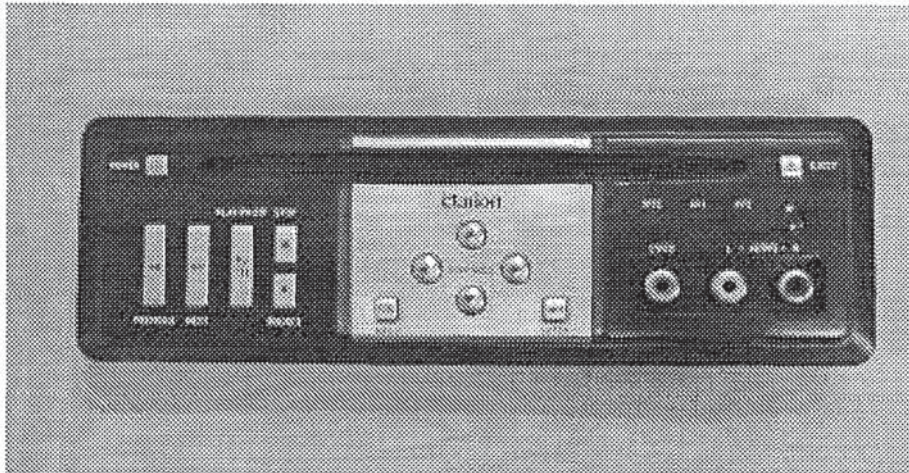

22-35500-001 DVD-355 (CLARION VS755) KB ASS'Y				
1	02-01112-00F	SMD LED PG1112H GREEN "STANLEY"	15	D802~816
2	02-01112-02F	SMD LED BR1112H RED "STANLEY"	2	D801, 817
3	02-50051-03	CHIP ZENER DIODE 5.1V $\pm 5\%$ (LL-34)	1	ZD801
4	02-50168-00	6.8V ZENER DIODE (SMD 1206)	4	ZD805~808
5	03-06312-00	IC PT6312LQ ANGUS	1	IC801
6	05-63101-00	CHIP 100PF $\pm 5\%$ NPO 0603 SMT	2	C801, 804
7	05-63104-02	CHIP CAP 0.1uF $\pm 20\%$ Y5V 0603 SMT	3	C805, 807, 808
8	05-63470-00	CHIP CAP 47PF $\pm 5\%$ NPO 0603 SMT	1	C803
9	06-16476-54	E. CAP CHIP 47uF/16V ϕ 5X5.5	2	C802, 806
10	07-63000-00	CHIP RES 0 Ω $\pm 5\%$ 0603 SMT	2	R828, 829
11	07-63102-00	CHIP RES 1K Ω $\pm 5\%$ 0603 SMT	7	R803, 806/7, 809~812

12	07-63151-00	CHIP RES 150 Ω $\pm 5\%$ 0603 SMT	1	R808
13	07-63221-00	CHIP RES 220 Ω $\pm 5\%$ 0603 SMT	1	R827
14	07-63241-00	CHIP RES 240 Ω $\pm 5\%$ 0603 SMT	2	R804, 805
15	07-63331-00	CHIP RES 330 Ω $\pm 5\%$ 0603 SMT	1	R802
16	07-63333-00	CHIP RES 33K Ω $\pm 5\%$ 0603 SMT	1	R817
17	07-63472-00	CHIP RES 4.7K Ω $\pm 5\%$ 0603 SMT	5	R813~816, 818
18	07-63560-00	CHIP RES 56 Ω $\pm 5\%$ 0603 SMT	3	R820, 821, 822
19	07-63561-00	CHIP RES 560 Ω $\pm 5\%$ 0603 SMT	2	R823, 824
20	07-63750-00	CHIP RES 75 Ω $\pm 5\%$ 0603 SMT	1	R801
21	12-35500-201	PCB DVD-355 KB CEM-3 D/S 173X42.5X1.6MM	1	KB
22	16-19100-00	TACT SW SMD KPS-1107EBM 180G/4.3H KIE BLACK	14	DOWN, EJECT, ENTER, LEFT, UP, N EXT, RIGHT, PREV, MENU, PLAY/P AUSE, RESET, SOURCE, STOP
23	25-19168-20	20P FFC SOCKET SMT 1.0MM	1	CN801
24	25-35500-03	3P AV SOCKET WITH SW. AV3-8.4-16BA	1	CN805
25	25-35500-10J	10P PLUG 1.27B-1E-10A H=9.5MM JINGSHI	1	CN803
26	25-35501-10J	10P JACK 1.27B-1D-10Y JINGSHI	1	CN802
27	29-01201-00	IR RECEIVER GP1UM261XK (SHARP)	1	IC802
28	06-10476-00N	E. CAP 47uF/10V 105° C ϕ 4X7 XK	1	CF6
29	12-01351-396	PCB DVD135 IR 1.2 16X26	1	IRB
30	25-35501-03	CD ϕ 3.5 PLUG WITH DOUBLE SHIELD 3M CLARION	1	
31	29-01201-00	IR RECEIVER GP1UM261XK (SHARP)	1	IR2
32	40-12006-21M	SCREW ϕ 2X6 BA/ST BLACK ODM	13	
33	43-35501-00	PC PLATE-CD (0.3)	1	
34	43-35502-00	(0.2MM) PVC PLATE (FOR SOCKET)	1	
35	51-35520-30W	FRONT PANEL	1	
36	51-35521-30	RING	1	
37	52-35522-30	RESEAT KNOB	1	
38	52-35523-80	POWER KNOB (L-UP)	1	
39	52-35523-81	EJECT KNOB (L-UP)	1	
40	52-35524-80	MENU KNOB (L-UP)	1	
41	52-35524-81	ENTER KNOB (L-UP)	1	
42	52-35525-80	PRE-N KNOB (L-UP)	1	
43	52-35526-80	CONTROLS KNOB (L-UP)	1	
44	52-35527-70	TRIM LENS (LITTLE)	2	
45	52-35528-70	TRIM LENS (BIG)	2	

46	52-35529-01	CD-WINDOWS LENS	1	
47	52-35530-00	DVD-LIGHT LENS	3	
48	53-10805-00	CIRCLE REM LENS (ARCYLIC, RED)	1	
49	81-35501-00	SHADE (CUT) (CLOTH)	1	

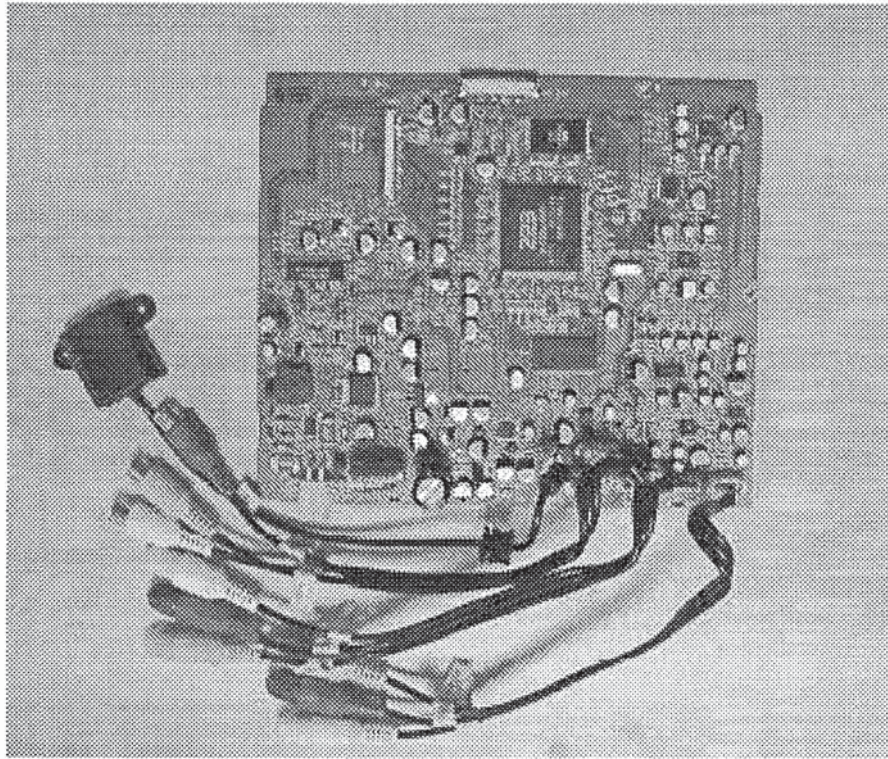


13-35500-001 DVD-355 (CLARION VS755) MB ASS'Y				
1	01-00103-00K	TR. KEC103S NPN SOT-23 KEC	3	Q302, 304, 503
2	01-00104-00	KRC104S (SOT-23) SMD	1	Q501
3	01-00106-00	KRA106S (SOT-23) SMD	4	Q301, 303, 510, 511, 509
4	01-00106-10	KRC106S (SOT-23) SMD	1	Q508
5	01-00231-00	KRC231S (SOT-23)	2	Q305, 306
6	01-00436-00S	TR. BD436 PNP TO-126 SAMSUNG	1	Q504
7	01-00812-00S	TR 2SA812 M7 PNP SOT-23 NEC	1	Q502
8	01-01623-00R	CHIP TR. C1623 NEC	1	Q901
9	01-04375-00	TR. KTC4375-Y (SOT-89)	3	Q505~507
10	02-00226-00	DIODE ISS226 (SOT-23)	3	D101~103
11	02-02040-00	SCHOTTKY MBRS2040T3 SMD	1	D501
12	02-04148-02	DIO CHIP RLS4148 1206 ROHM	6	D301, 302, 504~505, 507, 508
13	02-05819-02	CHIP IN5819 (SOD-106)	1	D501, 506

14	02-50047-01	CHIP ZENER DIODE 4.7V (LL-34)	1	ZD504
15	02-50051-03	CHIP ZENER DIODE 5.1V $\pm 5\%$ (LL-34)	1	ZD301
16	02-50091-01	CHIP ZENER DIODE 9.1V $\pm 5\%$ 0.5W LL-34	1	ZD503
17	02-50100-02	CHIP ZENER DIODE 10V $\pm 5\%$ (LL-34)	2	ZD501, 502
18	03-01117-00	VOLTAQE REGULATOR LD1117S	1	IC502
19	03-01501-02	SWITH POWER IC 5V (AP1501-5.0K)	1	IC501
20	03-02263-01	IC NJM2263M VIDEO SWITCH	1	IC101
21	03-02401-00	EEPROM (FLAT PACK) 24C01	1	IC202
22	03-03121-06	IC BA3121F SOP8 ROHM	2	IC305, CI306
23	03-04052-03	IC CHIP BU4052BCF ROHM	1	IC303
24	03-04558-16	I. C. BA4558F	2	IC302, 304
25	03-06018-00	ES6018 (QFP-208PIN)	1	IC201
26	03-06416-00	W986416DH-6 TSSOP-54PIN	1	IC204
27	03-07201-00	IC NJU7201 U50 (SOT-89)5V	1	IC505
28	03-07660-00	IC ICL 7660A (SOIC 8PIN) INTEL SIL	1	IC509
29	03-07809-02	IC 78L09	2	IC507
30	03-07818-00	REGULATOR LC-78L18	1	IC504
31	03-08728-00	WM8728 (SSOP-20PIN)	1	IC301
32	03-11117-00	VOLTAGE GEGULATOR AP1117E33A	1	IC503
33	03-49802-00	IC AT49BV802AT-70TU TSOP-48 ATMEL	1	IC203
34	03-78153-00	IC EM78P153EP-171A DIP14	1	IC506
35	04-00270-01	CRYSTAL 27MHZ 49SSD27EEM	1	X201
36	04-00400-02	CERAMIC RESONATOR 4MHZ	1	X202
37	05-63101-00	CHIP 100PF $\pm 5\%$ NPO 0603 SMT	2	C332, 333
38	05-63102-01	CHIP 1000PF $\pm 10\%$ X7R 0603 SMT	5	C109, 312, 314, 331, 334
39	05-63104-01	CHIP 0.1uF $\pm 10\%$ X7R 0603 SMT	63	C107, 202~5, 209~41, 301/3/5~7, 326/39, 502/5/8/9, 511/3/5/8, 520/1/4/6, 532/41/4, 345/53
40	05-63151-00	CHIP 150PF $\pm 5\%$ NPO 0603 SMT	2	C313, 315
41	05-63220-00	CHIP CAP 22PF $\pm 5\%$ NPO 0603 SMT	1	C112
42	05-63222-01	CHIP 2200PF $\pm 10\%$ X7R 0603 SMT	2	C317, 319
43	05-63270-00	CHIP CAP 27PF $\pm 5\%$ NPO 0603 SMT	2	C207, 208
44	05-63330-00	CHIP CAP 33PF $\pm 5\%$ NPO 0603 SMT	2	C534, 535
45	05-63471-00	CHIP 470PF $\pm 5\%$ NPO 0603 SMT	2	C102, 201
46	05-63473-01	CHIP 0.047uF $\pm 10\%$ X7R 0603 SMT	2	C536, 538

47	05-63680-00	CHIP CAP 68PF $\pm 5\%$ NPO 0603 SMT	1	C111
48	06-10108-00N	E. CAP 1000uF 10V 105° C ϕ 8X14 XK	1	C506
49	06-16106-54	E. CAP CHIP 10u/16V ϕ 4X5.5	33	C103~5, 302/9~11, 316/8, 320~5/28~29, 335/7, 504/42, 341/2/44, 347~50, 352, 355/6, 365, 366
50	06-16107-54	E. CAP CHIP 100u/16V ϕ 6.3X5.5	20	C108, 308, 327, 340, 512, 516/7, 522/3, 525, 527, 529, 537, 346, 354, 539, 364, 540, 543, 545
51	06-16107-54H	E. CAP CHIP 100UF/16V $\pm 20\%$ ϕ 6.3X5.5 (24V/IMIN)	5	C507, 510, 514, 519, 531
52	06-16226-54	E. CAP CHIP 22u/16V ϕ 5X5.5	2	C343, 351
53	06-25228-00	E. CAP 2200uF/25V ϕ 13X25 105° C	1	C501
54	06-63227-54	E. CAP CHIP 220uF/6.3V ϕ 6.3X5	12	C110, 242~249, 304, 528, 530
55	07-05102-00A	RES. 1K Ω (1/4)W (TAPPING)	1	R530
56	07-05331-01	RES. 330 Ω 1W $\pm 5\%$	1	R504
57	07-05470-54	CHIP RES. 47 Ω 1/8W	2	R301, 342
58	07-63000-00	CHIP RES 0 Ω $\pm 5\%$ 0603 SMT	4	R227, 512, 906, 531
59	07-63022-00	CHIP RES 2.2 Ω $\pm 5\%$ 0603	3	R525, 526, 527
60	07-63100-00	CHIP RES 10 Ω $\pm 5\%$ 0603 SMT	2	R208, 508, 523
61	07-63101-00	CHIP RES 100 Ω $\pm 5\%$ 0603 SMT	4	R211/2/5, 801
62	07-63102-00	CHIP RES 1K Ω $\pm 5\%$ 0603 SMT	11	R311/3, 338/9, 506, 509, 514
63	07-63102-01	CHIP RES 1K Ω $\pm 1\%$ 0603 SMT	1	R511
64	07-63103-00	CHIP RES 10K Ω $\pm 5\%$ 0603 SMT	18	R310/2, 316~319, 322/3, 340/1, 502, 505, 517, 518, 521, 533, 907/9
65	07-63103-04C	CHIP RCA03-4D103JTP 10K $\pm 5\%$ 0603X4 RALEC	2	RN903, 904
66	07-63104-00	CHIP RES 100K Ω $\pm 5\%$ 0603 SMT	2	R214, 519
67	07-63105-00	CHIP RES 1M Ω $\pm 5\%$ 0603 SMT	4	R101~104
68	07-63122-01	CHIP RES 1.2K $\pm 1\%$ 0603 SMT	1	R510
69	07-63123-00	CHIP RES 12K Ω $\pm 5\%$ 0603 SMT	6	R304/5, 345, 346, 349, 350
70	07-63180-00	CHIP RES 18 Ω $\pm 5\%$ 0603 SMT	1	R528
71	07-63203-00	CHIP RES 20K Ω $\pm 5\%$ 0603 SMT	2	R520
72	07-63221-00	CHIP RES 220 Ω $\pm 5\%$ 0603 SMT	2	R207, 217
73	07-63223-00	CHIP RES 22K Ω $\pm 5\%$ 0603 SMT	6	R302/3/6/9, 326/7
74	07-63272-00	CHIP RES 2.7K $\pm 5\%$ 0603 SMT	4	R320/1/4/5
75	07-63303-00	CHIP RES 30K $\pm 5\%$ 0603 SMT	2	R331/3
76	07-63330-00	CHIP RES 33 Ω $\pm 5\%$ 0603 SMT	1	R213
77	07-63330-04	CHIP CN34JT 33 Ω (0603X4 SMT)	20	RN201~218, 901, 902

78	07-63332-00	CHIP RES 3.3K Ω $\pm$ 5% 0603 SMT	4	R307/8, 330/2
79	07-63392-00	CHIP RES 3.9K Ω $\pm$ 5% 0603 SMT	2	R328/9
80	07-63472-00	CHIP RES 4.7K Ω $\pm$ 5% 0603 SMT	11	R203~206, 209, 210, 216, 522, 524, 520, 534
81	07-63473-00	CHIP RES 47K Ω $\pm$ 5% 0603 SMT	2	R507, 910
82	07-63562-00	CHIP RES 5.6K Ω $\pm$ 5% 0603 SMT	2	R314/5
83	07-63750-00	CHIP RES 75 Ω $\pm$ 5% 0603 SMT	2	R105, 201
84	09-11470-00	EMIFIL (SMD) BLM11B470SB	13	L104/5, 203, 205, 302~303, 801~807
85	09-12050-03	FERRITE CORE FSRH070080RN000B	1	ON 20-01206-01
86	09-31601-00	EMIFIL (SMD) BLM31P601SG	10	L201/2, 502~505, 507~510
87	09-61472-19	EMIIIL (SMD)NFM61R30T472T1	2	L511, 512
88	09-70018-54	CHIP WIREING 1.8uH SMD1210	3	L101~103
89	09-70100-54	CHIP WIREING 10uF SMD 1210	1	L514
90	09-70101-51	SMD POWER INDUCTOR 100uH 1.3A	1	L506
91	09-70101-57	CHIP WIREING 100uH SMD1210	1	L513
92	12-12040-500	PCB DVD-1204 RECEIVER	1	TO CN202
93	12-35501-041	PCB DVD-355 MB CEM-3 D/S 173X147X1.6MM	1	MB
94	15-00003-05	TDROIO COIL L=105uH ϕ 1.0MM	1	L501
95	16-00035-10	ϕ 3.5MM JACK 4PIN BLACK	1	TO CN202
96	20-01206-01	ϕ 3MM SHIELD WIRE 250MM	1	TO CN202
97	25-00162-05	RCA CABLE AUX IN (L R V)	3	TO CN301~303
98	25-02005-00	5PIN 2.0MM JACK STRAIGHT	3	CN301, 302, 303
99	25-05180-50	50PIN P=0.5MM L=180MM WIRE FFC	1	TO CN901
100	25-05569-01	4PIN 5569-NA1 SKT (DVD120)	1	CN501
101	25-12060-03	3P 2.5MM SOCKET SIP	1	CN202
102	25-19102-20	20P FFC E 1.0MM L=80MM	1	TO CN801
103	25-19168-20	20P FFC SOCKET SMT 1.0MM	1	CN801
104	25-50501-50	50P SOCKET 50002A-50T1-B SUYIN	1	CN901
105	33-00018-00	SMD FUSE 1.8A (FUZETEC FSMD185-2920)	1	F502
106	33-00050-01	SMD FUSE 0.5A (FUZETEC FSMD050-2920)	1	F501
107	40-12005-06	SCREW ϕ 2X5 BH/ST BLACK	2	
108	52-32823-00	CD JACK TOP COVER	1	
109	52-32824-00	CD JACK BOTTOM COVER	1	

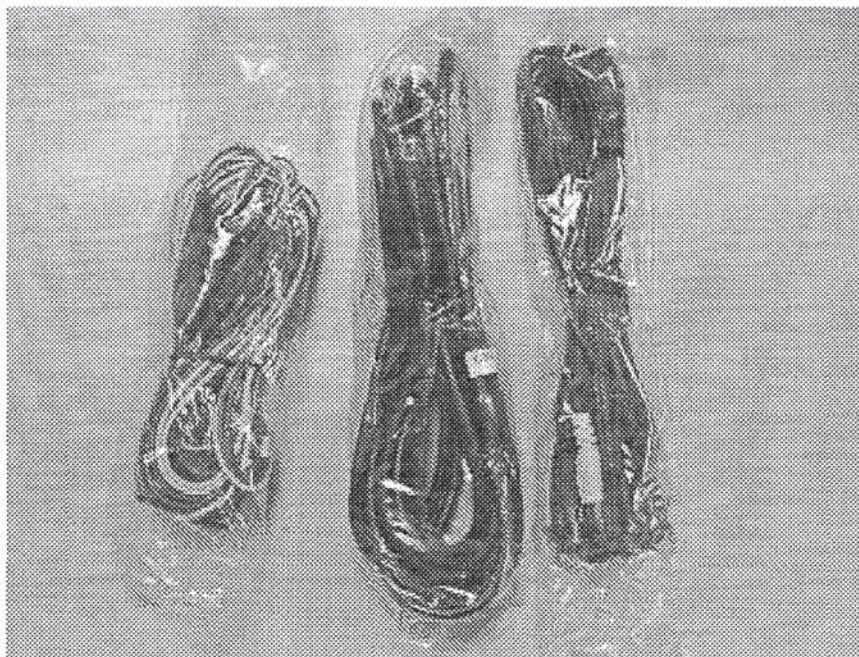

92-35500-001 DVD-355 PACKING ASSL'Y				
2	25-01201-50	1CH VIDEO CABLE 5M	1	
3	25-01202-50	2CH AUDIO CABLE 5M	1	
4	25-05557-04	4PIN HOUSING DVD-120 VDO (5M)	1	