


2. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 • The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 • Screw adjacent to ▽ mark on the product are used for disassembly.
 • For the applying amount of lubricants or glue, follow the instructions in this manual.
 (In the case of no amount instructions, apply as you think it appropriate.)


2.1 EXTERIOR(1)

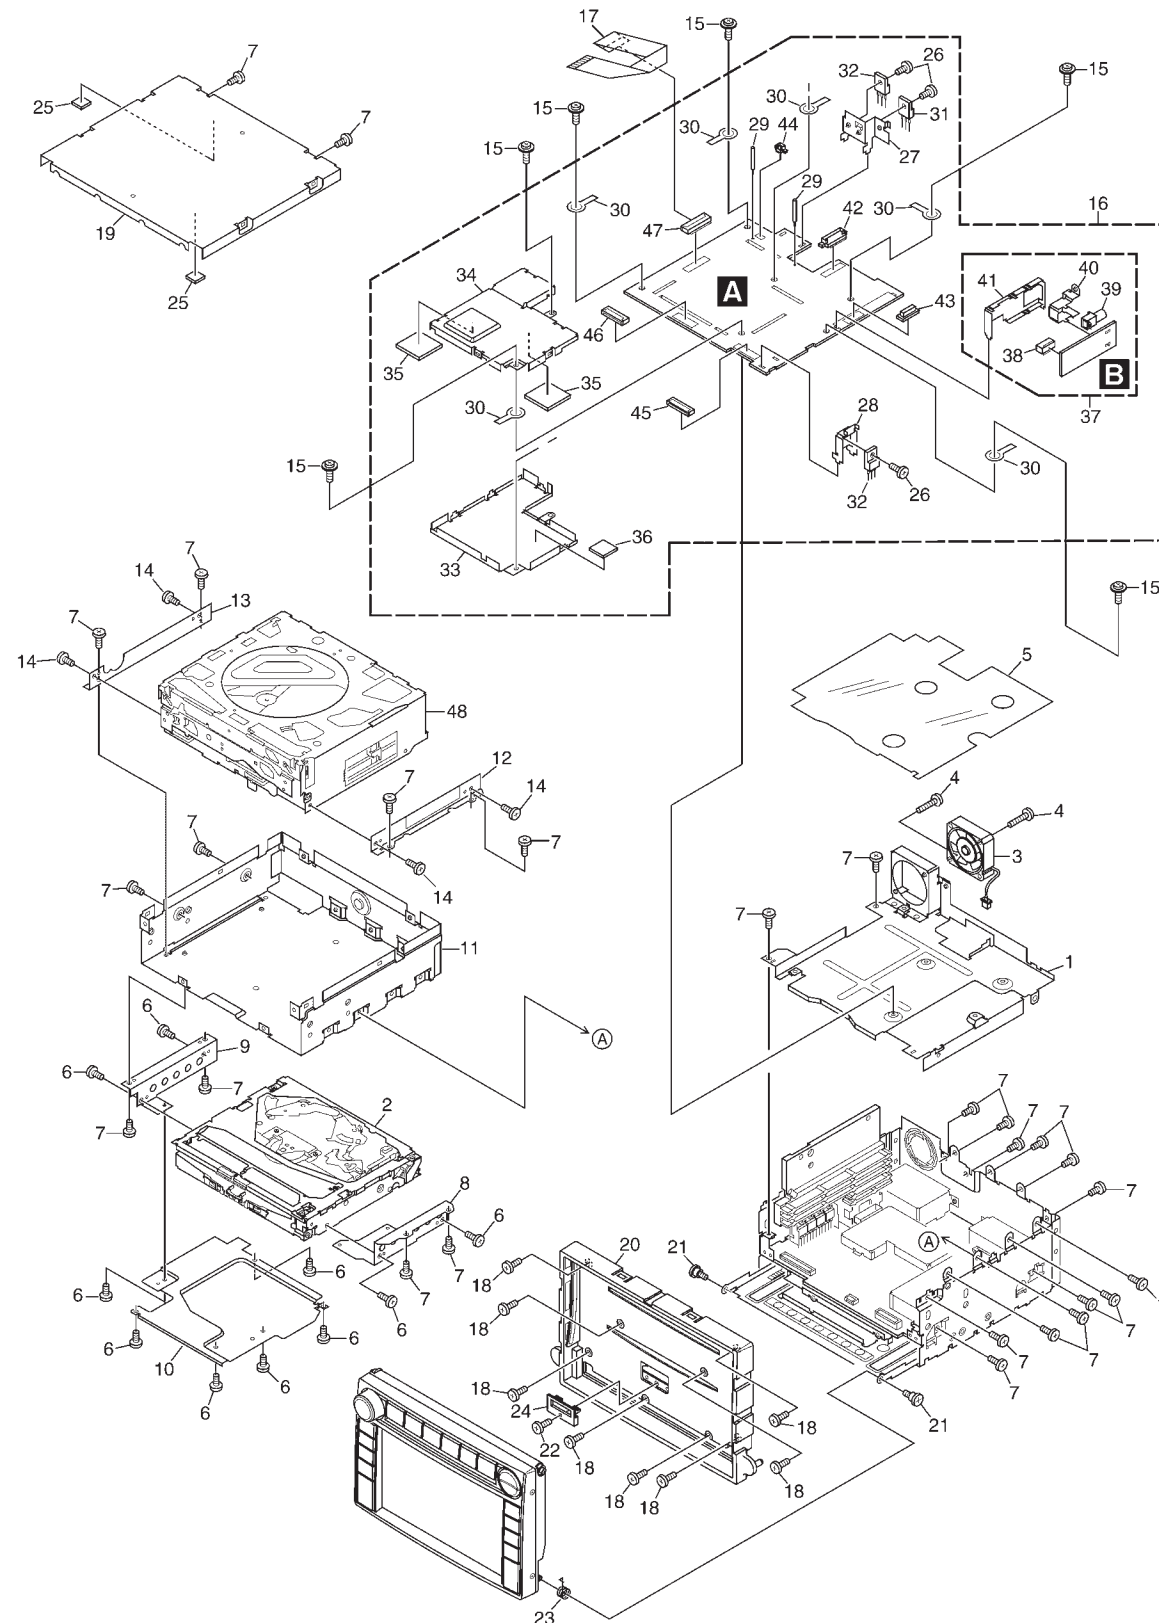

EXTERIOR(1) SECTION PARTS LIST

Mark No.	Description	Part No.	
1	Chassis Unit	CXC3213	
2	DVD Mechanism Module(MS3)	CXK6334	A
3	Fan Motor(M1)	CXM1295	
4	Screw(M2.6x10)	CBA1798	
5	Insulator	CNM8906	
6	Screw(M2x3)	CBA1527	
7	Screw	BMZ26P040FTC	
8	Bracket	CND2293	
9	Bracket	CND2294	
10	Shield	CND2324	
11	Chassis Unit	CXC3280	B
12	Bracket	CND2291	
13	Bracket	CND2292	
14	Screw	BMZ30P050FTC	
15	Screw	ISS26P060FTC	
16	Navi Unit	CWN1358	
17	FFC	CDE7616	
18	Screw(M2.6x4)	CBA1828	
19	Case	CNB3034	
20	Panel Unit	CXC3634	C
21	Screw	CBA1865	
22	Screw(M2x3)	CBA1864	
23	Spring	CBH2787	
24	Cover	CNV8134	
25	Cushion	CNM9684	
26	Screw	BMZ26P060FTC	
27	Holder	CND2307	
28	Holder	CND2308	
29	Clamper(CN3507,3508)	CEF1046	
30	Terminal(CN3510-3515)	CKF1064	D
31	Transistor(Q3513)	2SD2375	
32	Transistor(Q3501,3514)	2SB1185	
33	Shield	CND2306	
34	Shield	CND2305	
35	Sheet	CNM9256	
36	Sheet	CNM9298	
37	GPS Unit	CWX3292	
38	Connector(CN471)	CKS5204	
39	Connector(CN401)	CKX1081	E
40	Holder	CND2309	
41	Shield	CND2310	
42	Connector(CN3704)	CKS4834	
43	Connector(CN3701)	CKS5205	
44	Connector(CN3502)	CKS4822	
45	Connector(CN703)	CKS4052	
46	Connector(CN601)	CKS5115	
47	Connector(CN2)	DKN1240	F
48	CD Mechanism Module(Service)	CXX1998	


2.2 EXTERIOR(2)

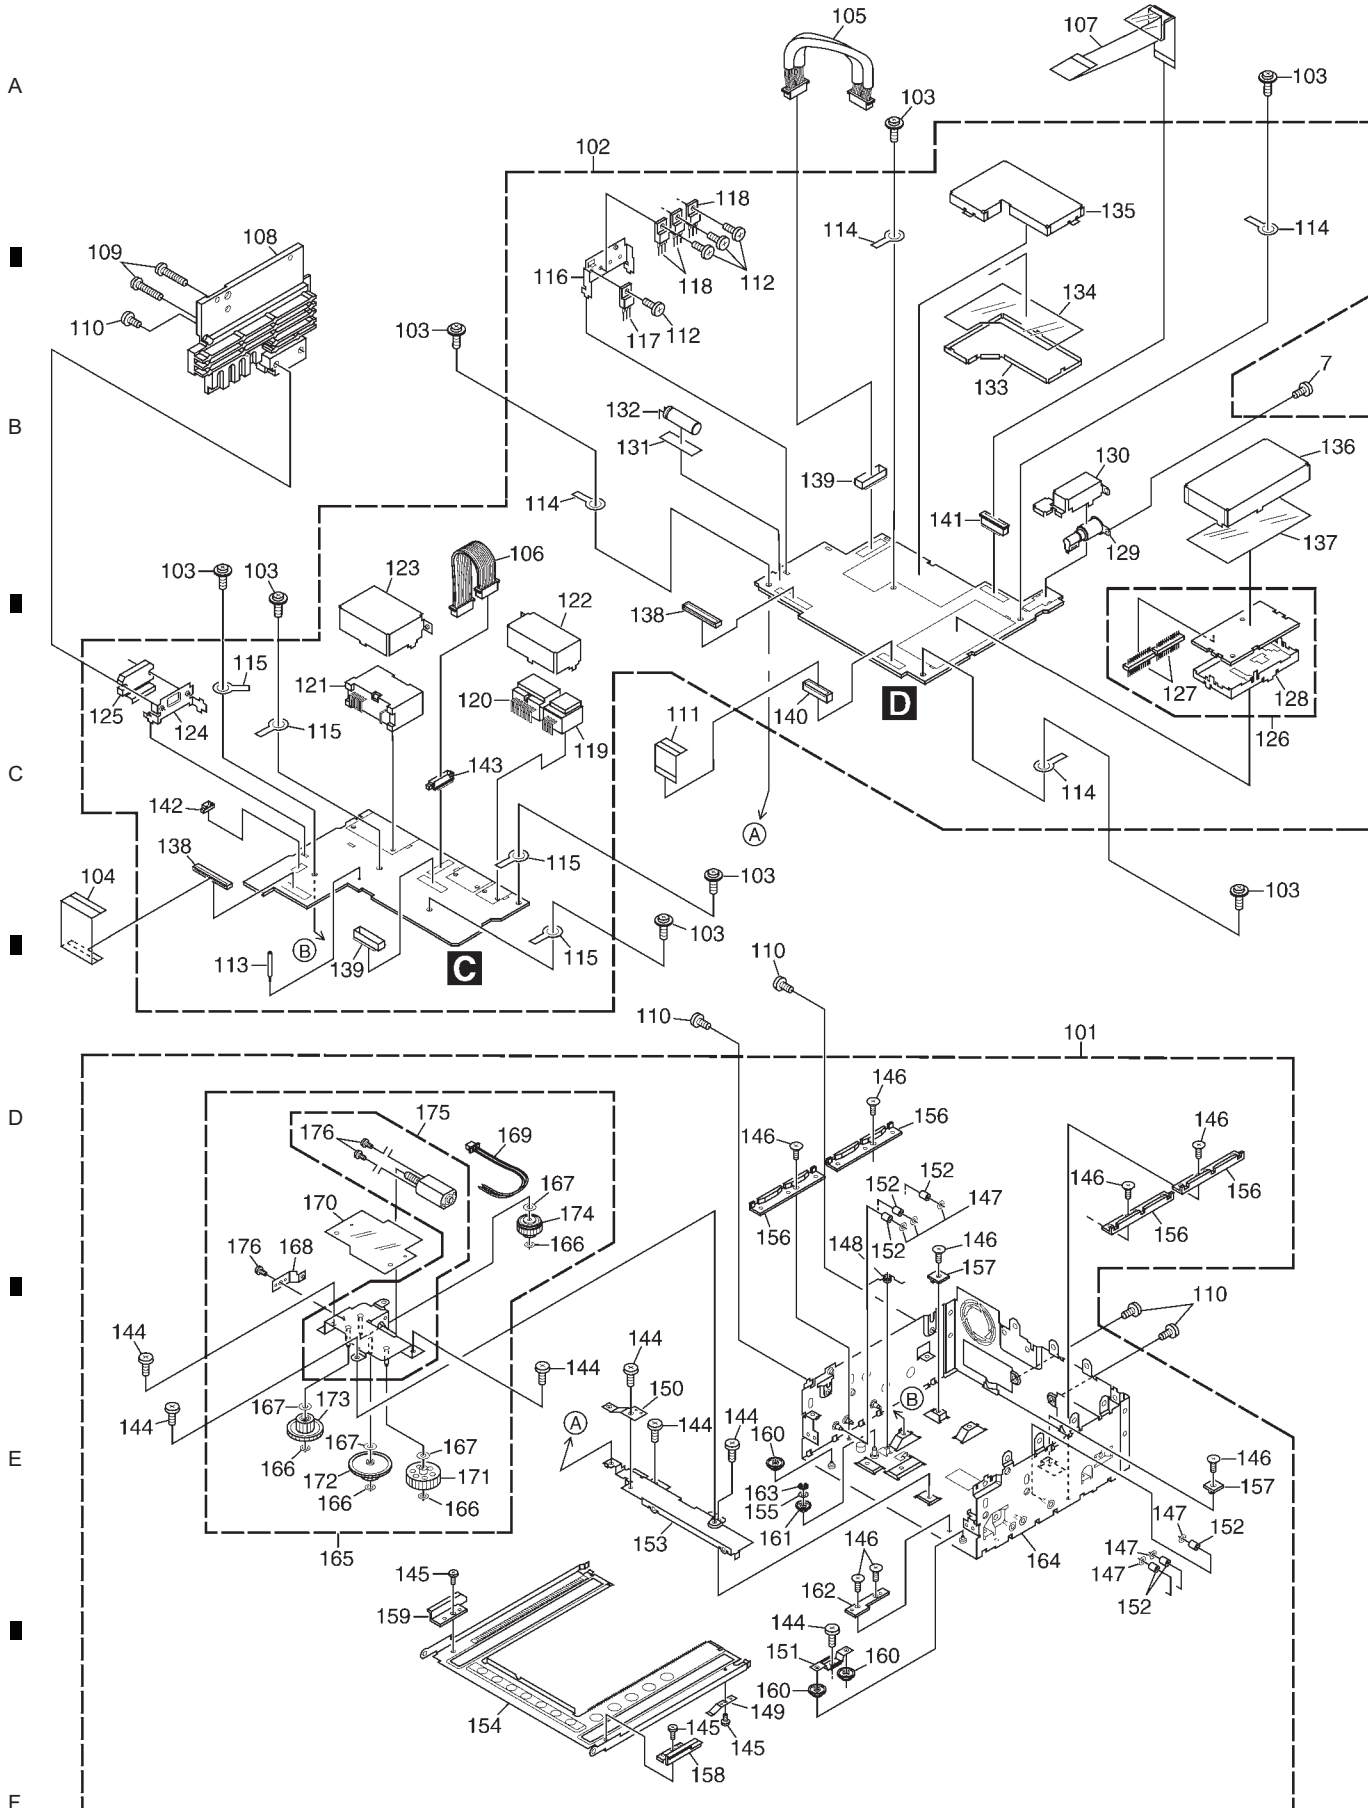

EXTERIOR(2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
101	Chassis Drive Assy	CXC3077	150	Spring	CBL1677	
102	Audio Compound Unit	CWN1488				A
103	Screw	ISS26P060FTC	151	Spring	CBL1678	
104	FFC	CDE7617	152	Collar	CLA4488	
105	Cord Assy	CDE7620	153	Bracket	CND2239	
			154	Frame	CND2240	
106	Cord Assy	CDE7619	155	Spacer	CNM9479	
107	FFC	CDE8247				
108	Heat Sink	CNR1759	156	Holder	CNV8079	
109	Screw	BMZ26P160FTC	157	Holder	CNV8081	
110	Screw	BMZ26P040FTC	158	Holder	CNV8205	
			159	Holder	CNV8206	
111	FFC	CDE7618	160	Roller	CNV8248	B
112	Screw	BMZ26P060FTC				
113	Clamper	CEF1046	161	Roller	CNV8249	
114	Terminal(CN1001,1002,1401,1402)	CKF1064	162	Holder	CNV8250	
115	Terminal(CN2255-2258)	CKF1064	163	Washer	YE15FTC	
			164	Chassis Unit	CXC3078	
116	Holder	CND2300	165	Drive Assy	CXC3079	
117	Transistor(Q1016)	2SD2375				
118	Transistor(Q1001,1004,1010)	2SB1185	166	Washer	CBF1039	
119	Connector(CN2041)	CKM1431	167	Spacer	CNM9278	
120	Plug(CN2021)	CKM1384	168	Spring	CBL1680	
			169	Cord Assy	CDE7678	C
121	Connector(CN2001)	CKM1454	170	Insulator	CNM8828	
122	Holder	CND2296				
123	Holder	CND2297	171	Gear	CNR1763	
124	Holder	CND2298	172	Gear	CNV8082	
125	IC(IC2421)	TDA7563	173	Gear	CNV8269	
			174	Torque Limiter Assy	CXC3081	
126	FM/AM Tuner Unit	CWE1822	175	Motor Unit(M2)	CXC3854	
127	Connector(CN101,102)	CKS4653				
128	Holder	CND2145	176	Screw	JGZ20P025FTC	
129	Connector(ANT1401)	CKX1082				D
130	Holder	CND2299				
131	Insulator	CNM9478				
132	Capacitor(C1035)	CCH1486				
133	Shield	CND2304				
134	Insulator	CNM9189				
135	Shield	CND2303				
136	Shield	CND2301				
137	Insulator	CNM8942				
138	Connector(CN1101,2051)	CKS4872				E
139	Connector(CN1102,2061)	CKS4812				
140	Connector(CN1301)	CKS5075				
141	Connector(CN1201)	CKS5005				
142	Connector(CN2251)	CKS4977				
143	Connector(CN2091)	CKS4834				
144	Screw(M2.6x2.5)	CBA1737				
145	Screw(M2x3)	CBA1762				
146	Screw	CBA1862				
147	Washer	CBF1038				F
148	Spring	CBH2788				
149	Spring	CBL1657				


2.3 EXTERIOR(3)

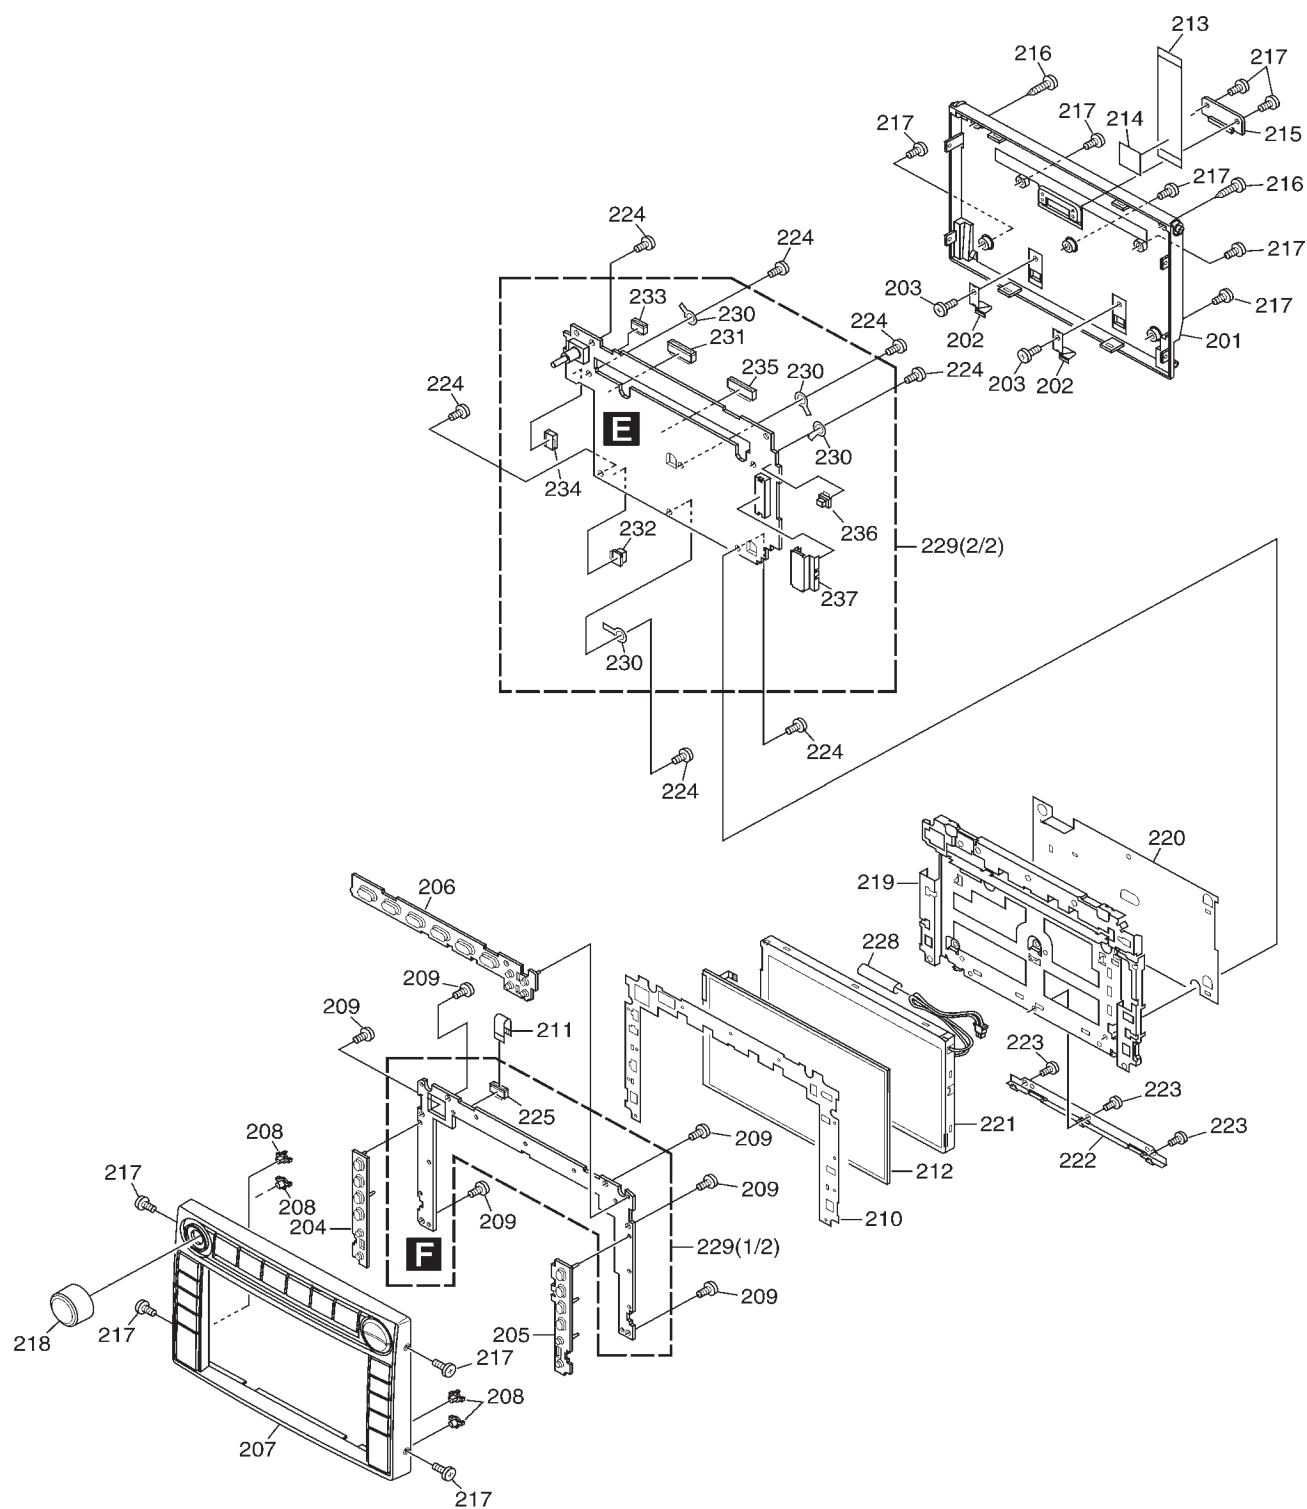

EXTERIOR(3) SECTION PARTS LIST

Mark No.	Description	Part No.
201	Case Unit	CXC3100
202	Spring	CBL1673
203	Screw	BMZ20P020FTC
204	Rubber	CNV8133
205	Rubber	CNV8179
206	Rubber	CNV8180
207	Grille Assy	CXC3847
208	Actuator	CNV8407
209	Screw	BPZ20P060FTC
210	Insulator	CNM8927
211	FFC	CDE7622
212	Touch Panel	CSX1072
213	Flexible PCB	CNP8015
214	Cover	CNM9472
215	Guide	CNV5169
216	Screw	BPZ20P100FTB
217	Screw	CBA1812
218	Knob Unit	CXC3101
219	Bracket	CND2252
220	Insulator	CNM8995
221	LCD Panel	CWX3017
222	Bracket	CND2253
223	Screw	BMZ20P020FTC
224	Screw	CBA1829
225	Connector(CN3402)	CKS3993
226	*****	
227	*****	
228	Tube	CDM1035
229	Monitor Compound Unit	CWM1490
230	Terminal(CN3102,3103,3107,3108)	CKF1064
231	Connector(CN3104)	CKS5114
232	Connector(CN3101)	CKS4496
233	Connector(CN3002)	CKS4507
234	Connector(CN3004)	CKS5105
235	Connector(CN3001)	CKS5113
236	Connector(CN3301)	CKS4428
237	Shield	CND1177

2.4 DVD MECHANISM MODULE

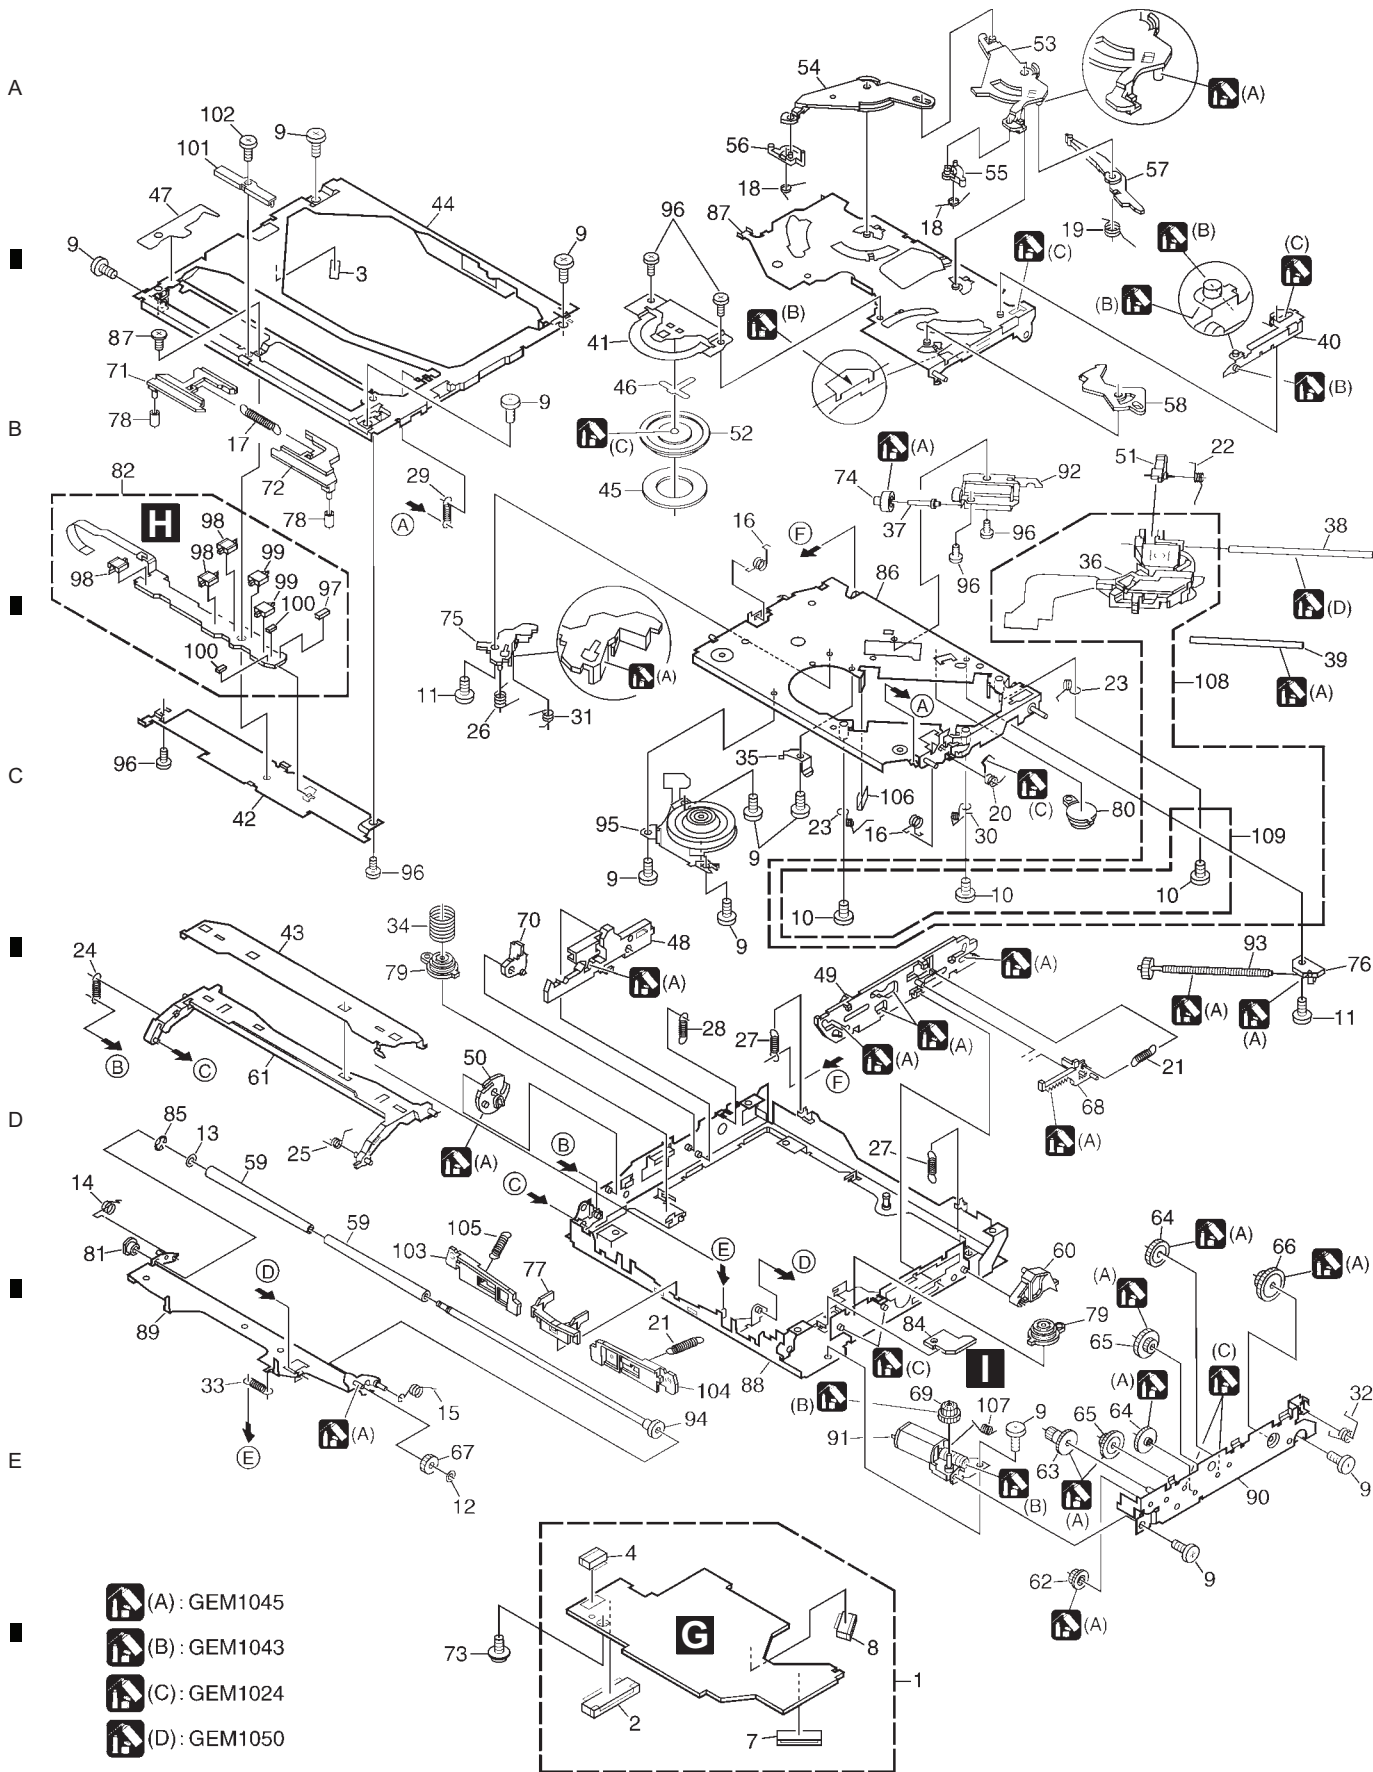

DVD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	DVD Core Unit(MS3R)	CWX3178	* 57	Arm	CNV7163	
2	Connector(CN601)	CKS5055	58	Arm	CNV7164	
3	Sheet	CNM8697	59	Roller	CNV7165	A
4	Connector(CN1202)	CKS5017	60	Arm	CNV7166	
5						
6			61	Guide	CNV8093	
7	Connector(CN1101)	CKS4842	62	Gear	CNV7169	
8	Connector(CN1201)	CKS5043	63	Gear	CNV7170	
9	Screw	BMZ20P020FTC	64	Gear	CNV7171	
10	Screw(M2 x 3.5)	CBA1571	65	Gear(Black)	CNV7172	
11	Screw(M2 x 2.5)	CBA1623	66	Gear	CNV7173	
12	Washer	CBF1038	67	Gear	CNV7174	
13	Washer	CBF1064	68	Rack	CNV7175	
14	Spring	CBH2586	69	Gear	CNV7176	B
15	Spring	CBH2587	70	Arm	CNV8077	
16	Spring	CBH2588	71	Lever	CNV7178	
17	Spring	CBH2589	72	Lever	CNV7179	
18	Spring	CBH2590	73	Screw	IMS20P030FTC	
19	Spring	CBH2591	74	Gear	CNV7181	
20	Spring	CBH2592	75	Holder	CNV7183	
21	Spring	CBH2593	76	Holder	CNV7184	
22	Spring	CBH2594	77	Guide	CNV7745	
23	Spring	CBH2595	78	Roller	CNV7344	
24	Spring	CBH2596	79	Damper	CNV7470	
25	Spring	CBH2597	80	Damper	CNV7471	C
26	Spring	CBH2598	81	Collar	CNV8845	
27	Spring	CBH2599	82	Compound Unit(A)	CWX3154	
28	Spring	CBH2600	83	Screw(M1.4xM1.4)	CBA1787	
29	Spring	CBH2601	84	Compound Unit(B)	CWX3156	
30	Spring	CBH2602	85	Washer	YE20FTC	
31	Spring	CBH2603	86	Chassis Unit	CXC3629	
32	Spring	CBH2604	87	Arm Unit	CXB8681	
33	Spring	CBH2605	88	Frame Unit	CXB8683	
34	Spring	CBH2711	89	Arm Unit	CXC4701	
35	Spring	CBL1564	90	Bracket Unit	CXB8685	D
36	Pickup Unit(Service)	CXX2030	91	Motor Unit(LOADING)(M1)	CXC4315	
37	Shaft	CLA3881	92	Motor Unit(CARRIAGE)(M2)	CXC4745	
38	Shaft	CLA4206	93	Screw Unit	CXB8689	
39	Shaft	CLA4207	94	Roller Unit	CXC5676	
40	Lever	CNC9933	95	Motor(SPINDLE)(M3)	CXM1308	
41	Holder	CNC9939	96	Screw	JFZ20P018FTC	
42	Holder	CND2251	97	Photo-transistor(Q1299)	CPT231SCTD	
43	Holder	CNC9941	98	Switch(S1201)	CSN1069	
44	Frame	CND2250	99	Spring Switch(S1204)	CSN1070	
45	Sheet	CNM6883	100	Resistor(R1298)	RS1/16S0R0J	E
46	Sheet	CNM8283	101	Guide	CNV7615	
47	Sheet	CNM8643	102	Screw(M1.7x1.2)	CBA1572	
48	Lever	CNV8076	103	Arm	CNV7742	
49	Lever	CNV8420	104	Arm	CNV7743	
50	Cam	CNV7156	105	Spring	CBH2710	
51	Rack	CNV7157	106	Spring	CBL1643	
52	Clamper	CNV7158	107	Spring	CBH2712	
53	Arm	CNV7159	108	Pickup Unit(Service)(Screw)	GXX1254	
54	Arm	CNV7160	109	Screw Assy	CXX1750	
55	Arm	CNV7161				F
56	Arm	CNV7162				

4



MECHANISM MODULE UNIT(SERVICE) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Control Unit(G3)	CWX3284	50	CD Mechanism Unit(Service)	CXX2141	
2	Stage Assy(Service)	CXX1934				
3	Connector(CN102)	CKS4937	51	Screw	JFZ20P020FTC	A
4	Connector(CN902)	CKS4914				
* 5	Chassis Unit	CXC2394				
* 6	Lever Unit	CXC2393				
* 7	Cam Gear Unit	CXC2435				
8	Connector(CN101)	CKS4840				
9	Terminal(CN202)	CKF1077				
10	Gear	CNV7856				
11	Gear	CNV7851				B
12	Gear	CNV7854				
* 13	Gear	CND1924				
14	Flexible PCB	CNP7958				
15	Gear	CND1939				
16	Arm	CNV7869				
17	Case	CND1934				
18	Stair	CND1932				
19	Stair	CND1931				
20	Stair	CND1930				C
21	Spring	CBH2731				
22	Cam	CNV7932				
23	Cam	CNV7867				
24	Cam	CNV7868				
25	Cam	CNV7866				
26	Arm	CNV7850				
27	Spring	CBH2732				
28	Washer	CBF1094				
29	Holder	CNV7861				
30	Washer	YE15FTC				D
* 31	Arm	CND1926				
32	Screw(M2x2.5)	CBA1823				
33	Washer	CBF1064				
* 34	Gear	CND1936				
* 35	Gear	CND1937				
36	Spring	CBH2720				
37	PCB Assy	CXC3142				
38	Cam Motor Assy(CAM)(M1)	CXC5900				E
* 39	Lever Unit	CXC2392				
40	Tray Assy	CXC3141				
41	Under Tray Assy	CXC6454				
42	Shutter Assy	CXC3732				
43	Sheet	CNM9680				
44	Holder Unit	CXC2418				
* 45	Arm	CND1933				
46	Screw	BMZ20P025FTC				
47	Screw	IMS26P025FTC				F
48	PCB Assy	CWX2986				
49	ELV Motor Assy(ELV)(M2)	CXC5902				

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
Unit Number:CWN1358			IC 101	(A,78,32) IC	TC74LCX08FTS1
			IC 102	(A,79,26) IC	TC7SH04FUS1
			IC 103	(A,77,42) IC	TC74LCX245FTS1
			IC 104	(A,86,42) IC	TC74LCX245FTS1
			IC 105	(A,94,42) IC	TC74LCX245FTS1
Unit Name:Navi Unit					
Unit Number:CWX3292			IC 106	(A,103,42) IC	TC74LCX245FTS1
			IC 107	(A,105,52) IC	TC74LCX541FTS1
			IC 108	(A,105,60) IC	TC74LCX541FTS1
Unit Name:GPS Unit					
Unit Number:CWN1839			IC 109	(A,105,69) IC	TC74LCX541FTS1
			IC 110	(B,61,54) IC	PEH020B
	Unit Name:Audio Compound Unit				
Unit Number:CWN1488			IC 111	(B,61,38) IC	PEH021B
			IC 112	(B,49,76) IC	TC7SH00FUS1
			IC 113	(B,61,72) IC	M5M5V216ATP-70HI
Unit Name:Monitor Compound Unit					
Unit Number:CWX3178			IC 114	(B,49,73) IC	TC7SH08FUS1
			IC 201	(A,47,39) IC	MB86291APFVS-G-DL
	Unit Name:DVD Core Unit(MS3R)				
Unit Number:CWX3154			IC 301	(A,87,33) IC	M51957BFP
			IC 302	(A,85,23) IC	TC7WH08FU
			IC 303	(A,135,95) IC	NJM2068V
Unit Name:Compound Unit(A)			IC 304	(A,38,69) IC	AK4351VT
			IC 305	(A,38,74) IC	AK5381VT
	Unit Number:CWX3156			IC 307	(A,126,88) IC
			IC 308	(A,114,111) IC	NJM2068V
Unit Name:Compound Unit(B)					
Unit Number:CWX284			IC 601	(A,104,10) IC	TC7SH00FUS1
			IC 701	(A,128,35) IC	TC7SH08FUS1
			IC 702	(A,64,63) IC	TC7SH08FUS1
Unit Name:Control Unit(G3)					
Unit Number:CWX2986			IC 703	(A,136,31) IC	TC74VHCT08AFTS1
			IC 801	(A,12,96) IC	LP3965ES-ADJ
			IC 803	(B,46,107) IC	TPS5102IDBT
Unit Name:RPS PCB Assy			IC 806	(A,154,63) IC	S-L2980A33MC-C6S
			IC 3502	(A,132,103) IC	S-812C50AUA-C3E
	A				
Unit Number:CWN1358			IC 3701	(A,147,145) IC	LM20BIM7
			IC 3702	(A,124,29) IC	TC7S02FU
			IC 3703	(A,128,29) IC	TC7SH00FUS1
			IC 3704	(B,144,112) IC	TC7SH04FUS1
			Q 201	(A,68,25) Transistor	UMD2N
MISCELLANEOUS					
			Q 301	(A,93,36) Transistor	DTC114EU
IC 1	(B,81,45) IC	HY57V561620CLT-H	Q 302	(B,115,110) Transistor	UMD3N
IC 2	(A,84,65) IC	UPD705103GM-180S1	Q 303	(B,118,107) Transistor	UMD3N
IC 3	(B,98,45) IC	HY57V561620CLT-H	Q 304	(B,118,110) Transistor	UMD3N
IC 4	(A,100,35) IC	TC7SZ08FU	Q 305	(B,115,104) Transistor	FMG12
IC 5	(B,89,69) IC	PD6336C	Q 306	(B,112,109) Transistor	DTC323TU

Circuit Symbol and No.			Part No.
Q 307	(A,121,85) Transistor		IMD3A
Q 601	(B,87,10) Transistor		2SA1576
Q 602	(B,95,10) Transistor		2SA1576
Q 603	(B,103,10) Transistor		2SA1576
Q 801	(B,44,91) Transistor		DTC114EU
Q 803	(B,11,120) Transistor		2SA1834F5
Q 804	(B,6,124) Transistor		2SC4081
Q 805	(B,52,120) Transistor		DTC114EU
Q 806	(B,33,116) FET		RK4936
Q 807	(B,33,97) FET		RK4936
Q 3501	(A,40,151) Transistor		2SB1185
Q 3502	(B,32,134) Transistor		IMX1
Q 3503	(B,86,125) Transistor		2SC4081
Q 3504	(B,83,124) Transistor		2SC4081
Q 3505	(B,42,130) Transistor		DTC114EU
Q 3506	(B,45,133) Transistor		2SA1576
Q 3508	(B,117,123) Transistor		2SB1184F5
Q 3509	(A,106,126) Transistor		IMX1
Q 3512	(B,53,131) Transistor		DTC114EU
Q 3513	(A,51,151) Transistor		2SD2375
Q 3514	(A,157,13) Transistor		2SB1185
Q 3515	(A,151,46) Transistor		DTC144EU
Q 3516	(A,157,51) Transistor		2SA1576
Q 3517	(A,156,44) Transistor		2SD1767
Q 3518	(B,148,7) Transistor		IMX1
Q 3701	(B,142,111) Transistor		DTC123JU
D 301	(A,108,105) Diode		UDZS5R1(B)
D 302	(A,114,104) Diode		HZU3R9(B2)
D 303	(A,115,105) Diode		1SS355
D 801	(B,39,109) Diode		RB400D
D 802	(B,39,105) Diode		RB400D
D 803	(A,37,109) Diode		RB060L-40
D 804	(A,37,104) Diode		RB060L-40
D 3501	(B,33,140) Diode		HZU7R5(B2)
D 3502	(A,117,128) Diode		HZU6R8(B2)
D 3503	(B,42,139) Diode		RSX201L-30
D 3504	(B,49,129) Diode		RB500V-40
D 3505	(B,54,134) Diode		HZU10(B2)
D 3506	(B,115,135) Diode		RF501B2S
D 3508	(A,152,42) Diode		UDZS5R6(B)
D 3509	(B,90,122) Diode		HZU7R5(B3)
D 3510	(B,84,119) Diode		UDZS20(B)
D 3511	(B,90,120) Diode		RB500V-40
D 3512	(B,90,118) Diode		RB500V-40
L 1	(B,73,31) Inductor		CTF1558
L 2	(B,89,32) Inductor		CTF1558
L 3	(A,100,31) Chip Ferrite Bead		CTF1557
L 5	(A,80,47) Inductor		CTF1556
L 6	(A,73,45) Inductor		CTF1295
L 7	(B,104,69) Inductor		CTF1558
L 8	(A,88,80) Inductor		CTF1556
L 9	(B,14,70) Inductor		CTF1393
L 101	(A,74,30) Chip Ferrite Bead		CTF1557
L 102	(A,76,26) Chip Ferrite Bead		CTF1557
L 103	(A,82,42) Chip Ferrite Bead		CTF1557
L 104	(A,90,41) Chip Ferrite Bead		CTF1557
L 105	(A,98,41) Chip Ferrite Bead		CTF1557
L 106	(A,107,41) Chip Ferrite Bead		CTF1557
L 107	(A,105,48) Chip Ferrite Bead		CTF1557
L 108	(A,105,56) Chip Ferrite Bead		CTF1557

Circuit Symbol and No.			Part No.
L 109	(A,105,64) Chip Ferrite Bead		CTF1557
L 110	(B,47,50) Inductor		CTF1556
L 111	(B,47,35) Inductor		CTF1556
L 112	(B,50,69) Inductor		CTF1556
L 113	(B,51,74) Chip Ferrite Bead		CTF1557
L 114	(B,51,69) Chip Ferrite Bead		CTF1557
L 201	(A,69,43) Inductor		CTF1556
L 203	(A,28,24) Inductor		CTF1556
L 204	(A,47,59) Inductor		CTF1488
L 205	(A,69,30) Inductor		CTF1556
L 206	(A,31,61) Inductor		CTF1556
L 208	(B,104,14) Inductor		CTF1389
L 209	(B,96,14) Inductor		CTF1389
L 210	(B,88,14) Inductor		CTF1389
L 211	(A,104,13) Inductor		CTF1389
L 301	(A,83,33) Chip Ferrite Bead		CTF1557
L 302	(A,87,27) Chip Ferrite Bead		CTF1557
L 303	(A,125,86) Inductor		CTF1410
L 305	(A,46,68) Inductor		CTF1556
L 306	(A,46,74) Inductor		CTF1556
L 307	(A,45,70) Inductor		CTF1556
L 601	(B,108,13) Inductor		CTF1410
L 602	(A,105,13) Inductor		CTF1410
L 603	(A,33,11) Inductor		CTH1256
L 604	(A,55,12) Inductor		CTF1295
L 605	(A,77,12) Inductor		CTF1394
L 606	(A,67,16) Inductor		CTF1306
L 607	(A,67,13) Inductor		CTF1306
L 608	(A,65,16) Inductor		CTF1306
L 609	(A,65,13) Inductor		CTF1306
L 610	(A,64,16) Inductor		CTF1306
L 611	(A,64,13) Inductor		CTF1306
L 612	(A,62,13) Inductor		CTF1306
L 613	(A,61,16) Inductor		CTF1306
L 614	(A,60,13) Inductor		CTF1306
L 615	(A,60,16) Inductor		CTF1306
L 616	(A,59,13) Inductor		CTF1306
L 617	(A,58,16) Inductor		CTF1306
L 618	(A,57,13) Inductor		CTF1306
L 619	(B,68,7) Inductor		CTF1334
L 620	(A,62,16) Inductor		CTF1306
L 701	(A,117,33) Inductor		CTF1306
L 702	(B,118,83) Inductor		CTF1306
L 703	(A,115,10) Inductor		CTF1306
L 704	(A,115,11) Inductor		CTF1306
L 705	(B,118,82) Inductor		CTF1306
L 706	(B,118,76) Inductor		CTF1306
L 707	(A,115,12) Inductor		CTF1306
L 708	(A,64,93) Inductor		CTF1306
L 709	(A,115,14) Inductor		CTF1306
L 710	(A,117,30) Inductor		CTF1306
L 711	(A,117,32) Inductor		CTF1306
L 712	(B,118,91) Inductor		CTF1334
L 713	(B,118,90) Inductor		CTF1334
L 714	(A,115,15) Inductor		CTF1306
L 715	(A,115,16) Inductor		CTF1334
L 716	(B,118,79) Inductor		CTF1389
L 717	(B,118,80) Inductor		CTF1389
L 718	(B,118,77) Inductor		CTF1389
L 719	(A,125,35) Inductor		CTF1410

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	L 720	(A,63,66) Inductor	CTF1410
	L 721	(A,118,20) Inductor	CTF1306
	L 722	(A,120,20) Inductor	CTF1306
	L 723	(A,121,20) Inductor	CTF1306
	L 724	(A,123,20) Inductor	CTF1306
	L 725	(A,122,20) Inductor	CTF1306
	L 726	(A,125,20) Inductor	CTF1334
	L 727	(A,135,35) Inductor	CTF1410
	L 728	(B,134,18) Inductor	CTF1306
	L 729	(B,137,18) Inductor	CTF1306
B	L 730	(B,141,11) Inductor	CTF1334
	L 731	(B,141,15) Inductor	CTF1334
	L 732	(B,144,15) Inductor	CTF1334
	L 733	(B,141,16) Inductor	CTF1306
	L 734	(B,144,17) Inductor	CTF1334
	L 735	(A,135,19) Inductor	CTF1393
	L 736	(B,141,13) Inductor	CTF1306
	L 737	(B,130,18) Inductor	CTF1334
	L 738	(B,131,18) Inductor	CTF1334
	L 740	(B,128,18) Inductor	CTF1306
	L 741	(B,135,18) Inductor	CTF1306
	L 742	(B,132,18) Inductor	CTF1306
	L 743	(A,127,21) Inductor	CTF1379
	L 744	(B,144,11) Inductor	CTF1306
C	L 801	(A,35,116) Inductor	CTH1257
	L 802	(A,35,97) Inductor	CTH1257
	L 803	(A,47,100) Inductor	CTH1253
	L 804	(A,16,108) Inductor	CTF1306
	L 806	(A,58,104) Inductor	CTF1306
	L 807	(A,58,107) Inductor	CTF1306
	L 3501	(A,67,109) Inductor	CTF1393
	L 3502	(A,129,102) Inductor	CTF1295
	L 3503	(A,67,105) Inductor	CTF1393
	L 3504	(B,66,103) Inductor	CTF1393
D	L 3505	(A,66,93) Inductor	CTF1334
	L 3506	(A,67,93) Inductor	CTF1334
	L 3701	(A,147,141) Inductor	CTF1295
	L 3703	(A,147,149) Inductor	CTF1295
	L 3704	(B,151,107) Inductor	CTF1334
	L 3705	(B,151,105) Inductor	CTF1334
	L 3706	(B,150,115) Inductor	CTF1393
	L 3707	(B,147,112) Inductor	CTF1410
	L 3708	(B,151,103) Inductor	CTF1334
	L 3709	(B,151,101) Inductor	CTF1334
E	L 3710	(B,151,113) Inductor	CTF1393
	L 3712	(B,151,110) Inductor	CTF1334
	L 3713	(B,158,107) Inductor	CTF1334
	L 3714	(B,158,105) Inductor	CTF1334
	L 3716	(B,158,104) Inductor	CTF1334
	L 3717	(B,157,100) Inductor	CTF1334
	L 3719	(B,151,108) Inductor	CTF1334
	L 3720	(A,124,33) Inductor	CTF1410
	L 3721	(A,128,33) Inductor	CTF1410
	X 1	(A,85,86) Radiator 30.000MHz	CSS1633
F	X 2	(B,77,75) Radiator 33.000MHz	CSS1634
	X 3	(B,102,64) Radiator 33.86MHz	CSS1551
	X 202	(A,69,35) Radiator 14.31818MHz	CSS1632
	△FU601	(A,89,12) Fuse 1.25A	CEK1255
	△FU801	(A,62,108) Fuse 4A	CEK1260
	△FU802	(B,18,125) Fuse 2.5A	CEK1258

△FU803	(A,19,108) Fuse 2.5A	CEK1258
△FU3501	(B,38,139) Fuse 1.6A	CEK1256
△FU3503	(B,116,128) Fuse 1A	CEK1254
△FU3506	(A,35,131) Fuse 1A	CEK1254
△FU3507	(B,150,14) Fuse 1A	CEK1254
GY3701	(A,140,137) Sensor	CSX1054
FB1	(B,11,57) Inductor	CTF1453
EF1	(A,73,48) EMI Filter	CCG1158
EF2	(B,104,71) EMI Filter	CCG1158
EF5	(A,78,48) EMI Filter	CCG1158
EF6	(B,14,55) EMI Filter	CCG1158
EF7	(B,15,67) EMI Filter	CCG1158
EF101	(B,50,66) EMI Filter	CCG1158
EF102	(B,48,52) EMI Filter	CCG1158
EF103	(B,48,37) EMI Filter	CCG1158
EF201	(A,30,24) EMI Filter	CCG1158
EF202	(A,31,59) EMI Filter	CCG1158
EF601	(B,100,13) EMI Filter	CCG1168
EF602	(B,92,13) EMI Filter	CCG1168
EF603	(B,84,13) EMI Filter	CCG1168
EF801	(A,62,102) EMI Filter	CCG1083
EF3501	(B,106,136) EMI Filter	CCG1172
EF3502	(A,17,50) EMI Filter	CCG1083
EF3503	(B,101,129) EMI Filter	CCG1172
EF3504	(B,19,53) EMI Filter	CCG1083
EF3505	(B,10,53) EMI Filter	CCG1083

RESISTORS

R 1	(B,73,48)	RS1/16S0R0J
R 3	(B,73,51)	RS1/16S0R0J
R 5	(B,88,45)	RS1/16SS271J
R 6	(B,105,47)	RS1/16SS271J
R 7	(A,99,62)	RS1/16S220J
R 9	(B,29,63)	RS1/16S101J
R 10	(A,95,84)	RS1/16S104J
R 11	(A,97,84)	RAB4C473J
R 12	(A,87,82)	RS1/16S105J
R 13	(A,86,82)	RS1/16S151J
R 14	(B,89,48)	RS1/16S0R0J
R 16	(B,89,51)	RS1/16S0R0J
R 20	(A,77,83)	RS1/16S101J
R 22	(A,79,83)	RS1/16S101J
R 23	(B,79,73)	RS1/16S105J
R 24	(B,79,76)	RS1/16S151J
R 26	(A,80,83)	RS1/16S101J
R 27	(A,77,80)	RS1/16S101J
R 28	(A,79,81)	RS1/16S101J
R 29	(A,76,80)	RS1/16S101J
R 30	(A,74,80)	RS1/16S101J
R 31	(A,75,83)	RS1/16S101J
R 32	(B,79,67)	RS1/16S104J
R 33	(A,73,83)	RS1/16S473J
R 34	(B,100,64)	RS1/16S105J
R 35	(A,69,62)	RS1/16S104J
R 36	(A,68,73)	RS1/16S101J
R 37	(A,68,74)	RS1/16S101J
R 38	(A,68,76)	RS1/16S101J
R 39	(A,68,77)	RS1/16S101J
R 40	(A,68,60)	RS1/16S470J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 45	(B,72,69)	RS1/16S104J		R 221	(A,66,36)	RS1/16S105J	
R 46	(B,73,74)	RS1/16S104J		R 222	(A,68,40)	RS1/16S151J	
R 47	(B,100,59)	RS1/16S104J		R 224	(A,26,30)	RS1/16S0R0J	
R 48	(B,101,79)	RS1/16S104J		R 225	(A,64,23)	RS1/16S104J	A
R 49	(B,103,79)	RS1/16S104J		R 226	(A,65,23)	RS1/16S104J	
R 50	(B,104,79)	RS1/16S104J		R 227	(A,26,27)	RS1/16S104J	
R 52	(A,27,82)	RS1/16S101J		R 228	(A,27,30)	RS1/16S104J	
R 53	(A,27,80)	RS1/16S101J		R 229	(B,59,28)	RS1/16S560J	
R 54	(A,27,79)	RS1/16S101J		R 230	(A,27,27)	RS1/16S104J	
R 55	(A,27,78)	RS1/16S101J		R 232	(A,28,27)	RS1/16S104J	
R 57	(A,27,76)	RS1/16S101J		R 237	(B,59,30)	RS1/16S104J	
R 59	(A,27,75)	RS1/16S101J		R 238	(B,60,30)	RS1/16S330J	
R 60	(A,27,74)	RS1/16S101J		R 240	(A,61,22)	RS1/16S104J	
R 62	(A,27,72)	RS1/16S101J		R 301	(A,82,33)	RS1/16S123J	B
R 63	(A,27,71)	RS1/16S101J		R 302	(A,82,36)	RS1/16S103J	
R 64	(A,27,70)	RS1/16S101J		R 303	(A,83,30)	RS1/16S473J	
R 65	(A,27,69)	RS1/16S101J		R 304	(A,131,89)	RS1/16S104J	
R 66	(A,27,67)	RS1/16S101J		R 305	(A,131,88)	RS1/16S104J	
R 67	(A,27,66)	RS1/16S101J		R 306	(A,118,85)	RS1/16S473J	
R 68	(A,27,64)	RS1/16S101J		R 307	(B,112,105)	RS1/16S4701F	
R 69	(A,27,63)	RS1/16S101J		R 309	(B,109,105)	RS1/16S4701F	
R 70	(A,24,62)	RS1/16S101J		R 310	(A,115,108)	RS1/16S821J	
R 71	(B,29,81)	RS1/16S101J		R 311	(B,112,104)	RS1/16S4701F	
R 72	(B,29,79)	RS1/16S101J		R 313	(A,108,109)	RS1/16S1000F	
R 73	(B,29,78)	RS1/16S101J		R 314	(B,108,105)	RS1/16S1501F	C
R 74	(B,29,77)	RS1/16S101J		R 315	(A,107,111)	RS1/16S4702F	
R 75	(B,29,75)	RS1/16S101J		R 316	(B,109,108)	RS1/16S4701F	
R 76	(B,29,74)	RS1/16S101J		R 317	(A,108,113)	RS1/16S6802F	
R 77	(B,29,73)	RS1/16S101J		R 318	(A,106,114)	RS1/16S6202F	
R 78	(B,29,71)	RS1/16S101J		R 319	(B,108,108)	RS1/16S1001F	
R 79	(B,29,70)	RS1/16S101J		R 320	(A,36,64)	RS1/16S103J	
R 80	(B,29,69)	RS1/16S101J		R 321	(B,112,107)	RS1/16S105J	
R 81	(B,29,67)	RS1/16S101J		R 322	(B,107,105)	RS1/16S0R0J	
R 82	(B,29,66)	RS1/16S101J		R 324	(A,125,96)	RS1/16S4703F	
R 84	(A,28,61)	RS1/16S562J		R 325	(A,127,95)	RS1/16S1002F	
R 85	(A,29,74)	RS1/16S103J		R 326	(A,128,93)	RS1/16S4702F	D
R 87	(B,102,77)	RS1/16S104J		R 327	(A,129,95)	RS1/16S4702F	
R 99	(B,26,66)	RS1/16S101J		R 328	(A,136,92)	RS1/16S474J	
R 100	(B,26,65)	RS1/16S101J		R 329	(A,33,67)	RS1/16S101J	
R 101	(B,49,50)	RS1/16S473J		R 330	(A,33,71)	RS1/16S221J	
R 102	(B,49,35)	RS1/16S473J		R 331	(A,33,69)	RS1/16S221J	
R 103	(B,47,73)	RS1/16S473J		R 332	(A,33,70)	RS1/16S221J	
R 104	(A,78,36)	RS1/16S220J		R 333	(A,33,75)	RS1/16S101J	
R 151	(B,73,46)	RS1/16S0R0J		R 334	(A,33,74)	RS1/16S221J	
R 152	(B,105,49)	RS1/16S0R0J		R 335	(A,33,76)	RS1/16S221J	
R 163	(A,68,72)	RS1/16S560J		R 336	(A,33,77)	RS1/16S221J	E
R 176	(A,68,70)	RS1/16S0R0J		R 337	(A,138,98)	RS1/16S1802F	
R 180	(A,91,80)	RS1/16S101J		R 338	(A,139,95)	RS1/16S2202F	
R 194	(A,92,82)	RS1/16S390J		R 339	(A,125,84)	RS1/16S102J	
R 201	(A,66,55)	RN1/16SE1502D		R 341	(A,33,79)	RS1/16S104J	
R 202	(A,66,54)	RN1/16SE1202D		R 342	(A,47,82)	RS1/10S0R0J	
R 203	(A,37,57)	RS1/16S104J		R 343	(A,44,83)	RS1/10S0R0J	
R 204	(B,65,29)	RS1/16S620J		R 349	(B,103,58)	RS1/16S473J	
R 205	(A,66,33)	RS1/16S0R0J		R 350	(B,94,57)	RS1/16S473J	
R 210	(A,45,56)	RS1/16S104J		R 601	(B,89,10)	RS1/10S101J	
R 211	(A,44,56)	RS1/16S104J		R 602	(A,96,11)	RS1/4S470J	
R 212	(A,36,57)	RS1/16S104J		R 603	(B,97,10)	RS1/10S101J	
R 213	(A,35,57)	RS1/16S104J		R 604	(B,106,10)	RS1/10S101J	F
R 217	(A,67,50)	RS1/16S272J		R 605	(B,104,12)	RS1/16S100J	
R 220	(A,68,22)	RS1/16S223J		R 606	(B,96,12)	RS1/16S100J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 607	(B,88,12)	RS1/16S100J	R 907	(A,68,81)	RS1/16S473J
	R 608	(B,84,10)	RS1/16S681J	R 908	(A,68,82)	RS1/16S473J
	R 609	(B,85,10)	RS1/16S301J	R 909	(A,57,77)	RS1/16S473J
	R 610	(B,92,10)	RS1/16S681J	R 910	(A,63,81)	RS1/16S473J
	R 611	(B,93,10)	RS1/16S301J	R 911	(A,52,83)	RS1/16S103J
	R 612	(B,100,9)	RS1/16S681J	R 912	(B,102,82)	RS1/16S560J
	R 613	(B,101,9)	RS1/16S301J	R 913	(B,103,82)	RS1/16S560J
	R 614	(A,102,8)	RS1/16S101J	R 914	(A,104,73)	RS1/16S0R0J
	R 701	(B,24,57)	RS1/16S473J	R 915	(B,76,69)	RS1/16S104J
	R 702	(B,26,55)	RS1/16S473J	R 916	(B,74,62)	RS1/16S104J
	R 703	(B,26,57)	RS1/16S473J	R 917	(B,88,58)	RS1/16S471J
	R 704	(B,24,55)	RS1/16S473J	R 918	(A,61,77)	RS1/16S473J
B	R 705	(B,32,58)	RS1/16S473J	R 919	(A,61,73)	RS1/16S473J
	R 706	(B,31,58)	RS1/16S473J	R 920	(A,58,77)	RS1/16S473J
	R 707	(B,31,55)	RS1/16S473J	R 921	(A,60,73)	RS1/16S473J
	R 708	(B,32,55)	RS1/16S473J	R 922	(A,58,73)	RS1/16S473J
	R 709	(B,27,55)	RS1/16S473J	R 923	(A,57,83)	RS1/16S473J
	R 710	(B,27,57)	RS1/16S473J	R 924	(B,83,80)	RS1/16S473J
	R 714	(B,141,17)	RS1/16S0R0J	R 925	(A,54,83)	RS1/16S473J
	R 715	(B,144,12)	RS1/16S0R0J	R 926	(A,56,83)	RS1/16S473J
	R 716	(B,144,14)	RS1/16S0R0J	R 927	(B,81,80)	RS1/16S473J
	R 721	(A,131,30)	RS1/16S104J	R 928	(B,72,71)	RS1/16S473J
	R 801	(B,47,96)	RS1/16S6803D	R 929	(A,65,75)	RS1/16S473J
	R 802	(A,7,109)	RN1/16SE3901D	R 930	(A,63,80)	RS1/16S473J
C	R 803	(A,6,105)	RN1/16SE6801D	R 931	(A,68,83)	RS1/16S473J
	R 804	(A,6,102)	RN1/16SE1002D	R 932	(A,57,73)	RS1/16S473J
	R 806	(B,50,116)	RS1/16S821J	R 933	(A,63,77)	RS1/16S473J
	R 807	(B,7,128)	RS1/16S330J	R 934	(A,63,78)	RS1/16S473J
	R 808	(B,9,128)	RS1/16S330J	R 935	(A,101,75)	RS1/16S0R0J
	R 809	(B,11,127)	RS1/16S102J	R 936	(B,94,82)	RS1/16S473J
	R 810	(B,45,93)	RS1/16S100J	R 937	(A,51,83)	RS1/16S473J
	R 811	(B,52,97)	RN1/16SE5601D	R 938	(B,95,82)	RS1/16S473J
	R 812	(B,50,96)	RN1/16SE1002D	R 939	(B,97,82)	RS1/16S473J
	R 813	(B,47,97)	RN1/16SE2200D	R 940	(B,98,82)	RS1/16S473J
	R 814	(B,52,116)	RN1/16SE3001D	R 942	(A,70,78)	RS1/16S473J
D	R 815	(B,50,117)	RN1/16SE1002D	R 943	(A,63,82)	RS1/16S473J
	R 816	(B,47,117)	RS1/16S0R0J	R 944	(B,92,83)	RS1/16S473J
	R 817	(B,52,114)	RS1/16S152J	R 945	(A,63,70)	RS1/16S473J
	R 818	(B,52,104)	RS1/16S104J	R 946	(B,99,82)	RS1/16S473J
	R 819	(B,52,99)	RS1/16S152J	R 947	(B,100,79)	RS1/16S473J
	R 820	(B,50,98)	RS1/16S821J	R 948	(A,62,66)	RS1/16S473J
	R 822	(B,49,120)	RS1/16S473J	R 949	(B,86,57)	RS1/16S473J
	R 823	(B,52,107)	RN1/16SE1003D	R 950	(B,89,57)	RS1/16S473J
	R 824	(B,31,112)	RS1/10S150J	R 951	(A,54,77)	RS1/16S473J
	R 825	(B,47,114)	RS1/16S224J	R 952	(B,83,57)	RS1/16S473J
E	R 826	(B,47,100)	RS1/16S224J	R 953	(A,56,80)	RS1/16S473J
	R 827	(B,31,93)	RS1/10S150J	R 954	(A,54,80)	RS1/16S473J
	R 828	(B,52,112)	RS1/16S2203D	R 955	(A,57,80)	RS1/16S473J
	R 829	(B,52,102)	RS1/16S2203D	R 956	(A,64,66)	RS1/16S473J
	R 833	(B,6,128)	RS1/16S330J	R 957	(B,78,69)	RS1/16S473J
	R 834	(B,6,122)	RS1/16S102J	R 958	(B,77,69)	RS1/16S473J
	R 835	(B,7,120)	RS1/16S392J	R 963	(A,105,75)	RS1/16S0R0J
	R 836	(B,45,116)	RS1/16S0R0J	R 964	(A,107,76)	RS1/16S0R0J
	R 837	(B,45,97)	RS1/16S0R0J	R 965	(A,107,74)	RS1/16S0R0J
	R 901	(B,77,58)	RS1/16S153J	R 966	(A,107,73)	RS1/16S0R0J
F	R 902	(B,80,58)	RS1/16S153J	R 967	(B,107,81)	RS1/16S473J
	R 903	(B,76,63)	RS1/16S153J	R 3501	(B,30,140)	RS1/16S121J
	R 904	(B,76,62)	RS1/16S153J	R 3502	(B,32,140)	RS1/16S471J
	R 905	(A,70,79)	RS1/16S473J	R 3503	(B,34,143)	RS1/8S221J
	R 906	(A,53,83)	RS1/16S473J	R 3504	(B,30,131)	RS1/4S181J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 3505	(B,40,144)	RS1/16S223J		C 25	(A,83,51)	CKSRYB104K16	
R 3506	(B,28,135)	RS1/16S562J					
R 3507	(B,86,122)	RS1/16S473J		C 26	(A,84,79)	CKSRYB104K16	A
R 3509	(B,88,125)	RS1/16S104J		C 27	(B,94,32)	CSZFS100M10	
				C 28	(B,99,30)	CKSRYB104K16	
R 3510	(B,46,130)	RS1/16S103J		C 29	(B,105,42)	CKSRYB104K16	
R 3511	(B,81,121)	RS1/16S103J		C 30	(A,100,33)	CKSRYB104K16	
R 3512	(B,80,124)	RS1/16S103J					
R 3513	(B,46,129)	RS1/16S512J		C 31	(B,74,74)	CCSRCH9R0D50	
R 3516	(A,102,126)	RS1/16S562J		C 32	(B,74,77)	CCSRCH9R0D50	
				C 33	(A,78,51)	CKSRYB104K16	
R 3517	(B,111,123)	RS1/16S223J		C 34	(B,88,26)	CKSRYB104K16	
R 3519	(A,110,126)	RS1/8S221J		C 35	(A,80,79)	CKSRYB104K16	
R 3520	(A,112,126)	RS1/8S221J					
R 3523	(A,114,127)	RS1/16S471J		C 36	(A,72,78)	CKSRYB104K16	
R 3524	(A,117,126)	RS1/16S121J		C 37	(B,16,58) 10μF	CCG1173	
				C 38	(A,86,48)	CSZFS100M10	B
R 3525	(B,49,134)	RS1/4S391J		C 39	(A,69,55)	CKSRYB104K16	
R 3526	(A,153,50)	RS1/10S152J		C 40	(A,69,57)	CKSRYB104K16	
R 3528	(A,152,16)	RS1/16S223J					
R 3530	(B,148,10)	RS1/16S105J		C 41	(A,69,65)	CKSRYB104K16	
R 3531	(B,146,7)	RS1/10S391J		C 42	(B,83,59)	CKSRYB104K16	
				C 43	(B,87,26)	CKSRYB104K16	
R 3532	(A,150,11)	RS1/16S1501F		C 44	(B,79,71)	CKSRYB104K16	
R 3533	(A,149,11)	RS1/16S2201F		C 45	(B,73,26)	CKSRYB104K16	
R 3534	(A,157,48)	RS1/16S473J					
R 3535	(A,155,50)	RS1/16S153J		C 46	(B,61,24)	CKSRYB104K16	
R 3701	(A,136,128)	RS1/16S104J		C 47	(B,87,80)	CKSRYB104K16	
				C 48	(B,60,23)	CKSRYB104K16	
R 3702	(A,138,129)	RS1/16S151J		C 49	(B,86,59)	CKSRYB104K16	C
R 3703	(A,147,143)	RS1/16S0R0J		C 51	(A,91,50)	CKSRYB224K10	
R 3704	(B,159,109)	RS1/16S104J					
R 3705	(B,151,111)	RS1/16S0R0J		C 54	(A,26,61)	CCSRCH121J50	
R 3706	(B,152,115)	RS1/16S0R0J		C 55	(B,90,59)	CKSRYB104K16	
				C 56	(B,39,22)	CKSRYB104K16	
R 3707	(B,154,109)	RS1/16S0R0J		C 57	(B,94,59)	CKSRYB104K16	
R 3708	(B,143,114)	RS1/16S152J		C 60	(B,95,80)	CKSRYB104K16	
R 3710	(B,154,108)	RS1/16S0R0J					
R 3711	(B,124,114)	RS1/16S0R0J		C 63	(B,100,61)	CKSRYB104K16	
R 3725	(A,147,139)	RS1/16S0R0J		C 64	(B,100,66)	CKSRYB104K16	
				C 66	(B,100,69)	CKSRYB104K16	
CAPACITORS				C 67	(B,102,71)	CSZFS100M10	
				C 69	(A,70,50) 22μF	CCG1178	D
C 1	(B,74,33)	CKSRYB104K16					
C 2	(B,74,36)	CKSRYB104K16		C 70	(A,74,51) 22μF	CCG1178	
C 3	(B,74,39)	CKSRYB104K16		C 71	(B,72,75)	CKSRYB104K16	
C 4	(B,74,44)	CKSRYB104K16		C 72	(B,108,67)	CKSRYB104K16	
C 5	(B,74,56)	CKSRYB104K16		C 73	(B,108,66)	CKSRYB104K16	
				C 74	(B,100,76)	CKSRYB104K16	
C 6	(A,94,51)	CKSRYB104K16					
C 7	(A,99,59)	CKSRYB104K16		C 75	(A,99,32)	CKSRYB104K16	
C 8	(A,98,64)	CKSRYB104K16		C 76	(B,74,42)	CKSRYB103K50	
C 9	(A,98,67)	CKSRYB104K16		C 77	(B,82,32)	CKSRYB103K50	
C 10	(A,98,70)	CKSRYB104K16		C 78	(B,88,35)	CKSRYB103K50	
				C 79	(B,105,44)	CKSRYB103K50	
C 11	(A,99,75)	CKSRYB104K16					E
C 12	(B,77,32)	CSZFS100M10		C 80	(B,98,31)	CKSRYB103K50	
C 13	(B,88,40)	CKSRYB104K16		C 81	(B,90,53)	CKSRYB224K10	
C 14	(B,88,43)	CKSRYB104K16		C 82	(B,105,37)	CKSRYB103K50	
C 15	(A,90,50)	CKSRYB104K16		C 83	(B,15,63)	CKSRYB104K16	
				C 84	(B,14,62)	CKSRYB104K16	
C 16	(A,87,50)	CKSRYB104K16					
C 17	(A,86,79)	CKSRYB104K16		C 91	(A,99,29)	CKSRYB102K50	
C 18	(A,88,83)	CCSRCH100D50		C 92	(A,83,47)	CKSRYB102K50	
C 19	(A,84,83)	CCSRCH100D50		C 96	(B,106,37)	CKSRYB224K10	
C 20	(B,91,32)	CKSRYB104K16		C 97	(B,106,42)	CKSRYB224K10	
				C 98	(B,106,44)	CKSRYB224K10	
C 21	(B,90,36)	CKSRYB104K16					
C 22	(B,90,39)	CKSRYB104K16		C 101	(A,74,33)	CKSRYB104K16	F
C 23	(B,90,44)	CKSRYB104K16		C 102	(A,77,26)	CKSRYB104K16	
C 24	(B,90,55)	CKSRYB104K16		C 103	(A,82,40)	CKSRYB104K16	
				C 104	(A,90,44)	CKSRYB104K16	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 105	(A,98,44)	CKSRYB104K16	C 246	(A,45,22)	CKSRYB104K16
	C 106	(A,107,43)	CKSRYB104K16	C 247	(A,40,22)	CKSRYB104K16
	C 107	(A,103,48)	CKSRYB104K16	C 248	(A,35,22)	CKSRYB104K16
	C 108	(A,103,56)	CKSRYB104K16	C 249	(A,32,22)	CSZFS100M10
	C 109	(A,103,64)	CKSRYB104K16	C 250	(A,50,57)	CSZFS100M10
	C 110	(B,48,57)	CSZFS100M10	C 251	(A,66,40)	CSZFS100M10
	C 111	(B,48,54)	CKSRYB104K16	C 252	(A,32,56)	CSZFS100M10
	C 112	(B,49,49)	CKSRYF224Z16	C 253	(A,68,28)	CKSRYB104K16
	C 113	(B,48,41)	CSZFS100M10	C 255	(A,29,42)	CKSRYB103K50
	C 114	(B,49,38)	CKSRYB104K16	C 256	(A,29,40)	CKSRYB103K50
B	C 115	(B,49,33)	CKSRYF224Z16	C 257	(A,29,38)	CKSRYB103K50
	C 116	(B,61,79)	CKSRYB104K16	C 258	(A,29,36)	CKSRYB103K50
	C 117	(B,50,64)	CSZFS100M10	C 259	(A,29,48)	CKSRYB103K50
	C 118	(B,51,63)	CKSRYB104K16	C 260	(A,29,53)	CKSRYB103K50
	C 119	(B,61,64)	CKSRYB104K16	C 261	(A,27,23)	CKSRYB103K50
	C 120	(B,51,76)	CKSRYB104K16	C 262	(A,26,23)	CKSRYB103K50
	C 121	(B,51,71)	CKSRYB104K16	C 263	(A,72,43)	CKSRYB102K50
	C 122	(B,45,52)	CKSRYB104K16	C 301	(A,83,36)	CKSRYB104K16
	C 123	(B,48,69)	CKSRYB104K16	C 302	(A,91,36)	CKSRYB334K10
	C 124	(B,72,54)	CCSRCH101J50	C 303	(A,84,27)	CKSRYB104K16
C	C 125	(A,108,48)	CKSRYB104K16	C 304	(A,37,85)	CKSRYB104K16
	C 126	(A,108,64)	CKSRYB104K16	C 305	(A,106,111)	CKSRYB474K10
	C 201	(A,66,52)	CKSRYB104K16	C 306	(B,107,108)	CKSRYB105K10
	C 202	(A,61,57)	CKSRYB104K16	C 307	(A,123,88)	CKSRYB104K16
	C 203	(A,60,57)	CKSRYB104K16	C 308	(A,114,114)	CKSRYB104K16
	C 204	(A,64,52)	CKSRYB104K16	C 310	(A,125,94)	CKSRYB222K50
	C 205	(A,54,57)	CKSRYB104K16	C 311	(A,108,107)	CKSRYB105K10
	C 206	(A,48,56)	CKSRYB104K16	C 312	(A,119,105)	CEHVV100M16
	C 207	(A,42,56)	CKSRYB104K16	C 313	(A,132,98)	CKSRYB152K50
	C 208	(A,39,57)	CKSRYB104K16	C 314	(A,109,111)	CCSRCH181J50
D	C 209	(A,31,52)	CKSRYB104K16	C 315	(A,130,95)	CCSRCH151J50
	C 211	(A,64,49)	CKSRYB104K16	C 317	(A,109,114)	CCSRCH471J50
	C 213	(A,64,46)	CKSRYB104K16	C 318	(A,141,95)	CCSRCH102J50
	C 214	(A,66,47)	CKSRYB104K16	C 319	(A,133,92)	CKSRYB103K50
	C 215	(A,31,50)	CKSRYB104K16	C 320	(A,129,90)	CKSRYB104K16
	C 216	(A,29,44)	CKSRYB104K16	C 321	(A,139,92)	CKSRYB104K16
	C 217	(A,31,46)	CKSRYB104K16	C 323	(A,39,65)	CSZFS100M10
	C 220	(A,68,47)	CSZFS100M10	C 324	(A,43,77)	CKSRYB104K16
	C 221	(A,64,44)	CKSRYB104K16	C 327	(A,45,78) 10μF	CCG1182
	C 222	(A,64,41)	CKSRYB104K16	C 328	(A,42,70)	CKSRYB104K16
E	C 223	(A,66,23)	CKSRYB224K10	C 329	(A,44,66) 10μF	CCG1182
	C 224	(A,64,39)	CKSRYB104K16	C 330	(A,40,80)	CSZFS4R7M10
	C 225	(A,66,43)	CKSRYB104K16	C 331	(A,40,78)	CKSRYB104K16
	C 227	(A,31,42)	CKSRYB104K16	C 332	(A,42,75)	CKSRYB104K16
	C 228	(A,31,40)	CKSRYB104K16	C 339	(A,44,73) 10μF	CCG1182
	C 230	(A,69,31)	CCSRCH150J50	C 341	(A,105,35)	CCSRCH101J50
	C 231	(A,69,40)	CCSRCH150J50	C 342	(A,83,28)	CKSRYB104K16
	C 232	(A,64,36)	CKSRYB104K16	C 350	(A,41,83)	CKSRYB104K16
	C 233	(A,64,33)	CKSRYB104K16	C 351	(A,84,26)	CKSRYB102K50
	C 234	(A,31,37)	CKSRYB104K16	C 352	(A,89,26)	CKSRYB102K50
F	C 235	(A,30,34)	CKSRYB104K16	C 602	(B,109,13)	CKSRYB104K16
	C 237	(A,65,30)	CKSRYB104K16	C 603	(B,111,10) 68μF/6.3V	CCH1635
	C 238	(A,65,28)	CKSRYB104K16	C 604	(A,105,10)	CKSRYB104K16
	C 239	(A,29,32)	CKSRYB104K16	C 608	(A,41,11) 100μF/16V	CCH1477
	C 240	(A,31,30)	CKSRYB104K16	C 609	(A,49,11) 100μF/16V	CCH1477
	C 241	(A,31,27)	CKSRYB104K16	C 624	(A,18,11) 100μF/16V	CCH1477
	C 242	(A,58,22)	CKSRYB104K16	C 625	(A,25,11) 100μF/16V	CCH1477
	C 243	(A,55,22)	CKSRYB104K16	C 701	(A,126,35)	CKSRYB104K16
	C 244	(A,51,22)	CKSRYB104K16	C 702	(A,62,63)	CKSRYB104K16
	C 245	(A,48,22)	CKSRYB104K16	C 703	(A,137,35)	CKSRYB104K16

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 708	(A,131,20)		CKSRYB102K50			C 3522	(A,116,122)		CKSRYB104K16		
C 710	(B,67,16)		CKSRYB104K16			C 3525	(B,48,140)		CKSRYB103K50		A
C 712	(A,131,18)		CKSRYB102K50			C 3527	(A,39,130)		CKSRYB103K50		
C 716	(A,133,18)		CKSRYB102K50			C 3528	(A,55,136) 100µF/16V		CCH1477		
C 718	(A,137,19)		CKSRYB102K50			C 3529	(B,148,12)		CKSRYB472K50		
C 728	(A,139,19)		CKSRYB102K50			C 3530	(A,148,22)		CKSRYB104K16		
C 729	(B,119,19)		CKSRYB102K50			C 3532	(A,151,44)		CKSRYB104K16		
C 730	(A,141,19)		CKSRYB102K50			C 3533	(A,155,34)		CKSRYB104K16		
C 734	(A,128,21)		CKSRYB102K50			C 3534	(A,155,38) 100µF/6.3V		CCH1665		
C 801	(A,8,113) 100µF/6.3V		CCH1665			C 3535	(A,69,104)		CKSRYB104K16		
C 802	(A,7,107)		CCSRCH680J50			C 3536	(A,69,106)		CKSRYB103K50		
C 803	(A,14,113)		CEHVW100M16			C 3537	(B,68,106)		CKSRYB104K16		
C 804	(A,11,107)		CKSRYB104K16			C 3538	(B,67,106)		CKSRYB103K50		B
C 805	(A,11,120) 100µF/6.3V		CCH1665			C 3701	(A,136,130)		CKSRYB103K50		
C 806	(A,11,117)		CKSRYB104K16			C 3702	(A,142,129)		CKSYB106K6R3		
C 807	(A,23,100)		CKSRYB104K16			C 3703	(A,147,138)		CKSRYB105K10		
C 808	(B,52,106)		CKSRYB105K10			C 3706	(A,147,148)		CKSRYB104K16		
C 809	(B,50,114)		CKSRYB102K50			C 3707	(B,154,112)		CKSRYB104K16		
C 810	(B,48,93) 4.7µF		CCG1111			C 3708	(B,155,112)		CKSRYB104K16		
C 811	(B,52,109) 15pF		CCG1215			C 3709	(B,157,112)		CKSRYB104K16		
C 812	(B,35,107) 10µF		CCG1182			C 3712	(B,142,113)		CKSRYB474K10		
C 813	(B,44,112)		CKSRYF474Z16			C 3713	(B,146,114)		CKSRYB104K16		
C 814	(B,44,102)		CKSRYF474Z16			C 3716	(A,124,31)		CKSRYB104K16		
C 815	(B,40,114) 10µF		CCG1195			C 3717	(A,128,31)		CKSRYB104K16		C
C 816	(B,41,98) 10µF		CCG1195			B Unit Number:CWX3292 Unit Name:GPS Unit					
C 817	(B,50,100)		CKSRYB102K50								
C 818	(A,23,114)		CKSRYB104K16								
C 819	(A,26,112) 330µF/10V		CCH1623			MISCELLANEOUS					
C 820	(A,26,102) 330µF/10V		CCH1623								
C 821	(B,47,116)		CKSRYB822K50			IC 401	(A,28,11) IC		UPB1025K		
C 822	(B,52,113)		CKSRYB563K16			IC 402	(B,33,19) IC		TC7SU04FU		
C 823	(B,52,110)		CKSRYB103K50			IC 403	(B,30,15) IC		TC7WH74FU		
C 824	(B,47,99)		CKSRYB822K50			IC 451	(B,27,23) IC		NJM2100V		
C 825	(B,52,103)		CKSRYB103K50			IC 452	(A,31,22) IC		S-812C51AMC-C3F		D
C 826	(B,52,100)		CKSRYB563K16			IC 471	(B,43,11) IC		ADC78H89CIMT		
C 827	(A,50,111) 10µF		CCG1195			IC 501	(A,37,14) IC		S-1112B15MC-L6A		
C 828	(A,44,107) 10µF		CCG1195			IC 502	(A,47,17) IC		PD3441A		
C 829	(B,47,113)		CKSRYB104K16			IC 503	(B,51,22) IC		S-80929CNNB-G8Z		
C 830	(B,47,101)		CKSRYB104K16			IC 504	(B,57,19) IC		PD6563A		
C 831	(A,50,108) 10µF		CCG1195			IC 505	(A,59,7) IC		S-1112B15MC-L6A		
C 832	(A,44,110) 10µF		CCG1195			IC 506	(B,49,6) IC		TC7S14FU		
C 833	(B,38,113) 10µF		CCG1195			Q 451	(A,20,22) Transistor		2SB1132		
C 835	(B,39,98) 10µF		CCG1195			D 401	(A,17,14) Diode		HZU5R6(B3)		
C 3501	(A,69,111)		CKSRYB104K16			D 402	(A,19,17) Diode		HZU5R6(B3)		E
C 3502	(A,37,142)		CKSRYB104K16			D 403	(B,23,9) Diode		1SV314		
C 3503	(A,32,138)		CEHVW331M16			D 501	(B,44,19) Diode		RB751V40		
C 3504	(A,69,108)		CKSRYB103K50			L 401	(B,21,16) Inductor		LCYC1R0K2125		
C 3505	(B,28,134)		CKSRYB103K50			L 402	(A,24,4) Inductor		LCYB3N3S1005		
C 3506	(A,154,57) 100µF/6.3V		CCH1665			L 403	(A,24,6) Inductor		LCYB4N7S1005		
C 3507	(A,154,61)		CKSRYB104K16			L 404	(B,23,7) Inductor		LCYB3N9S1005		
C 3508	(A,154,66)		CKSRYB104K16			L 405	(A,22,10) Inductor		LCYB4N7S1005		
C 3510	(A,44,137)		CEHVW471M16			L 406	(A,21,12) Inductor		LCYB6N8J1005		
C 3514	(A,136,110) 100µF/6.3V		CCH1665			L 407	(A,33,6) Inductor		CTF1410		
C 3515	(A,104,126)		CKSRYB103K50			L 409	(A,21,17) Inductor		LCYB22NJ1608		
C 3516	(A,136,114)		CKSRYB104K16			L 410	(A,23,17) Inductor		LCYB22NJ1608		F
C 3517	(B,120,146)		CKSRYB104K16			L 412	(A,26,19) Inductor		CTF1486		
C 3518	(A,141,103)		CKSRYB334K10			L 413	(A,29,19) Inductor		CTF1486		
C 3519	(A,111,120) 100µF/16V		CCH1477			L 414	(B,34,10) Inductor		CTF1410		
C 3520	(A,120,142)		CCH1664(P30)								
C 3521	(A,138,103)		CEHVW1R0M50								

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

L 451	(B,20,19) Inductor	CTF1410
L 452	(A,36,22) Inductor	CTF1410
L 472	(B,37,13) Inductor	CTF1410
L 473	(B,44,5) Inductor	CTF1410
L 501	(A,36,9) Inductor	CTF1410
L 502	(A,39,14) Inductor	CTF1410
L 503	(B,55,24) Inductor	CTF1410
X 401	(B,29,19) TCXO	CWX3181
X 501	(A,58,17) Radiator 32.768kHz	CSS1319
F 401	Filter	CTF1548

RESISTORS

R 402	(B,23,11)	RS1/16SS472J
R 403	(B,26,6)	RS1/16SS472J
R 404	(B,26,5)	RS1/16SS751J
R 405	(A,26,5)	RS1/16S100J
R 406	(B,31,3)	RS1/16S100J
R 407	(B,24,15)	RS1/16SS103J
R 408	(B,22,14)	RS1/16SS103J
R 409	(A,32,14)	RS1/16S392J
R 410	(B,33,14)	RS1/16SS392J
R 411	(B,33,17)	RS1/16SS0R0J
R 412	(B,36,19)	RS1/16SS104J
R 413	(A,37,18)	RS1/16SS561J
R 451	(A,17,22)	RN1/16SC22R0D
R 452	(B,22,24)	RN1/16SE1801D
R 453	(B,22,22)	RN1/16SE1502D
R 454	(B,22,21)	RN1/16SE6802D
R 455	(A,24,24)	RN1/16SE2202D
R 456	(A,24,22)	RN1/16SE6802D
R 457	(B,24,20)	RN1/16SE2701D
R 458	(A,27,24)	RN1/16SC18R0D
R 459	(A,27,22)	RN1/16SE6801D
R 460	(A,24,21)	RN1/16SE2202D
R 461	(B,30,21)	RS1/16SS103J
R 462	(B,37,16)	RS1/16SS223J
R 463	(A,33,18)	RS1/16SS223J
R 464	(B,36,17)	RS1/16SS333J
R 465	(A,34,20)	RS1/16SS333J
R 466	(A,14,22)	RN1/16SC22R0D
R 467	(A,15,22)	RN1/16SC22R0D
R 471	(B,47,17)	RS1/16SS102J
R 472	(B,37,19)	RS1/16SS102J
R 474	(B,47,3)	RS1/16SS102J
R 476	(B,53,7)	RAB4CQ102J
R 478	(B,53,9)	RAB4CQ333J
R 479	(B,49,9)	RAB4CQ104J
R 480	(B,49,11)	RAB4CQ471J
R 481	(B,41,6)	RS1/16SS102J
R 482	(B,41,15)	RS1/16SS102J
R 502	(A,39,24)	RS1/16S0R0J
R 503	(B,41,18)	RS1/16S0R0J
R 504	(B,43,18)	RS1/16S0R0J
R 505	(B,47,4)	RS1/16SS473J
R 506	(B,41,22)	RS1/16S0R0J
R 507	(B,40,22)	RS1/16S0R0J
R 508	(B,42,24)	RS1/16S0R0J
R 509	(B,41,20)	RS1/16S0R0J
R 510	(B,45,24)	RS1/16S0R0J

R 511	(B,44,22)	RS1/16S0R0J
R 512	(B,46,22)	RS1/16S0R0J
R 515	(B,47,19)	RS1/16S0R0J
R 517	(B,50,18)	RS1/16SS473J
R 518	(B,49,20)	RS1/16SS103J
R 521	(B,49,17)	RS1/16SS102J
R 524	(B,51,6)	RS1/16SS473J
R 525	(B,51,4)	RS1/16SS223J
R 526	(B,45,17)	RS1/16SS473J
R 527	(B,38,19)	RS1/16SS473J
R 528	(B,59,10)	RS1/16S103J
R 529	(B,53,12)	RS1/16SS0R0J
R 530	(B,53,13)	RS1/16SS0R0J

R 531	(B,53,11)	RS1/16SS0R0J
R 532	(A,39,11)	RS1/16SS103J
R 547	(A,40,9)	RS1/16SS102J
R 548	(A,42,9)	RS1/16SS102J

CAPACITORS

C 401	(B,20,13)	CCSRCH101J50
C 402	(B,22,18)	CKSSYB102K50
C 403	(B,22,17)	CKSSYB103K16
C 404	(A,22,8) 0.75pF	CCG1208
C 405	(B,28,6)	CKSSYB153K16
C 407	(B,24,10) 100pF	CCG1210
C 408	(B,24,7) 100pF	CCG1210
C 409	(B,30,6)	CKSSYB153K16
C 411	(A,20,10) 100pF	CCG1210
C 412	(B,28,8)	CKSSYB104K10
C 413	(A,29,5)	CKSSYB102K50
C 414	(B,26,11)	CKSSYB103K16
C 415	(A,29,4) 10μF	CCG1171
C 416	(B,24,13)	CCSSCH470J50
C 417	(A,22,13) 3pF	CCG1209
C 418	(B,24,12)	CKSSYB103K16
C 419	(A,30,7)	CKSSYB104K10
C 420	(B,30,8)	CKSRYB105K10
C 421	(B,28,10)	CKSSYB104K10
C 422	(A,24,14)	CKSSYB103K16
C 423	(B,29,11)	CKSSYB104K10
C 424	(A,33,4)	CKSRYB104K16
C 425	(B,24,16)	CKSSYB103K16
C 426	(B,32,7)	CKSRYB105K10
C 427	(A,22,17)	CCSRCH301J50
C 428	(B,30,10)	CKSRYB105K10
C 429	(B,33,21)	CCSSCH101J50
C 430	(A,23,15)	CCSSCH120J50
C 431	(A,25,17)	CCSRCH301J50
C 432	(B,26,14)	CKSSYB103K16
C 433	(B,31,12)	CKSSYB103K16
C 434	(B,31,11)	CKSSYB104K10
C 435	(B,27,12)	CKSSYB103K16
C 436	(A,25,15)	CKSSYB103K16
C 437	(A,26,16)	CKSSYB104K10
C 438	(A,28,19)	CCSRCH102J50
C 439	(A,33,16)	CKSRYB104K16
C 440	(A,28,17)	CCSSCH271J25
C 441	(B,32,17)	CKSSYB104K10
C 442	(A,31,19)	CCSRCH102J50

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 443	(A,30,16)	CKSSYB104K10
C 444	(A,19,12) 3pF	CCG1209
C 445	(A,24,8) 3pF	CCG1209
C 446	(A,39,19)	CCSSCH101J50
C 447	(B,32,19)	CKSSYB104K10
C 448	(B,27,15)	CKSSYB104K10
C 449	(B,33,13)	CCSSCH5R0C50
C 451	(B,19,18)	CKSSYB104K10
C 452	(A,12,23)	CKSSYB104K10
C 453	(B,22,20)	CKSSYB103K16
C 454	(B,24,21)	CCSSCH101J50
C 455	(A,27,21)	CKSSYB104K10
C 456	(A,34,21)	CKSSYB104K10
C 457	(A,35,24)	CKSSYB104K10
C 471	(A,38,6) 33μF/10V	CCH1586
C 473	(B,47,9)	CKSSYB103K16
C 475	(B,47,13)	CKSSYB103K16
C 476	(B,49,13)	CKSSYB103K16
C 477	(B,51,13)	CKSSYB103K16
C 478	(B,39,12)	CKSQYB225K10
C 479	(B,44,6)	CKSRYB104K16
C 502	(A,36,17)	CKSRYB474K10
C 503	(A,44,25)	CKSSYB104K10
C 504	(A,39,17)	CKSSYB104K10
C 505	(A,44,9)	CKSSYB104K10
C 506	(A,39,12)	CKSSYB104K10
C 507	(A,42,25)	CKSSYB104K10
C 508	(A,39,20)	CKSSYB104K10
C 509	(A,39,16)	CKSSYB104K10
C 510	(A,46,9)	CKSSYB104K10
C 511	(A,48,9)	CKSSYB104K10
C 512	(A,46,25)	CKSSYB104K10
C 513	(A,49,25)	CKSSYB104K10
C 514	(A,50,9)	CKSSYB104K10
C 515	(A,55,21)	CKSSYB104K10
C 516	(A,55,19)	CKSSYB104K10
C 517	(A,55,17)	CKSSYB104K10
C 518	(A,55,15)	CKSSYB104K10
C 519	(A,58,10)	CCSRCH100D50
C 520	(A,56,10)	CCSRCH100D50
C 522	(A,60,10)	CKSRYB474K10
C 523	(A,56,6)	CKSRYF105Z10
C 524	(B,57,24)	CKSSYB104K10
C 525	(A,36,11)	CKSRYF105Z10
C 526	(A,55,11)	CKSSYB104K10
C 527	(B,49,4)	CCSSCH101J50
C 528	(B,51,8)	CKSSYB104K10
C 529	(B,48,23)	CKSSYB104K10
C 530	(A,55,13)	CKSSYB104K10
C 531	(B,51,24)	CKSRYB122K50

Audio Compound Unit**Consists of****Connector PCB****Audio PCB****Unit Number:CWN1488****Unit Name:Audio Compound Unit**

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
MISCELLANEOUS		
IC 1001	(A,114,51) IC	PQ070XH01Z
IC 1002	(A,101,65) IC	PQ070XH01Z
IC 1601	(A,98,35) IC	S-93C66BD0I-J8
IC 1602	(A,111,19) IC	TC7S86FU
IC 1603	(A,63,10) IC	S-80837CNUA-B8W
IC 1604	(A,79,27) IC	PEG162C
IC 1701	(B,105,97) IC	TC74VHC08F1S1
IC 1702	(A,96,51) IC	TC74VHCT125AFTS1
IC 1703	(A,110,99) IC	TC74VHC08F1S1
IC 1704	(A,90,90) IC	AK4591VQ
IC 1705	(A,116,111) IC	TC74VHC08F1S1
IC 1706	(B,83,110) IC	NJM2100V
IC 1707	(A,89,106) IC	AK7730AVT
IC 1801	(A,48,71) IC	NJM2068V
IC 1802	(A,66,75) IC	NJM2068V
IC 1901	(A,63,90) IC	NJM2068V
IC 1902	(A,66,107) IC	NJM2068V
IC 2061	(B,99,70) IC	NJM2058V
IC 2201	(A,50,89) IC	NJM2903V
IC 2251	(B,19,44) IC	S-812C50AMC-C3E
IC 2252	(B,11,44) IC	TA75S393F
IC 2253	(B,7,13) IC	GP2S700HC
IC 2254	(B,71,74) IC	BA6288FS
IC 2301	(A,123,90) IC	TJA1041T
IC 2321	(A,103,77) IC	NJM2068V
IC 2322	(A,103,84) IC	NJM2068V
IC 2323	(A,103,68) IC	NJM2115V
IC 2421	(A,14,76) IC	TDA7563
IC 2430	(B,51,69) IC	NJM2068V
Q 1001	(A,12,73) Transistor	2SB1185
Q 1002	(A,24,68) Transistor	UMD3N
Q 1003	(A,20,69) Transistor	IMX1
Q 1004	(A,12,51) Transistor	2SB1185
Q 1005	(A,18,53) Transistor	IMX1
Q 1006	(A,41,43) Transistor	DTA124EU
Q 1007	(A,45,44) Transistor	2SC4081
Q 1008	(A,48,43) Transistor	DTC114TU
Q 1009	(A,35,48) Transistor	2SC2712
Q 1010	(A,12,62) Transistor	2SB1185
Q 1011	(A,20,63) Transistor	IMX1
Q 1014	(A,43,38) Transistor	2SA1577
Q 1015	(A,43,35) Transistor	DTC114EU
Q 1016	(A,12,40) Transistor	2SD2375
Q 1017	(A,29,44) Transistor	UMD3N
Q 1101	(B,52,55) Transistor	2SC4081
Q 1102	(B,50,52) Transistor	2SC4081
Q 1201	(B,114,87) Transistor	FMG12
Q 1202	(B,118,89) Transistor	DTA123EU
Q 1401	(A,116,39) Transistor	IMH1A
Q 1402	(A,121,34) Transistor	2SA1576
Q 1403	(A,121,30) Transistor	2SA1576
Q 1404	(A,126,40) Transistor	IMH1A
Q 1405	(A,128,27) Transistor	FMG12
Q 1406	(A,124,19) Transistor	DTA123EU
Q 1601	(A,96,24) Transistor	UMD3N
Q 1602	(A,59,36) Transistor	DTC323TU
Q 1603	(A,55,32) Transistor	DTC114EU
Q 1604	(A,53,36) Transistor	2SA1577

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 1605 (A,59,26) Transistor
Q 1606 (A,56,22) Transistor

DTC323TU
DTC114EU

D 2201 (A,50,93) Diode
D 2211 (A,40,72) Diode

1SS355
1SS355

A Q 1607 (A,55,26) Transistor
Q 1806 (B,56,12) Transistor
Q 1901 (B,54,97) Transistor
Q 1902 (B,53,110) Transistor
Q 1903 (B,54,101) Transistor

2SA1577
DTC114EU
FMG12
FMG12
DTA124EU

D 2212 (A,43,78) Diode
D 2221 (B,40,72) Diode
D 2222 (B,42,78) Diode
D 2231 (A,41,83) Diode
D 2232 (A,46,81) Diode

UDZS18(B)
1SS355
UDZS18(B)
1SS355
1SS355

Q 1904 (B,50,114) Transistor
Q 1905 (B,63,101) Transistor
Q 1906 (B,43,113) Transistor
Q 1907 (B,66,96) Transistor
Q 1908 (B,47,108) Transistor

DTA124EU
UMD3N
UMD3N
DTA123EU
DTA123EU

D 2241 (B,41,83) Diode
D 2242 (B,47,81) Diode
D 2301 (B,118,98) Diode
D 2302 (B,116,96) Diode
D 2303 (B,122,99) Diode

1SS355
1SS355
UDZS27(B)
UDZS27(B)
UDZS27(B)

B Q 2121 (B,59,94) Transistor
Q 2141 (A,74,93) Transistor
Q 2142 (A,70,99) Transistor
Q 2143 (A,78,90) Transistor
Q 2161 (B,45,89) Transistor

2SC4081
2SC4116
2SB1184F5
DTC114EU
2SC4116

D 2304 (B,119,94) Diode
D 2321 (B,96,84) Diode
D 2361 (B,149,98) Diode
D 2362 (B,148,91) Diode
D 2371 (B,151,102) Diode

UDZS27(B)
UDZS4R7(B)
SC016-2
UDZS8R2(B)
HZU5R6(B3)

Q 2181 (A,20,55) Transistor
Q 2191 (B,28,117) Transistor
Q 2301 (A,131,94) Transistor
Q 2361 (B,149,86) Transistor
Q 2371 (B,148,95) Transistor

2SC4081
2SC4081
2SC4081
2SC4081
2SA1162

D 2381 (A,148,100) Diode
D 2382 (A,147,93) Diode
D 2391 (A,150,104) Diode
ZNR1401 (A,164,125) Surge Protector
L 1001 (A,103,75) Inductor

SC016-2
UDZS8R2(B)
HZU5R6(B3)
DSP-201M-A21F
CTF1617

C Q 2372 (B,141,92) Transistor
Q 2381 (A,151,90) Transistor
Q 2391 (A,141,91) Transistor
Q 2392 (A,145,96) Transistor
Q 2403 (A,15,54) Transistor

DTC124EU
2SC4081
DTC124EU
2SA1162
DTC124EU

L 1002 (A,99,75) Inductor
L 1101 (B,54,23) Inductor
L 1201 (A,133,113) Inductor
L 1401 (A,114,43) Inductor
L 1402 (A,125,63) Inductor

CTF1617
CTF1379
LCTAW2R2J2520
CTF1607
CTF1607

Q 2405 (A,9,55) Transistor
D 1001 (A,24,75) Diode
D 1002 (A,19,47) Diode
D 1003 (A,56,43) Diode
D 1004 (A,32,53) Diode

DTC124EU
UDZS7R5(B)
UDZS6R2(B)
1SS355
HZU4R7(B3)

L 1403 (A,125,69) Inductor
L 1404 (A,147,103) Coil
L 1405 (A,135,101) Inductor
L 1406 (A,126,86) Inductor
L 1407 (A,129,58) Inductor

CTF1607
CTB1103
LCTC330K2125
CTF1386
CTF1386

D 1005 (B,26,60) Diode
D 1006 (A,34,45) Diode
D 1007 (B,36,44) Diode
D 1008 (A,21,37) Diode
D 1101 (B,44,56) Diode

HZU7R5(B3)
UDZS5R6(B)
DAN202U
RF501B2S
HZU8R2(B2)

L 1601 (A,106,22) Inductor
L 1602 (A,60,44) Inductor
L 1603 (A,100,41) Inductor
L 1701 (A,101,45) Inductor
L 1702 (A,108,94) Inductor

CTF1379
LCTAW2R2J2520
CTF1379
CTF1379
CTF1379

D 1102 (B,44,52) Diode
D 1201 (B,118,85) Diode
D 1401 (A,128,23) Diode
D 1601 (A,58,32) Diode
D 1603 (A,69,50) Diode

HZU9R1(B2)
DAP202U
DAP202U
1SS355
MA152WA

L 1703 (A,105,92) Inductor
L 1704 (B,106,101) Inductor
L 1705 (A,104,108) Inductor
L 1706 (A,114,106) Inductor
L 1707 (A,94,83) Inductor

CTF1379
CTF1379
CTF1379
CTF1379
CTF1379

D 1604 (A,58,22) Diode
D 1605 (A,73,49) Diode
D 1901 (B,51,101) Diode
D 1902 (B,53,114) Diode
D 1903 (B,57,101) Diode

1SS355
MA152WA
DAP202U
DAP202U
DAN202U

L 1708 (A,82,93) Inductor
L 1709 (B,89,115) Inductor
L 1710 (A,82,96) Inductor
L 1711 (A,89,115) Inductor
L 1712 (A,92,115) Inductor

CTF1379
CTF1379
CTF1379
CTF1379
CTF1379

D 1904 (B,46,113) Diode
D 2101 (A,62,104) Diode
D 2121 (B,54,91) Diode
D 2122 (B,50,89) Diode
D 2131 (A,38,88) Diode

DAN202U
5KP22A
UDZS8R2(B)
SC016-2
UDZS13(B)

L 1713 (B,92,95) Inductor
L 1714 (B,97,106) Inductor
L 1715 (A,81,104) Inductor
L 1716 (B,91,104) Inductor
L 1717 (B,110,96) Inductor

CTF1379
CTF1379
CTF1379
CTF1379
CTF1379

D 2141 (A,79,97) Diode
D 2142 (B,66,96) Diode
D 2143 (B,66,93) Diode
D 2161 (B,42,88) Diode
D 2171 (B,36,114) Diode

1SS355
RB160L-40
SC016-2
UDZS5R6(B)
UDZS5R6(B)

L 1718 (B,111,98) Inductor
L 1719 (B,110,78) Inductor
L 1720 (B,106,78) Inductor
L 1721 (B,62,73) Inductor
L 1722 (B,62,75) Inductor

CTF1379
CTF1379
CTF1379
CTF1379
CTF1379

D 2181 (A,23,53) Diode
D 2182 (A,19,51) Diode
D 2191 (B,30,114) Diode

HZU9R1(B1)
DAN202U
UDZS5R6(B)

L 1723 (B,62,80) Inductor
L 1724 (B,61,80) Inductor
L 1725 (B,75,84) Inductor

CTF1379
CTF1379
CTF1379

5				6				7				8			
<u>Circuit Symbol and No.</u>				<u>Part No.</u>				<u>Circuit Symbol and No.</u>				<u>Part No.</u>			
L 1726	(B,75,86)	Inductor		CTF1379				R 1006	(A,18,72)			RS1/10S820J			
L 1727	(B,75,88)	Inductor		CTF1379				R 1007	(A,20,72)			RS1/10S820J			
L 1728	(B,75,90)	Inductor		CTF1379				R 1008	(B,22,69)			RS1/16S332J			A
L 1729	(A,70,97)	Inductor		CTF1379				R 1009	(A,16,49)			RS1/16S271J			
L 1730	(A,69,90)	Inductor		CTF1379				R 1010	(A,18,49)			RS1/16S471J			
L 1731	(A,75,109)	Inductor		CTF1379											
L 1732	(A,75,104)	Inductor		CTF1379				R 1011	(A,15,52)			RS1/16S223J			
								R 1012	(A,21,55)			RS1/16S332J			
L 1733	(B,87,87)	Inductor		CTF1379				R 1013	(A,21,51)			RS1/10S271J			
L 1734	(B,87,85)	Inductor		CTF1379				R 1014	(A,49,39)			RS1/16S682J			
L 1735	(B,89,84)	Inductor		CTF1379				R 1016	(A,49,40)			RS1/16S473J			
L 1736	(B,91,84)	Inductor		CTF1379											
L 1737	(A,114,116)	Inductor		CTF1379				R 1017	(A,54,44)			RS1/16S473J			
								R 1018	(A,51,43)			RS1/16S473J			
L 1738	(B,102,93)	Inductor		CTF1379				R 1019	(A,53,42)			RS1/16S104J			
L 1739	(A,111,108)	Inductor		CTF1379				R 1020	(A,52,40)			RS1/16S473J			B
L 1742	(B,74,114)	Inductor		CTF1379				R 1021	(A,114,64)			RN1/16SE8201D			
L 1743	(B,109,103)	Inductor		CTF1379											
L 1744	(B,109,105)	Inductor		CTF1379				R 1022	(A,113,64)			RN1/16SE8201D			
								R 1023	(A,111,62)			RN1/16SE1002D			
L 1745	(B,105,106)	Inductor		CTF1379				R 1024	(A,85,62)			RN1/16SE8201D			
L 1746	(B,105,108)	Inductor		CTF1379				R 1025	(A,88,62)			RN1/16SE8201D			
L 1801	(A,44,71)	Inductor		CTF1379				R 1026	(A,89,60)			RN1/16SE1002D			
L 1802	(A,61,76)	Inductor		CTF1379											
L 1901	(A,59,94)	Inductor		CTF1379				R 1027	(B,36,51)			RS1/16S102J			
								R 1028	(A,32,48)			RS1/16S681J			
L 1902	(A,62,110)	Inductor		CTF1379				R 1029	(B,24,58)			RS1/16S271J			
L 2101	(A,81,118)	Choke Coil 600mH	CTH1213					R 1030	(B,24,60)			RS1/16S471J			
L 2161	(B,35,91)	Inductor	CTF1410					R 1032	(A,16,63)			RS1/16S223J			C
L 2251	(B,22,42)	Inductor	CTF1379												
L 2252	(B,79,72)	Choke Coil 22μH	CTH1217					R 1033	(A,24,63)			RS1/10S271J			
								R 1034	(A,19,61)			RS1/16S332J			
L 2301	(A,121,83)	Inductor	LCTAW2R2J2520					R 1038	(A,46,35)			RS1/16S102J			
TH1401	(A,158,120)	Poly Switch	MINISMDC014F					R 1039	(A,45,40)			RS1/16S473J			
X 1601	(A,81,8)	16.0MHz	CSS1669					R 1040	(A,15,38)			RS1/16S104J			
X 1701	(A,100,103)	11.2896MHz	CSS1670												
S 2251	(B,4,18)	Switch(OPEN)	CSN1067					R 1041	(A,22,44)			RS1/16S561J			
								R 1042	(A,25,44)			RS1/16S561J			
S 2252	(B,4,7)	Switch(HOME)	CSN1068					R 1101	(B,47,56)			RS1/16S473J			
△FU2091	(B,71,126)	Fuse 4A	CEK1260					R 1102	(B,47,51)			RS1/16S473J			
FB2101	(A,81,102)	Inductor	CTF1694					R 1103	(B,47,54)			RS1/16S104J			
EF2031	(B,126,105)	EMI Filter	CCG1067												D
EF2032	(B,122,105)	EMI Filter	CCG1067					R 1104	(B,47,53)			RS1/16S104J			
								R 1201	(A,141,116)			RS1/8S0R0J			
EF2033	(B,115,105)	EMI Filter	CCG1067					R 1202	(A,114,90)			RS1/16S3001F			
EF2034	(B,112,105)	EMI Filter	CCG1067					R 1203	(A,114,85)			RS1/16S3001F			
EF2035	(B,106,105)	EMI Filter	CCG1067					R 1204	(A,114,89)			RS1/16S1002F			
EF2036	(B,103,105)	EMI Filter	CCG1067												
EF2037	(B,99,109)	EMI Filter	CCG1067					R 1205	(A,114,86)			RS1/16S1002F			
								R 1315	(B,128,10)			RS1/16S0R0J			
EF2038	(B,129,114)	EMI Filter	CCG1067					R 1316	(A,144,14)			RS1/16S0R0J			
EF2039	(B,123,121)	EMI Filter	CCG1067					R 1317	(B,131,11)			RS1/16S0R0J			
EF2040	(B,119,119)	EMI Filter	CCG1067					R 1318	(A,145,17)			RS1/16S0R0J			
EF2041	(B,117,119)	EMI Filter	CCG1067												
EF2042	(B,110,119)	EMI Filter	CCG1067					R 1319	(A,146,14)			RS1/16S0R0J			E
								R 1320	(B,139,9)			RS1/16S0R0J			
EF2043	(B,149,110)	EMI Filter	CCG1067					R 1321	(B,148,10)			RS1/16S0R0J			
EF2044	(B,144,104)	EMI Filter	CCG1067					R 1324	(A,150,17)			RS1/16S0R0J			
EF2045	(B,145,124)	EMI Filter	CCG1067					R 1325	(A,151,14)			RS1/16S0R0J			
EF2046	(B,140,124)	EMI Filter	CCG1067												
EF2091	(B,92,113)	EMI Filter	CCG1172					R 1326	(B,148,8)			RS1/16S0R0J			
								R 1327	(A,152,17)			RS1/16S0R0J			
								R 1330	(A,155,14)			RS1/16S0R0J			
								R 1402	(A,124,31)			RS1/16S125J			
								R 1403	(A,124,29)			RS1/16S4702F			
R 1001	(A,24,72)		RS1/16S271J												
R 1002	(A,22,72)		RS1/16S471J					R 1404	(A,124,34)			RS1/16S4702F			
R 1003	(B,18,71)		RS1/16S101J					R 1407	(A,120,42)			RS1/16S223J			F
R 1004	(B,20,71)		RS1/16S101J					R 1408	(A,120,39)			RS1/16S223J			
R 1005	(A,16,73)		RS1/16S223J					R 1409	(A,118,34)			RS1/16S1002F			
								R 1410	(A,118,30)			RS1/16S1002F			

RESISTORS

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 1411	(A,118,32)	RS1/16S4700F	R 1640	(A,62,26)	RS1/16S104J
	R 1412	(A,123,39)	RS1/16S223J	R 1641	(A,100,27)	RS1/16S223J
	R 1413	(A,123,42)	RS1/16S223J	R 1642	(A,50,22)	RS1/16S224J
	R 1414	(B,129,57)	RS1/16S681J	R 1643	(A,96,28)	RS1/16S104J
	R 1415	(B,130,70)	RS1/16S681J	R 1645	(A,49,22)	RS1/16S104J
	R 1416	(B,130,73)	RS1/16S681J	R 1646	(A,96,30)	RS1/16S102J
	R 1417	(B,130,76)	RS1/16S681J	R 1647	(A,94,35)	RS1/16S104J
	R 1418	(B,130,81)	RS1/16S681J	R 1648	(A,94,38)	RS1/16S471J
	R 1419	(B,130,84)	RS1/16S681J	R 1649	(A,96,41)	RS1/16S471J
	R 1420	(A,142,100)	RS1/16S222J	R 1650	(A,96,42)	RS1/16S471J
B	R 1421	(A,127,20)	RS1/16S102J	R 1651	(A,96,44)	RS1/16S471J
	R 1422	(A,124,23)	RS1/16S222J	R 1653	(A,96,45)	RS1/16S471J
	R 1425	(B,130,78)	RS1/16S681J	R 1654	(A,93,43)	RS1/16S221J
	R 1501	(B,61,24)	RS1/16S104J	R 1655	(A,59,32)	RS1/16S102J
	R 1502	(B,61,25)	RS1/16S104J	R 1656	(A,62,37)	RS1/16S104J
	R 1503	(B,61,21)	RS1/16S104J	R 1657	(A,91,43)	RS1/16S473J
	R 1504	(B,61,22)	RS1/16S104J	R 1658	(A,73,43)	RS1/16S102J
	R 1505	(B,65,19)	RS1/16S104J	R 1659	(A,88,46)	RS1/16S681J
	R 1506	(B,55,54)	RS1/16S224J	R 1660	(A,79,44)	RS1/16S102J
	R 1507	(B,54,54)	RS1/16S224J	R 1661	(A,71,43)	RS1/16S224J
C	R 1508	(A,67,43)	RS1/16S102J	R 1662	(A,70,43)	RS1/16S104J
	R 1601	(B,64,16)	RS1/16S104J	R 1663	(A,72,47)	RS1/16S104J
	R 1602	(A,102,34)	RS1/16S103J	R 1664	(A,85,46)	RS1/16S681J
	R 1603	(A,106,19)	RS1/16S222J	R 1665	(A,85,43)	RS1/16S681J
	R 1604	(A,70,9)	RS1/16S104J	R 1666	(A,86,46)	RS1/16S681J
	R 1605	(A,98,16)	RS1/16S682J	R 1667	(A,87,43)	RS1/16S681J
	R 1606	(B,73,21)	RS1/16S104J	R 1668	(A,56,37)	RS1/16S103J
	R 1607	(A,99,30)	RS1/16S473J	R 1669	(A,56,35)	RS1/16S102J
	R 1608	(A,109,19)	RS1/16S223J	R 1670	(A,49,34)	RS1/16S105J
	R 1609	(A,111,15)	RS1/16S222J	R 1673	(A,62,25)	RS1/16S102J
D	R 1610	(B,71,19)	RS1/16S104J	R 1675	(A,72,45)	RS1/16S104J
	R 1611	(A,102,31)	RS1/16S473J	R 1676	(A,89,46)	RS1/16S221J
	R 1612	(A,107,19)	RS1/16S223J	R 1677	(A,91,46)	RS1/16S221J
	R 1613	(B,74,21)	RS1/16S104J	R 1678	(A,82,46)	RS1/16S681J
	R 1614	(A,68,43)	RS1/16S102J	R 1679	(A,82,43)	RS1/16S681J
	R 1615	(B,70,11)	RS1/16S104J	R 1680	(A,83,46)	RS1/16S681J
	R 1616	(B,86,20)	RS1/16S104J	R 1681	(A,84,43)	RS1/16S681J
	R 1617	(B,87,17)	RS1/16S471J	R 1682	(A,65,49)	RS1/16S104J
	R 1618	(B,78,15)	RS1/16S102J	R 1684	(A,76,43)	RS1/16S471J
	R 1619	(B,78,17)	RS1/16S102J	R 1686	(A,89,43)	RS1/16S682J
E	R 1620	(A,62,33)	RS1/16S220J	R 1687	(A,85,49)	RS1/16S104J
	R 1621	(A,62,32)	RS1/16S220J	R 1688	(A,65,51)	RS1/16S104J
	R 1622	(A,94,17)	RS1/16S101J	R 1689	(A,55,29)	RS1/16S103J
	R 1623	(B,77,21)	RS1/16S104J	R 1691	(A,57,28)	RS1/16S102J
	R 1624	(A,62,15)	RS1/16S220J	R 1692	(A,86,49)	RS1/16S104J
	R 1625	(A,62,14)	RS1/16S220J	R 1693	(A,92,46)	RS1/16S473J
	R 1626	(A,69,11)	RS1/16S681J	R 1694	(A,66,46)	RS1/16S104J
	R 1627	(A,71,11)	RS1/16S681J	R 1695	(A,52,22)	RS1/16S105J
	R 1628	(A,72,11)	RS1/16S681J	R 1696	(B,59,17)	RS1/16S104J
	R 1629	(B,73,11)	RS1/16S104J	R 1697	(A,62,21)	RS1/16S104J
	R 1630	(B,82,21)	RS1/16S104J	R 1698	(B,90,22)	RS1/16S104J
	R 1631	(B,71,11)	RS1/16S102J	R 1701	(B,98,96)	RS1/16S681J
	R 1632	(A,79,14)	RS1/16S0R0J	R 1702	(B,98,98)	RS1/16S681J
	R 1633	(B,89,17)	RS1/16S222J	R 1703	(B,95,97)	RS1/16S104J
	R 1634	(A,98,17)	RS1/16S682J	R 1704	(B,106,102)	RS1/16S681J
F	R 1635	(A,94,19)	RS1/16S101J	R 1705	(B,111,96)	RS1/16S681J
	R 1636	(A,99,27)	RS1/16S104J	R 1706	(B,93,96)	RS1/16S681J
	R 1637	(A,99,21)	RS1/16S471J	R 1707	(B,92,111)	RS1/16S104J
	R 1638	(A,96,22)	RS1/16S471J	R 1708	(B,92,110)	RS1/16S104J
	R 1639	(A,99,23)	RS1/16S471J	R 1709	(B,100,106)	RS1/16S104J

5			6			7			8		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.		
R 1711	(B,88,105)		RS1/16S681J			R 1902	(A,66,97)		RS1/16S3902F		
R 1712	(B,89,105)		RS1/16S681J			R 1903	(A,66,100)		RS1/16S3902F		A
R 1713	(A,89,99)		RS1/16S101J			R 1904	(A,70,113)		RS1/16S3902F		
R 1714	(A,88,99)		RS1/16S101J			R 1905	(A,64,84)		RS1/16S1503F		
R 1718	(A,86,99)		RS1/16S101J			R 1906	(A,63,97)		RS1/16S1503F		
R 1719	(B,90,99)		RS1/16S101J			R 1907	(A,63,100)		RS1/16S1503F		
R 1731	(A,85,99)		RS1/16S101J			R 1908	(A,68,115)		RS1/16S1503F		
R 1732	(A,96,103)		RS1/16S101J			R 1909	(A,62,97)		RS1/16S1503F		
R 1735	(A,83,102)		RS1/16S101J			R 1910	(A,65,115)		RS1/16S1503F		
R 1739	(B,94,104)		RS1/16S681J			R 1911	(A,61,85)		RS1/16S1503F		
R 1741	(A,109,104)		RS1/16S681J			R 1912	(A,62,100)		RS1/16S1503F		
R 1742	(A,95,99)		RS1/16S101J			R 1913	(B,60,96)		RS1/16S4702F		
R 1743	(A,109,105)		RS1/16S681J			R 1914	(B,59,94)		RS1/16S4702F		B
R 1744	(A,94,99)		RS1/16S101J			R 1915	(B,58,108)		RS1/16S4702F		
R 1745	(A,114,99)		RS1/16S681J			R 1916	(B,58,112)		RS1/16S4702F		
R 1746	(B,84,106)		RS1/16S1002F			R 1917	(B,58,96)		RS1/16S4700F		
R 1748	(A,94,112)		RS1/16S562J			R 1918	(B,57,96)		RS1/16S4700F		
R 1749	(B,78,110)		RS1/16S472J			R 1919	(B,58,109)		RS1/16S4700F		
R 1754	(B,86,112)		RS1/16S1002F			R 1920	(B,58,111)		RS1/16S4700F		
R 1755	(B,83,115)		RS1/16S1002F			R 1921	(B,47,111)		RS1/16S182J		
R 1756	(B,80,114)		RS1/16S1002F			R 1922	(B,62,98)		RS1/16S182J		
R 1757	(B,87,112)		RS1/16S3300F			R 1923	(B,62,103)		RS1/16S222J		
R 1758	(B,89,112)		RS1/16S3300F			R 1924	(B,67,99)		RS1/16S391J		
R 1759	(B,79,113)		RS1/16S472J			R 1925	(B,43,115)		RS1/16S222J		
R 1801	(A,44,64)		RS1/16S6802F			R 1926	(B,50,111)		RS1/16S391J		C
R 1802	(A,52,70)		RS1/16S6802F			R 1927	(B,59,101)		RS1/16S102J		
R 1803	(A,51,78)		RS1/16S6802F			R 1928	(B,46,115)		RS1/16S102J		
R 1804	(A,48,79)		RS1/16S6802F			R 2061	(B,105,71)		RS1/16S3902F		
R 1805	(A,68,68)		RS1/16S6802F			R 2062	(B,106,74)		RS1/16S3902F		
R 1806	(A,70,77)		RS1/16S6802F			R 2063	(B,101,74)		RS1/16S1002F		
R 1807	(A,67,82)		RS1/16S6802F			R 2064	(B,106,77)		RS1/16S1002F		
R 1808	(A,64,82)		RS1/16S6802F			R 2065	(B,105,65)		RS1/16S3902F		
R 1809	(A,52,69)		RS1/16S5602F			R 2066	(B,106,67)		RS1/16S3902F		
R 1810	(A,45,77)		RS1/16S5602F			R 2067	(B,104,67)		RS1/16S1002F		
R 1811	(A,64,68)		RS1/16S5602F			R 2068	(B,106,63)		RS1/16S1002F		
R 1812	(A,62,81)		RS1/16S5602F			R 2071	(B,95,72)		RS1/16S3902F		D
R 1813	(A,43,67)		RS1/16S5602F			R 2072	(B,93,75)		RS1/16S3902F		
R 1814	(A,52,75)		RS1/16S5602F			R 2073	(B,97,74)		RS1/16S1002F		
R 1815	(A,70,74)		RS1/16S5602F			R 2074	(B,90,77)		RS1/16S1002F		
R 1816	(A,70,82)		RS1/16S5602F			R 2075	(B,94,64)		RS1/16S3902F		
R 1817	(A,45,66)		RS1/16S5102F			R 2076	(B,93,66)		RS1/16S3902F		
R 1819	(B,46,73)		RS1/16S1003F			R 2077	(B,94,66)		RS1/16S1002F		
R 1820	(B,47,73)		RS1/16S1003F			R 2078	(B,91,63)		RS1/16S1002F		
R 1821	(B,44,74)		RS1/16S4700F			R 2079	(B,104,74)		RS1/16S1000F		
R 1822	(B,49,74)		RS1/16S4700F			R 2080	(B,105,69)		RS1/16S1000F		
R 1824	(A,57,79)		RS1/16S1003F			R 2081	(B,95,74)		RS1/16S1000F		E
R 1825	(A,57,81)		RS1/16S1003F			R 2082	(B,93,68)		RS1/16S1000F		
R 1827	(A,57,84)		RS1/16S1001F			R 2121	(B,56,94)		RS1/16S473J		
R 1828	(A,57,82)		RS1/16S1001F			R 2122	(B,56,91)		RS1/16S223J		
R 1830	(B,51,15)		RS1/16S912J			R 2123	(B,51,93)		RS1/4S102J		
R 1831	(B,52,12)		RS1/16S151J			R 2124	(B,47,93)		RS1/4S103J		
R 1833	(A,52,66)		RS1/16S5102F			R 2131	(A,41,88)		RS1/4S102J		
R 1834	(A,50,76)		RS1/16S5102F			R 2132	(A,39,93)		RS1/4S182J		
R 1835	(A,48,77)		RS1/16S5102F			R 2141	(A,72,90)		RS1/16S102J		
R 1836	(A,66,68)		RS1/16S5102F			R 2142	(A,77,99)		RS1/16S223J		
R 1837	(A,70,73)		RS1/16S5102F			R 2143	(A,76,95)		RS1/16S823J		
R 1838	(A,68,80)		RS1/16S5102F			R 2144	(A,81,96)		RS1/4S271J		F
R 1839	(A,65,80)		RS1/16S5102F			R 2145	(A,81,90)		RS1/4S271J		
R 1840	(A,66,65)		RS1/16S0R0J			R 2161	(B,44,87)		RS1/16S473J		
R 1901	(A,67,87)		RS1/16S3902F			R 2162	(B,41,92)		RS1/16S104J		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 2163	(B,40,88)	RS1/16S102J
	R 2164	(B,36,88)	RS1/4S102J
	R 2165	(B,37,92)	RS1/16S472J
	R 2171	(B,39,113)	RS1/4S472J
	R 2172	(B,30,111)	RS1/10S473J
	R 2185	(A,20,57)	RS1/16S104J
	R 2186	(A,22,56)	RS1/16S473J
	R 2187	(A,18,49)	RS1/16S472J
	R 2191	(B,33,113)	RS1/4S472J
	R 2192	(B,30,118)	RS1/16S473J
B	R 2193	(B,32,118)	RS1/16S104J
	R 2201	(A,48,85)	RS1/16S273J
	R 2202	(A,45,85)	RS1/16S473J
	R 2203	(A,51,86)	RS1/16S223J
	R 2204	(A,45,89)	RS1/16S105J
	R 2205	(A,43,90)	RS1/16S103J
	R 2206	(A,52,92)	RS1/16S103J
	R 2207	(A,46,93)	RS1/4S102J
	R 2211	(A,40,78)	RS1/16S332J
	R 2212	(A,36,63)	RS1/8S1001F
C	R 2213	(A,36,67)	RS1/8S1001F
	R 2214	(A,36,71)	RS1/8S1001F
	R 2215	(A,36,73)	RS1/8S1001F
	R 2216	(A,36,76)	RS1/8S1001F
	R 2221	(B,36,71)	RS1/8S1001F
	R 2222	(B,36,73)	RS1/8S1001F
	R 2223	(B,40,76)	RS1/16S332J
	R 2224	(B,36,67)	RS1/8S1001F
	R 2225	(B,43,68)	RS1/8S1001F
	R 2226	(B,36,76)	RS1/8S1001F
D	R 2231	(A,43,82)	RS1/16S103J
	R 2232	(A,37,82)	RS1/4S471J
	R 2241	(B,44,82)	RS1/16S103J
	R 2242	(B,38,82)	RS1/4S471J
	R 2251	(B,19,42)	RS1/16S1800D
	R 2252	(B,9,42)	RS1/16S1002F
	R 2253	(B,7,43)	RS1/16S1002F
	R 2255	(B,9,46)	RS1/16S105J
	R 2256	(B,14,44)	RS1/16S473J
	R 2257	(B,16,42)	RS1/16S1502D
E	R 2258	(B,15,42)	RS1/16S102J
	R 2302	(A,130,92)	RS1/16S223J
	R 2303	(A,130,96)	RS1/16S473J
	R 2304	(A,133,92)	RS1/16S223J
	R 2307	(A,126,95)	RS1/16S272J
	R 2308	(A,130,97)	RS1/16S102J
	R 2322	(A,110,80)	RS1/16S101J
	R 2323	(A,103,75)	RS1/16S2202F
	R 2324	(A,108,76)	RS1/16S4702F
	R 2325	(A,97,76)	RS1/16S2202F
F	R 2326	(A,97,79)	RS1/16S683J
	R 2329	(B,101,85)	RS1/16S102J
	R 2331	(A,96,83)	RS1/16S3902F
	R 2335	(A,103,86)	RS1/16S3902F
	R 2336	(A,97,88)	RS1/16S3902F
	R 2337	(A,100,87)	RS1/16S3902F
	R 2340	(A,106,88)	RS1/16S3601F
	R 2341	(A,108,66)	RS1/16S3902D
	R 2342	(A,108,68)	RS1/16S8201D

R 2343	(A,105,72)	RS1/16S3300F
R 2344	(A,93,69)	RS1/16S3902D
R 2345	(A,98,69)	RS1/16S8201D
R 2346	(A,98,71)	RS1/16S3300F
R 2347	(A,101,65)	RS1/16S1002F
R 2348	(A,105,64)	RS1/16S1002F
R 2361	(B,145,86)	RS1/16S223J
R 2362	(B,142,98)	RS1/4S101J
R 2363	(B,151,87)	RS1/16S473J
R 2364	(B,144,89)	RS1/16S332J
R 2365	(B,151,90)	RS1/16S473J
R 2366	(B,151,92)	RS1/16S103J
R 2371	(B,151,96)	RS1/16S221J
R 2372	(B,144,93)	RS1/16S822J
R 2373	(B,145,95)	RS1/16S223J
R 2381	(A,147,89)	RS1/16S223J
R 2382	(A,148,90)	RS1/16S473J
R 2383	(A,146,91)	RS1/16S332J
R 2384	(A,151,93)	RS1/16S473J
R 2385	(A,141,99)	RS1/4S101J
R 2386	(A,151,95)	RS1/16S103J
R 2391	(A,140,96)	RS1/16S822J
R 2392	(A,149,97)	RS1/16S221J
R 2393	(A,142,96)	RS1/16S223J
R 2404	(A,12,54)	RS1/16S103J
R 2406	(A,12,57)	RS1/16S103J
R 2423	(B,11,67)	RS1/16S332J
R 2430	(B,54,65)	RS1/16S2702D
R 2431	(B,56,71)	RS1/16S391J
R 2435	(B,53,75)	RS1/16S2702D
R 2436	(B,51,64)	RS1/16S2702D
R 2437	(B,50,73)	RS1/16S2702D
R 2438	(B,47,68)	RS1/16S6800F
R 2439	(B,49,71)	RS1/16S6800F
R 2440	(B,54,64)	RS1/16S2703F
R 2441	(B,53,73)	RS1/16S2703F

CAPACITORS

C 1001	(A,27,74)	CKSRYB102K50
C 1002	(A,32,68) 100μF/16V	CCH1477
C 1003	(B,22,70)	CKSRYB223K50
C 1004	(A,22,48)	CKSRYB105K10
C 1005	(A,27,52) 100μF/16V	CCH1477
C 1006	(A,23,53)	CKSRYB103K50
C 1008	(A,52,44)	CKSRYB102K50
C 1010	(A,104,51) 100μF/16V	CCH1477
C 1011	(A,113,62)	CCSRCH680J50
C 1012	(A,118,68)	CEHVW100M16
C 1013	(A,98,78)	CKSRYB104K16
C 1014	(A,104,78)	CKSRYB104K16
C 1015	(A,92,75) 100μF/16V	CCH1477
C 1016	(A,109,75) 100μF/16V	CCH1477
C 1019	(A,85,64)	CKSRYB102K50
C 1020	(A,79,63) 100μF/16V	CCH1477
C 1021	(A,90,64)	CCSRCH680J50
C 1022	(A,87,68)	CEHVW100M16
C 1023	(A,58,50) 100μF/16V	CCH1477
C 1024	(A,50,50) 100μF/16V	CCH1477
C 1025	(A,42,50) 100μF/16V	CCH1477

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 1026	(A,36,53)		CEHVW100M16			C 1626	(B,92,14)		CCSRCH680J50		
C 1027	(A,38,49)		CKSRYB103K50			C 1701	(B,103,101)		CKSRYB104K16		
C 1028	(B,28,60)		CKSRYB102K50			C 1702	(B,89,96)		CCSRCH100D50		
C 1029	(A,32,61) 100μF/16V		CCH1477			C 1703	(A,99,46)		CKSRYB104K16		A
C 1030	(A,22,61)		CKSRYB223K50			C 1704	(A,101,94)		CEHVW100M16		
C 1031	(A,37,37) 100μF/16V		CCH1477			C 1705	(A,97,94)		CKSRYB104K16		
C 1032	(A,29,37) 100μF/16V		CCH1477			C 1707	(A,97,91)		CKSRYB104K16		
C 1033	(A,38,43)		CKSRYB104K16			C 1708	(A,100,109)		CEHVW100M16		
C 1034	(A,34,43)		CKSRYB473K50			C 1709	(A,111,94)		CKSRYB104K16		
C 1035	(A,9,25) 3300μF/16V		CCH1486			C 1710	(A,95,108)		CKSRYB104K16		
C 1101	(A,57,18)		CKSRYB104K16			C 1711	(A,91,98)		CKSRYB104K16		
C 1201	(A,126,117) 100μF/16V		CCH1477			C 1712	(B,80,98)		CKSRYB104K16		
C 1207	(A,135,117)		CEHVW100M16			C 1713	(A,78,99)		CEHVW100M16		
C 1209	(A,136,113)		CKSRYB104K16			C 1714	(B,91,102)		CKSRYB104K16		B
C 1211	(A,142,120)		CKSRYB104K16			C 1716	(B,77,114)		CKSRYB105K10		
C 1214	(A,109,90) 10μF/16V		CCH1651			C 1717	(A,96,101)		CCSRCH7R0D50		
C 1215	(A,109,85) 10μF/16V		CCH1651			C 1718	(B,83,87) 4.7μF		CCG1201		
C 1216	(A,141,112)		CKSRYB104K16			C 1719	(B,83,85) 4.7μF		CCG1201		
C 1402	(A,139,101)		CKSRYB103K50			C 1720	(A,48,28) 4.7μF		CCG1201		
C 1403	(A,158,115)		CKSRYB103K50			C 1721	(A,50,30) 4.7μF		CCG1201		
C 1404	(A,125,31)		CCSRCH101J50			C 1722	(A,96,104)		CCSRCH7R0D50		
C 1405	(A,124,28)		CKSRYB122K50			C 1723	(A,117,106)		CKSRYB104K16		
C 1406	(A,124,35)		CKSRYB122K50			C 1724	(A,83,105)		CKSRYB104K16		
C 1407	(A,111,28) 2.2μF/35V		CCH1650			C 1725	(B,99,106)		CKSRYB104K16		
C 1408	(A,111,34) 2.2μF/35V		CCH1650			C 1726	(A,84,83)		CKSRYB104K16		C
C 1409	(A,118,27)		CKSRYB103K50			C 1727	(A,80,85)		CEHVW100M16		
C 1410	(A,118,23) 100μF/16V		CCH1477			C 1728	(A,91,83)		CKSRYB104K16		
C 1411	(A,127,31)		CKSRYB332K50			C 1729	(A,101,85)		CEHVW100M16		
C 1412	(A,127,33)		CKSRYB332K50			C 1730	(B,80,93)		CKSRYB104K16		
C 1417	(A,129,43)		CKSRYB103K50			C 1732	(A,78,93)		CEHVW100M16		
C 1418	(A,124,47) 100μF/16V		CCH1477			C 1734	(A,80,109)		CEHVW100M16		
C 1419	(A,118,44)		CKSRYB102K50			C 1735	(A,89,112)		CKSRYB104K16		
C 1420	(A,129,54)		CKSRYB103K50			C 1736	(A,92,113)		CKSRYB682K50		
C 1421	(A,124,56)		CEHVW470M16			C 1737	(B,80,110)		CKSRYB104K16		
C 1422	(A,122,63)		CKSRYB102K50			C 1738	(B,84,104)		CCSRCH151J50		
C 1428	(A,124,75) 100μF/16V		CCH1477			C 1739	(B,80,116)		CCSRCH151J50		D
C 1429	(A,126,88)		CKSRYB103K50			C 1740	(A,84,114)		CEHVW100M16		
C 1430	(A,122,68)		CKSRYB102K50			C 1741	(A,92,112)		CKSRYB104K16		
C 1435	(A,127,88)		CKSRYB104K16			C 1744	(B,88,110)		CKSRYB152K50		
C 1602	(A,60,40)		CEHVW100M16			C 1745	(B,86,115)		CKSRYB104K16		
C 1603	(B,79,21)		CKSRYB104K16			C 1746	(A,89,113)		CKSRYB104K16		
C 1604	(A,103,22)		CKSRYB104K16			C 1747	(A,98,114)		CEHVW100M16		
C 1605	(B,60,37)		CKSRYB102K50			C 1801	(B,58,73) 4.7μF		CCG1201		
C 1606	(A,79,12)		CCSRCH120J50			C 1802	(B,58,75) 4.7μF		CCG1201		
C 1607	(A,82,12)		CCSRCH120J50			C 1803	(B,58,79) 4.7μF		CCG1201		
C 1608	(A,103,20)		CCSRCH681J50			C 1804	(B,58,77) 4.7μF		CCG1201		
C 1609	(A,111,17)		CCSRCH681J50			C 1805	(B,72,86) 4.7μF		CCG1201		E
C 1610	(B,68,9)		CKSRYB105K10			C 1806	(B,72,84) 4.7μF		CCG1201		
C 1611	(A,100,40)		CKSRYB104K16			C 1807	(B,72,88) 4.7μF		CCG1201		
C 1612	(B,86,22)		CKSRYB104K16			C 1808	(B,72,90) 4.7μF		CCG1201		
C 1613	(B,69,21)		CKSRYB104K16			C 1813	(A,50,65)		CCSRCH470J50		
C 1614	(B,69,22)		CKSRYB104K16			C 1814	(A,65,70)		CCSRCH470J50		
C 1615	(A,62,28)		CKSRYB473K50			C 1815	(A,45,76)		CCSRCH470J50		
C 1616	(A,96,26)		CKSRYB104K16			C 1816	(A,62,79)		CCSRCH470J50		
C 1617	(A,62,30)		CKSRYB102K50			C 1817	(A,45,71)		CKSRYB104K16		
C 1618	(A,89,42)		CKSRYB104K16			C 1818	(A,62,73)		CKSRYB104K16		
C 1619	(A,79,42)		CKSRYB104K16			C 1819	(A,45,67)		CCSRCH470J50		F
C 1620	(A,51,34)		CKSRYB102K50			C 1820	(A,52,74)		CCSRCH470J50		
C 1621	(A,61,22)		CKSRYB102K50			C 1821	(A,70,71)		CCSRCH470J50		
C 1622	(A,53,22)		CKSRYB102K50			C 1822	(A,70,80)		CCSRCH470J50		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 1824	(B,45,70) 4.7μF	CCG1201	C 2023	(B,117,105)	CKSRYB102K50
	C 1825	(B,47,77) 4.7μF	CCG1201	C 2024	(B,111,105)	CKSRYB102K50
	C 1828	(A,58,77) 4.7μF	CCG1201	C 2025	(B,107,105)	CKSRYB102K50
	C 1829	(A,60,80) 4.7μF	CCG1201	C 2026	(B,102,105)	CKSRYB102K50
	C 1831	(B,51,12)	CKSRYB222K50	C 2027	(B,99,106)	CKSRYB102K50
	C 1832	(B,43,81) 4.7μF	CCG1201	C 2028	(B,128,116)	CKSRYB102K50
	C 1833	(B,50,87) 4.7μF	CCG1201	C 2029	(B,122,118)	CKSRYB102K50
	C 1834	(A,52,67)	CCSRCH181J50	C 2030	(B,121,118)	CKSRYB102K50
	C 1835	(A,48,64)	CCSRCH181J50	C 2031	(B,115,118)	CKSRYB102K50
B	C 1836	(A,52,77)	CCSRCH181J50	C 2032	(B,112,118)	CKSRYB102K50
	C 1837	(A,51,80)	CCSRCH181J50	C 2041	(B,149,108)	CKSRYB102K50
	C 1838	(A,68,67)	CCSRCH181J50	C 2042	(B,141,104)	CKSRYB102K50
	C 1839	(A,70,76)	CCSRCH181J50	C 2043	(B,138,104)	CKSRYB102K50
	C 1840	(A,70,83)	CCSRCH181J50	C 2044	(B,143,123)	CKSRYB102K50
	C 1841	(A,70,85)	CCSRCH181J50	C 2045	(B,142,123)	CKSRYB102K50
	C 1901	(A,67,90) 4.7μF	CCG1201	C 2046	(B,136,123)	CKSRYB102K50
	C 1902	(A,69,97) 4.7μF	CCG1201	C 2061	(B,109,72) 4.7μF	CCG1201
	C 1903	(A,72,104) 4.7μF	CCG1201	C 2062	(B,109,74) 4.7μF	CCG1201
	C 1904	(A,72,110) 4.7μF	CCG1201	C 2064	(B,101,75)	CCSRCH101J50
	C 1905	(A,67,113)	CCSRCH101J50	C 2066	(B,108,65) 4.7μF	CCG1201
	C 1906	(A,66,87)	CCSRCH101J50	C 2067	(B,108,67) 4.7μF	CCG1201
	C 1907	(A,65,97)	CCSRCH101J50	C 2069	(B,103,67)	CCSRCH101J50
	C 1908	(A,65,100)	CCSRCH101J50	C 2071	(B,105,77)	CCSRCH101J50
	C 1913	(A,60,85)	CCSRCH4R0D50	C 2072	(B,104,63)	CCSRCH101J50
C	C 1914	(A,63,104)	CCSRCH4R0D50	C 2075	(B,92,71) 4.7μF	CCG1201
	C 1915	(A,60,97)	CCSRCH4R0D50	C 2076	(B,91,75) 4.7μF	CCG1201
	C 1916	(A,65,114)	CCSRCH4R0D50	C 2078	(B,97,75)	CCSRCH101J50
	C 1917	(A,60,94)	CKSRYB104K16	C 2080	(B,90,65) 4.7μF	CCG1201
	C 1918	(A,63,110)	CKSRYB104K16	C 2081	(B,90,67) 4.7μF	CCG1201
	C 1919	(A,58,89) 4.7μF	CCG1201	C 2083	(B,96,66)	CCSRCH101J50
	C 1920	(A,57,97) 4.7μF	CCG1201	C 2085	(B,92,77)	CCSRCH101J50
	C 1921	(A,59,105) 4.7μF	CCG1201	C 2086	(B,90,63)	CCSRCH101J50
	C 1922	(A,60,114) 4.7μF	CCG1201	C 2087	(B,96,69)	CKSRYB104K16
	C 1923	(A,53,99)	CEHVW220M16	C 2101	(B,12,83)	CKSRYB104K16
D	C 1924	(A,46,114)	CEHVW220M16	C 2104	(A,64,121) 4700μF/16V	CCH1646
	C 1925	(A,53,94) 4.7μF	CCG1201	C 2121	(B,56,90)	CKSRYB473K50
	C 1926	(A,47,101) 4.7μF	CCG1201	C 2131	(A,36,88)	CCSRCH181J50
	C 1927	(A,55,107) 4.7μF	CCG1201	C 2161	(B,40,92)	CKSRYB102K50
	C 1928	(A,55,113) 4.7μF	CCG1201	C 2171	(B,39,118)	CKSRYB103K50
	C 2002	(B,44,93)	CKSYB473K50	C 2172	(B,40,118)	CCSRCH221J50
	C 2003	(B,41,94)	CKSRYB102K50	C 2191	(B,33,118)	CKSRYB103K50
	C 2004	(B,36,94)	CKSRYB102K50	C 2192	(B,28,113)	CCSRCH221J50
	C 2005	(B,35,94)	CKSRYB102K50	C 2201	(A,51,84)	CKSRYB103K50
	C 2006	(B,33,94)	CKSRYB102K50	C 2202	(A,53,92)	CKSRYB472K50
E	C 2007	(B,25,108)	CKSRYB103K50	C 2231	(A,47,83)	CKSRYB473K50
	C 2008	(B,23,108)	CKSRYB102K50	C 2241	(B,46,83)	CKSRYB473K50
	C 2009	(B,20,108)	CKSRYB102K50	C 2251	(B,39,46)	CEHVW100M16
	C 2010	(B,16,108)	CKSRYB102K50	C 2252	(B,46,46)	CEHVW100M16
	C 2011	(B,12,108)	CKSRYB102K50	C 2253	(B,16,45)	CKSRYB102K50
	C 2012	(B,8,95)	CKSRYB102K50	C 2255	(B,15,45)	CKSRYB102K50
	C 2013	(B,42,108)	CKSRYB102K50	C 2256	(B,80,83)	CEHVW470M16
	C 2014	(B,40,108)	CKSRYB102K50	C 2257	(B,85,84)	CKSRYB105K10
	C 2015	(B,34,108)	CKSRYB103K50	C 2258	(B,71,80)	CEHVW100M16
	C 2016	(B,31,108)	CKSRYB103K50	C 2259	(B,75,82)	CKSRYB104K16
F	C 2017	(B,26,108)	CKSRYB103K50	C 2260	(B,76,77)	CKSRYB473K50
	C 2018	(B,21,108)	CKSRYB102K50	C 2261	(B,66,77)	CKSRYB473K50
	C 2019	(B,18,108)	CKSRYB102K50	C 2301	(B,119,88)	CEHVW100M16
	C 2020	(B,14,108)	CKSRYB102K50	C 2302	(A,121,85)	CKSRYB223K50
	C 2021	(B,124,105)	CKSRYB102K50	C 2303	(B,116,99)	CCSRCH101J50
	C 2022	(B,120,105)	CKSRYB102K50	C 2304	(B,122,94)	CCSRCH101J50

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 2306	(A,128,98)	CKSRYB103K50
C 2322	(A,110,76)	CCSRCH271J50
C 2323	(A,100,80)	CKSRYB393K25
C 2325	(A,97,81)	CKSRYB393K25
C 2327	(B,98,85)	CKSRYB102K50
C 2328	(B,91,83) 100µF/16V	CCH1477
C 2329	(A,105,80)	CKSRYB104K16
C 2330	(A,96,84)	CCSRCH470J50
C 2335	(A,106,86)	CKSRYB334K10
C 2336	(A,97,86)	CCSRCH470J50
C 2338	(A,103,88)	CKSRYB334K10
C 2339	(A,109,84)	CKSRYB104K16
C 2341	(A,111,68) 4.7µF	CCG1201
C 2342	(A,109,68) 820pF	CCG1217
C 2343	(A,101,71)	CKSRYB152K50
C 2344	(A,94,71) 4.7µF	CCG1201
C 2345	(A,96,69) 820pF	CCG1217
C 2346	(A,102,65)	CKSRYB104K16
C 2347	(A,105,70)	CKSRYB104K16
C 2361	(B,142,86)	CKSRYB473K50
C 2381	(A,145,89)	CKSRYB473K50
C 2403	(A,9,57)	CKSRYB104K16
C 2421	(B,38,60)	CEHVW470M16
C 2422	(A,28,76)	CFTNA224J50
C 2423	(A,28,56)	CFTNA224J50
C 2424	(A,28,66)	CFTNA224J50
C 2425	(A,28,85)	CFTNA224J50
C 2426	(B,10,63)	CKSRYB473K50
C 2427	(A,23,66)	CKSQYB225K10
C 2428	(A,23,62)	CKSYB225K16
C 2429	(B,12,68)	CKSRYB104K16
C 2430	(B,51,63)	CCSRCH470J50
C 2431	(B,50,75)	CCSRCH470J50
C 2432	(B,49,66)	CKSRYB104K16

Monitor Compound Unit

Consists of

Monitor PCB

Keyboard PCB



Unit Number:CWN1490

Unit Name:Monitor Compound Unit

MISCELLANEOUS

IC 3001	(A,121,45) IC	PE5433A
IC 3003	(A,123,61) IC	S-29221BROI-J8T1
IC 3004	(A,111,57) IC	S-80835CENN-B8U
IC 3005	(A,131,55) IC	TC7SH08FUS1
IC 3103	(A,80,95) IC	S-1131B25UC-N4K
IC 3104	(A,43,77) IC	TC90A64AF-P
IC 3105	(A,47,60) IC	TC7SH08FUS1
IC 3106	(A,61,42) IC	NJM082BV
IC 3107	(A,70,62) IC	NJM2138V
IC 3252	(A,109,86) IC	BD6171KV
IC 3301	(A,156,88) IC	TC7SH08FUS1
IC 3302	(A,149,82) IC	TA78L05F
IC 3303	(A,162,80) IC	OZ961ISN
IC 3304	(B,181,77) FET	TS8M1
IC 3305	(B,175,77) FET	TS8M1

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
Q 3051	(A,80,84) Transistor	2SC4617
Q 3052	(A,75,84) Transistor	2SC4617
Q 3053	(A,71,82) Transistor	2SA1774
Q 3061	(A,80,79) Transistor	2SC4617
Q 3062	(A,75,79) Transistor	2SC4617
Q 3063	(A,71,76) Transistor	2SA1774
Q 3071	(A,80,73) Transistor	2SC4617
Q 3072	(A,75,73) Transistor	2SC4617
Q 3073	(A,71,70) Transistor	2SA1774
Q 3101	(A,121,72) Transistor	DTC114EK
Q 3102	(A,126,76) Transistor	2SB1260
Q 3103	(A,55,91) Transistor	2SC4617
Q 3105	(A,64,67) Transistor	UMZ1N
Q 3106	(A,56,64) Transistor	UMZ1N
Q 3107	(A,56,60) Transistor	UMZ1N
Q 3108	(A,62,52) Transistor	UMZ1N
Q 3109	(A,55,52) Transistor	UMZ1N
Q 3110	(A,47,52) Transistor	UMZ1N
Q 3111	(A,53,41) Transistor	UMT2N
Q 3112	(A,53,46) Transistor	UMX2N
Q 3251	(A,101,98) FET	RSQ035P03
Q 3252	(A,112,99) FET	RSQ035P03
Q 3253	(A,117,79) Transistor	DTC114EE
Q 3301	(A,152,94) Transistor	2SC4617
Q 3302	(A,166,92) Transistor	2SB1184F5
Q 3303	(A,152,74) Transistor	2SC4617
Q 3304	(A,152,72) Transistor	2SC4617
Q 3306	(A,155,76) Transistor	DTA144EE
Q 3335	(A,154,61) Transistor	UMZ1N
Q 3336	(A,154,65) Transistor	UMX2N
Q 3337	(A,154,58) Transistor	UMX2N
Q 3345	(A,154,68) FET	3LP01SS
D 3005	(A,63,10) Diode	UDZS5R6(B)
D 3006	(A,45,10) Diode	UDZS5R6(B)
D 3007	(A,49,10) Diode	UDZS5R6(B)
D 3008	(A,52,10) Diode	UDZS5R6(B)
D 3009	(A,56,10) Diode	UDZS5R6(B)
D 3010	(A,59,10) Diode	UDZS5R6(B)
D 3011	(A,24,39) Diode	UDZS5R6(B)
D 3012	(A,21,39) Diode	UDZS5R6(B)
D 3013	(A,17,39) Diode	UDZS5R6(B)
D 3014	(A,12,33) Diode	UDZS5R6(B)
D 3015	(A,66,10) Diode	UDZS5R6(B)
D 3016	(A,10,24) Diode	UDZS5R6(B)
D 3017	(A,6,24) Diode	UDZS5R6(B)
D 3018	(A,25,23) Diode	UDZS5R6(B)
D 3251	(A,95,103) Diode	RSX201L-30
D 3252	(A,112,104) Diode	RB160M-30
D 3253	(A,118,97) Diode	RB548W
D 3254	(A,118,92) Diode	RB548W
D 3255	(A,119,76) Diode	RB548W
D 3256	(A,115,76) Diode	RB548W
D 3257	(A,112,76) Diode	RB548W
D 3301	(A,149,71) Diode	UDZS6R8(B)
D 3302	(A,173,85) Diode	UDZS6R2(B)
D 3303	(A,173,81) Diode	UDZS6R2(B)
D 3304	(A,162,73) Diode	MA147
D 3305	(A,162,69) Diode	UDZS6R2(B)
D 3306	(A,165,69) Diode	MA147
D 3307	(A,152,77) Diode	1SS355

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	D 3308	(A,149,62) Diode	UDZS8R2(B)
	D 3351	(A,166,85) Diode	RB751V40
	D 3403	(A,179,38) LED	YBG1112H
	D 3404	(A,179,51) LED	YBG1112H
	D 3405	(A,177,21) LED	YBG1112H
■	D 3406	(A,177,15) LED	YBG1112H
	D 3407	(A,125,108) LED	YBG1112H
	D 3408	(A,146,108) LED	YBG1112H
	D 3409	(A,83,108) LED	YBG1112H
	D 3410	(A,104,108) LED	YBG1112H
B	D 3411	(A,41,108) LED	YBG1112H
	D 3412	(A,62,108) LED	YBG1112H
	D 3413	(A,179,78) LED	YBG1112H
	D 3414	(A,179,65) LED	YBG1112H
	D 3415	(A,171,98) LED	YBG1112H
■	D 3416	(A,171,107) LED	YBG1112H
	D 3421	(A,8,78) LED	YBG1112H
	D 3422	(A,8,65) LED	YBG1112H
	D 3423	(A,8,51) LED	YBG1112H
	D 3424	(A,8,38) LED	YBG1112H
C	D 3425	(A,11,21) LED	YBG1112H
	D 3426	(A,11,15) LED	YBG1112H
	D 3427	(A,159,97) LED	CL-270PG-C-TS
	D 3428	(A,28,97) LED	CL-270PG-C-TS
	L 3001	(A,117,30) Inductor	CTF1306
■	L 3002	(A,120,30) Inductor	CTF1306
	L 3003	(A,100,45) Inductor	LCYA100J2520
	L 3051	(A,86,87) Inductor	LCYA100J2520
	L 3101	(A,66,81) Inductor	LCYA100J2520
	L 3102	(A,60,87) Inductor	LCYA100J2520
D	L 3103	(A,53,91) Inductor	CTF1306
	L 3104	(A,65,70) Inductor	LCYA100J2520
	L 3105	(A,63,81) Inductor	LCYA100J2520
	L 3112	(A,39,93) Inductor	CTF1306
	L 3113	(A,37,93) Inductor	CTF1306
■	L 3114	(A,36,93) Inductor	CTF1306
	L 3115	(A,34,93) Inductor	CTF1306
	L 3116	(A,34,91) Inductor	CTF1306
	L 3117	(A,37,98) Inductor Array	CTF1421
	L 3122	(A,42,64) Inductor	CTF1306
E	L 3123	(A,41,62) Inductor	CTF1306
	L 3124	(A,37,63) Inductor	CTF1306
	L 3125	(A,33,64) Inductor	CTF1306
	L 3126	(A,35,63) Inductor	CTF1306
	L 3127	(A,78,59) Inductor	LCYA100J2520
F	L 3128	(A,70,45) Coil	LCYA101J2520
	L 3129	(A,65,36) Coil	LCYA101J2520
	L 3130	(A,74,57) Inductor	LCYA100J2520
	L 3131	(A,42,53) Inductor	LCYA100J2520
	L 3132	(A,38,53) Inductor	LCYA100J2520
■	L 3133	(A,34,53) Inductor	LCYA100J2520
	L 3134	(A,30,53) Inductor	LCYA100J2520
	L 3251	(A,90,96) Choke Coil 10μH	CTH1249
	L 3252	(A,101,76) Inductor	LCYA100J2520
	L 3253	(A,96,96) Choke Coil 18μH	CTH1250
F	L 3254	(A,125,88) Choke Coil 10μH	CTH1259
	L 3255	(A,114,104) Inductor	LCYA100J2520
	L 3257	(A,107,75) Inductor	LCYA100J2520
	L 3258	(A,121,96) Inductor	LCYA100J2520
	L 3259	(A,107,100) Choke Coil 68μH	CTH1318

L 3301	(B,175,88) Inductor	CTH1256
T 3301	(B,176,54) Transformer	CTT1119
TH3001	(A,112,33) Thermistor	CCX1051
X 3001	(A,109,45) Radiator 12.58MHz	CSS1601
X 3101	(A,48,93) Crystal Resonator 42MHz	CSS1604
S 3001	(B,16,17) Encoder(VOL)	CSD1120

VR3301	(A,170,80) Semi-fixed 15kΩ	CCP1424
FB3104	(A,38,62) Ferrite Bead	CTF1528
FB3101	(A,43,90) Ferrite Bead	CTF1528
FB3103	(A,30,74) Ferrite Bead	CTF1528
FB3105	(A,40,63) Ferrite Bead	CTF1528
FB3102	(A,38,90) Ferrite Bead	CTF1528

RESISTORS

R 3001	(A,116,56)	RS1/16S473J
R 3003	(A,113,31)	RN1/16SE1502D
R 3004	(A,105,53)	RS1/16S473J
R 3005	(A,117,33)	RS1/16S471J
R 3009	(A,110,35)	RS1/16S473J
R 3011	(A,128,31)	RS1/16S272J
R 3012	(A,131,31)	RS1/16S272J
R 3015	(A,128,33)	RS1/16S470J
R 3016	(A,131,33)	RS1/16S470J
R 3018	(A,132,43)	RS1/16S471J
R 3019	(A,108,41)	RS1/16S473J
R 3021	(A,108,54)	RS1/16S471J
R 3024	(A,139,45)	RS1/16S473J
R 3025	(A,135,55)	RS1/16S103J
R 3027	(A,117,56)	RS1/16S473J
R 3028	(A,127,57)	RS1/16S471J
R 3029	(A,128,55)	RS1/16S471J
R 3030	(A,119,56)	RS1/16S102J
R 3031	(A,114,56)	RS1/16S0R0J
R 3033	(A,114,58)	RS1/16S473J
R 3034	(A,129,61)	RS1/16S473J
R 3035	(A,134,33)	RS1/16S473J
R 3036	(A,135,33)	RS1/16S473J
R 3037	(A,137,33)	RS1/16S473J
R 3038	(A,138,33)	RS1/16S473J
R 3039	(A,121,56)	RS1/16S102J
R 3040	(A,122,56)	RS1/16S102J
R 3041	(A,124,56)	RS1/16S102J
R 3042	(A,125,56)	RS1/16S102J
R 3043	(A,129,57)	RS1/16S471J
R 3045	(A,120,33)	RS1/16S471J
R 3046	(A,132,45)	RS1/16S471J
R 3047	(A,119,33)	RS1/16S471J
R 3049	(A,109,54)	RS1/16S473J
R 3050	(A,132,59)	RS1/16S473J
R 3052	(A,81,84)	RS1/16S153J
R 3053	(A,81,82)	RS1/16S104J
R 3054	(A,79,82)	RS1/16S681J
R 3055	(A,77,82)	RS1/16S331J
R 3056	(A,77,85)	RS1/16S331J
R 3057	(A,73,82)	RS1/16S391J
R 3058	(A,73,84)	RS1/16S391J
R 3062	(A,81,79)	RS1/16S153J
R 3063	(A,81,76)	RS1/16S104J
R 3064	(A,79,76)	RS1/16S681J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 3065	(A,77,76)	RS1/16S331J		R 3155	(A,55,50)	RS1/16S331J	
R 3066	(A,77,79)	RS1/16S331J		R 3156	(A,57,52)	RS1/16S103J	
R 3067	(A,73,76)	RS1/16S391J		R 3157	(A,47,50)	RS1/16S331J	A
R 3068	(A,73,79)	RS1/16S391J		R 3158	(A,50,52)	RS1/16S103J	
R 3072	(A,81,73)	RS1/16S153J		R 3159	(A,62,64)	RN1/16SE1501D	
R 3073	(A,81,70)	RS1/16S104J		R 3160	(A,62,60)	RN1/16SE1501D	
R 3074	(A,79,70)	RS1/16S681J		R 3161	(A,69,53)	RN1/16SE1802D	
R 3075	(A,77,70)	RS1/16S331J		R 3162	(A,64,44)	RN1/16SE1602D	
R 3076	(A,77,73)	RS1/16S331J		R 3163	(A,70,58)	RS1/16S102J	
R 3077	(A,73,70)	RS1/16S391J		R 3164	(A,68,58)	RS1/16S102J	
R 3078	(A,73,73)	RS1/16S391J		R 3165	(A,64,64)	RN1/16SE3901D	
R 3081	(A,122,33)	RS1/16S471J		R 3166	(A,64,58)	RN1/16SE3901D	
R 3082	(A,123,33)	RS1/16S471J		R 3167	(A,61,37)	RN1/16SE1502D	
R 3083	(A,125,33)	RS1/16S471J		R 3168	(A,57,41)	RN1/16SE1002D	B
R 3084	(A,126,33)	RS1/16S471J		R 3169	(A,58,43)	RS1/16S101J	
R 3085	(A,9,27)	RS1/16S0R0J		R 3173	(A,49,42)	RS1/16S133J	
R 3086	(A,6,29)	RS1/16S0R0J		R 3174	(A,51,42)	RS1/16S0R0J	
R 3087	(A,111,37)	RS1/16S473J		R 3175	(A,75,62)	RS1/16S102J	
R 3088	(A,109,37)	RS1/16S473J		R 3176	(A,56,44)	RS1/16S133J	
R 3089	(A,108,37)	RS1/16S473J		R 3177	(A,72,67)	RN1/16SE3901D	
R 3090	(A,107,39)	RS1/16S473J		R 3178	(A,55,44)	RS1/16S0R0J	
R 3101	(A,127,73)	RS1/16S153J		R 3179	(A,55,41)	RS1/16S100J	
R 3102	(A,124,71)	RS1/16S472J		R 3180	(A,73,67)	RN1/16SE1501D	
R 3103	(A,124,73)	RS1/16S472J		R 3181	(A,55,47)	RS1/16S100J	
R 3109	(A,38,101)	RS1/16S472J		R 3182	(A,52,44)	RS1/16S0R0J	C
R 3110	(A,38,98)	RS1/16S473J		R 3183	(A,76,63)	RN1/16SE1802D	
R 3111	(A,38,100)	RS1/16S473J		R 3184	(A,76,66)	RN1/16SE1002D	
R 3112	(A,38,103)	RS1/16S473J		R 3186	(A,26,43)	RS1/16S333J	
R 3122	(A,41,108)	RS1/16S104J		R 3190	(A,27,43)	RS1/16S0R0J	
R 3123	(A,42,108)	RS1/16S104J		R 3193	(A,31,93)	RS1/16S333J	
R 3124	(A,44,108)	RS1/16S104J		R 3251	(A,93,87)	RN1/16SE6802D	
R 3125	(A,48,91)	RS1/16SS471J		R 3252	(A,93,91)	RN1/16SE1002D	
R 3126	(A,47,90)	RS1/16SS105J		R 3253	(A,94,85)	RN1/16SE4701D	
R 3127	(A,32,89)	RS1/16S333J		R 3254	(A,98,91)	RN1/16SE3900D	
R 3128	(A,54,94)	RS1/16S331J		R 3255	(A,97,83)	RN1/16SE1002D	D
R 3129	(A,55,88)	RS1/16S152J		R 3256	(A,96,92)	RN1/16SE3901D	
R 3131	(A,59,72)	RS1/16S392J		R 3257	(A,96,89)	RS1/16S103J	
R 3132	(A,59,70)	RS1/16S473J		R 3258	(A,97,85)	RS1/16S103J	
R 3133	(A,50,60)	RS1/16S0R0J		R 3259	(A,102,80)	RN1/16SE5100D	
R 3134	(A,46,62)	RS1/16S101J		R 3260	(A,102,82)	RN1/16SE2201D	
R 3135	(A,44,61)	RS1/16S101J		R 3261	(A,101,88)	RS1/16S153J	
R 3136	(A,40,59)	RS1/16S101J		R 3262	(A,101,85)	RS1/16S153J	
R 3137	(A,36,61)	RS1/16S470J		R 3263	(A,105,94)	RS1/16S104J	
R 3138	(A,31,64)	RS1/16S101J		R 3264	(A,102,95)	RS1/16S150J	
R 3139	(A,33,61)	RS1/16S101J		R 3265	(A,112,96)	RS1/16S150J	
R 3140	(A,51,60)	RS1/16S101J		R 3266	(A,111,94)	RS1/16S104J	E
R 3141	(A,36,60)	RS1/16S101J		R 3267	(A,116,87)	RN1/16SE6202D	
R 3142	(A,66,67)	RS1/16S102J		R 3270	(A,105,79)	RN1/16SE1002D	
R 3143	(A,58,64)	RS1/16S102J		R 3271	(A,119,87)	RS1/16S821J	
R 3144	(A,58,60)	RS1/16S102J		R 3272	(A,105,77)	RN1/16SE1802D	
R 3145	(A,61,67)	RS1/16S272J		R 3273	(A,108,77)	RN1/16SE2202D	
R 3146	(A,53,64)	RS1/16S272J		R 3274	(A,116,88)	RN1/16SE3303D	
R 3147	(A,53,60)	RS1/16S272J		R 3275	(A,116,90)	RN1/16SE1802D	
R 3148	(A,61,48)	RN1/16SE3002D		R 3281	(A,116,81)	RN1/16SE2703D	
R 3149	(A,61,47)	RN1/16SE1203D		R 3282	(A,74,90)	RS1/16S1R0J	
R 3150	(A,64,47)	RS1/16S223J		R 3301	(A,160,92)	RS1/16S103J	F
R 3151	(A,58,46)	RN1/16SE1002D		R 3302	(A,148,99)	RS1/4S222J	
R 3152	(A,70,50)	RN1/16SE2402D		R 3303	(A,151,98)	RS1/4S222J	
R 3153	(A,62,50)	RS1/16S331J		R 3304	(A,148,95)	RS1/16S103J	
R 3154	(A,65,52)	RS1/16S103J		R 3305	(A,150,94)	RS1/16S103J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 3306	(A,154,98)	RS1/4S222J	R 3465	(B,137,103)	RS1/10S5600F
	R 3308	(A,157,97)	RS1/4S222J	R 3466	(B,134,103)	RS1/10S1001F
	R 3310	(A,150,74)	RS1/16S103J	R 3467	(B,116,105)	RS1/10S5600F
	R 3311	(A,150,75)	RS1/16S104J	R 3468	(B,113,105)	RS1/10S1001F
	R 3313	(A,155,70)	RS1/16S473J	R 3469	(B,116,103)	RS1/10S5600F
	R 3314	(A,152,69)	RS1/16S105J	R 3470	(B,113,103)	RS1/10S1001F
	R 3315	(A,155,73)	RS1/16S333J	R 3471	(B,74,103)	RS1/10S5600F
	R 3316	(A,158,69)	RN1/16SE5102D	R 3472	(B,71,103)	RS1/10S1001F
	R 3317	(A,165,73)	RS1/16S105J	R 3473	(B,74,105)	RS1/10S5600F
	R 3318	(A,161,86)	RS1/16S102J	R 3474	(B,71,105)	RS1/10S1001F
B	R 3319	(A,168,81)	RS1/16S563J	R 3475	(B,173,85)	RS1/10S3000F
	R 3320	(A,173,84)	RS1/16S103J	R 3476	(B,176,85)	RS1/10S3000F
	R 3321	(A,173,82)	RS1/16S103J	R 3477	(B,173,86)	RS1/10S3000F
	R 3323	(A,159,69)	RN1/16SE5100D	R 3478	(B,176,86)	RS1/10S5600F
	R 3324	(A,167,56)	RS1/8S474J	R 3479	(B,175,104)	RS1/10S1001F
	R 3325	(A,167,51)	RS1/8S474J	R 3480	(B,179,104)	RS1/10S2001F
	R 3326	(A,167,45)	RS1/8S474J	R 3481	(B,175,102)	RS1/10S1201F
	R 3327	(A,167,40)	RS1/8S474J	R 3482	(B,179,102)	RS1/10S1501F
	R 3328	(A,169,37)	RS1/8S474J	R 3491	(B,11,70)	RS1/10S5600F
	R 3329	(A,169,32)	RS1/8S474J	R 3492	(B,7,70)	RS1/10S3000F
C	R 3330	(A,169,27)	RS1/8S474J	R 3493	(B,11,72)	RS1/10S3000F
	R 3331	(A,152,59)	RS1/16S103J	R 3494	(B,7,72)	RS1/10S5600F
	R 3332	(A,150,58)	RS1/16S104J	R 3495	(B,10,43)	RS1/10S3000F
	R 3333	(A,159,61)	RS1/16S473J	R 3496	(B,8,43)	RS1/10S3000F
	R 3334	(A,156,67)	RS1/10S335J	R 3497	(B,10,46)	RS1/10S3000F
	R 3335	(A,158,58)	RS1/16S101J	R 3498	(B,8,46)	RS1/10S3000F
	R 3336	(A,157,61)	RS1/16S103J	R 3499	(B,7,16)	RS1/10S1001F
	R 3337	(A,152,62)	RN1/16SE4700D	R 3500	(B,9,16)	RS1/10S7500F
	R 3338	(A,151,66)	RN1/16SE1000D	R 3501	(B,7,20)	RS1/10S1001F
	R 3339	(A,151,64)	RN1/16SE1000D	R 3502	(B,9,20)	RS1/10S1001F
D	R 3340	(A,158,64)	RN1/16SE8200D	CAPACITORS		
	R 3341	(A,157,56)	RS1/16S473J	C 3001	(A,22,38)	CCSRCH101J50
	R 3349	(A,151,70)	RS1/16S103J	C 3002	(A,26,38)	CCSRCH101J50
	R 3401	(B,179,30)	RS1/16S153J	C 3003	(A,14,33)	CCSRCH101J50
	R 3402	(A,177,18)	RS1/16S333J	C 3004	(A,19,38)	CCSRCH101J50
	R 3411	(A,172,86)	RS1/16S153J	C 3005	(A,65,9)	CKSRYB222K50
	R 3412	(A,172,71)	RS1/16S333J			
	R 3413	(A,172,58)	RS1/16S104J	C 3006	(A,47,9)	CKSRYB222K50
	R 3421	(A,114,102)	RS1/16S153J	C 3007	(A,51,9)	CKSRYB222K50
	R 3422	(A,135,102)	RS1/16S333J	C 3008	(A,54,9)	CKSRYB222K50
	R 3431	(B,8,85)	RS1/16S153J	C 3009	(A,58,9)	CKSRYB222K50
	R 3432	(B,9,74)	RS1/16S333J	C 3010	(A,61,9)	CKSRYB222K50
	R 3433	(B,8,58)	RS1/16S104J			
	R 3441	(B,6,44)	RS1/16S153J	C 3011	(A,115,33)	CKSRYB104K16
	R 3442	(B,8,30)	RS1/16S333J	C 3012	(A,104,46) 22μF	CCG1183
E	R 3443	(A,11,18)	RS1/16S104J	C 3013	(A,110,48)	CKSRYB104K16
	R 3451	(B,164,104)	RS1/10S2001F	C 3014	(A,107,48)	CKSRYB104K16
	R 3452	(B,164,100)	RS1/10S1501F	C 3016	(A,113,56)	CKSRYB105K10
	R 3453	(B,166,104)	RS1/10S2001F			
	R 3454	(B,166,100)	RS1/10S1501F	C 3018	(A,109,57)	CKSRYB104K16
	R 3455	(B,181,44)	RS1/10S3000F	C 3019	(A,128,61)	CKSRYB104K16
	R 3456	(B,177,44)	RS1/10S3000F	C 3020	(A,134,55)	CKSRYB104K16
	R 3457	(B,181,45)	RS1/10S3000F	C 3025	(A,68,9)	CKSRYB222K50
	R 3458	(B,177,45)	RS1/10S3000F	C 3027	(A,9,25)	CKSRYB222K50
	R 3459	(B,180,16)	RS1/10S1001F			
F	R 3460	(B,178,16)	RS1/10S7500F	C 3028	(A,6,25)	CKSRYB222K50
	R 3461	(B,180,20)	RS1/10S1001F	C 3029	(A,23,23)	CKSRYB222K50
	R 3462	(B,178,20)	RS1/10S1001F	C 3051	(A,86,84)	CKSYB106K6R3
	R 3463	(B,134,105)	RS1/10S5600F	C 3052	(A,77,83)	CCSRCH470J50
	R 3464	(B,137,105)	RS1/10S1001F	C 3053	(A,75,82)	CCSRCH470J50
				C 3054	(A,83,84)	CKSRYB104K16
				C 3055	(A,81,88) 68μF/6.3V	CCH1440

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 3061	(A,86,79)		CKSYB106K6R3			C 3190	(A,53,65)		CKSSYF104Z16		
C 3062	(A,77,77)		CCSRCH470J50			C 3191	(A,49,63)		CKSSYF104Z16		
C 3063	(A,75,76)		CCSRCH470J50			C 3192	(A,46,63)		CKSSYF104Z16		A
C 3064	(A,83,79)		CKSRYB104K16			C 3193	(A,46,64)		CKSSYF104Z16		
C 3071	(A,86,74)		CKSYB106K6R3			C 3195	(A,48,64)		CKSSYF104Z16		
C 3072	(A,77,72)		CCSRCH470J50			C 3196	(A,39,64)		CKSSYF104Z16		
C 3073	(A,75,70)		CCSRCH470J50			C 3197	(A,36,58)		CCSRCH101J50		
C 3074	(A,83,73)		CKSRYB104K16			C 3198	(A,35,64)		CKSRYB105K10		
C 3101	(A,128,84) 10μF		CCG1138			C 3199	(A,45,60)		CKSRYB104K16		
C 3102	(A,128,80) 10μF		CCG1138			C 3200	(A,69,67)		CKSRYB104K16		
C 3103	(A,65,76)		CKSYB106K6R3			C 3201	(A,61,64)		CKSRYB104K16		
C 3105	(A,57,68)		CKSRYB105K10			C 3202	(A,61,60)		CKSRYB104K16		
C 3107	(A,62,71) 68μF/6.3V		CCH1440			C 3203	(A,78,64) 22μF		CCG1183		
C 3108	(A,63,79)		CKSRYB105K10			C 3204	(A,67,44) 22μF		CCG1183		B
C 3130	(A,51,94)		CCSRCH9R0D50			C 3205	(A,66,39) 4.7μF		CCG1111		
C 3131	(A,45,94)		CCSRCH9R0D50			C 3206	(A,64,61)		CKSRYB103K50		
C 3132	(A,84,95)		CKSRYB105K10			C 3207	(A,65,44)		CKSRYB104K16		
C 3134	(A,71,92)		CKSSYF104K16			C 3208	(A,64,39)		CKSRYB104K16		
C 3135	(A,74,94) 68μF/6.3V		CCH1440			C 3209	(A,65,47)		CKSRYB104K16		
C 3136	(A,33,93)		CKSRYB104K16			C 3210	(A,67,52)		CKSQYB225K10		
C 3140	(A,54,89)		CKSSYF104Z16			C 3211	(A,59,52)		CKSQYB225K10		
C 3141	(A,51,90)		CKSRYB103K50			C 3212	(A,52,52)		CKSQYB225K10		
C 3142	(A,46,89)		CKSRYB104K16			C 3213	(A,68,50)		CKSRYB103K50		
C 3143	(A,44,89)		CKSSYF104Z16			C 3214	(A,64,54)		CKSRYB104K16		
C 3144	(A,39,89)		CKSSYF104Z16			C 3215	(A,57,54)		CKSRYB104K16		C
C 3145	(A,34,89)		CKSRYB105K10			C 3216	(A,49,54)		CKSRYB104K16		
C 3147	(A,50,90)		CCSRCH181J50			C 3217	(A,71,53) 22μF		CCG1183		
C 3149	(A,54,88)		CKSSYF104Z16			C 3218	(A,75,53) 22μF		CCG1183		
C 3151	(A,56,94)		CCSRCH4R0C50			C 3219	(A,65,64)		CCSRCH4R0C50		
C 3154	(A,56,86)		CKSSYF104Z16			C 3220	(A,65,58)		CCSRCH4R0C50		
C 3155	(A,56,85)		CKSSYF104Z16			C 3221	(A,64,41)		CKSRYB104K16		
C 3158	(A,56,84)		CKSSYF104Z16			C 3222	(A,44,54)		CKSRYB104K16		
C 3160	(A,58,83)		CKSSYF104Z16			C 3223	(A,40,54)		CKSRYB104K16		
C 3161	(A,58,82)		CKSSYF104Z16			C 3224	(A,36,54)		CKSRYB104K16		
C 3163	(A,56,83)		CKSSYF104Z16			C 3225	(A,41,46)		CKSRYB104K16		
C 3164	(A,30,81)		CKSSYF104Z16			C 3226	(A,38,46)		CKSRYB104K16		D
C 3165	(A,56,82)		CKSSYF104Z16			C 3227	(A,35,45)		CKSRYB104K16		
C 3166	(A,56,81)		CKSSYF104Z16			C 3228	(A,32,54)		CKSRYB104K16		
C 3167	(A,56,80)		CKSSYF104Z16			C 3229	(A,43,49) 4.7μF		CCG1111		
C 3168	(A,56,79)		CKSSYF104Z16			C 3230	(A,39,49) 22μF		CCG1183		
C 3169	(A,58,81)		CKSSYF104Z16			C 3231	(A,35,49)		CKSYB106K6R3		
C 3170	(A,58,80)		CKSSYF104Z16			C 3232	(A,70,67)		CCSRCH4R0C50		
C 3171	(A,58,79)		CKSSYF104Z16			C 3233	(A,31,49) 4.7μF		CCG1111		
C 3172	(A,56,78)		CKSSYF104Z16			C 3234	(A,75,66)		CKSRYB104K16		
C 3173	(A,59,78)		CKSRYB104K16			C 3235	(A,31,45)		CKSRYB104K16		
C 3174	(A,59,76)		CKSRYB104K16			C 3252	(A,95,87)		CCSRCH271J50		
C 3175	(A,59,75)		CKSRYB104K16			C 3255	(A,114,72)		CKSQYB225K10		E
C 3176	(A,63,78)		CCSRCH181J50			C 3256	(A,98,74)		CKSRYB104K16		
C 3177	(A,63,76)		CCSRCH181J50			C 3258	(A,98,88)		CKSRYB393K16		
C 3178	(A,63,75)		CCSRCH181J50			C 3259	(A,92,103) 68μF/6.3V		CCH1440		
C 3179	(A,57,74)		CKSSYF104Z16			C 3260	(A,96,91)		CCSRCH331J50		
C 3180	(A,55,74)		CKSSYF104Z16			C 3261	(A,97,86)		CCSRCH331J50		
C 3181	(A,30,73)		CKSSYF104Z16			C 3262	(A,91,100)		CKSRYB104K16		
C 3182	(A,59,73)		CKSRYB105K10			C 3263	(A,100,82)		CKSRYB104K16		
C 3183	(A,56,72)		CKSRYB392K50			C 3264	(A,101,78)		CKSYB475K16		
C 3184	(A,55,70)		CKSSYF104Z16			C 3265	(A,102,91)		CKSRYB103K50		
C 3185	(A,55,68)		CKSSYF104Z16			C 3266	(A,99,88)		CKSRYB473K50		F
C 3186	(A,54,66)		CKSSYF104Z16			C 3267	(A,99,85)		CKSRYB103K50		
C 3188	(A,55,66)		CKSSYF104Z16			C 3268	(A,102,88)		CCSRCH101J50		
C 3189	(A,50,64)		CKSSYF104Z16			C 3269	(A,102,85)		CCSRCH100D50		

Circuit Symbol and No.**Part No.**

C 3270	(A,100,83)	CKSRYB393K16
C 3271	(A,105,93)	CKSRYB104K16
C 3272	(A,102,104) 10μF	CCG1138

A

C 3273	(A,98,104) 10μF	CCG1138
C 3274	(A,107,93)	CKSRYB105K10
C 3275	(A,117,104) 10μF	CCG1138
C 3276	(A,108,93)	CCSRCH102J50
C 3278	(A,111,93)	CKSRYB104K16

C 3279	(A,110,80)	CCSRCH102J50
C 3280	(A,107,79)	CKSRYB105K10
C 3281	(A,114,94)	CKSRYB105K10
C 3282	(A,114,93)	CKSRYB103K50
C 3283	(A,109,105)	CKSRYB104K16

B

C 3284	(A,121,86)	CKSYB475K16
C 3285	(A,106,106) 22μF	CCG1183
C 3286	(A,115,107)	CKSRYB104K16
C 3287	(A,117,95)	CKSRYB472K50
C 3288	(A,117,94)	CKSRYB472K50

C 3289	(A,120,77)	CKSRYB474K10
C 3290	(A,117,77)	CKSRYB474K10
C 3291	(A,113,77)	CKSRYB474K10
C 3292	(A,119,90)	CKSRYB104K16
C 3293	(A,120,91)	CKSQYF105Z25

C

C 3294	(A,118,72)	CKSQYB105K16
C 3295	(A,116,72)	CKSQYB105K16
C 3296	(A,112,72)	CKSQYB225K10
C 3297	(A,120,100)	CKSQYB105K16
C 3298	(A,120,98)	CKSQYB105K16

C 3299	(A,108,73)	CKSQYB105K16
C 3300	(A,122,93)	CKSQYF105Z25
C 3301	(A,145,92) 10μF	CCG1138
C 3302	(A,173,91) 10μF	CCG1138
C 3303	(A,149,90) 10μF	CCG1138

C 3304	(A,149,87) 10μF	CCG1138
C 3305	(A,153,85)	CKSRYB104K16
C 3306	(A,155,84)	CKSRYB104K16
C 3307	(A,153,82)	CKSRYB105K10
C 3308	(A,155,86)	CKSRYB105K10

D

C 3309	(A,156,82)	CKSQYB105K16
C 3310	(A,154,88)	CKSRYB104K16
C 3311	(A,156,78)	CKSRYB104K16
C 3312	(A,157,80)	CKSRYB105K10
C 3314	(A,158,74)	CFHXSQ822J16

C 3315	(A,160,74)	CKSRYB152K50
C 3316	(A,166,73)	CKSRYB103K50
C 3317	(A,166,81)	CCSRCH221J50
C 3318	(A,167,83)	CKSRYB473K50
C 3319	(A,167,78)	CKSRYB473K50

E

C 3320	(B,181,83) 10μF	CCG1138
C 3321	(B,181,87) 10μF	CCG1138
C 3322	(B,172,78)	CKSQYB104K50
C 3323	(B,178,78)	CKSQYB104K50
C 3324	(B,182,72)	CKSQYB105K16

C 3325	(B,184,73)	CKSQYB105K16
C 3326	(B,176,33) 22pF	CCG1140
C 3327	(B,172,33) 2700pF	CCG1227
C 3328	(A,164,57)	CKSQYB104K50
C 3335	(A,159,56)	CKSRYB104K16

F

C 3336	(A,155,63)	CKSRYB104K16
--------	------------	--------------

Circuit Symbol and No.**Part No.****Unit Number: CWX3178****Unit Name: DVD Core Unit (MS3R)****MISCELLANEOUS**

IC 401	(A,16,29) IC	PE5430A
IC 402	(A,4,39) IC	S-80827CNNB-B8M
IC 404	(A,4,36) IC	TC7S08F
IC 601	(B,11,18) IC	BA033FP
IC 602	(B,10,71) IC	BA18BC0FP

IC 1101	(A,15,82) IC	AN8703FH
IC 1201	(A,46,39) IC	BA5985FM
IC 1202	(A,45,56) IC	BA6859AFP-Y
IC 1301	(A,16,56) IC	MNZS26EDCUB
Q 1101	(B,36,104) Transistor	2SB1260

Q 1102	(B,36,98) Transistor	2SB1260
Q 1103	(B,25,105) Transistor	UN2211
Q 1104	(A,24,105) Transistor	2SB709A
Q 1105	(A,27,105) Transistor	2SD601A
D 1101	(B,33,104) Diode	1SS355

D 1102	(B,33,96) Diode	1SS355
D 1301	(B,25,55) Diode	UDZ2R7(B)
D 1302	(B,9,81) Chip LED	CL2051RXTU
L 401	(A,9,17) Inductor	CTF1395
L 402	(A,4,33) Inductor	CTF1410

L 1301	(B,15,55) Inductor	CTF1409
L 1302	(B,8,40) Inductor	CTF1409
L 1303	(B,15,58) Inductor	CTF1395
L 1305	(B,6,70) Inductor	CTF1409
X 401	(A,4,29) Ceramic Resonator 16.000MHz	CSS1576

X 1301	(A,33,64) Ceramic Resonator 16.934MHz	CSS1603
--------	---------------------------------------	---------

RESISTORS

R 401	(A,28,23)	RS1/16SS104J
R 403	(A,41,26)	RS1/16SS473J
R 404	(B,6,36)	RS1/16SS473J
R 405	(B,6,38)	RS1/16SS105J
R 406	(B,11,31)	RS1/16SS103J

R 407	(A,2,20)	RS1/16SS104J
R 410	(A,26,39)	RS1/16SS473J
R 414	(A,27,27)	RS1/16SS473J
R 415	(A,19,15)	RS1/16S1002D
R 418	(A,32,23)	RS1/16SS473J

R 419	(A,28,24)	RS1/16SS221J
R 420	(A,29,27)	RS1/16SS103J
R 421	(A,29,28)	RS1/16SS103J
R 423	(A,29,30)	RS1/16SS103J
R 424	(A,26,32)	RS1/16SS221J

R 427	(A,29,25)	RS1/16SS103J
R 433	(B,7,63)	RS1/16SS473J
R 434	(A,27,22)	RS1/16SS223J
R 435	(A,26,23)	RS1/16SS222J
R 436	(A,33,30)	RS1/16SS101J

R 437	(A,33,31)	RS1/16SS101J
R 601	(B,7,64)	RS1/16SS102J
R 603	(A,4,19)	RS1/16SS820J
R 604	(A,8,10)	RS1/16SS820J
R 605	(A,9,10)	RS1/16SS820J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 606	(A,10,10)	RS1/16SS220J		R 1236	(B,13,10)	RS1/16SS683J	
R 607	(A,11,10)	RS1/16SS103J		R 1238	(A,50,64)	RS1/16SS2R2J	
R 608	(A,19,11)	RS1/16SS101J		R 1239	(A,51,64)	RS1/16SS2R2J	
R 612	(B,9,10)	RAB4CQ820J		R 1241	(A,15,11)	RS1/16SS822J	A
R 615	(B,11,10)	RAB4CQ220J		R 1242	(B,17,8)	RS1/16SS243J	
R 616	(B,19,11)	RAB4CQ220J		R 1243	(B,12,84)	RS1/16S391J	
R 617	(B,21,14)	RAB4CQ220J		R 1244	(B,9,84)	RS1/16S471J	
R 618	(B,24,11)	RAB4CQ220J		R 1245	(B,19,97)	RS1/16SS105J	
R 620	(A,14,11)	RS1/16SS103J		R 1301	(B,18,55)	RS1/16SS222J	
R 625	(A,5,19)	RS1/16SS220J		R 1323	(B,21,47)	RS1/16SS221J	
R 626	(A,4,22)	RS1/16SS820J		R 1324	(B,22,47)	RS1/16SS221J	
R 627	(A,7,19)	RS1/16SS220J		R 1334	(A,34,45)	RS1/16SS221J	
R 629	(B,7,13)	RS1/16SS103J		R 1338	(B,26,57)	RS1/16SS472J	
R 1101	(A,24,97)	RS1/16SS101J		R 1339	(A,32,56)	RS1/16SS273J	
R 1102	(B,40,101)	RS1/16SS3R9J		R 1340	(B,26,58)	RS1/16SS472J	B
R 1103	(B,42,101)	RS1/16SS3R9J		R 1341	(A,32,57)	RS1/16SS273J	
R 1104	(B,42,102)	RS1/16SS3R9J		R 1342	(A,34,57)	RS1/16SS273J	
R 1105	(B,40,102)	RS1/16SS3R9J		R 1344	(A,32,58)	RS1/16SS273J	
R 1106	(A,21,97)	RS1/16SS330J		R 1349	(B,27,64)	RS1/16SS562J	
R 1107	(B,40,97)	RS1/16SS3R9J		R 1350	(B,27,63)	RS1/16SS242J	
R 1108	(B,40,98)	RS1/16SS3R9J		R 1352	(B,24,64)	RS1/16S2702D	
R 1109	(B,40,99)	RS1/16SS3R9J		R 1353	(A,28,72)	RS1/16SS102J	
R 1110	(B,40,100)	RS1/16SS3R9J		R 1360	(B,21,65)	RS1/16SS153J	
R 1111	(B,17,104)	RS1/16SS272J		R 1361	(B,18,65)	RS1/16SS105J	
R 1112	(B,18,104)	RS1/16SS472J		R 1362	(A,7,75)	RS1/16SS473J	C
R 1113	(B,23,103)	RS1/16SS102J		R 1363	(A,3,75)	RS1/16SS101J	
R 1124	(A,5,85)	RS1/16SS273J		R 1364	(A,7,74)	RS1/16SS123J	
R 1125	(A,5,84)	RS1/16SS273J		R 1365	(A,4,74)	RS1/16SS101J	
R 1126	(A,6,81)	RS1/16SS224J		R 1367	(B,13,79)	RS1/16SS473J	
R 1133	(A,6,79)	RS1/16S2402D		R 1369	(B,15,76)	RS1/16SS473J	
R 1134	(A,6,77)	RS1/16S1002D		R 1377	(A,2,68)	RS1/16SS103J	
R 1135	(A,2,77)	RS1/16S2702D		R 1378	(A,1,68)	RS1/16SS103J	
R 1140	(A,23,83)	RS1/16SS105J		R 1379	(A,1,44)	RS1/16SS0R0J	
R 1141	(A,25,85)	RS1/16SS105J		R 1380	(A,31,65)	RS1/16SS681J	
R 1142	(B,17,80)	RS1/16SS105J		R 1381	(A,31,63)	RS1/16SS105J	
R 1151	(B,17,93)	RS1/16SS103J		R 1383	(B,24,52)	RS1/16SS0R0J	D
R 1152	(B,13,90)	RS1/16SS103J		R 1384	(A,3,68)	RS1/16SS103J	
R 1201	(A,41,49)	RS1/16SS221J		R 1385	(A,-2,63)	RS1/16SS103J	
R 1202	(A,38,45)	RS1/16SS393J		R 1386	(A,-1,63)	RS1/16SS103J	
R 1203	(A,39,45)	RS1/16SS303J		CAPACITORS			
R 1205	(B,44,43)	RS1/16SS0R0J		C 401	(A,20,39)	CKSRYB474K10	
R 1206	(B,46,44)	RS1/16SS102J		C 402	(B,6,39)	CKSSYB104K10	
R 1209	(B,46,38)	RS1/16SS221J		C 403	(B,6,41)	CKSSYB103K16	
R 1210	(B,50,42)	RS1/16SS393J		C 404	(A,4,32)	CKSRYB105K10	
R 1211	(B,51,44)	RS1/16SS393J		C 405	(A,11,17)	CKSRYB474K10	
R 1212	(B,50,45)	RS1/16SS393J		C 406	(A,19,19)	CKSRYB474K10	E
R 1213	(A,53,47)	RS1/16SS393J		C 407	(A,16,14)	CKSSYB103K16	
R 1214	(B,44,47)	RS1/16SS221J		C 408	(A,19,16)	CKSRYB474K10	
R 1219	(A,51,50)	RS1/16SS221J		C 410	(B,6,37)	CKSSYB103K16	
R 1220	(B,46,39)	RS1/16SS221J		C 411	(B,6,35)	CKSSYB104K10	
R 1221	(A,51,60)	RS1/16S1802D		C 601	(B,8,27) 10μF/10V	CCH1349	
R 1222	(A,27,79)	RS1/16SS221J		C 602	(B,12,27) 10μF/10V	CCH1349	
R 1223	(A,47,64)	RS1/16SS2R2J		C 603	(B,14,27)	CKSSYB102K50	
R 1224	(A,48,64)	RS1/16SS2R2J		C 604	(B,6,27)	CKSRYB474K10	
R 1228	(A,49,64)	RS1/16SS2R2J		C 605	(B,11,63)	CSZSR470M6R3	
R 1231	(B,15,7)	RS1/16SS822J		C 606	(B,7,65)	CKSSYB102K50	F
R 1232	(B,14,7)	RS1/16SS822J		C 607	(B,5,78)	CKSRYB474K10	
R 1233	(B,13,8)	RS1/16SS822J		C 611	(A,15,13)	CCSSCH181J25	
R 1234	(B,15,10)	RS1/16SS563J		C 1101	(B,14,101)	CSZSC470M16	
R 1235	(B,14,10)	RS1/16SS243J					

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 1102	(A,25,100)	CSZSR470M6R3
	C 1103	(B,30,105)	CKSSYB104K10
	C 1104	(B,33,102)	CKSSYB103K16
	C 1105	(A,22,100)	CSZSR101M6R3
	C 1106	(B,32,100)	CKSSYB104K10
	C 1107	(B,31,95)	CKSSYB103K16
	C 1108	(B,23,105)	CKSSYB104K10
	C 1109	(A,21,105)	CKSRYB473K25
	C 1110	(A,30,106)	CKSRYB473K25
	C 1111	(A,32,103)	CKSSYB103K16
	C 1112	(A,22,94)	CKSRYB105K10
	C 1113	(A,24,94)	CKSRYB105K10
	C 1114	(A,31,102)	CKSSYB103K16
	C 1121	(A,6,83)	CKSSYB221K50
	C 1122	(A,2,79)	CKSRYB393K16
B	C 1124	(A,13,74)	CKSSYB221K50
	C 1125	(B,16,76)	CKSSYB104K10
	C 1126	(A,15,75)	CKSSYB104K10
	C 1127	(B,17,76)	CKSSYB104K10
	C 1128	(B,15,80)	CKSRYB472K50
	C 1129	(A,22,79)	CKSSYB104K10
	C 1132	(A,25,83)	CKSRYB561K50
	C 1133	(A,24,86)	CKSRYB561K50
	C 1134	(A,23,86)	CKSRYB273K16
	C 1135	(B,20,81)	CKSSYB473K10
C	C 1136	(A,22,90)	CKSSYB104K10
	C 1137	(A,22,89)	CKSSYB104K10
	C 1138	(A,14,89)	CKSSYB104K10
	C 1139	(A,16,90)	CKSSYB104K10
	C 1201	(A,39,47)	CKSSYB104K10
	C 1204	(B,1,72)	CEVW101M16
	C 1205	(A,39,36)	CKSRYB104K16
	C 1206	(B,45,35)	CKSRYB103K50
	C 1207	(B,45,34)	CKSRYB103K50
	C 1208	(B,51,42)	CCSSCH5R0C50
D	C 1209	(B,51,45)	CCSSCH470J50
	C 1210	(A,51,52)	CKSSYB104K10
	C 1301	(A,6,42)	CKSSYB104K10
	C 1302	(A,13,41)	CKSSYB104K10
	C 1303	(A,15,41)	CKSRYB224K10
	C 1304	(A,20,42)	CKSSYB104K10
	C 1305	(A,23,41)	CKSRYB224K10
	C 1306	(A,32,45)	CKSSYB471K50
	C 1307	(A,33,52)	CKSSYB104K10
	C 1308	(A,31,52)	CKSRYB224K10
E	C 1309	(A,35,54)	CKSSYB104K10
	C 1310	(A,35,55)	CKSSYB104K10
	C 1311	(A,35,57)	CKSSYB103K16
	C 1312	(A,37,58)	CKSSYB103K16
	C 1313	(A,30,61)	CKSSYB104K10
	C 1314	(A,34,61)	CKSRYB224K10
	C 1315	(B,27,65)	CKSRYB102K50
	C 1316	(B,24,65)	CKSRYB393K16
	C 1317	(A,30,68)	CKSSYB104K10
	C 1318	(A,30,71)	CKSSYB103K16
	C 1319	(A,27,77)	CKSSYB104K10
	C 1320	(A,24,78)	CKSSYB103K16
	C 1329	(A,22,72)	CKSSYB104K10
	C 1330	(B,24,67)	CKSRYB183K50
	C 1331	(B,21,66)	CCSSCH470J50

C 1332	(A,20,72)	CKSRYB224K10
C 1333	(A,19,72)	CKSRYB105K10
C 1334	(B,15,67)	CKSRYB102K50
C 1335	(B,18,63)	CKSSYB562K25
C 1336	(A,18,72)	CKSSYB104K10
C 1337	(A,16,72)	CKSRYB102K50
C 1338	(B,16,69)	CKSRYB102K50
C 1339	(A,15,72)	CKSRYB102K50
C 1340	(A,13,71)	CKSSYB104K10
C 1341	(B,16,66)	CCSSCH101J50
C 1342	(B,16,65)	CKSRYB391K50
C 1343	(B,16,63)	CKSRYB471K50
C 1344	(B,16,62)	CKSRYB331K50
C 1346	(A,8,71)	CKSRYB224K10
C 1347	(A,1,61)	CKSSYB104K10
C 1348	(A,1,57)	CKSSYB104K10
C 1349	(A,2,56)	CKSSYB104K10
C 1350	(A,2,52)	CKSSYB104K10
C 1351	(A,1,48)	CKSSYB104K10
C 1352	(A,1,46)	CKSSYB104K10
C 1355	(B,2,59)	CSZS100M6R3

**Unit Number: CWX3154****Unit Name: Compound Unit(A)**

Q 1299	Photo-taransistor	CPT231SCTD
S 1201	Spring Switch(12cm)	CSN1069
S 1202	Spring Switch(8cm)	CSN1069
S 1203	Spring Switch(DISC SENS)	CSN1069
S 1204	Spring Switch(DISC SENS)	CSN1070
S 1205	Spring Switch(8cm)	CSN1070
R 1298		RS1/16S0R0J
R 1299		RS1/16S0R0J

**Unit Number: CWX3156****Unit Name: Compound Unit(B)**

S 1206	Switch(CLAMP)	CSN1051
--------	---------------	---------

**Unit Number: CWX3284****Unit Name: Control Unit(G3)****MISCELLANEOUS**

IC 201	(A,44,26) IC	UPD63761AGJ
IC 202	(B,62,32) IC	MSM56V16160F8TKFM
IC 203	(A,63,11) IC	NJM2391DL1-33
IC 204	(A,53,12) IC	S-L2980A15MC-C6A
IC 301	(A,67,22) IC	BA6859AFP-Y
IC 302	(A,65,38) IC	BD7962FM
IC 701	(B,16,23) IC	PE5524A
IC 702	(A,5,24) IC	BR93L56RFVM-W
IC 703	(A,20,26) IC	S-812C33AMC-C2N
Q 101	(A,41,44) Transistor	2SB1132
Q 601	(B,32,11) Transistor	IMH20
Q 602	(B,40,11) Transistor	2SB709A

5				6				7				8			
Circuit Symbol and No.				Part No.				Circuit Symbol and No.				Part No.			
Q 701	(A,15,24)	Transistor		UMF21N				R 601	(A,33,9)			RS1/16SS101J			
D 201	(B,72,11)	Diode		1SR154-400				R 602	(A,32,13)			RS1/16SS101J			
D 202	(B,72,14)	Diode		1SR154-400				R 603	(B,35,9)			RS1/16SS223J			A
D 601	(B,37,11)	Diode		M1MA152WAT1G				R 604	(A,32,15)			RS1/16SS223J			
L 102	(A,31,45)	Inductor		CTF1389				R 605	(B,33,14)			RS1/16SS103J			
L 206	(A,40,12)	Inductor		CTF1645											
X 201	(A,42,9)	Ceramic Resonator 16.934MHz		CSS1603				R 606	(B,33,13)			RS1/16SS0R0J			
X 701	(B,16,11)	Ceramic Resonator 4.000MHz		CSS1652				R 701	(A,23,20)			RS1/16SS103J			
RESISTORS								R 702	(A,24,22)			RS1/16SS103J			
R 101	(A,15,37)			RS1/10SR471J				R 703	(A,21,23)			RS1/16SS184J			
R 102	(A,16,37)			RS1/10SR331J				R 704	(A,21,20)			RS1/16SS223J			
R 103	(A,49,45)			RS1/10SR2R7J				R 705	(B,32,23)			RAB4CQ221J			
R 104	(A,47,45)			RS1/10SR2R4J				R 706	(B,28,20)			RS1/16SS221J			
R 105	(A,46,45)			RS1/10SR2R4J				R 707	(A,14,15)			RS1/16SS473J			B
R 108	(B,34,30)			RS1/16SS272J				R 708	(A,26,17)			RS1/16SS103J			
R 201	(B,44,35)			RS1/16SS393J				R 709	(A,12,26)			RS1/16SS103J			
R 202	(B,44,36)			RS1/16SS103J				R 710	(B,26,17)			RS1/16SS473J			
R 203	(A,38,39)			RS1/16SS222J				R 711	(B,27,17)			RS1/16SS123J			
R 204	(A,34,39)			RS1/16SS562J				R 712	(B,29,22)			RAB4CQ221J			
R 205	(A,35,36)			RS1/16SS472J				R 713	(B,28,31)			RAB4CQ221J			
R 207	(A,36,37)			RS1/16SS101J				R 714	(A,12,25)			RS1/16SS272J			
R 208	(B,51,20)			RS1/16SS333J				R 715	(A,19,15)			RS1/16SS473J			
R 209	(B,46,39)			RS1/16SS472J				R 716	(B,20,34)			RS1/16SS221J			
R 212	(B,47,39)			RS1/16SS472J				R 717	(B,19,33)			RS1/16SS221J			
R 214	(A,50,40)			RS1/16SS103J				R 718	(B,18,33)			RS1/16SS221J			C
R 215	(A,28,23)			RS1/16SS102J				R 719	(B,17,36)			RS1/16SS473J			
R 216	(A,48,41)			RS1/16SS472J				R 720	(B,16,33)			RS1/16SS102J			
R 218	(A,50,39)			RS1/16SS103J				R 721	(A,15,15)			RS1/16SS102J			
R 219	(A,49,39)			RS1/16SS472J				R 723	(B,13,9)			RS1/16SS473J			
R 221	(B,33,21)			RS1/16SS333J				R 724	(B,15,33)			RS1/16SS471J			
R 222	(B,36,18)			RS1/16SS221J				R 725	(B,12,9)			RS1/16SS473J			
R 223	(A,49,12)			RS1/16SS333J				R 726	(A,12,18)			RS1/16SS472J			
R 224	(A,47,11)			RS1/16SS333J				R 730	(A,11,15)			RS1/16SS101J			
R 227	(B,51,22)			RS1/16SS121J				R 731	(B,9,33)			RS1/16SS473J			
R 229	(A,41,41)			RS1/16SS0R0J				R 735	(A,9,25)			RS1/16SS472J			
R 237	(A,37,14)			RS1/16SS0R0J				R 736	(A,9,24)			RS1/16SS473J			D
R 238	(B,43,14)			RS1/16SS0R0J				R 740	(A,7,14)			RS1/16SS104J			
R 301	(B,47,21)			RS1/16SS221J				R 742	(A,12,22)			RS1/16SS103J			
R 302	(A,71,46)			RS1/16SS473J				R 743	(A,21,30)			RS1/16SS103J			
R 303	(B,68,46)			RS1/16SS473J				R 744	(A,20,31)			RS1/16SS103J			
R 304	(A,72,44)			RS1/16SS333J				R 745	(B,12,7)			RS1/16SS104J			
R 305	(B,68,43)			RS1/16SS822J				R 747	(A,11,28)			RS1/16SS104J			
R 306	(B,67,43)			RS1/16SS822J				R 749	(A,13,30)			RS1/16SS104J			
R 307	(B,67,41)			RS1/16SS333J				R 902	(B,18,6)			RS1/16SS221J			
R 308	(A,70,16)			RS1/16SS102J				R 903	(A,9,13)			RS1/16SS102J			
R 309	(B,45,23)			RS1/16SS102J				R 904	(B,15,6)			RS1/16SS101J			
R 310	(A,61,16)			RS1/16SS221J				R 906	(B,20,4)			RS1/16SS221J			E
R 311	(B,65,44)			RS1/16SS822J				R 909	(A,20,22)			RS1/16SS473J			
R 312	(B,63,42)			RS1/16SS822J				R 912	(A,8,18)			RS1/16SS0R0J			
R 313	(B,65,43)			RS1/16SS273J				R 914	(B,25,4)			RS1/16SS0R0J			
R 314	(B,61,42)			RS1/16SS183J				CAPACITORS							
R 315	(B,70,42)			RAB4CQ103J				C 102	(B,25,37)			CKSSYB104K10			
R 316	(A,73,16)			RS1/10SR1R0J				C 103	(A,37,46)			CKSSYB104K10			
R 317	(A,73,14)			RS1/10SR2R2J				C 104	(A,35,43)			CSZS150M6R3			
R 319	(A,71,30)			RS1/16SS393J				C 201	(B,44,33)			CKSSYB182K50			
R 320	(A,63,30)			RS1/16SS333J				C 202	(B,43,33)			CKSSYB473K10			
R 321	(A,69,30)			RS1/16SS273J				C 203	(A,38,38)			CKSSYB104K10			F
R 322	(A,65,30)			RS1/16SS183J				C 204	(B,32,29)			CKSSYB102K50			
R 323	(A,73,45)			RS1/16SS822J				C 205	(A,33,39)			CCSSCH5R0C50			

	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	C 206	(A,40,39)	CKSSYB152K50
	C 207	(A,35,39)	CCSSCH330J50
	C 208	(A,33,34) 0.47μF	CCG1213
	C 209	(B,35,28)	CKSSYB103K16
	C 210	(A,27,31)	CCSSCH470J50
	C 211	(A,29,29)	CKSSYB682K25
	C 212	(A,43,41)	CKSSYB104K10
	C 213	(A,38,37)	CKSSYB104K10
	C 214	(A,29,31)	CCSSCH680J50
	C 216	(A,50,41)	CKSSYB152K50
B	C 217	(A,29,24)	CKSSYB104K10
	C 218	(A,29,22)	CKSSYB102K50
	C 219	(A,51,39)	CKSSYB102K50
	C 220	(A,51,37)	CKSSYB104K10
	C 221	(B,51,24)	CKSSYB104K10
C	C 222	(A,36,16)	CKSSYB104K10
	C 223	(B,62,24)	CKSSYB104K10
	C 225	(A,36,15)	CKSSYB104K10
	C 226	(A,36,11)	CKSRYB105K6R3
	C 227	(B,36,13)	CKSSYB103K16
	C 228	(B,67,24)	CKSSYB104K10
	C 230	(B,42,15)	CKSSYB104K10
	C 231	(A,40,11)	CKSSYB104K10
	C 232	(B,69,24)	CKSSYB104K10
	C 233	(A,54,15)	CKSSYB104K10
D	C 234	(A,53,9)	CKSRYB105K6R3
	C 235	(B,58,20)	CEVW221M4
	C 236	(A,72,9) 10μF/6.3V	CCH1470
	C 237	(B,57,9)	CKSSYB104K10
	C 238	(A,71,6)	CKSRYB474K10
	C 242	(B,65,40)	CKSSYB104K10
	C 243	(B,47,41)	CKSSYB104K10
	C 301	(B,61,43)	CKSSYB221K50
	C 302	(B,65,42)	CCSSCH151J50
	C 303	(A,63,16)	CKSSYB104K10
E	C 304	(A,60,31)	CKSQYB475K10
	C 305	(B,67,20)	CEVW101M10
	C 306	(A,71,31)	CKSSYB472K25
	C 307	(A,63,31)	CKSSYB103K16
	C 601	(A,36,9)	CKSQYB475K6R3
	C 602	(A,35,13)	CKSQYB475K6R3
	C 603	(A,33,10)	CCSRCH102J50
	C 604	(A,33,15)	CCSRCH102J50
	C 701	(A,14,22)	CKSRYB104K25
	C 703	(B,41,20)	CKSSYB103K16
F	C 704	(B,38,20)	CKSSYB103K16
	C 705	(B,41,19)	CKSSYB103K16
	C 706	(B,38,19)	CKSSYB103K16
	C 709	(A,23,15)	CKSRYB105K6R3
	C 711	(B,20,33)	CKSSYB104K10
	C 712	(A,20,15)	CKSSYB103K16
	C 713	(A,17,19)	CKSQYB475K6R3
	C 714	(A,14,18)	CKSSYB222K50
	C 715	(A,8,20)	CKSSYB104K10
	C 717	(A,16,27)	CKSRYB105K6R3
	C 718	(A,23,25)	CKSSYB103K16
	C 719	(A,22,18)	CKSSYB103K16
	C 901	(A,15,33)	CKSSYB104K10
	C 902	(A,27,17)	CKSSYB104K10
	C 903	(B,29,10)	CKSSYB104K10

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 904	(B,73,8)	CKSSYB104K10
C 905	(B,60,42)	CKSSYB104K10
C 906	(B,8,5)	CKSSYB104K10



Unit Number: CWX2986
Unit Name: RPS PCB Assy

MISCELLANEOUS

VR11	(A,8,10) Semi-fixed 1kΩ(B)	CCP1442
VR12	(A,9,23) Semi-fixed 1kΩ(B)	CCP1442
R 11	(A,8,15)	RS1/16S562J
R 12	(A,10,15)	RS1/16S472J
R 13	(A,8,18)	RS1/16S562J
R 14	(A,9,6)	RS1/16S562J

Miscellaneous Parts List

	Pickup Unit(Service)	CXX2030
M 1	Motor Unit(LOADING)	CXC4659
M 2	Motor Unit(CARRIAGE)	CXC4314
M 3	Motor(SPINDLE)	CXM1308
M 1	Fan Motor	CXM1295
M 2	Motor Unit	CXC3854
M 1	Cam Motor Assy(CAM)	CXC5900
M 2	ELV Motor Assy(ELV)	CXC5902
VR13	Variable Resistor 10kΩ(B)	CCW1029