9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to ▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

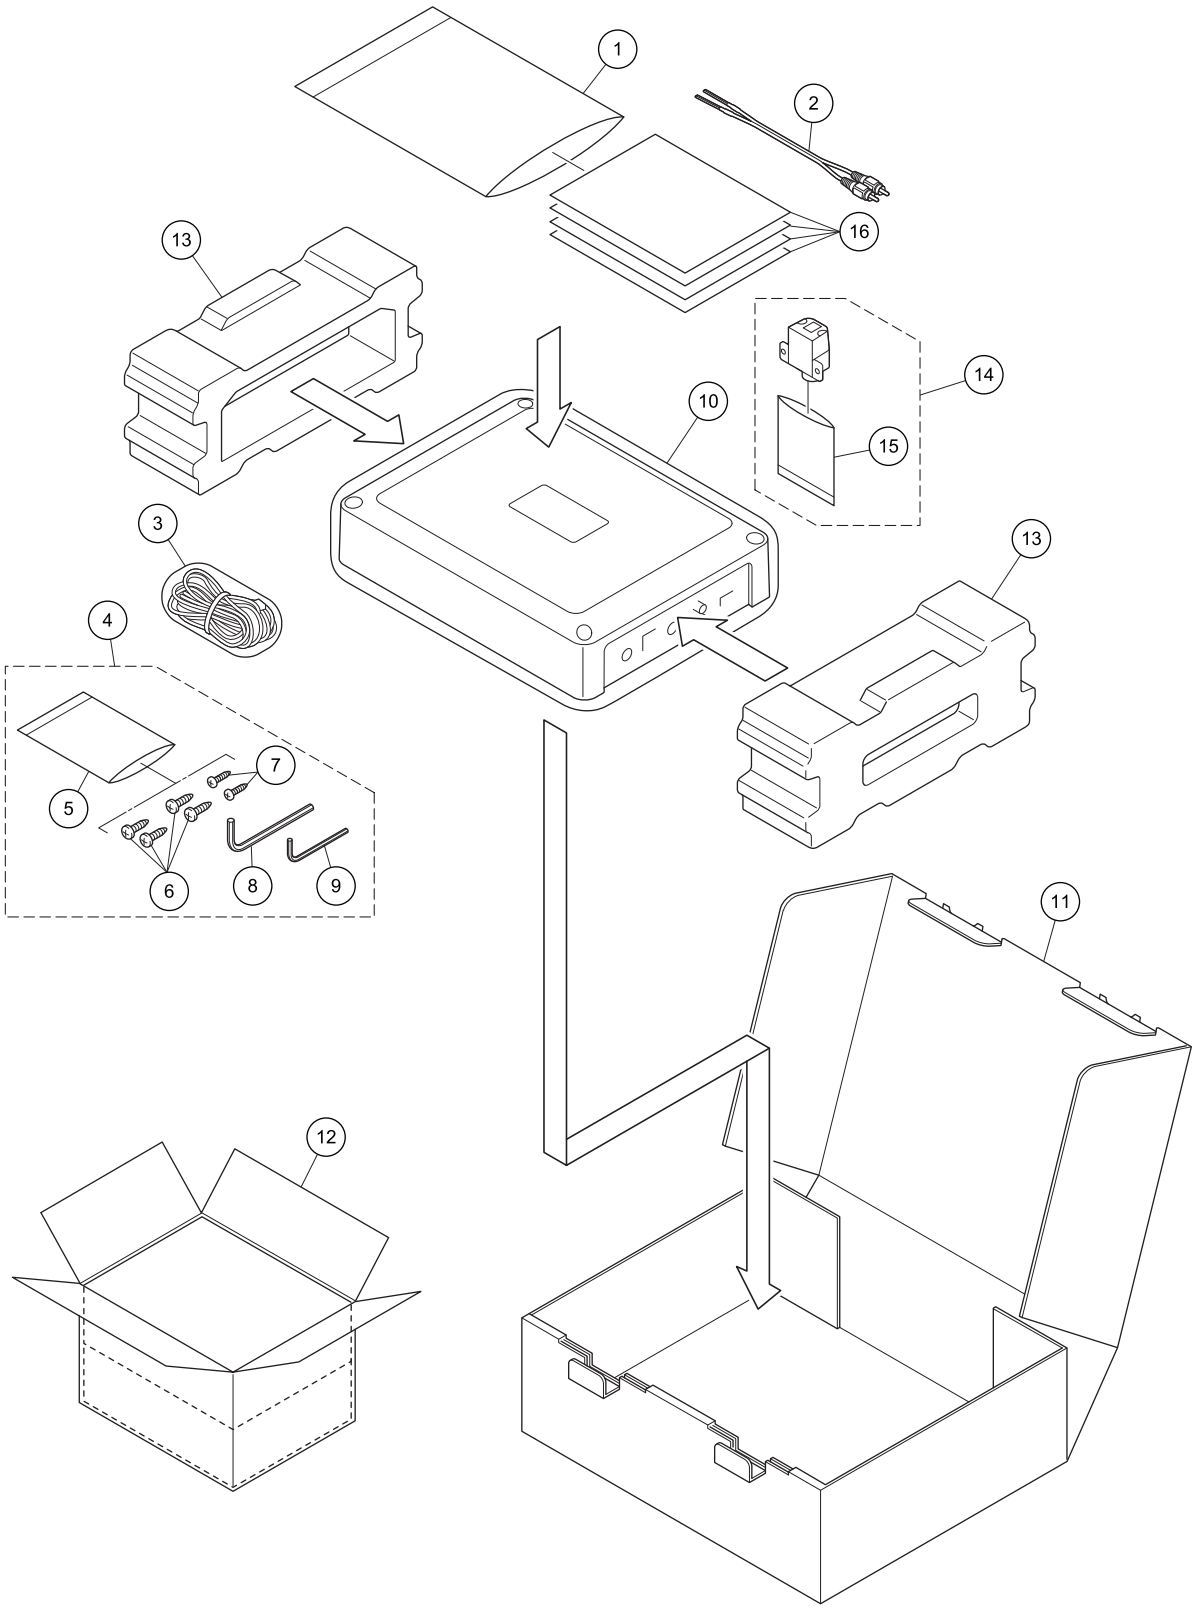

(1)PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Polyethylene Bag	CEG1116
	2	Cord Assy	YDE5010
	3	Cord Assy	YDP5015
	4	Screw Assy	YEA5034
*	5	Polyethylene Sheet	CNM4338
	6	Screw	YBA5003
	7	Screw	YBA5004
	8	Shaft	YLP5003
	9	Shaft	YLP5004
	10	Polyethylene Bag	See Contrast table(2)
	11	Unit Box	See Contrast table(2)
	12	Contain Box	See Contrast table(2)
	13	Protector	YHP5036
	14	Remote Assy	YXC5100
*	15	Polyethylene Bag	CEG1171
	16-1	Owner's Manual	See Contrast table(2)
	16-2	Owner's Manual	See Contrast table(2)
*	16-3	Card	See Contrast table(2)
*	16-4	Warranty Card	See Contrast table(2)

(2) CONTRAST TABLE

GM-D8400M/XS/UC, GM-D8400M/XS/EW5 and GM-D8400M/XS/ES are constructed the same except for the following:

Mark	No.	Description	GM-D8400M/XS/UC	GM-D8400M/XS/EW5	GM-D8400M/XS/ES
	10	Polyethylene Bag	YEG5004	YEG5003	YEG5003
	11	Unit Box	YHG5168	YHG5167	YHG5166
	12	Contain Box	YHL5170	YHL5169	YHL5168
	16-1	Owner's Manual	YRD5156	YRD5155	YRD5153
	16-2	Owner's Manual	Not used	Not used	YRD5154
*	16-3	Card	ARY1048	Not used	Not used
*	16-4	Warranty Card	Not used	CRY1265	Not used

Owner's Manual,Installation Manual

Part No.	Language
YRD5156	English, French, Spanish
YRD5155	English, Spanish, German, French, Italian, Dutch, Russian
YRD5153	English, Spanish
YRD5154	Portuguese(B), Arabic

9.2 EXTERIOR

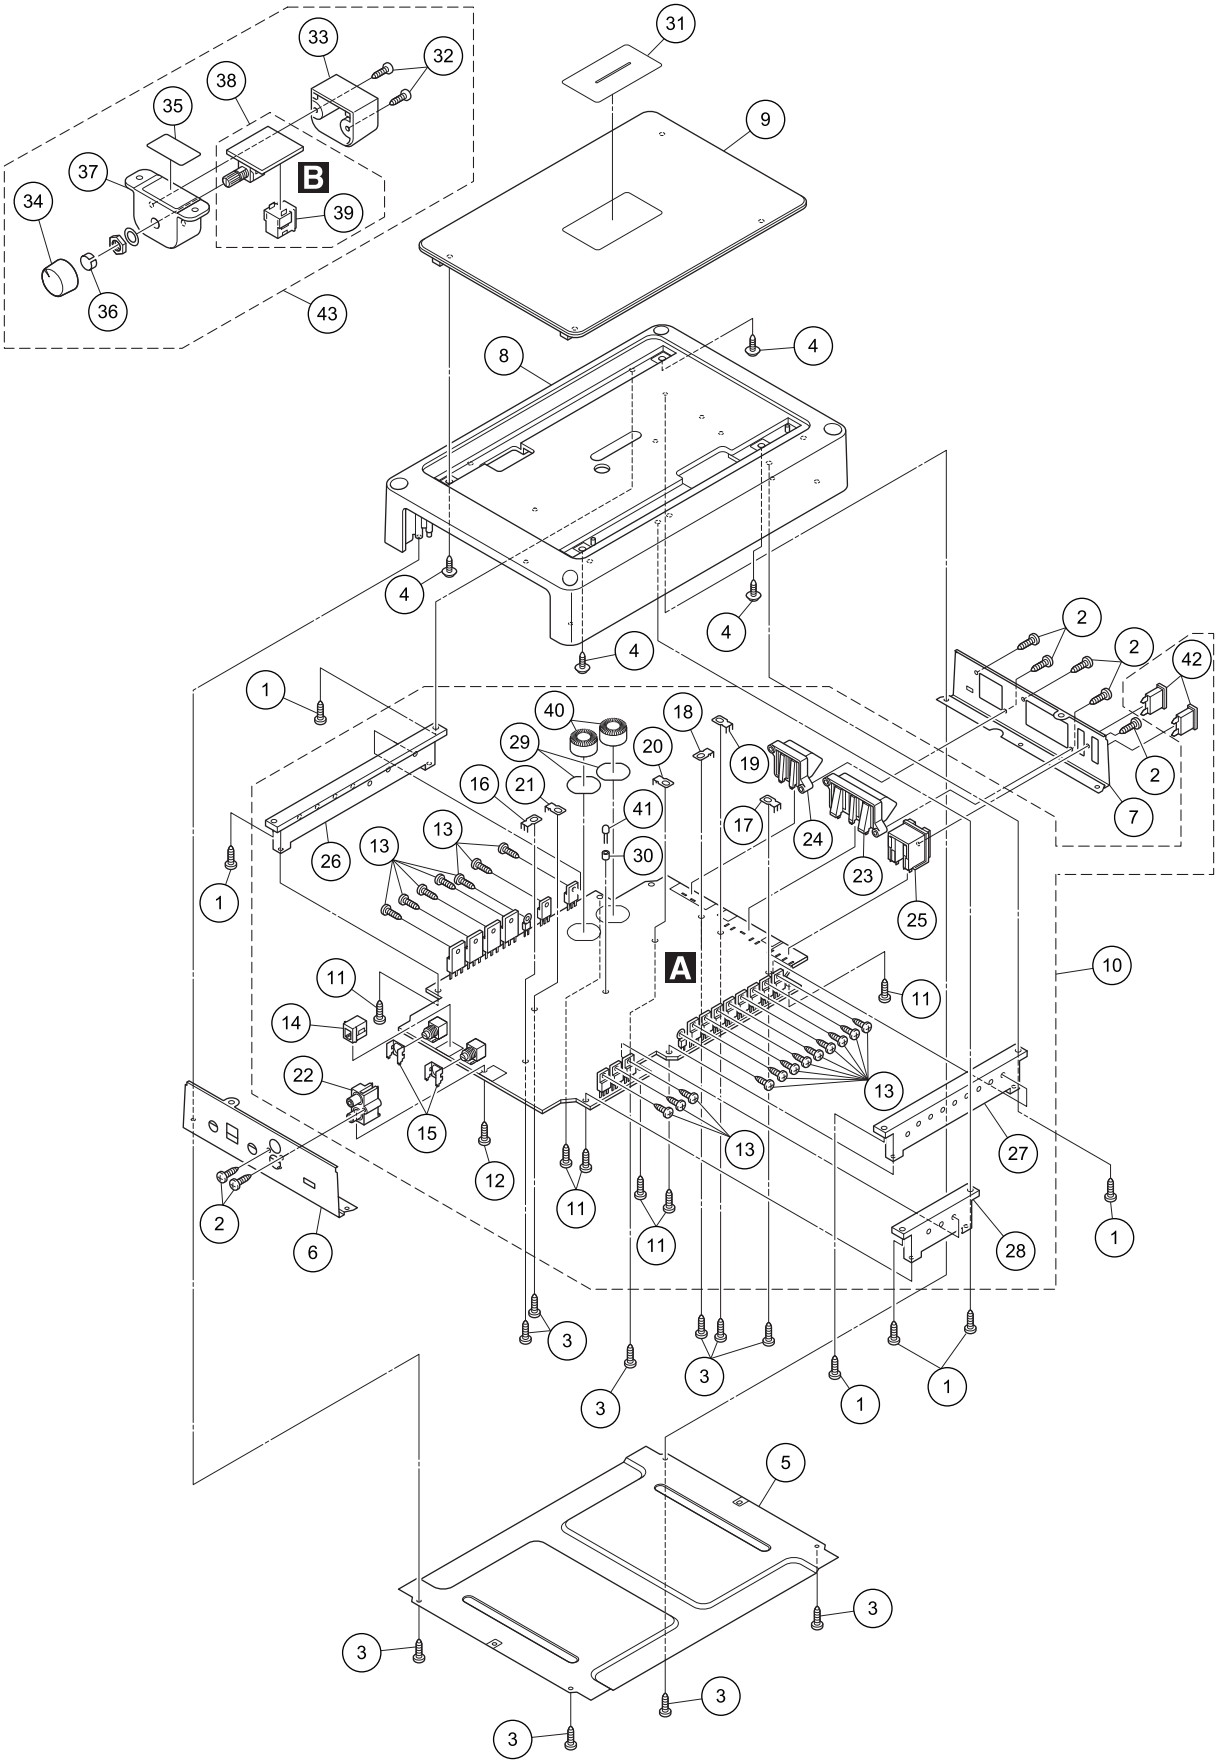

(1)EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BBZ30P100FTB
	2	Screw	BPZ30P100FTB
	3	Screw(M3 x 8)	CBA2011
	4	Screw	IBZ30P100FTC
	5	Case	YNB5034
	6	Panel	YNB5037
	7	Panel	See Contrast table(2)
	8	Heat Sink	YNR5097
	9	Cover	YNR5099
	10	Amp Unit	See Contrast table(2)
	11	Screw	BBZ30P080FSN
	12	Screw	BPZ30P100FSN
	13	Screw(M3 x 8)	CBA2011
	14	Connector(CN501)	CKS4962
	15	Holder	CND2466
	16	Terminal(CN103)	VNF1084
	17	Terminal(CN301)	VNF1084
	18	Terminal(CN302)	VNF1084
	19	Terminal(CN602)	VNF1084
	20	Terminal(CN605)	VNF1084
	21	Terminal(CN606)	VNF1084
	22	RCA Pin Jack(CN101)	YKB5009
	23	Terminal(CN601)	YKE5015
	24	Terminal(CN303)	YKE5016
	25	Fuse Holder(CN603)	YKR5002
	26	Sub Heat Sink	YNR5101
	27	Sub Heat Sink	YNR5121
	28	Sub Heat Sink	YNR5122
	29	Insulator	YNM5045
	30	Spacer	YNS5118
*	31	Badge	YAH5040
	32	Screw	BPZ20P100FTB
	33	Cover	CNS8141
	34	Knob	YAA5040
	35	Name Label	YAL5417
	36	Spring	YBL5010
	37	Grille	YNS5389
	38	Remote Unit Assy	YWM5247
	39	Connector(CN401)	CKS4962
	40	Choke Coil(L602, L603)	YTH5007
	41	LED(D606)	NSPB346BS-5859
⚠	42	Fuse(30 A)	CEK1330
	43	Remote Assy	YXC5100

(2) CONTRAST TABLE

GM-D8400M/XS/UC, GM-D8400M/XS/EW5 and GM-D8400M/XS/ES are constructed the same except for the following:

Mark	No.	Description	GM-D8400M/XS/UC	GM-D8400M/XS/EW5	GM-D8400M/XS/ES
	7	Panel	YNB5040	YNB5036	YNB5036
	10	Amp Unit	YWH5027	YWH5025	YWH5025

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Unit Number : YWH5027(UC)

Unit Number : YWH5025(ES,EW5)

Unit Name : Amp Unit

Unit Number : YWM5247

Unit Name : Remote Unit

A

Unit Number : YWH5027(UC)

Unit Number : YWH5025(ES,EW5)

Unit Name : Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	(B,48,60) IC	NJM2068MD
IC 102	(B,35,60) IC	NJM2068MD
IC 103	(B,25,84) IC	NJM4558MD
IC 105	(B,41,107) IC	NJM4558MD
IC 301	(B,38,92) IC	NJM311M
IC 302	(B,52,90) IC	NJM311M
IC 303	(B,62,78) IC	TC74AC14F
IC 305	(B,82,102) IC	TND505MD
IC 501	(B,29,152) IC	NJM4558MD
IC 502	(B,28,131) IC	NJM2172V
IC 601	(A,105,73) IC	PA2027A
IC 602	(B,117,43) IC	UPC494GS
IC 603	(A,57,40) IC	TA78L005AP
Q 301	(B,62,93) Transistor	IMT4
Q 302	(B,55,153) Transistor	2SC5565
Q 303	(B,55,164) Transistor	2SA2012
Q 304	(B,47,154) Transistor	2SC5565
Q 305	(B,47,165) Transistor	2SA2012
Q 306	(A,127,188) FET	FKP250A
Q 307	(A,107,188) FET	FKP250A
Q 308	(A,87,188) FET	FKP250A
Q 309	(A,67,188) FET	FKP250A
Q 601	(B,118,72) Transistor	2SC4081
Q 602	(B,115,70) Chip Transistor	2SA1576A
Q 603	(B,111,62) Chip Transistor	DTA114EUA
Q 604	(B,108,58) Chip Transistor	DTC114TUA
Q 605	(A,91,62) Transistor	2SB1243
Q 606	(B,124,50) Transistor	2SC4081
Q 607	(B,127,50) Chip Transistor	DTC114TUA
Q 608	(B,129,36) Transistor	2SD1766
Q 609	(B,119,25) Transistor	2SB1188
Q 610	(B,127,25) Transistor	2SB1188
Q 611	(B,119,33) Transistor	2SD1766
Q 612	(A,226,6) Transistor	FKV550N
Q 613	(A,174,6) Transistor	FKV550N
Q 614	(A,213,6) Transistor	FKV550N
Q 615	(A,161,6) Transistor	FKV550N
Q 616	(A,200,6) Transistor	FKV550N
Q 617	(A,149,6) Transistor	FKV550N
Q 618	(A,187,6) Transistor	FKV550N
Q 619	(A,136,6) Transistor	FKV550N
Q 620	(A,49,6) Transistor	2SD2395
Q 621	(A,61,6) Transistor	2SB1566
Q 622	(A,74,6) Transistor	2SC5511
Q 691	(B,98,53) Chip Transistor	DTC124EUA
Q 901	(B,39,168) Transistor	2SA1579
Q 902	(B,38,159) Transistor	2SC4102
Q 903	(B,39,154) Transistor	2SC4102
Q 904	(B,36,153) Transistor	2SA1579
Q 905	(B,38,149) Transistor	2SA1579
Q 911	(B,9,162) Transistor	2SC4102
Q 912	(B,15,159) Chip Transistor	2SA1576A
Q 921	(B,258,161) Transistor	2SC4081
Q 922	(B,253,158) Transistor	2SC4081
Q 923	(B,254,162) Chip Transistor	2SA1576A
Q 931	(B,75,86) Transistor	2SA1579
Q 932	(B,76,93) Transistor	2SC4081
Q 933	(B,72,84) Chip Transistor	DTC114YUA
Q 941	(B,92,48) Transistor	2SC4081
Q 942	(B,91,52) Chip Digital Transistor	DTA124EUA
D 101	(B,12,68) Diode	1SR154-400
D 102	(B,20,69) Diode	1SR154-400
D 301	(B,32,102) Diode	MA111
D 302	(B,46,118) Diode	MA111
D 303	(B,60,70) Diode	MA111
D 304	(B,64,70) Diode	MA111

Circuit Symbol and No.		Part No.
D 305	(B,70,78) Diode	MA111
D 309	(B,93,95) Diode	RF101L2S
D 601	(A,216,40) Diode	RM4Z-LFJ4
D 602	(B,117,78) Diode	UDZS7R5(B)
D 603	(B,111,74) Diode	1SR154-400
D 604	(B,108,69) Diode	1SR154-400
D 605	(B,82,77) Diode	MA111
D 606	(A,139,97) LED	NSPB346BS-5859
D 607	(B,130,49) Diode	MA111
D 608	(B,123,62) Diode	DAN202U
D 609	(B,117,62) Diode	DAN202U
D 610	(A,175,186) Diode	FML22S
D 611	(A,205,186) Diode	FML22R
D 612	(B,43,27) Diode	UDZS16(B)
D 613	(B,56,27) Diode	UDZS16(B)
D 614	(B,53,37) Diode	MA111
D 615	(B,81,27) Diode	UDZS13(B)
D 691	(B,29,44) Diode	DAN202U
D 901	(B,30,164) Diode	MA111
D 911	(B,21,160) Diode	MA111
D 921	(B,262,157) Diode	MA111
D 922	(B,248,161) Diode	MA111
D 941	(B,81,52) Diode	MA111
ZNR101	(B,7,70) Surge Protector	CSA30-201N
ZNR102	(B,15,71) Surge Protector	CSA30-201N
L 301	(A,79,150) Choke Coil 93.75 µH	YTH5009
L 601	(A,230,58) Choke Coil 50 µH	YTH5010
L 602	(A,179,160) Choke Coil 220 µH	YTH5007
L 603	(A,212,160) Choke Coil 220 µH	YTH5007
T 601	(A,177,58) Transformer	YTT5008
TH601	(A,126,8) Thermistor	CCX1013
TH602	(A,154,185) Thermistor	CCX1013
TH603	(A,149,45) Thermistor	CCX1064
TH604	(A,59,140) Thermistor	CCX1064
S 101	(A,12,53) Slide Switch(RCA/SP)	CSH1042
S 601	(A,270,160) Slide Switch(BFC)(ES,EW5)	CSH1072
VR101	(A,18,109) Variable Resistor 20 kohm(C)	YCS5002
VR102	(A,18,149) Volume 10 kohm(A)	CCS1265
VR301	(A,29,107) Semi-fixed 10 kohm(OB)	CCP1506
⚠FU601	Fuse 30 A	CEK1330
⚠FU602	Fuse 30 A	CEK1330

RESISTORS

R 101	(A,19,40)	RD1/4PU683J
R 102	(A,24,50)	RD1/4PU683J
R 103	(B,44,51)	RS1/16S471J
R 104	(B,31,51)	RS1/16S471J
R 105	(B,50,51)	RS1/16S223J
R 106	(B,36,51)	RS1/16S223J
R 107	(B,44,60) 10 kohm	CCN1152
R 108	(B,31,60) 10 kohm	CCN1152
R 109	(B,46,67) 10 kohm	CCN1152
R 110	(B,32,67) 10 kohm	CCN1152
R 111	(B,43,64) 10 kohm	CCN1152
R 112	(B,29,64) 10 kohm	CCN1152
R 113	(B,49,68) 10 kohm	CCN1152
R 114	(B,35,66) 10 kohm	CCN1152
R 115	(B,50,71)	RS1/16S222J
R 116	(B,38,67)	RS1/16S222J
R 118	(B,16,101)	RS1/16S272J
R 119	(B,26,101)	RS1/16S272J
R 120	(B,16,153)	RS1/16S182J
R 122	(B,20,153)	RS1/16S470J
R 127	(B,39,114)	RS1/16S682J
R 128	(B,37,111)	RS1/16S682J
R 301	(B,34,103)	RS1/16S223J
R 302	(B,46,114)	RS1/16S223J
R 303	(B,34,100)	RS1/16S203J
R 304	(B,48,115)	RS1/16S153J
R 305	(B,43,100)	RS1/16S272J
R 306	(B,40,100)	RS1/16S105J
R 307	(B,52,97)	RS1/16S102J
R 308	(B,50,97)	RS1/16S222J
R 309	(B,40,85)	RS1/16S223J
R 310	(B,41,85)	RS1/16S562J
R 311	(B,38,85)	RS1/16S273J
R 312	(A,48,89)	RD1/4PU332J
R 313	(B,53,97)	RS1/16S223J
R 314	(B,55,97)	RS1/16S104J
R 315	(B,67,85)	RS1/16S102J
R 316	(B,66,71)	RS1/16S562J
R 317	(B,61,72)	RS1/16S102J
R 318	(B,68,78)	RS1/16S102J
R 319	(B,59,85)	RS1/16S332J
R 320	(B,62,85)	RS1/16S332J
R 321	(B,60,98)	RS1/16S822J
R 322	(B,64,98)	RS1/16S822J
R 323	(A,85,95)	RD1/4PU1R0J
R 324	(A,59,165)	RD1/4PU1R0J
R 325	(A,51,166)	RD1/4PU1R0J
R 326	(B,57,170)	RS1/16S104J
R 327	(B,49,170)	RS1/16S104J
R 328	(A,143,175)	RS1/2PMF180J
R 329	(A,118,175)	RS1/2PMF180J
R 330	(A,92,175)	RS1/2PMF180J
R 331	(A,78,175)	RS1/2PMF180J
R 332	(A,127,170)	RS2PMF100J
R 333	(A,81,170)	RS2PMF100J
R 334	(A,122,166) 10 mohm	YCN5005
R 335	(A,115,156) 10 mohm	YCN5005
R 336	(A,68,125)	RS2PMF4R7J
R 339	(A,60,157)	RS1PMF333J
R 340	(A,50,141)	RS1/2PMF223J
R 341	(A,47,136)	RD1/4PU102J
R 342	(A,50,129)	RD1/4PU222J
R 501	(B,23,145)	RS1/16S393J
R 502	(B,28,145)	RS1/16S683J
R 503	(B,23,142)	RS1/16S333J
R 504	(B,30,145)	RS1/16S473J
R 505	(B,33,145)	RS1/16S223J
R 506	(B,33,140)	RS1/16S102J
R 507	(B,24,131)	RS1/16S103J
R 508	(B,37,127)	RS1/16S103J
R 509	(B,40,117)	RS1/16S682J
R 511	(B,32,131)	RS1/16S101J
R 512	(B,42,117)	RS1/16S182J
R 513	(B,18,123)	RS1/16S184J
R 601	(A,249,78)	RD1/4PU222J
R 602	(B,119,75)	RS1/16S473J

Circuit Symbol and No.			Part No.
R 603	(B,114,77)		RS1/16S103J
R 604	(B,116,75)		RS1/16S103J
R 605	(B,117,68)		RS1/16S222J
R 606	(B,114,67)		RS1/16S472J
R 607	(B,95,79)		RS1/16S472J
R 608	(B,99,79)		RS1/16S472J
R 609	(B,102,79)		RS1/16S103J
R 610	(B,92,79)		RS1/16S472J
R 611	(A,87,57)		RD1/4PU221J
R 612	(A,94,57)		RD1/4PU152J
R 613	(B,108,62)		RS1/16S223J
R 614	(B,103,62)		RS1/16S223J
R 615	(B,101,62)		RS1/16S223J
R 616	(A,84,70)		RD1/4PU472J
R 617	(A,81,65)		RD1/4PU101J
R 618	(A,126,67)		RD1/4PU392J
R 619	(A,121,72)		RD1/4PU471J
R 620	(A,124,80)		RD1/4PU471J
R 621	(B,121,50)	(ES,EW5)	RS1/16S105J
R 622	(B,119,50)		RS1/16S153J
R 623	(B,114,50)		RS1/16S242J
R 624	(B,112,50)		RS1/16S182J
R 625	(B,110,50)		RS1/16S273J
R 626	(B,122,58)		RS1/16S272J
R 627	(B,124,58)		RS1/16S272J
R 628	(B,115,58)		RS1/16S272J
R 629	(B,117,58)		RS1/16S272J
R 630	(B,115,36)		RS1/16S472J
R 631	(B,114,36)		RS1/16S472J
R 632	(B,114,32)		RS1/16S472J
R 633	(B,110,38)		RS1/16S683J
R 634	(B,112,35)		RS1/16S392J
R 635	(A,110,29)		RD1/4PU332J
R 636	(A,125,36)		RD1/4PU332J
R 637	(A,117,20)		RD1/4PU472J
R 638	(A,136,41)		RD1/4PU472J
R 639	(A,174,29)		RS1/2PMF121J
R 640	(A,226,29)		RS1/2PMF121J
R 641	(A,161,29)		RS1/2PMF121J
R 642	(A,213,29)		RS1/2PMF121J
R 643	(A,149,29)		RS1/2PMF121J
R 644	(A,200,29)		RS1/2PMF121J
R 645	(A,136,29)		RS1/2PMF121J
R 646	(A,187,29)		RS1/2PMF121J
R 647	(A,150,33)		RS1/2PMF220J
R 648	(A,192,32)		RS1/2PMF220J
R 649	(A,147,66)		RS1/2PMF220J
R 650	(A,162,84)		RS1/2PMF220J
R 651	(A,136,56)		RS1/2PMF220J
R 652	(A,46,35)		RS1/2PMF100J
R 653	(A,68,35)		RS1/2PMF100J
R 654	(A,46,21)		RD1/4PU222J
R 655	(A,66,21)		RD1/4PU222J
R 656	(A,86,35)		RS1PMF220J
R 657	(A,86,21)		RS1PMF333J
R 671	(B,97,37)		RS1/16S223J
R 691	(B,99,46)		RS1/16S683J
R 901	(B,34,168)		RS1/16S222J
R 902	(B,40,163)		RS1/16S104J
R 903	(B,35,159)		RS1/16S473J
R 904	(B,30,168)		RS1/16S104J
R 905	(B,27,164)		RS1/16S473J
R 906	(B,35,149)		RS1/16S472J
R 907	(B,41,151)		RS1/16S472J
R 908	(B,40,158)		RS1/16S473J
R 909	(B,41,147)		RS1/16S104J
R 911	(B,12,159)		RS1/16S102J
R 912	(B,12,163)		RS1/16S104J
R 913	(B,15,164)		RS1/16S103J
R 914	(B,18,159)		RS1/16S223J
R 915	(B,18,162)		RS1/16S103J
R 921	(A,238,163)		RD1/4PU473J
R 922	(B,250,158)		RS1/16S472J
R 923	(B,249,157)		RS1/16S104J
R 924	(B,257,157)		RS1/16S472J
R 925	(B,259,157)		RS1/16S472J
R 931	(B,71,89)		RS1/16S332J
R 932	(B,78,93)		RS1/16S103J
R 933	(B,79,89)		RS1/16S472J
R 934	(B,73,89)		RS1/16S822J
R 941	(B,94,52)		RS1/16S392J
R 942	(B,88,52)		RS1/16S102J
R 943	(B,84,53)		RS1/16S333J
R 944	(B,95,48)		RS1/16S471J

CAPACITORS

C 101	(A,18,45)	CEAT100M50
C 102	(A,18,54)	CEAT100M50
C 103	(B,46,51)	CCSRCH471J50
C 104	(B,32,51)	CCSRCH471J50
C 105	(A,48,48)	CEAT100M50
C 106	(A,34,48)	CEAT100M50
C 107	(B,9,70)	CKSQYB102K50
C 108	(B,17,73)	CKSQYB102K50
C 109	(B,44,67)	CKSQYB223K50
C 110	(B,30,68)	CKSQYB223K50
C 111	(B,44,64)	CCSRCH271J50
C 112	(B,31,64)	CCSRCH271J50
C 113	(B,49,66)	CCSRCH271J50
C 114	(B,35,68)	CCSRCH271J50
C 115	(B,53,60)	CKSRYB103K50
C 116	(B,31,57)	CKSRYB103K50
C 117	(B,44,57)	CKSRYB103K50
C 118	(B,39,60)	CKSRYB103K50
C 121	(B,30,84)	CKSRYB103K50
C 122	(A,26,98)	CFTNA274J50
C 123	(A,20,98)	CFTLA154J50
C 124	(B,21,82)	CKSRYB103K50
C 128	(B,36,111)	CKSRYB472K50
C 129	(B,37,104)	CKSRYB103K50
C 130	(B,44,114)	CKSRYB103K50
C 301	(A,47,104)	CEAT220M50
C 302	(B,38,100)	CKSRYB222K50
C 303	(B,36,85)	CCSRCH471J50
C 304	(B,34,89)	CKSRYB103K50
C 307	(B,42,92)	CKSRYB103K50
C 309	(B,48,97)	CKSRYB103K50
C 310	(B,57,97)	CCSRCH471J50
C 311	(B,56,90)	CKSRYB103K50
C 312	(B,61,68)	CKSRYB221K50

Circuit Symbol and No.		Part No.
C 313	(B,49,83)	CKSRYB103K50
C 314	(B,65,85)	CKSRYB104K50
C 315	(B,64,85)	CKSRYB221K50
C 318	(A,90,105)	CEAT100M50
C 319	(A,74,100)	CEAT101M16
C 320	(B,84,109)	CKSYB475K25
C 321	(B,79,107)	CKSRYB104K50
C 322	(B,92,102)	CKSRYB104K50
C 323	(B,47,159)	CKSRYB474K16
C 324	(A,69,100)	CFTNA103J2A
C 325	(A,59,104)	CEAT100M2A
C 326	(B,55,170)	CKSQYB472K50
C 327	(B,47,170)	CKSQYB472K50
C 328	(A,117,170)	CQMA102K2E
C 329	(A,89,170)	CQMA102K2E
C 330	(A,100,167) 1 µF	CCE1035
C 331	(A,108,167) 1 µF	CCE1035
C 334	(A,101,137) 4.7 µF	CCE1036
C 335	(A,72,116) 4.7 µF	CCE1036
C 338	(B,261,136) 2 200 pF	CCG1248
C 339	(B,269,117)	CKSQYB103K50
C 340	(B,267,117)	CKSQYB102K50
C 341	(B,48,140)	CCSRCH471J50
C 349	(B,55,159)	CKSRYB474K16
C 501	(B,26,143)	CKSRYB104K50
C 502	(B,25,145)	CKSRYB104K50
C 503	(A,24,139)	CEAT1R0M50
C 504	(A,40,134)	CEAT100M50
C 505	(A,23,124)	CEAT100M50
C 506	(A,34,134)	CEAT470M16
C 507	(A,29,124)	CEAT2R2M50
C 508	(A,35,124)	CEAT1R0M50
C 509	(B,30,159)	CKSRYB103K50
C 510	(B,25,149)	CKSRYB103K50
C 511	(B,13,127)	CKSQYB470K50
C 512	(B,20,123)	CKSQYB470K50
C 601	(B,253,69)	CKSQYB104K50
C 602	(B,253,73)	CKSQYB103K50
C 603	(B,253,71)	CKSQYB102K50
C 604	(B,230,46)	CKSRYB103K50
C 605	(B,263,77)	CKSQYB104K50
C 606	(B,263,83)	CKSQYB103K50
C 607	(B,263,79)	CKSQYB102K50
C 608	(B,117,75)	CKSRYB103K50
C 609	(B,104,81)	CKSRYB103K50
C 610	(A,100,77)	CEAT100M50
C 611	(A,94,77)	CEAT100M50
C 612	(A,106,77)	CEAT101M16
C 613	(B,108,79)	CKSRYB103K50
C 614	(B,107,62)	CKSRYB103K50
C 615	(B,87,69)	CKSRYB102K50
C 616	(A,83,62)	CEAT220M50
C 617	(B,105,62)	CKSRYB103K50
C 618	(A,98,62)	CEAT220M25
C 619	(A,85,78)	CEAT471M16
C 620	(B,135,97)	CKSRYB104K50
C 621	(B,117,50)	CKSRYB102K50
C 622	(B,116,50)	CKSRYB472K50
C 623	(A,107,46)	CEANP221M10
C 624	(B,120,58)	CKSRYB104K50
C 625	(B,125,58)	CKSRYB104K50
C 626	(B,113,58)	CKSRYB104K50
C 627	(B,118,58)	CKSRYB104K50
C 628	(B,110,42)	CKSRYB105K16
C 629	(B,124,43)	CKSRYB223K50
C 630	(A,126,40)	CEAT221M16
C 631	(A,101,36)	CFTNA103J2A
C 632	(B,110,35)	CKSQYB474K16
C 633	(A,147,38)	CQMA472J50
C 634	(A,211,32)	CQMA472J50
C 635	(A,217,67) 3 900 µF/16 V	YCH5003(P35)
C 636	(A,234,67) 3 900 µF/16 V	YCH5003(P35)
C 637	(A,147,74)	CQMA102K2E
C 638	(A,152,79)	CQMA102K2E
C 639	(A,142,61)	CQMA102K2E
C 640	(A,192,102) 3 300 µF/71 V	CCH1703
C 641	(A,230,102) 3 300 µF/71 V	CCH1703
C 642	(A,192,133) 3 300 µF/71 V	CCH1703
C 643	(A,230,133) 3 300 µF/71 V	CCH1703
C 644	(A,211,134)	CFTNA104J2A
C 645	(A,211,94)	CFTNA104J2A
C 648	(A,46,25)	CEAT100M2A
C 649	(A,66,30)	CEAT100M2A
C 650	(A,39,25)	CEAT470M25
C 651	(A,59,30)	CEAT470M25
C 652	(B,37,27)	CKSRYB103K50
C 653	(B,62,27)	CKSRYB103K50
C 654	(A,53,25)	CEAT470M25
C 655	(A,73,30)	CEAT470M25
C 656	(B,60,36)	CKSRYB103K50
C 657	(B,75,27)	CKSRYB103K50
C 658	(B,62,36)	CKSQYB334K50
C 659	(B,48,38)	CKSRYB104K50
C 660	(A,51,40)	CEAT100M50
C 671	(A,85,25)	CEAT100M2A
C 672	(A,79,25)	CEAT470M25
C 674	(A,103,25)	CEAT470M25
C 675	(B,94,27)	CKSRYB473K50
C 691	(B,98,49)	CKSQYB105K25
C 901	(B,36,168)	CKSRYB103K50
C 902	(B,35,165)	CKSRYB103K50
C 903	(B,28,164)	CKSRYB104K50
C 911	(B,6,160)	CKSRYB103K50
C 912	(B,8,159)	CKSRYB102K50
C 913	(B,15,162)	CKSRYB104K50
C 914	(B,19,162)	CKSRYB104K50
C 921	(A,244,158)	CEANP221M10
C 931	(B,76,90)	CKSRYB473K50
C 941	(B,88,49)	CKSRYB474K16

B

Unit Number : YWM5247
Unit Name : Remote Unit Assy

MISCELLANEOUS

VR401	(A,8,20) Variable Resistor 10 kohm(B)	YCS5004
R 401	(B,18,12)	RS1/16S622J
R 402	(B,18,22)	RS1/16S821J