


EXPLODED VIEW / PARTS LIST

DCP section

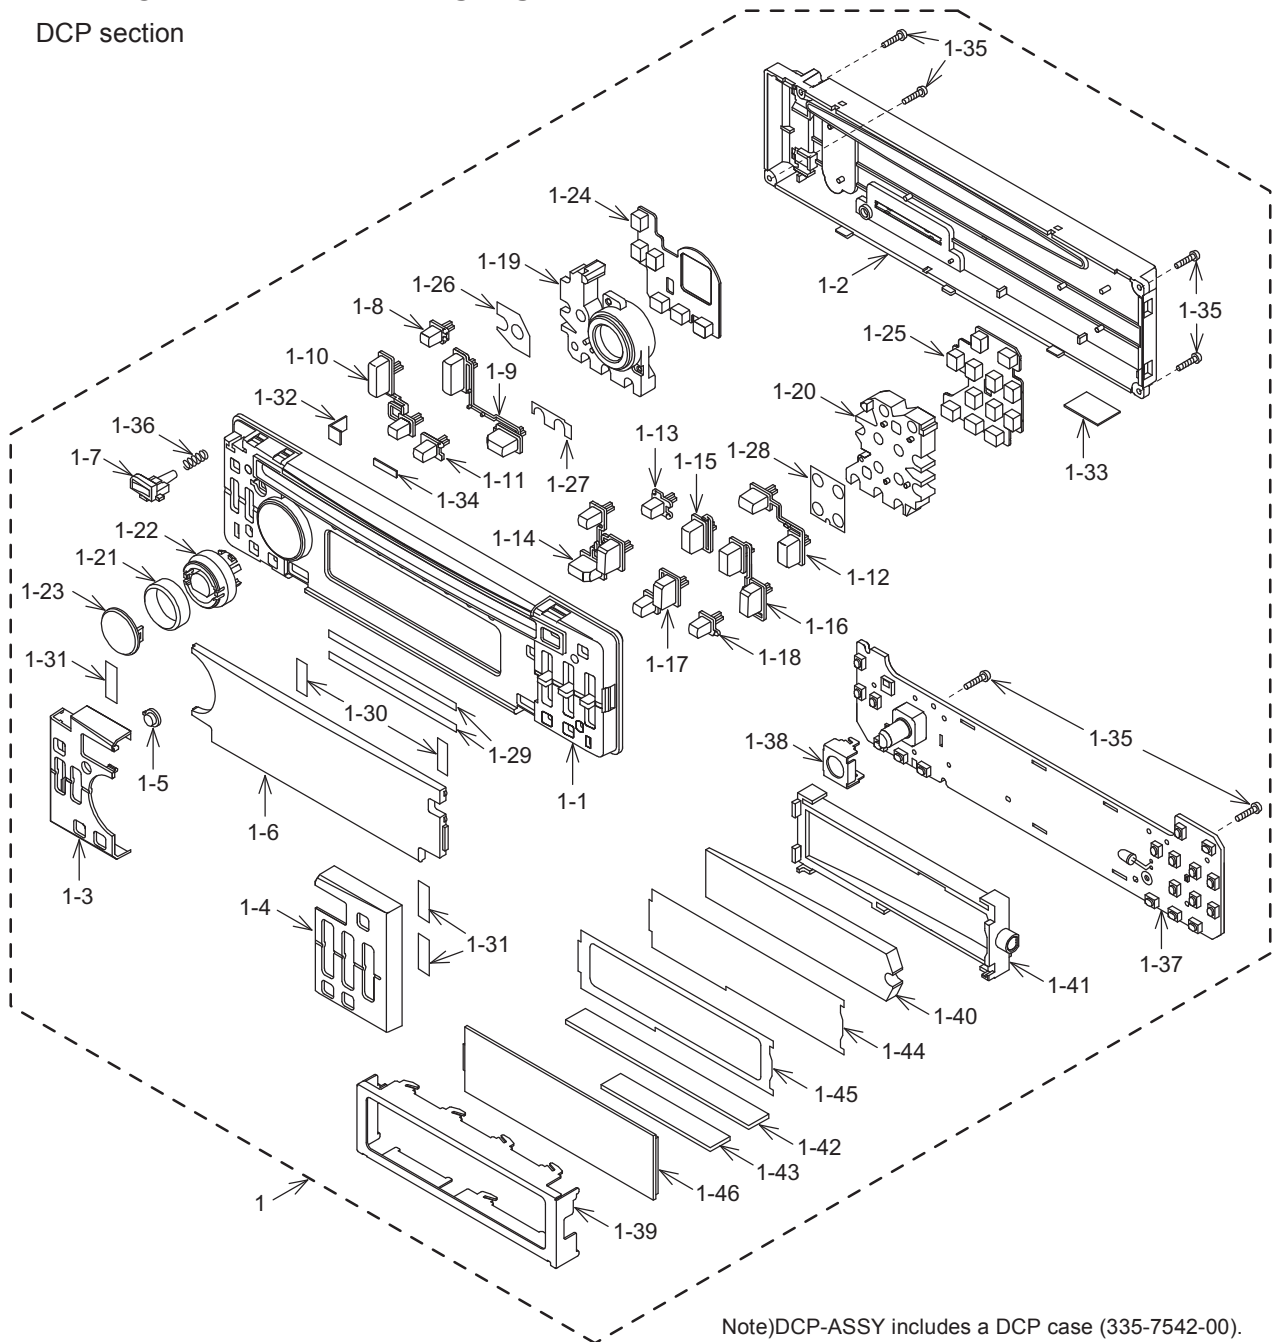

Note) DCP-ASSY includes a DCP case (335-7542-00).

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-536-800	DCP-ASSY	1	1-13	382-7287-00	BUTTON(Z+)	1
1-1	370-6141-02	ESCUTCHEON	1	1-14	382-7288-00	BUTTON(D/B/4)	1
1-2	335-6897-02	REAR-COVER	1	1-15	382-7289-00	BUTTON(1)	1
1-3	335-7365-03	FACE PANEL(L)	1	1-16	382-7290-00	BUTTON(2/6)	1
1-4	335-7366-02	FACE PANEL(R)	1	1-17	382-7291-00	BUTTON(5/TITLE)	1
1-5	335-7390-01	IR FILTER	1	1-18	382-7292-01	BUTTON(ISR)	1
1-6	373-1048-22	DIAL-CVR	1	1-19	335-7416-00	ILLUMI PLATE(L)	1
1-7	382-7252-00	BUTTON(RELEASE)	1	1-20	335-7417-00	ILLUMI PLATE(R)	1
1-8	382-7282-00	BUTTON(PLAY)	1	1-21	345-5496-00	RUBBER RING	1
1-9	382-7283-00	BUTTON(FF/SRC)	1	1-22	380-5612-00	KNOB	1
1-10	382-7284-00	BUTTON(FB/ADJ)	1	1-23	380-5613-00	KNOB COVER	1
1-11	382-7285-00	BUTTON(A-M)	1	1-24	345-5519-00	RUBBER SHEET(L)	1
1-12	382-7286-00	BUTTON(EJ/3)	1	1-25	345-5520-00	RUBBER SHEET(R)	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-26	347-7710-00	SHADE	1
1-27	347-7711-00	SHADE	1
1-28	347-7712-00	SHADE	1
1-29	347-7717-00	DOUBLE FACE	2
1-30	347-7718-00	DOUBLE FACE	2
1-31	347-7719-00	DOUBLE FACE	3
1-32	347-7783-00	FILM	1
1-33	347-7784-00	FILM	1
1-34	347-7785-00	FILM	1
1-35	716-0872-11	SPECIAL SCREW	6
1-36	750-6782-00	SPRING	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-37	-----	SWITCH-PWB	1
1-38	331-3337-00	VR-HOLDER	1
1-39	331-3957-00	LCD CVR	1
1-40	335-7354-00	LCD ILLUMI	1
1-41	335-7414-00	LCD HOLDER	1
1-42	345-5497-00	RUBBER PART	1
1-43	345-5583-00	RUBBER PART	1
1-44	347-7705-00	LCD FILM	1
1-45	347-7706-00	BLACK FILM	1
1-46	379-1331-51	LCD	1

Main section

Exploded view on next page.


NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-536-800	ESCUTCHEON-ASSY	1
2	-----	MAIN-PWB	1
3	880-2090B	AM/FM TUNER	1
4	074-1194-00	OUTLET SOCKET(13P)	1
5	074-1214-00	OUTLET SOCKET(16P)	1
6	076-0714-20	PLUG(20P)	1
7	092-2216-50	ANT-RECEPT	1
8	331-2945-01	SHIELD CVR(F)	1
9	331-2946-00	SHIELD CVR(R)	1
10	331-3737-00	IC HOLDER	1
11	331-3956-00	REAR CVR	1
12	347-7377-00	INSULATOR	1
13	347-7708-00	FILM	1
14	714-2605-81	MACHINE SCREW(M2.6x5)	1
15	-----	DVD-PWB	1
16	310-1786-02	UPPER CASE	1
17	311-1881-00	LOWER CASE	1
18	313-1891-01	HEAT SINK	1
19	313-1925-00	HEAT SINK	1
20	331-2594-00	HOOK PLATE	1
21	331-3734-01	MECH BRKT	1
22	331-3735-01	SHIELD CASE	1
23	331-3736-01	SHIELD CASE	1
24	335-5915-01	HOOK	1
25	341-1627-00	SHAFT	1
26	345-5446-00	SHADE RUBBER	2
27	345-5448-00	SPACER	4
28	345-5584-00	HEAT RUBBER	1

NO.	PART NO.	DESCRIPTION	Q'TY
29	345-5585-00	CUSHION	1
30	346-0097-00	LEATHER SHEET	1
31	347-6341-00	E-SHEET	1
32	347-7225-01	INSULATOR	1
33	347-7228-00	DOUBLE FACE	1
34	347-7398-00	FILM	1
35	347-7404-00	FILM	1
36	347-7707-00	SHIELD SHEET	1
37	347-7709-00	FILM	1
38	370-6027-06	ESCUTCHEON	1
39	382-4078-00	BUTTON	1
40	020-3045-11	DC FAN	1
41	816-3006-50	FLAT WIRE(50P)	1
42	816-3007-50	FLAT WIRE(18P)	1
43	929-2130-81	DVD-MECHANISM	1
44	714-2603-80	MACHINE SCREW(M2.6x3)	3
45	714-2610-81	MACHINE SCREW(M2.6x10)	2
46	714-3004-80	MACHINE SCREW(M3x4)	4
47	714-3006-81	MACHINE SCREW(M3x6)	8
48	716-0778-00	WAVE SCREW(2x6)	2
49	716-0878-00	IT-SCREW(M2.6x5)	12
50	750-3173-00	SPRING	2
51	750-3219-00	SPRING(F-HOOK)	1
52	780-2612-00	SPECIAL SCREW(M2.6x12)	2
53	290-8534-00	LABEL	1
54	286-6592-00 286-6593-00 286-6594-00	SETPLATE(K-A) SETPLATE(K-B) SETPLATE(K-C)	1

Note) No.54 SETPLATE depend on each model.

The model name is specified in the description.

(PE-2751K-A:K-A / PE-2751K-B:K-B / PE-2751K-C:K-C)

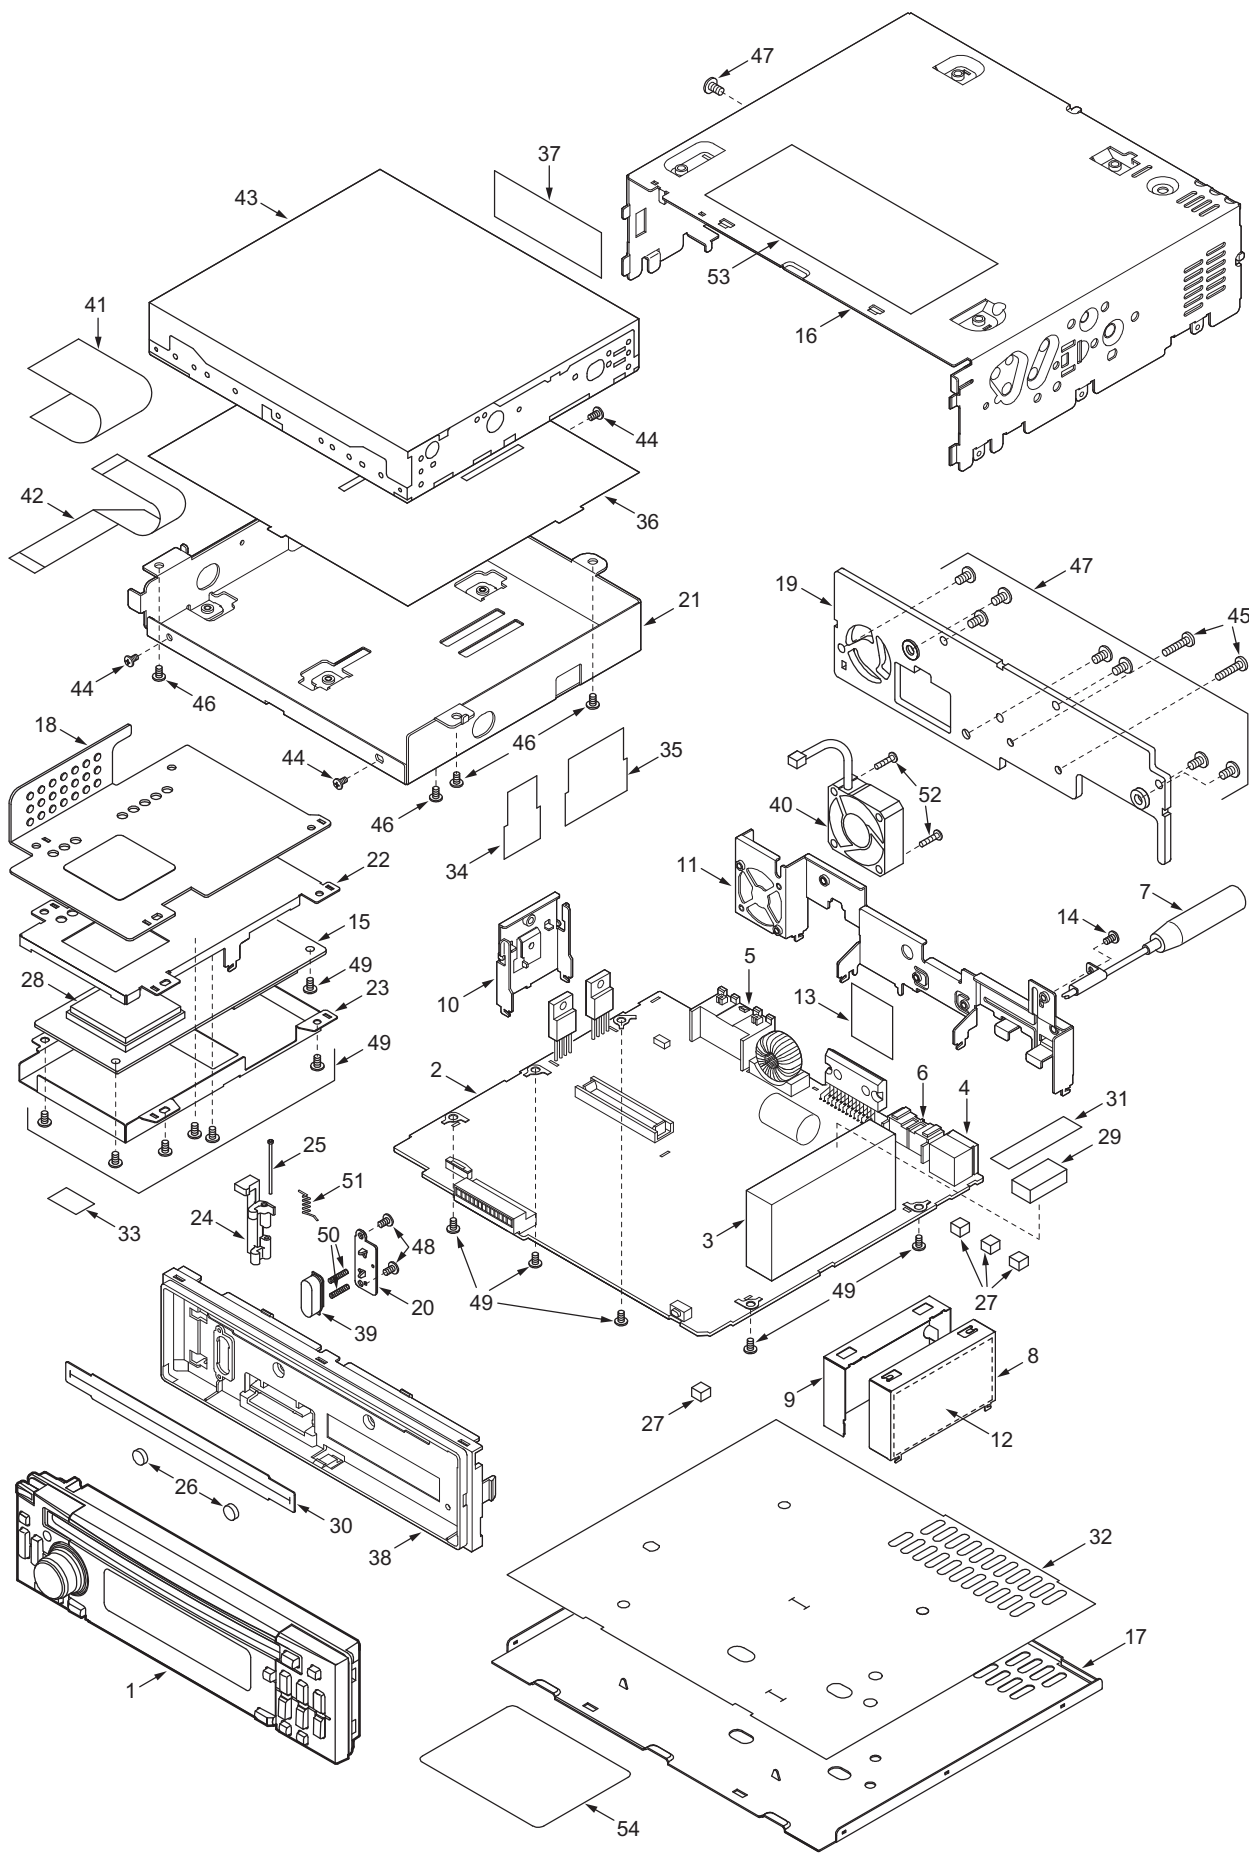

ELECTRICAL PARTS LIST

DVD PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C3	042-0567-53	6.3V 10uF	C423	043-0540-00	6.3V10uF	L10	010-3103-58	600 ohm/100MHz
C4	043-0519-50	0.1uF	C424	166-8201-50	82pF CH	L11	010-3103-58	600 ohm/100MHz
C5	043-0519-50	0.1uF	C425	043-0540-00	6.3V10uF	L12	010-3103-58	600 ohm/100MHz
C6	043-0519-50	0.1uF	C429	043-0540-00	6.3V10uF	L13	010-3103-58	600 ohm/100MHz
C7	042-0567-53	6.3V 10uF	C430	166-8201-50	82pF CH	L14	010-3103-58	600 ohm/100MHz
C8	043-0519-50	0.1uF	C431	043-0540-00	6.3V10uF	L15	010-3103-58	600 ohm/100MHz
C9	043-0519-50	0.1uF	C432	168-5612-55	560pF Z	L16	010-3103-58	600 ohm/100MHz
C10	043-0519-50	0.1uF	C433	168-5612-55	560pF Z	L17	010-3103-58	600 ohm/100MHz
C11	042-0567-53	6.3V 10uF	C434	042-0472-91	16V 47uF	L18	010-3103-58	600 ohm/100MHz
C12	043-0519-50	0.1uF	C435	168-1042-78	16V 0.1uF	L19	010-3103-58	600 ohm/100MHz
C13	043-0519-50	0.1uF	C436	168-1042-78	16V 0.1uF	L20	010-3103-58	600 ohm/100MHz
C14	042-0567-53	6.3V 10uF	C437	042-0416-54	16V 10uF M TAN	L507	010-2285-58	1k ohm/100MHz
C15	043-0519-50	0.1uF	C438	043-0540-00	6.3V10uF	L508	010-2285-58	1k ohm/100MHz
C16	043-0519-50	0.1uF	C439	166-8201-50	82pF CH	R5	033-1021-15	1/10W 1k ohm
C17	043-0519-50	0.1uF	C440	043-0540-00	6.3V10uF	R6	033-1021-15	1/10W 1k ohm
C18	042-0567-53	6.3V 10uF	C441	042-0416-54	16V 10uF M TAN	R8	033-4721-15	1/10W 4.7k ohm
C19	043-0519-50	0.1uF	C501	168-1042-78	16V 0.1uF	R9	033-4721-15	1/10W 4.7k ohm
C20	043-0519-50	0.1uF	C502	042-0416-52	10V 10uF M TAN	R10	033-4721-15	1/10W 4.7k ohm
C21	043-0519-50	0.1uF	C503	042-0416-52	10V 10uF M TAN	R12	033-4721-15	1/10W 4.7k ohm
C22	043-0519-50	0.1uF	C504	042-0416-52	10V 10uF M TAN	R15	033-4721-15	1/10W 4.7k ohm
C23	043-0519-50	0.1uF	C505	168-1042-78	16V 0.1uF	R16	033-4721-15	1/10W 4.7k ohm
C24	043-0519-50	0.1uF	C506	168-1042-78	16V 0.1uF	R17	033-4721-15	1/10W 4.7k ohm
C25	043-0519-50	0.1uF	C507	042-0416-52	10V 10uF M TAN	R18	033-4721-15	1/10W 4.7k ohm
C26	043-0519-50	0.1uF	C508	042-0416-52	10V 10uF M TAN	R19	119-4721-15	1/10W 4.7k ohm
C27	043-0519-50	0.1uF	C515	168-1042-78	16V 0.1uF	R20	033-3301-15	1/10W 33 ohm
C28	042-0567-53	6.3V 10uF	C516	043-0296-50	0.1uF	R21	033-3301-15	1/10W 33 ohm
C30	043-0519-50	0.1uF	CCT1	050-0140-52	1/32W 100 ohm x4J	R22	033-3301-15	1/10W 33 ohm
C31	043-0519-50	0.1uF	CCT2	050-0140-52	1/32W 100 ohm x4J	R23	033-3301-15	1/10W 33 ohm
C32	166-1007-50	10pF CH	CCT3	050-0140-52	1/32W 100 ohm x4J	R26	033-3301-15	1/10W 33 ohm
C33	043-0519-50	0.1uF	CCT4	050-0140-59	1/32W 33 ohm x4J	R32	033-1521-15	1/10W 1.5k ohm
C34	043-0519-50	0.1uF	CCT5	050-0140-59	1/32W 33 ohm x4J	R33	033-1051-15	1/10W 1M ohm
C35	043-0519-50	0.1uF	CCT6	050-0140-59	1/32W 33 ohm x4J	R37	032-0140-12	1/10W 75 ohm F
C36	166-1007-50	10pF CH	CCT7	050-0140-59	1/32W 33 ohm x4J	R39	033-4701-15	1/10W 47 ohm
C37	043-0519-50	0.1uF	CCT8	050-0140-59	1/32W 33 ohm x4J	R42	033-4721-15	1/10W 4.7k ohm
C38	042-0567-53	6.3V 10uF	CCT9	050-0140-59	1/32W 33 ohm x4J	R62	033-1521-15	1/10W 1.5k ohm
C39	043-0519-50	0.1uF	CCT10	050-0140-59	1/32W 33 ohm x4J	R63	033-1521-15	1/10W 1.5k ohm
C40	042-0567-53	6.3V 10uF	CCT11	050-0140-70	1/32W 10 ohm x4J	R401	032-0140-51	1/10W 15k ohm F
C41	042-0567-53	6.3V 10uF	CCT12	050-0140-70	1/32W 10 ohm x4J	R402	032-0140-04	1/10W 8.2k ohm
C42	043-0519-50	0.1uF	CCT13	050-0140-70	1/32W 10 ohm x4J	R403	119-1031-15	1/10W 10k ohm
C43	043-0519-50	0.1uF	CCT14	050-0140-59	1/32W 33 ohm x4J	R404	119-1041-15	1/10W 100k ohm
C44	043-0519-50	0.1uF	CCT15	050-0140-70	1/32W 10 ohm x4J	R405	119-1041-15	1/10W 100k ohm
C45	043-0519-50	0.1uF	CCT16	050-0140-70	1/32W 10 ohm x4J	R407	032-0140-04	1/10W 8.2k ohm
C46	042-0567-53	6.3V 10uF	CCT17	050-0140-70	1/32W 10 ohm x4J	R408	119-1031-15	1/10W 10k ohm
C47	043-0519-50	0.1uF	CCT18	050-0140-70	1/32W 10 ohm x4J	R409	032-0140-51	1/10W 15k ohm F
C48	043-0519-50	0.1uF	CCT19	050-0140-70	1/32W 10 ohm x4J	R410	032-0140-51	1/10W 15k ohm F
C49	043-0519-50	0.1uF	CCT20	050-0140-59	1/32W 33 ohm x4J	R411	032-0140-04	1/10W 8.2k ohm
C50	042-0567-53	6.3V 10uF	CCT501	050-0122-53	1/10W 1k ohm x4 J	R412	119-1031-15	1/10W 10k ohm
C51	043-0519-50	0.1uF	D1	001-0367-91	1SS226	R413	119-1041-15	1/10W 100k ohm
C55	168-1022-55	1000pF K	D2	001-0529-41	MA8075-M	R414	119-1041-15	1/10W 100k ohm
C56	043-0519-50	0.1uF	D3	001-0529-41	MA8075-M	R415	032-0140-04	1/10W 8.2k ohm
C57	042-0567-53	6.3V 10uF	D4	001-0529-41	MA8075-M	R416	119-1031-15	1/10W 10k ohm
C58	042-0416-57	10V 47uF M TAN	D5	001-0529-41	MA8075-M	R417	032-0140-51	1/10W 15k ohm F
C59	042-0416-57	10V 47uF M TAN	IC2	052-6065-00	S29AL016D90TFI020E	R418	032-0140-51	1/10W 15k ohm F
C60	042-0416-57	10V 47uF M TAN	IC3	051-6453-00	ES6218SAF	R419	032-0140-04	1/10W 8.2k ohm
C61	166-1011-50	100pF CH	IC4	051-9406-28	BR24L01AF-W	R420	119-1031-15	1/10W 10k ohm
C62	166-1011-50	100pF CH	IC5	051-9330-00	K4S641632F-TC60	R421	119-1041-15	1/10W 100k ohm
C401	043-0540-00	6.3V10uF	IC401	051-3026-90	NJM4580V	R422	119-1041-15	1/10W 100k ohm
C402	166-8201-50	82pF CH	IC402	051-3026-90	NJM4580V	R423	032-0140-04	1/10W 8.2k ohm
C403	043-0540-00	6.3V10uF	IC404	051-3026-90	NJM4580V	R424	119-1031-15	1/10W 10k ohm
C404	168-5612-55	560pF Z	IC405	051-3034-90	NJM4558V	R425	032-0140-51	1/10W 15k ohm F
C405	168-5612-55	560pF Z	IC502	051-6715-00	PCM1604Y/2K	R426	119-1021-15	1/10W 1k ohm
C406	168-1042-78	16V 0.1uF	J1	074-1205-00	50P	R427	119-1221-15	1/10W 1.2k ohm
C407	043-0540-00	6.3V10uF	J2	074-1279-80	30P	R501	119-1031-15	1/10W 10k ohm
C408	166-8201-50	82pF CH	L1	010-3406-58	NLV25 4.7uH J	TM501	073-0768-90	TERMINAL
C409	043-0540-00	6.3V10uF	L2	010-3406-58	NLV25 4.7uH J	TM601	073-0768-90	TERMINAL
C413	043-0540-00	6.3V10uF	L3	010-3406-58	NLV25 4.7uH J	TM602	073-0768-90	TERMINAL
C414	168-1032-55	0.01uF K	L5	010-3103-55	120 ohm/100MHz	X1	061-3523-90	27MHz
C415	043-0540-00	6.3V10uF	L6	010-3602-90	600 ohm/100MHz	PWB	039-2703-00	PWB(WITHOUT COMPONENT)
C417	168-5612-55	560pF Z	L7	010-3406-50	NLV25 1uH J			
C420	168-5612-55	560pF Z	L8	010-3602-90	600 ohm/100MHz			
C421	168-1042-78	16V 0.1uF	L9	010-3103-58	600 ohm/100MHz			

Main PWB(B2) section (PE-2751K-A)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-2216-50	ANT-RECEPT	C169	172-2231-15	0.022uF	C547	168-4732-78	0.047uF K
BL1	880-2090B	AM/FM TUNER	C170	042-1447-00	16V 2200uF	C548	168-4732-78	0.047uF K
C1	166-2096-50	2pF CK	C171	168-6822-55	6800pF K	C549	043-0540-01	10V2.2uF
C2	166-2201-50	22pF CH	C172	168-6822-55	6800pF K	C550	043-0540-01	10V2.2uF
C3	166-2201-50	22pF CH	C173	168-6822-55	6800pF K	C551	043-0540-00	6.3V10uF
C5	168-2232-55	0.022uF K	C174	168-6822-55	6800pF K	C552	042-0416-54	16V10uF M TAN
C6	168-2232-55	0.022uF K	C175	168-1032-55	0.01uF K	C553	168-2232-55	0.022uF K
C8	168-1032-55	0.01uF K	C201	042-1563-71	16V100uF	C554	042-0416-54	16V10uF M TAN
C10	168-2232-55	0.022uF K	C202	168-1042-78	16V 0.1uF	C555	168-2232-55	0.022uF K
C11	043-0540-02	16V1uF	C203	042-1631-50	10V100uF	C556	043-0540-00	6.3V10uF
C17	168-1532-55	0.015uF K	C204	043-0506-50	0.1uF	C557	168-2722-55	2700pF K
C18	168-2732-55	16V 0.027uF K	C205	042-0560-63	16V22uF	C558	168-1042-78	16V 0.1uF
C19	168-2732-55	16V 0.027uF K	C206	168-4732-78	0.047uF K	C559	168-1042-78	16V 0.1uF
C20	187-4763-35	16V47uF	C207	166-1011-50	100pF CH	C560	168-1042-78	16V 0.1uF
C21	168-2232-55	0.022uF K	C208	042-0560-84	16V470uF	C561	168-1042-78	16V 0.1uF
C22	168-2232-55	0.022uF K	C209	168-2232-55	0.022uF K	C562	187-2263-35	16V 22uF
C23	168-6822-55	6800pF K	C210	172-4731-15	0.047uF	C563	042-0416-54	16V10uF M TAN
C24	042-1631-50	10V100uF	C211	168-2232-55	0.022uF K	C564	168-1042-78	16V 0.1uF
C25	042-1631-50	10V100uF	C212	042-1615-02	10V 82uF OS	C565	189-2273-21	10V 220uF
C30	168-1042-78	16V 0.1uF	C213	168-1042-78	16V 0.1uF	C566	166-1007-50	10pF CH
C31	043-0540-02	16V1uF	C214	166-1021-50	1000pF CH	C567	166-1007-50	10pF CH
C37	163-4763-15	6.3V47uF	C215	168-1042-78	16V 0.1uF	C568	042-0416-54	16V10uF M TAN
C39	166-1011-50	100pF CH	C216	189-4773-32	16V470uF	C569	042-0416-54	16V10uF M TAN
C40	166-1011-50	100pF CH	C217	043-0510-51	25V10uF	C570	042-0416-54	16V10uF M TAN
C41	166-3311-50	330pF CH	C218	168-4732-78	0.047uF K	C571	043-0540-01	10V2.2uF
C44	166-1501-50	15pF CH	C219	166-1511-50	150pF CH	C572	043-0540-01	10V2.2uF
C45	166-1801-50	18pF CH	C220	168-1022-55	1000pF K	C579	043-0540-00	6.3V10uF
C47	168-1042-78	16V 0.1uF	C230	168-1042-78	16V 0.1uF	C580	043-0540-00	6.3V10uF
C101	168-1042-78	16V 0.1uF	C232	168-1042-78	16V 0.1uF	C581	043-0540-00	6.3V10uF
C102	168-1042-78	16V 0.1uF	C233	042-0416-57	10V47uF M TAN	C582	043-0540-00	6.3V10uF
C103	042-0416-57	10V47uF M TAN	C234	042-0416-54	16V10uF M TAN	C583	043-0540-00	6.3V10uF
C104	043-0541-00	6.3V22uF	C502	043-0540-00	6.3V10uF	C584	043-0540-00	6.3V10uF
C105	168-1032-55	0.01uF K	C504	043-0540-00	6.3V10uF	C585	042-0671-02	10V 22uF
C106	189-1083-12	6.3V1000uF	C506	043-0540-00	6.3V10uF	C586	043-0540-00	6.3V10uF
C107	042-0567-53	6.3V10uF	C507	043-0540-00	6.3V10uF	C587	043-0540-00	6.3V10uF
C108	168-1042-78	16V 0.1uF	C508	043-0540-00	6.3V10uF	C588	043-0540-00	6.3V10uF
C109	168-1032-55	0.01uF K	C509	043-0540-00	6.3V10uF	C589	043-0540-00	6.3V10uF
C110	043-0541-00	6.3V22uF	C510	043-0540-00	6.3V10uF	C590	043-0540-00	6.3V10uF
C111	043-0541-00	6.3V22uF	C512	043-0540-00	6.3V10uF	C591	043-0540-00	6.3V10uF
C114	166-1007-50	10pF CH	C513	168-1042-78	16V 0.1uF	C601	189-2273-29	10V 220uF
C115	168-1032-55	0.01uF K	C514	043-0540-01	10V2.2uF	C602	168-1042-78	16V 0.1uF
C116	189-1083-12	6.3V1000uF	C515	043-0540-01	10V2.2uF	C603	178-1052-78	1uF
C117	043-0541-00	6.3V22uF	C516	163-1063-35	16V10uF	C604	042-0403-55	16V33uF
C119	166-1007-50	10pF CH	C517	043-0540-00	6.3V10uF	C605	168-4732-78	0.047uF K
C120	042-0567-53	6.3V10uF	C518	042-0416-54	16V10uF M TAN	C606	042-0650-00	5.5V 0.1F
C121	168-1042-78	16V 0.1uF	C519	043-0540-01	10V2.2uF	C607	168-1032-55	0.01uF K
C122	043-0541-00	6.3V22uF	C520	163-1063-35	16V10uF	C608	042-1577-00	6.3V100uF
C123	168-1032-55	0.01uF K	C521	043-0540-00	6.3V10uF	C609	188-1063-37	16V10uF
C124	166-1007-50	10pF CH	C522	043-0540-00	6.3V10uF	C610	166-1021-50	1000pF CH
C125	043-0541-00	6.3V22uF	C523	043-0540-00	6.3V10uF	C611	168-4732-78	0.047uF K
C126	166-1007-50	10pF CH	C524	043-0540-00	6.3V10uF	C612	178-2242-78	0.22uF
C127	043-0541-00	6.3V22uF	C525	043-0540-01	10V2.2uF	C613	168-1032-55	0.01uF K
C128	166-1007-50	10pF CH	C526	043-0540-00	6.3V10uF	C801	187-1073-35	16V 100uF
C129	166-1007-50	10pF CH	C527	043-0540-00	6.3V10uF	C802	168-1042-78	16V 0.1uF
C130	043-0541-00	6.3V22uF	C528	043-0540-00	6.3V10uF	C803	172-1041-15	0.1uF
C131	043-0541-00	6.3V22uF	C529	168-1042-78	16V 0.1uF	C804	042-0416-57	10V47uF M TAN
C134	043-0541-00	6.3V22uF	C530	168-1042-78	16V 0.1uF	C805	168-1042-78	16V 0.1uF
C135	168-1022-55	1000pF K	C531	188-1063-37	16V10uF	C806	042-0416-57	10V47uF M TAN
C136	168-1022-55	1000pF K	C532	168-1042-78	16V 0.1uF	C807	168-1042-78	16V 0.1uF
C137	168-1022-55	1000pF K	C533	168-1042-78	16V 0.1uF	C808	042-0627-90	16V100uF
C138	168-1022-55	1000pF K	C534	168-2722-55	2700pF K	C809	168-1042-78	16V 0.1uF
C139	188-1063-37	16V10uF	C535	168-2722-55	2700pF K	C810	043-0506-52	0.47uF
C140	168-1022-55	1000pF K	C536	168-1042-78	16V 0.1uF	C811	042-0416-57	10V47uF M TAN
C142	168-1022-55	1000pF K	C537	187-1073-35	16V 100uF	C812	168-1042-78	16V 0.1uF
C143	168-1022-55	1000pF K	C538	168-1042-78	16V 0.1uF	C813	043-0506-52	0.47uF
C153	168-1022-55	1000pF K	C539	043-0540-01	10V2.2uF	C814	042-0416-57	10V47uF M TAN
C154	163-1063-35	16V10uF	C540	168-3332-78	0.033uF K	C815	168-1042-78	16V 0.1uF
C155	188-1053-67	50V 1uF	C541	188-1063-37	16V10uF	C816	172-3341-15	0.33uF
C157	178-2242-78	0.22uF	C542	043-0540-01	10V2.2uF	C817	042-0416-57	10V47uF M TAN
C160	178-2242-78	0.22uF	C543	043-0540-00	6.3V10uF	C818	168-1042-78	16V 0.1uF
C163	178-2242-78	0.22uF	C544	043-0542-00	25V4.7uF	C901	168-1032-55	0.01uF K
C165	188-1053-67	50V 1uF	C545	043-0540-01	10V2.2uF	C902	168-1032-55	0.01uF K
C167	178-2242-78	0.22uF	C546	043-0540-00	6.3V10uF	D101	001-0367-91	1SS226

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D102	001-0367-91	1SS226	L104	010-2285-58	1k ohm/100MHz	Q803	125-2199-93	KRC103S
D103	001-1310-00	KDS160-RTK	L105	010-2285-58	1k ohm/100MHz	Q804	125-2199-93	KRC103S
D104	001-1310-00	KDS160-RTK	L106	010-2285-58	1k ohm/100MHz	Q805	125-2038-92	RN1902
D113	001-1310-00	KDS160-RTK	L107	010-2285-58	1k ohm/100MHz	Q806	125-2038-92	RN1902
D114	001-1310-00	KDS160-RTK	L108	010-2285-58	1k ohm/100MHz	R3	119-2221-15	1/10W 2.2k ohm
D115	001-2403-90	M1F60	L109	010-2285-58	1k ohm/100MHz	R4	119-2221-15	1/10W 2.2k ohm
D116	001-0592-61	1N5404	L110	010-2285-58	1k ohm/100MHz	R5	119-1021-15	1/10W 1k ohm
D117	001-0529-43	MA8082-L	L111	010-2285-58	1k ohm/100MHz	R7	119-0000-05	1/10W 0 ohm JW
D201	001-0466-90	S5688B	L112	010-8038-00	CHOKE COIL 130uH	R10	119-0000-05	1/10W 0 ohm JW
D202	001-0466-90	S5688B	L201	010-6003-02	10uH	R13	119-4741-15	1/10W 470k ohm
D203	001-0504-46	HZS9B2L	L202	010-2200-04	12uH	R14	119-1531-15	1/10W 15k ohm
D204	001-0466-91	S5688G	L203	010-3108-53	250 ohm/100MHz	R18	119-1031-15	1/10W 10k ohm
D205	001-0466-91	S5688G	L204	010-3600-90	1k ohm/100MHz	R20	119-1031-15	1/10W 10k ohm
D206	001-1310-00	KDS160-RTK	L501	010-2230-76	22uH	R22	119-2221-15	1/10W 2.2k ohm
D207	001-0507-90	DAP202K	L502	010-3105-62	1k ohm/100MHz	R24	119-1031-15	1/10W 10k ohm
D208	001-0608-90	D1FS4	L503	010-3105-62	1k ohm/100MHz	R25	119-1031-15	1/10W 10k ohm
D209	001-4305-27	UDZSTE-1711B	L504	010-3105-62	1k ohm/100MHz	R27	119-5631-15	1/10W 56k ohm
D210	001-0422-39	MTZJ39	L505	010-3105-62	1k ohm/100MHz	R29	119-1521-15	1/10W 1.5k ohm
D601	001-1310-00	KDS160-RTK	L601	010-2230-76	22uH	R30	119-1521-15	1/10W 1.5k ohm
D602	001-1310-00	KDS160-RTK	L602	010-3100-66	2.2uH	R31	119-1021-15	1/10W 1k ohm
D603	001-0347-26	MA4047MTA	L603	010-3100-66	2.2uH	R33	119-1031-15	1/10W 10k ohm
D605	001-1310-00	KDS160-RTK	L604	010-3100-66	2.2uH	R34	119-1041-15	1/10W 100k ohm
D606	001-1310-00	KDS160-RTK	L605	010-2275-57	10uH	R35	119-1021-15	1/10W 1k ohm
D612	001-1310-00	KDS160-RTK	L607	010-2230-69	5.6uH	R36	119-1021-15	1/10W 1k ohm
D613	001-1310-00	KDS160-RTK	P101	076-0714-20	20P	R37	119-1021-15	1/10W 1k ohm
D614	001-0529-41	MA8075-M	P601	076-0438-02	2P	R101	119-3311-15	1/10W 330 ohm
D615	001-0529-41	MA8075-M	P602	076-3006-80	30P	R102	119-2231-15	1/10W 22k ohm
D616	001-0529-41	MA8075-M	Q4	125-2199-93	KRC103S	R103	119-1021-15	1/10W 1k ohm
D617	001-0529-41	MA8075-M	Q5	125-3004-90	KTA1504S	R104	119-1031-15	1/10W 10k ohm
D801	001-1310-00	KDS160-RTK	Q6	125-3004-90	KTA1504S	R105	032-0140-12	1/10W 75 ohm F
D802	001-1310-00	KDS160-RTK	Q101	193-1306-00	2SD1306	R106	119-2231-15	1/10W 22k ohm
FIL501	060-3103-90	NFM839R02G101B1	Q102	193-1306-00	2SD1306	R107	119-4731-15	1/10W 47k ohm
FIL502	060-3103-90	NFM839R02G101B1	Q103	193-1306-00	2SD1306	R108	119-3311-15	1/10W 330 ohm
FIL503	060-3103-90	NFM839R02G101B1	Q104	193-1306-00	2SD1306	R109	119-3311-15	1/10W 330 ohm
FIL504	060-3103-90	NFM839R02G101B1	Q105	193-1306-00	2SD1306	R110	119-2231-15	1/10W 22k ohm
IC3	051-6201-90	LC72146M	Q106	193-1306-00	2SD1306	R111	119-1021-15	1/10W 1k ohm
IC101	051-5331-90	MM1228XFBE	Q107	193-1306-00	2SD1306	R112	119-4711-15	1/10W 47k ohm
IC102	051-5331-90	MM1228XFBE	Q108	193-1306-00	2SD1306	R113	119-4731-15	1/10W 47k ohm
IC104	051-3054-90	HA17558ATEL-E	Q109	193-1306-00	2SD1306	R114	119-2231-15	1/10W 22k ohm
IC105	051-2057-00	TB2906HQ	Q110	193-1306-00	2SD1306	R115	032-0140-12	1/10W 75 ohm F
IC201	051-3274-90	BA178M05F	Q112	125-0199-96	KRA106S	R116	119-3311-15	1/10W 330 ohm
IC202	051-1905-93	AN77L06M	Q113	125-2199-96	KRC106S	R117	119-3311-15	1/10W 330 ohm
IC203	051-3921-90	MD1423N	Q114	192-2712-00	2SC2712	R118	119-4711-15	1/10W 470 ohm
IC501	051-5028-90	TDA7409DTR	Q201	102-4883-00	2SC4883	R119	119-2231-15	1/10W 22k ohm
IC502	051-7108-90	CD4053BPWR	Q202	191-1237-00	2SB1237	R120	119-1021-15	1/10W 1k ohm
IC503	051-5039-00	LC75347E	Q203	190-1416-00	2SA1416	R121	119-4711-15	1/10W 470 ohm
IC504	051-3054-90	HA17558ATEL-E	Q204	198-0302-50	2SK302Y.GR	R122	119-2231-15	1/10W 22k ohm
IC505	051-3054-90	HA17558ATEL-E	Q205	125-3004-90	KTA1504S	R123	119-3311-15	1/10W 330 ohm
IC506	051-3054-90	HA17558ATEL-E	Q206	191-1237-00	2SB1237	R124	119-3311-15	1/10W 330 ohm
IC507	051-3054-90	HA17558ATEL-E	Q207	125-3004-90	KTA1504S	R125	119-4711-15	1/10W 470 ohm
IC508	051-3054-90	HA17558ATEL-E	Q208	125-4010-90	KTC3875S	R126	119-2231-15	1/10W 22k ohm
IC509	051-3054-90	HA17558ATEL-E	Q209	125-2199-93	KRC103S	R127	119-4711-15	1/10W 470 ohm
IC510	051-5834-90	uPC5701GR-028-8JG	Q210	125-2199-93	KRC103S	R128	119-1021-15	1/10W 1k ohm
IC512	051-7108-90	CD4053BPWR	Q211	125-2199-93	KRC103S	R129	119-2231-15	1/10W 22k ohm
IC601	051-6600-58	HA12187FP	Q212	125-2199-93	KRC103S	R130	119-3311-15	1/10W 330 ohm
IC602	052-3403-00	M30622MGP-217GP	Q213	125-3007-90	KTA1298	R131	119-4711-15	1/10W 470 ohm
IC603	051-5437-08	S-80821ANMP-EDJ-E2	Q214	125-2199-93	KRC103S	R132	119-3311-15	1/10W 330 ohm
IC604	051-0869-58	NJM2103M	Q215	193-1863-50	2SD1863	R133	119-2231-15	1/10W 22k ohm
IC801	051-3334-00	NJM2396F09	Q216	125-3007-90	KTA1298	R136	119-1021-15	1/10W 1k ohm
IC802	051-3353-90	BA00BC0WFP	Q217	125-2199-93	KRC103S	R137	119-2231-15	1/10W 22k ohm
IC803	051-3354-90	BA33BC0WFP	Q501	125-2199-92	KRC102S	R139	119-3311-15	1/10W 330 ohm
IC804	051-3354-90	BA33BC0WFP	Q602	125-2199-93	KRC103S	R142	119-0000-05	1/10W 0 ohm JW
IC805	051-7260-08	TC7WT125FUTE12L	Q603	125-3004-90	KTA1504S	R144	119-1041-15	1/10W 100k ohm
J101	074-1214-00	16P	Q604	125-3004-90	KTA1504S	R145	119-1021-15	1/10W 1k ohm
J601	074-1194-00	13P CeNET	Q605	192-2712-00	2SC2712	R146	119-1241-15	1/10W 120k ohm
J603	074-1217-00	12P	Q609	125-2199-93	KRC103S	R147	119-1221-15	1/10W 1.2k ohm
J604	074-1287-68	18P	Q610	125-3007-90	KTA1298	R150	119-1231-15	1/10W 12k ohm
L1	010-4046-00	30uH	Q611	125-3004-90	KTA1504S	R162	119-1021-15	1/10W 1k ohm
L2	010-3103-64	1.5k ohm/100MHz	Q612	125-3007-90	KTA1298	R163	119-1021-15	1/10W 1k ohm
L3	010-3103-64	1.5k ohm/100MHz	Q613	125-2199-96	KRC106S	R164	119-1021-15	1/10W 1k ohm
L4	010-2275-53	220uH	Q614	125-2199-96	KRC106S	R165	119-8221-15	1/10W 8.2k ohm
L101	010-2279-50	4.7uH	Q620	125-4010-90	KTC3875S	R166	119-1021-15	1/10W 1k ohm
L102	010-2285-58	1k ohm/100MHz	Q801	191-1295-00	2SB1295	R167	119-1021-15	1/10W 1k ohm
L103	010-2285-58	1k ohm/100MHz	Q802	125-2038-92	RN1902	R168	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R169	119-1021-15	1/10W 1k ohm	R524	119-1031-15	1/10W 10k ohm	R624	-----	NO USED(*1)
R170	119-2231-15	1/10W 22k ohm	R525	119-1531-15	1/10W 15k ohm	R625	119-4731-15	1/10W 47k ohm
R201	116-1591-15	1/4W 1.5 ohm	R526	119-1041-15	1/10W 100k ohm	R626	119-4731-15	1/10W 47k ohm
R202	116-1591-15	1/4W 1.5 ohm	R527	119-1531-15	1/10W 15k ohm	R629	119-1041-15	1/10W 100k ohm
R203	116-1011-15	1/4W 100 ohm	R528	119-1531-15	1/10W 15k ohm	R631	119-2231-15	1/10W 22k ohm
R204	119-1801-15	1/10W 18 ohm	R529	032-0140-89	1/10W 47k ohm F	R633	119-1031-15	1/10W 10k ohm
R205	119-1031-15	1/10W 10k ohm	R530	032-0140-89	1/10W 47k ohm F	R634	119-4721-15	1/10W 4.7k ohm
R206	116-1591-15	1/4W 1.5 ohm	R531	119-1031-15	1/10W 10k ohm	R635	119-4721-15	1/10W 4.7k ohm
R207	116-1591-15	1/4W 1.5 ohm	R532	119-1031-15	1/10W 10k ohm	R636	119-2231-15	1/10W 22k ohm
R208	119-1031-15	1/10W 10k ohm	R533	119-1531-15	1/10W 15k ohm	R637	119-1041-15	1/10W 100k ohm
R209	119-1031-15	1/10W 10k ohm	R534	119-1531-15	1/10W 15k ohm	R638	119-4731-15	1/10W 47k ohm
R210	116-1521-15	1/4W 1.5k ohm	R535	119-5621-15	1/10W 5.6k ohm	R639	119-4721-15	1/10W 4.7k ohm
R211	119-1031-15	1/10W 10k ohm	R536	119-5621-15	1/10W 5.6k ohm	R640	119-4721-15	1/10W 4.7k ohm
R212	119-3321-15	1/10W 3.3k ohm	R537	119-5621-15	1/10W 5.6k ohm	R641	119-1031-15	1/10W 10k ohm
R213	116-1221-15	1/4W 1.2k ohm	R538	119-5621-15	1/10W 5.6k ohm	R642	119-1831-15	1/10W 18k ohm
R214	116-1221-15	1/4W 1.2k ohm	R539	119-1531-15	1/10W 15k ohm	R644	119-5621-15	1/10W 5.6k ohm
R215	119-3921-15	1/10W 3.9k ohm	R540	119-4711-15	1/10W 470 ohm	R645	119-1541-15	1/10W 150k ohm
R216	119-3321-15	1/10W 3.3k ohm	R541	119-4711-15	1/10W 470 ohm	R646	119-8221-15	1/10W 8.2k ohm
R217	119-2231-15	1/10W 22k ohm	R542	119-3931-15	1/10W 39k ohm	R647	119-3331-15	1/10W 33k ohm
R218	032-0164-50	0.1ohm F	R543	119-1041-15	1/10W 100k ohm	R648	119-4321-15	1/10W 4.3k ohm
R219	032-0164-50	0.1ohm F	R544	119-1041-15	1/10W 100k ohm	R649	119-1811-15	1/10W 180 ohm
R220	032-0140-85	1/10W 2.4k ohm F	R545	119-1041-15	1/10W 100k ohm	R650	119-1031-15	1/10W 10k ohm
R221	119-1031-15	1/10W 10k ohm	R546	119-1041-15	1/10W 100k ohm	R651	119-1811-15	1/10W 180 ohm
R222	119-1031-15	1/10W 10k ohm	R547	119-1041-15	1/10W 100k ohm	R652	119-1811-15	1/10W 180 ohm
R223	119-1041-15	1/10W 100k ohm	R548	119-1041-15	1/10W 100k ohm	R653	119-1031-15	1/10W 10k ohm
R224	032-0140-53	1/10W 2.2k ohm F	R549	119-1041-15	1/10W 100k ohm	R654	119-1011-15	1/10W 100 ohm
R225	119-3301-15	1/10W 33 ohm	R550	119-1041-15	1/10W 100k ohm	R655	119-1031-15	1/10W 10k ohm
R226	119-1051-15	1/10W 1M ohm	R551	119-1041-15	1/10W 100k ohm	R656	119-1031-15	1/10W 10k ohm
R227	119-5631-15	1/10W 56k ohm	R552	119-1041-15	1/10W 100k ohm	R657	116-1521-15	1/4W 1.5k ohm
R228	119-1001-15	1/10W 10 ohm	R553	119-1041-15	1/10W 100k ohm	R658	119-1021-15	1/10W 1k ohm
R229	119-1031-15	1/10W 10k ohm	R554	119-1041-15	1/10W 100k ohm	R662	119-1041-15	1/10W 100k ohm
R233	119-1031-15	1/10W 10k ohm	R555	119-1041-15	1/10W 100k ohm	R668	119-0000-05	1/10W 0 ohm JW
R234	119-1031-15	1/10W 10k ohm	R556	119-1041-15	1/10W 100k ohm	R669	119-3331-15	1/10W 33k ohm
R235	116-1011-15	1/4W 100 ohm	R557	119-1041-15	1/10W 100k ohm	R670	119-0000-05	1/10W 0 ohm JW
R236	119-1021-15	1/10W 1k ohm	R558	119-1041-15	1/10W 100k ohm	R671	119-0000-05	1/10W 0 ohm JW
R237	119-1221-15	1/10W 1.2k ohm	R559	119-1041-15	1/10W 100k ohm	R672	119-0000-05	1/10W 0 ohm JW
R238	116-1221-15	1/4W 1.2k ohm	R560	119-1041-15	1/10W 100k ohm	R673	116-4721-15	1/4W 4.7k ohm
R239	119-1031-15	1/10W 10k ohm	R561	119-4731-15	1/10W 47k ohm	R674	119-4731-15	1/10W 47k ohm
R240	119-1031-15	1/10W 10k ohm	R562	119-1011-15	1/10W 100 ohm	R675	119-1031-15	1/10W 10k ohm
R501	119-4721-15	1/10W 4.7k ohm	R563	119-1011-15	1/10W 100 ohm	R676	119-1041-15	1/10W 100k ohm
R502	119-4721-15	1/10W 4.7k ohm	R564	119-1011-15	1/10W 100 ohm	R677	119-1541-15	1/10W 150k ohm
R503	032-0140-00	1/10W 56k ohm F	R565	119-1011-15	1/10W 100 ohm	R801	119-4731-15	1/10W 47k ohm
R504	032-0140-94	1/10W 30k ohm F	R566	119-1011-15	1/10W 100 ohm	R802	119-1031-15	1/10W 10k ohm
R505	032-0140-00	1/10W 56k ohm F	R567	119-1011-15	1/10W 100 ohm	R803	119-1021-15	1/10W 1k ohm
R506	032-0140-94	1/10W 30k ohm F	R601	116-6801-15	1/4W 68 ohm	R804	119-4731-15	1/10W 47k ohm
R507	032-0140-94	1/10W 30k ohm F	R602	119-3321-15	1/10W 3.3k ohm	R805	119-1031-15	1/10W 10k ohm
R508	032-0140-00	1/10W 56k ohm F	R606	119-4721-15	1/10W 4.7k ohm	R806	119-4731-15	1/10W 47k ohm
R509	032-0140-00	1/10W 56k ohm F	R607	119-1031-15	1/10W 10k ohm	R807	119-1221-15	1/10W 1.2k ohm
R510	032-0140-94	1/10W 30k ohm F	R609	-----	NO USED(*1)	R808	119-1221-15	1/10W 1.2k ohm
R511	119-2221-15	1/10W 2.2k ohm	R610	119-1031-15	1/10W 10k ohm(*1)	R809	119-1021-15	1/10W 1k ohm
R512	119-2221-15	1/10W 2.2k ohm	R611	-----	NO USED(*1)	S101	013-6103-00	SWITCH
R513	119-2221-15	1/10W 2.2k ohm	R612	-----	NO USED(*1)	SUP1	060-0122-91	DSP-141N-S00B
R514	032-0140-89	1/10W 47k ohm F	R613	119-1031-15	1/10W 10k ohm(*1)	TH601	002-0315-00	TN10-3U153JT
R515	032-0140-89	1/10W 47k ohm F	R614	119-1031-15	1/10W 10k ohm	X2	061-1066-00	7.2MHz
R516	119-1041-15	1/10W 100k ohm	R615	119-1031-15	1/10W 10k ohm	X601	060-1533-90	CSTCE10M0G52-R0
R517	032-0140-89	1/10W 47k ohm F	R616	119-4731-15	1/10W 47k ohm	TM101	073-0781-00	TERMINAL
R518	119-1021-15	1/10W 1k ohm	R617	119-1531-15	1/10W 15k ohm	TM102	073-0781-00	TERMINAL
R519	032-0140-89	1/10W 47k ohm F	R619	119-1031-15	1/10W 10k ohm	TM103	073-0781-00	TERMINAL
R520	119-1021-15	1/10W 1k ohm	R620	119-1031-15	1/10W 10k ohm(*1)	TM104	073-0781-00	TERMINAL
R521	032-0140-89	1/10W 47k ohm F	R621	-----	NO USED(*1)	TM105	073-0781-00	TERMINAL
R522	032-0140-89	1/10W 47k ohm F	R622	119-1031-15	1/10W 10k ohm(*1)	PWB	039-2701-00	PWB(WITHOUT COMPONENT)
R523	119-1031-15	1/10W 10k ohm	R623	119-1031-15	1/10W 10k ohm(*1)			

Note) (*1) mark is different parts from PE-2751K-B and PE-2751K-C.

PE-2751K-B and PE-2751K-C (Difference from PE-2751K-A)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R609	119-1031-15	1/10W 10k ohm(K-C)	R613	-----	NO USED	R623	-----	NO USED
R610	119-1031-15	1/10W 10k ohm(K-B)	R620	119-1031-15	1/10W 10k ohm(K-B)	R624	119-1031-15	1/10W 10k ohm
R611	119-1031-15	1/10W 10k ohm	R621	119-1031-15	1/10W 10k ohm(K-C)			
R612	119-1031-15	1/10W 10k ohm	R622	-----	NO USED			

Note) Some parts depend on each model. The model name is specified in the description.
(PE-2751K-B:K-B / PE-2751K-C:K-C / PE-2751K-B and K-C:No mark)



Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	168-1042-78	16V 0.1uF	Q704	125-2199-93	KRC103S	S702	013-6312-50	SKRP-ABE-010
C702	168-1042-78	16V 0.1uF	Q707	125-2199-93	KRC103S	S703	013-6312-50	SKRP-ABE-010
C703	168-1042-78	16V 0.1uF	R701	119-1011-15	1/10W 100 ohm	S704	013-6312-50	SKRP-ABE-010
C704	168-1042-78	16V 0.1uF	R702	119-1021-15	1/10W 1k ohm	S705	013-6312-50	SKRP-ABE-010
C705	168-1042-78	16V 0.1uF	R703	119-1041-15	1/10W 100k ohm	S706	013-6312-50	SKRP-ABE-010
C706	042-0416-54	16V 10uF M TAN	R704	119-3921-15	1/10W 3.9k ohm	S707	013-6312-50	SKRP-ABE-010
C708	168-1042-78	16V 0.1uF	R710	119-1031-15	1/10W 10k ohm	S708	013-6312-50	SKRP-ABE-010
C709	168-1042-78	16V 0.1uF	R711	119-1031-15	1/10W 10k ohm	S709	013-6312-50	SKRP-ABE-010
C710	042-0416-54	16V 10uF M TAN	R712	119-1031-15	1/10W 10k ohm	S710	013-6312-50	SKRP-ABE-010
D702	001-0529-14	MA8030-L	R713	119-1031-15	1/10W 10k ohm	S711	013-6312-50	SKRP-ABE-010
D703	001-7046-00	NSPW310BS	R714	119-1241-15	1/10W 120k ohm	S712	013-6312-50	SKRP-ABE-010
D704	001-0529-41	MA8075-M	R725	119-6801-15	1/10W 68 ohm	S713	013-6312-50	SKRP-ABE-010
D705	001-0529-41	MA8075-M	R726	119-2211-15	1/10W 220 ohm	S714	013-6312-50	SKRP-ABE-010
D706	001-0529-41	MA8075-M	R727	119-2211-15	1/10W 220 ohm	S715	013-6312-50	SKRP-ABE-010
D707	001-7040-91	NSCW100-T	R728	119-8211-15	1/10W 820 ohm	S716	013-6312-50	SKRP-ABE-010
D708	001-7040-91	NSCW100-T	R729	119-2711-15	1/10W 270 ohm	S721	013-6312-50	SKRP-ABE-010
D709	001-1310-00	KDS160-RTK	R739	119-4711-15	1/10W 470 ohm	S722	013-6312-50	SKRP-ABE-010
IC701	051-6073-00	NJU6538FG1	R740	119-4711-15	1/10W 470 ohm	VR701	016-9900-84	VR W/SHAFT
IR701	060-4017-90	IR RECEIVER	R741	119-4711-15	1/10W 470 ohm	PWB	039-2702-00	PWB(WITHOUT COMPONENT)
LCD701	379-1331-51	LCD	R742	119-1811-15	1/10W 180 ohm			
J701	076-0615-00	12P	R743	119-1811-15	1/10W 180 ohm			
Q701	125-3004-90	KTA1504S	S701	013-6312-50	SKRP-ABE-010			

CONNECTOR LAYOUT

Rear view

No.	Description	No.	Description
1	VIDEO OUT1	2	VIDEO-GND
3	VIDEO-GND	4	GND
5	VIDEO OUT2	6	N.C.
7	AUX-L	8	AUX-GND-L
9	AUX-R	10	AUX-GND-R
11	SUB-R	12	S-GND
13	SUB-L	14	N.C.
15	REAR-R	16	S-GND
17	FRONT-R	18	S-GND
19	REAR-L	20	FRONT-L



Radio antenna jack



J601 (CeNET)



No.	Description
1	GND
2	BACK UP
3	L-CH(+)
4	N.C.
5	N.C.
6	BUS(+)
7	R-CH(+)
8	R-CH(-)
9	SYS-ACC
10	BUS(-)
11	L-CH(-)
12	ILLUMI
13	N.C.

No.	Description	No.	Description
1	SP R/L(+)	2	SP R/L(-)
3	SP F/L(-)	4	PHONE INT
5	SP F/L(+)	6	ACC
7	SP F/R(+)	8	AUTO ANT
9	SP F/R(-)	10	REMOTE
11	SP R/R(+)	12	ILLUMI
13	SP R/R(-)	14	BACK UP(BUS)
15	BACK UP	16	GND

J101

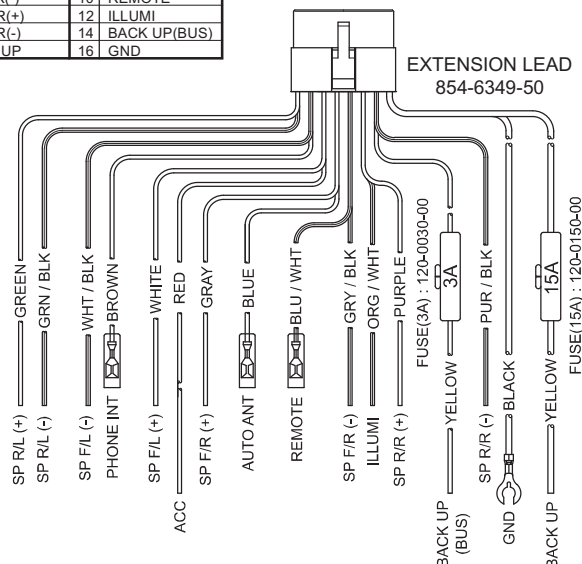

Lead Jack System	Gray		Black		Purple		Black		Red	
	Red	White	Red	White	Red	White	Yellow	Yellow	Red	White
2ch	Front		Rear		Non-Fader Sub Woofer		Visual Out		Aux-In	
Full Speaker (5.1ch)	Front		Rear (Surround)		Sub Woofer	Center	Visual Out		Aux-In	

RCA PIN CORD
855-5524-51

