


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :**
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to  mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

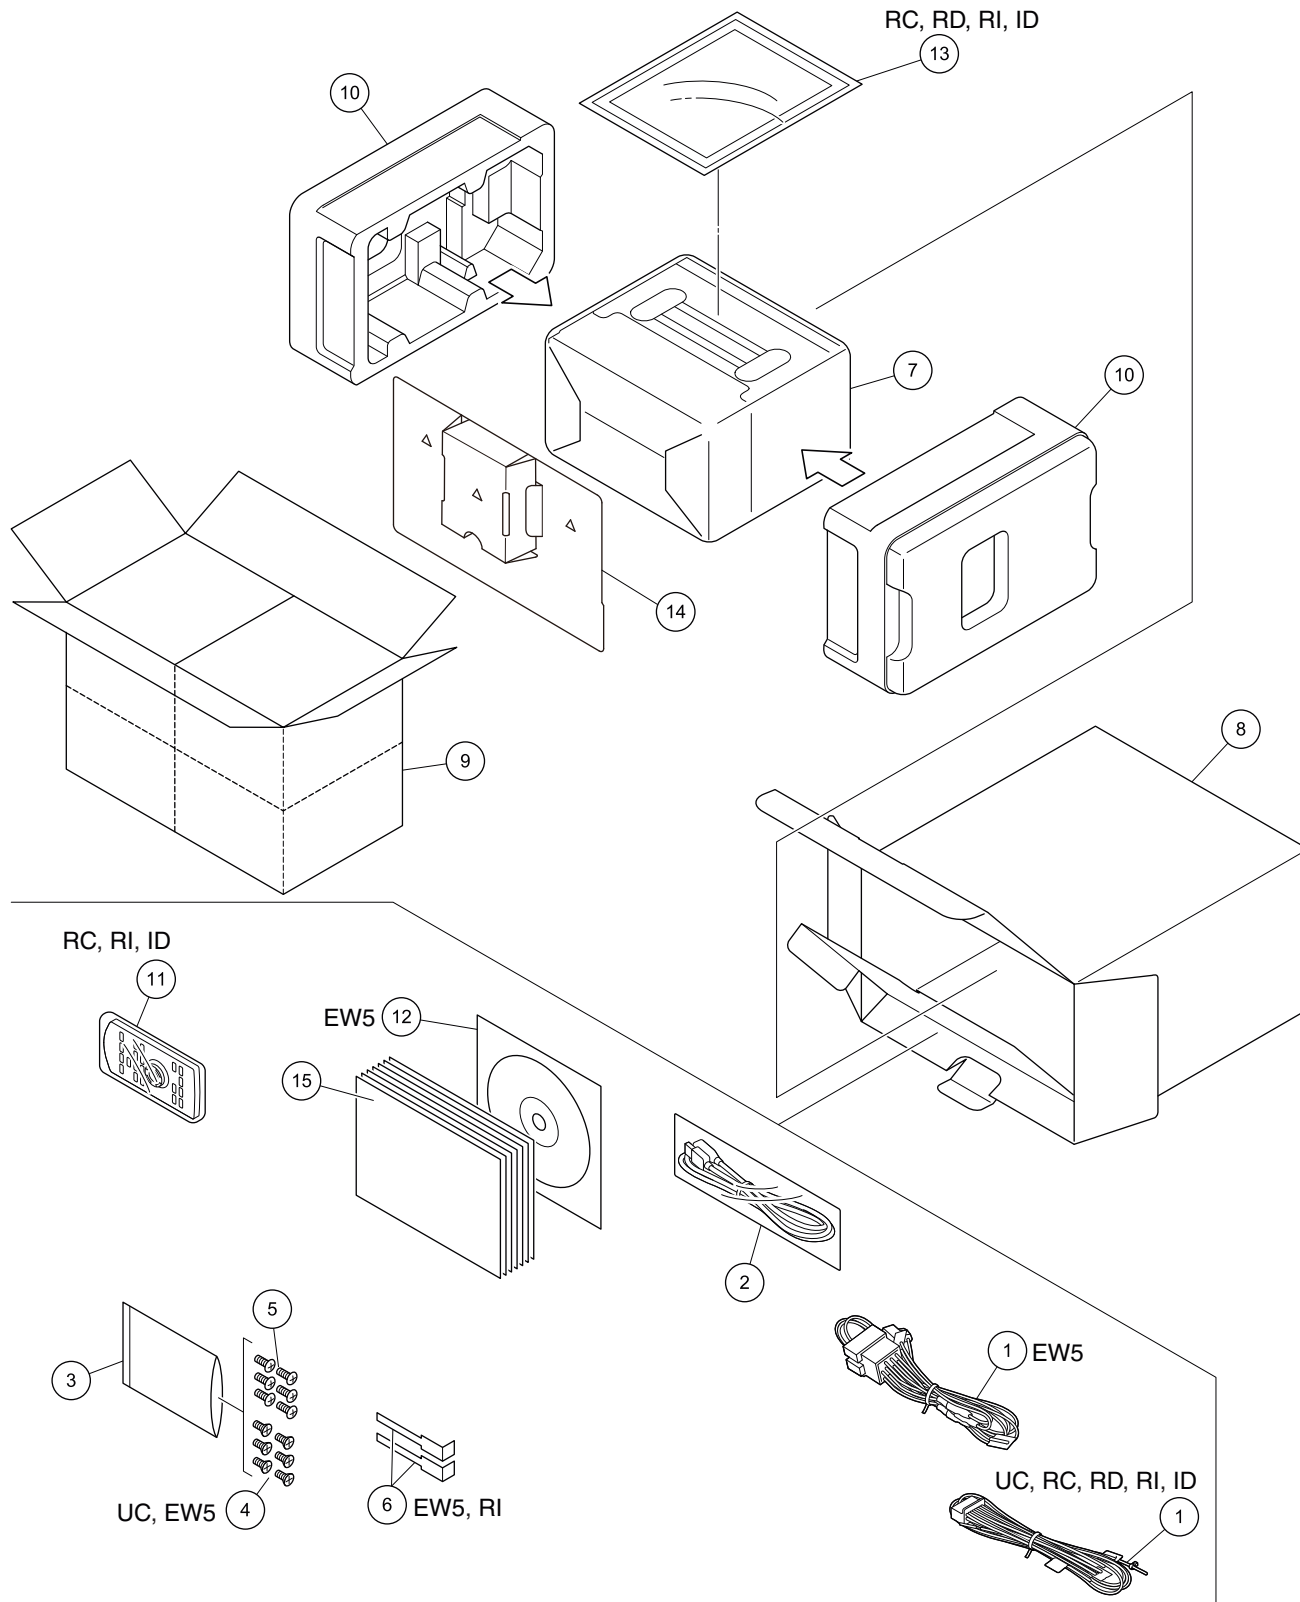

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Cord Assy	See Contrast table (2)	12	IM CD-ROM	See Contrast table (2)
2	USB Extended Cable	CDP1587	13	Panel	See Contrast table (2)
3	Polyethylene Bag	CEG1160	14	Partition	See Contrast table (2)
4	Screw	See Contrast table (2)	15-1	Owner's Manual	See Contrast table (2)
5	Screw	TRZ50P080FTC			
			*	15-2 Quick Start Guide	See Contrast table (2)
6	Handle	See Contrast table (2)		15-3 Installation Manual	See Contrast table (2)
7	Cover	See Contrast table (2)	*	15-4 Caution Card	See Contrast table (2)
8	Unit Box	See Contrast table (2)	*	15-5 Caution Card	See Contrast table (2)
9	Contain Box	See Contrast table (2)	*	15-6 Service Network	See Contrast table (2)
10	Protector	See Contrast table (2)			
			*	15-7 Warranty Card	See Contrast table (2)
11	Card Remote Control Unit	See Contrast table (2)			


(2) CONTRAST TABLE

AVH-171DVD/XNUC, AVH-170DVD/XNUC, AVH-170DVD/XNEW5, AVH-175DVD/XNRC, AVH-175DVD/XNRD, AVH-175DVD/XNRI and AVH-179DVD/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-171DVD/ XNUC	AVH-170DVD/ XNUC	AVH-170DVD/ XNEW5	AVH-175DVD/ XNRC	AVH-175DVD/ XNRD
	1	Cord Assy	CDP1696	CDP1696	CDP1697	CDP1696	CDP1696
	4	Screw	CRZ50P090FTC	CRZ50P090FTC	CRZ50P090FTC	Not used	Not used
	6	Handle	Not used	Not used	CND6289	Not used	Not used
	7	Cover	CEG1359	CEG1359	CEG1356	CEG1356	CEG1356
	8	Unit Box	CHG9050	CHG8767	CHG8773	CHG8768	CHG8769
	9	Contain Box	CHL9050	CHL8767	CHL8773	CHL8768	CHL8769
	10	Protector	CHP4598	CHP4598	CHP4599	CHP4598	CHP4598
	11	Card Remote Control Unit	Not used	Not used	Not used	CXE5116	Not used
	12	IM CD-ROM	Not used	Not used	CPJ1486	Not used	Not used
	13	Panel	Not used	Not used	Not used	CNS9475	CNS9475
	14	Partition	CHW2475	Not used	Not used	Not used	Not used
*	15-1	Owner's Manual	CRD4837	CRD4837	Not used	CRD4838	CRD4839
*	15-2	Quick Start Guide	Not used	Not used	CRD4835	Not used	Not used
*	15-3	Installation Manual	Not used	Not used	CRD4836	Not used	Not used
*	15-4	Caution Card	CRP1386	Not used	CRP1436	Not used	Not used
*	15-5	Caution Card	Not used	Not used	CRP1441	Not used	Not used
*	15-6	Service Network	Not used	Not used	Not used	Not used	Not used
*	15-7	Warranty Card	QRY3001	QRY3001	CRY1376	Not used	Not used

Mark	No.	Description	AVH-175DVD/ XNRI	AVH-179DVD/ XNID
	1	Cord Assy	CDP1696	CDP1696
	4	Screw	Not used	Not used
	6	Handle	CND6289	Not used
	7	Cover	CEG1356	CEG1356
	8	Unit Box	CHG8775	CHG8770
	9	Contain Box	CHL8775	CHL8770
	10	Protector	CHP4599	CHP4598
	11	Card Remote Control Unit	CXE5116	CXE5116
	12	IM CD-ROM	Not used	Not used
	13	Panel	CNS9475	CNS9475
	14	Partition	Not used	Not used
*	15-1	Owner's Manual	CRD4840	CRB4485
*	15-2	Quick Start Guide	Not used	Not used
*	15-3	Installation Manual	Not used	Not used
*	15-4	Caution Card	Not used	Not used

9.2 EXTERIOR (1)

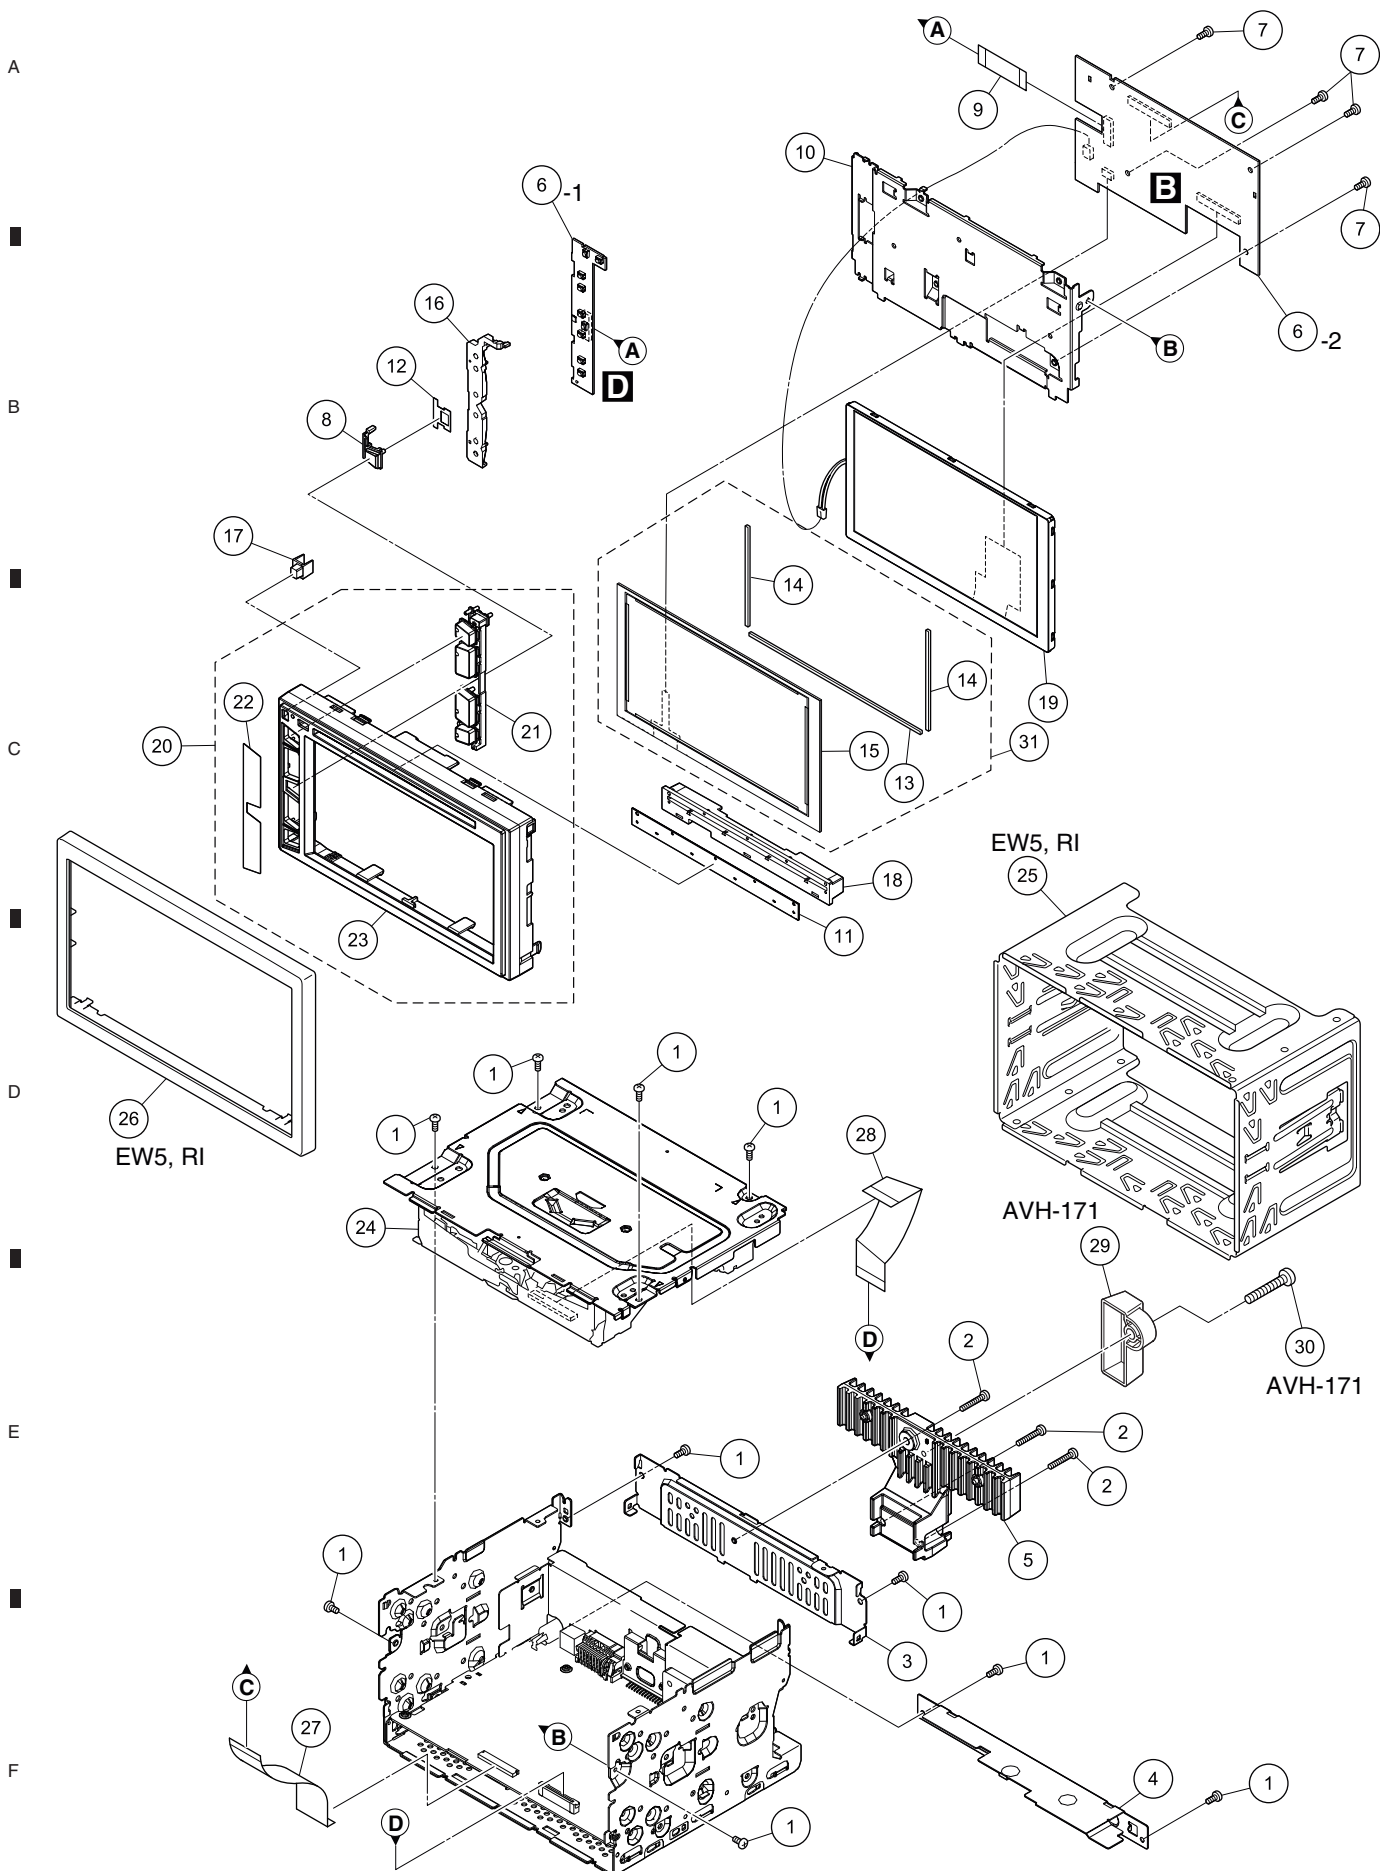

AVH-171DVD/XNUC

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw	BSZ26P060FTC	17	Lighting Conductor	CNW3303	
	2	Screw	BSZ26P120FTC	18	Holder	CNW3304	
	3	Holder	CND7211	19	TFT LCD	CWX4348	
	4	Holder	CND7212	20	Grille Assy	See Contrast table (2)	
	5	Heat Sink	CNR2170				
	6	Monitor Key Unit	See Contrast table (2)	21	Button	CAI4447	
	7	Screw	BSZ26P060FTC	22	Plate	CNN4861	
	8	Button (HOME)	CAI4449	23	Grille	See Contrast table (2)	
	9	FFC	CDE9768	24	DVD Mechanism Module(LS2.5)	CXK8200	
	10	Holder	CND7198	25	Holder	See Contrast table (2)	
	11	Cover	CNN4865	26	Panel	See Contrast table (2)	
	12	Sheet	CNN4864	27	FFC	CDD1084	
	13	Cushion	CNN4273	28	FFC	CDD1085	
	14	Cushion	CNN4964	29	Holder	See Contrast table (2)	
	15	Touch Panel	CSX1234	30	Screw	See Contrast table (2)	
	16	Lighting Conductor	CNW3302	31	Touch Panel Unit	CXE7987	


(2) CONTRAST TABLE

AVH-171DVD/XNUC, AVH-170DVD/XNUC, AVH-170DVD/XNEW5, AVH-175DVD/XNRC, AVH-175DVD/XNRD, AVH-175DVD/XNRI and AVH-179DVD/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-171DVD/ XNUC	AVH-170DVD/ XNUC	AVH-170DVD/ XNEW5	AVH-175DVD/ XNRC	AVH-175DVD/ XNRD
	6	Monitor Key Unit	CWN8753	CWN8753	CWN8754	CWN8753	CWN8753
	20	Grille Assy	CXE7819	CXE7811	CXE7807	CXE7810	CXE7810
	23	Grille	CNU3265	CNU3021	CNU3018	CNU3022	CNU3022
	25	Holder	Not used	Not used	CND7102	Not used	Not used
	26	Panel	Not used	Not used	CNU2645	Not used	Not used
	29	Holder	CNV7619	Not used	Not used	Not used	Not used
	30	Screw	BMZ40P140FTC	Not used	Not used	Not used	Not used

Mark	No.	Description	AVH-175DVD/ XNRI	AVH-179DVD/ XNID
	6	Monitor Key Unit	CWN8753	CWN8753
	20	Grille Assy	CXE7810	CXE7812
	23	Grille	CNU3022	CNU3023
	25	Holder	CND7102	Not used
	26	Panel	CNU2645	Not used
	29	Holder	Not used	Not used
	30	Screw	Not used	Not used

9.3 EXTERIOR (2)

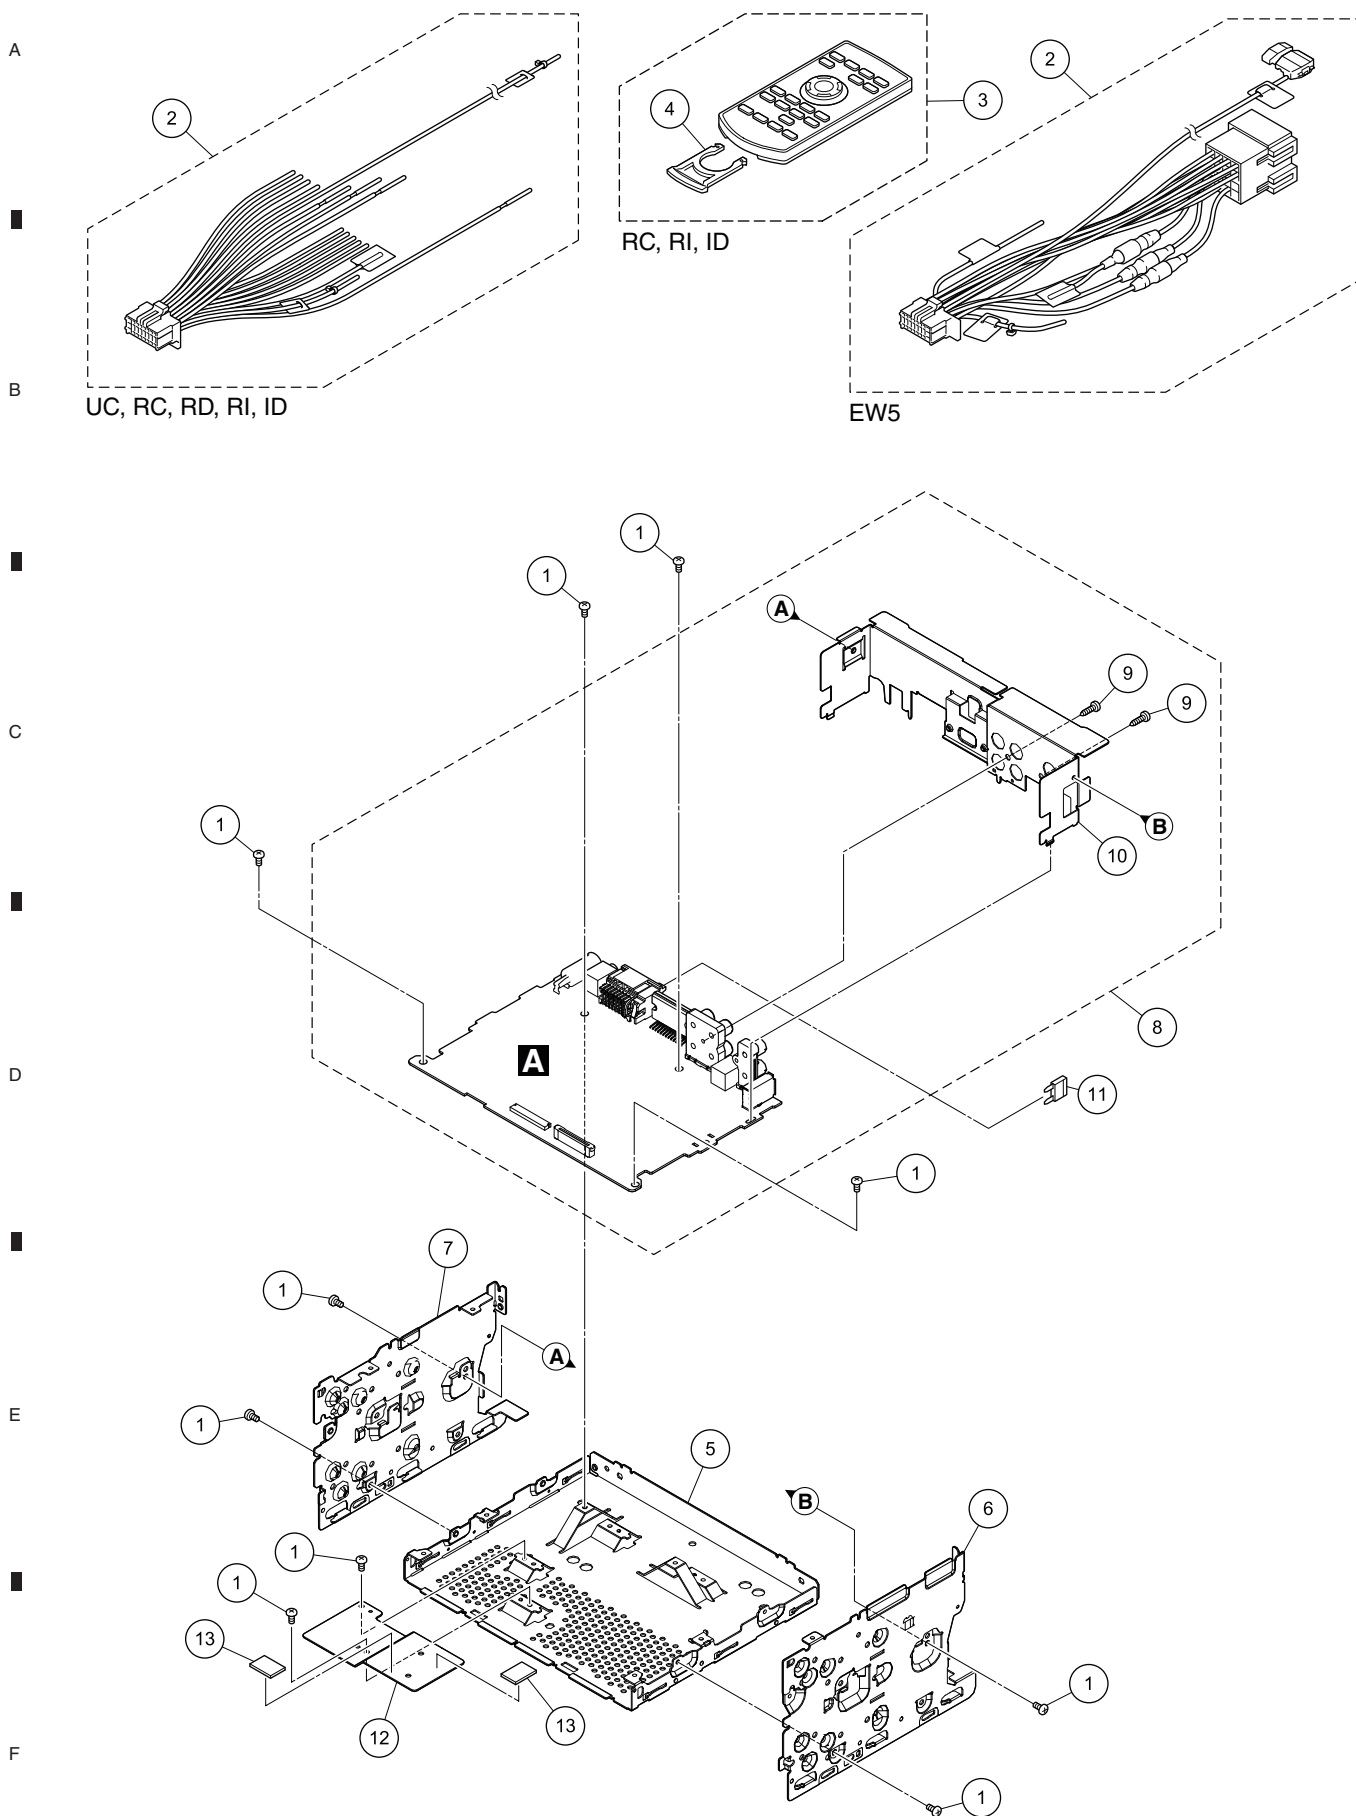

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Screw	BSZ26P060FTC	8	Mother Unit	See Contrast table (2)
2	Cord Assy	See Contrast table (2)	9	Screw	BPZ26P080FTC
3	Card Remote Control Unit	See Contrast table (2)	10	Holder	CND7251
4	Battery Cover	See Contrast table (2)			
5	Chassis	CNA3310	⚠ 11	Fuse(10 A)	YEK5001
			12	Holder	CND7260
6	Bracket	CND6985	13	Sheet	CNN5016
7	Bracket	CND6986			

(2) CONTRAST TABLE
 AVH-171DVD/XNUC, AVH-170DVD/XNUC, AVH-170DVD/XNEW5, AVH-175DVD/XNRC, AVH-175DVD/XNRD, AVH-175DVD/XNRI and AVH-179DVD/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-171DVD/ XNUC	AVH-170DVD/ XNUC	AVH-170DVD/ XNEW5	AVH-175DVD/ XNRC	AVH-175DVD/ XNRD
	2	Cord Assy	CDP1696	CDP1696	CDP1697	CDP1696	CDP1696
	3	Card Remote Control Unit	Not used	Not used	Not used	CXE5116	Not used
	4	Battery Cover	Not used	Not used	Not used	CNU1624	Not used
	8	Mother Unit	CWN8741	CWN8734	CWN8732	CWN8736	CWN8737

Mark	No.	Description	AVH-175DVD/ XNRI	AVH-179DVD/ XNID
	2	Cord Assy	CDP1696	CDP1696
	3	Card Remote Control Unit	CXE5116	CXE5116
	4	Battery Cover	CNU1624	CNU1624
	8	Mother Unit	CWN8738	CWN8739

9.4 DVD MECHANISM MODULE (1)

A


B

C

D

E

F

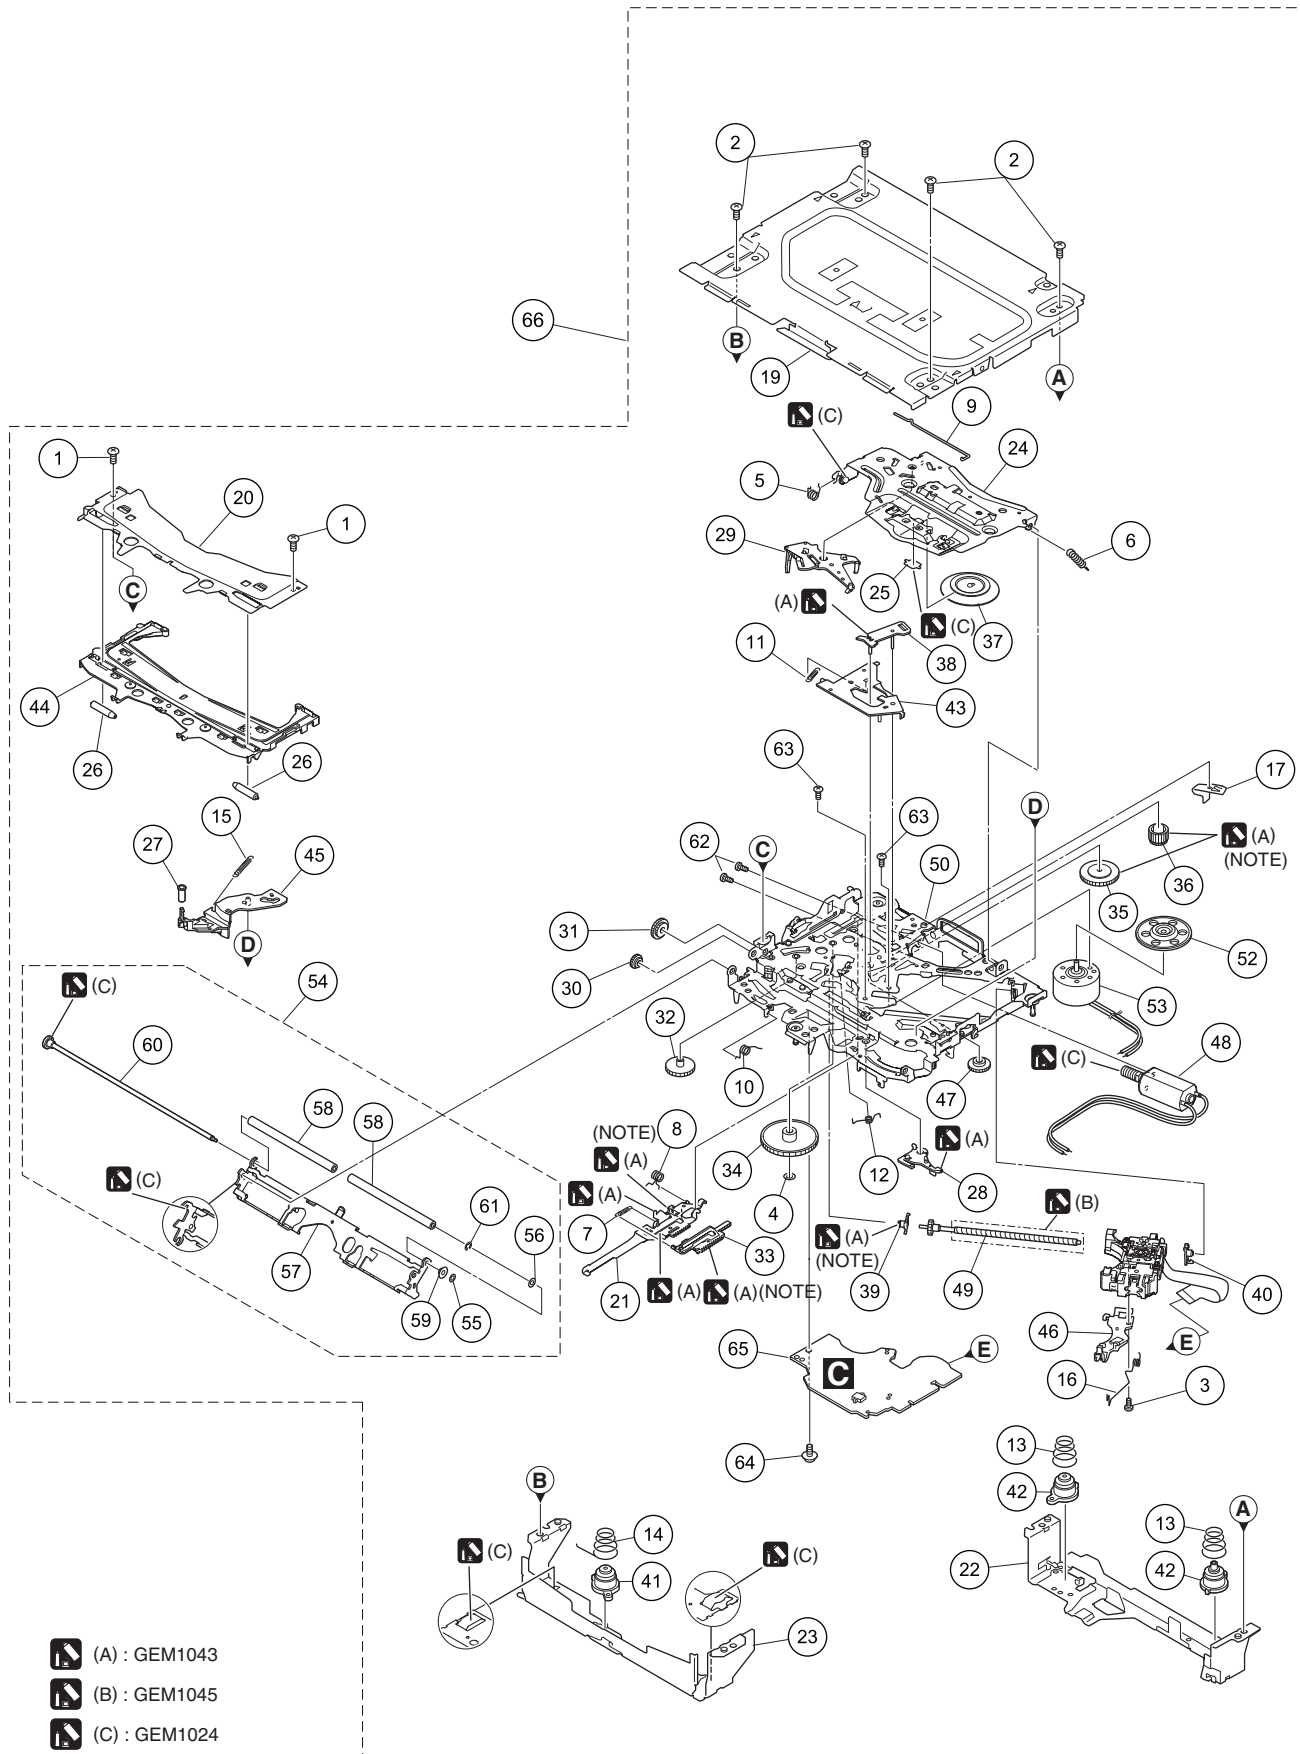

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Screw	BSZ20P040FTC	50	Chassis Unit	CXE8407	
2	Screw	BSZ26P060FTC				
3	Screw (M2 x 4)	CBA1835	51	*****		A
4	Washer	CBF1038	* 52	Support Wheel	CNW2052	
5	Spring	CBH2855	* 53	Spindle Motor	EXM2002	
			54	Arm Assy	CXE7890	
6	Spring	CBH2860	55	Washer	CBF1037	
7	Spring	CBH3010				
8	Spring	CBH3011	56	Washer	CBF1038	
9	Spring	CBH3014	57	Arm	CND6779	
10	Spring	CBH3015	58	Roller	CNW2500	
			59	Collar	CNW2444	
11	Spring	CBH3016	60	Gear Unit	CXE6225	B
12	Spring	CBH3017				
13	Spring	CBH3019	61	E Ring	YE15FTC	
14	Spring	CBH3086	62	Screw	JFZ20P025FTC	
15	Spring	CBH3095	63	Screw	JGZ17P020FTC	
			64	Screw (M2 x 5)	EBA1028	
16	Spring	CBH3096	* 65	Relay Unit	CWX4693	
17	Plate Spring	CBL1824				
18	*****		66	Mechanism Unit(Service)	CXX7130	
19	Case	CNB3928				
20	Bracket	CND4553				
21	Lever	CND7225				
22	Bracket	CND5710				
23	Bracket	CND6127				
24	Arm	CND7224				
25	Sheet	CNN3678				
26	Roller	CNW1172				
27	Roller	CNW1175				
28	Arm	CNW1177				
29	Arm	CNW1178				
30	Gear	CNW1180				D
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				
36	Gear	CNW1187				
37	Clamper	CNW1190				
38	Arm	CNW1192				E
39	Holder	CNW1193				
40	Holder	CNW1194				
41	Damper	CNW2439				
42	Damper	CNW2440				
43	Arm	CNW1726				
44	Guide	CNW3489				
45	Arm	CNW2241				
46	Rack	CNW2265				
47	Gear	CNW2287				F
48	Motor Unit	CXC4026				
49	Screw Unit	CXC8894				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J, RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.
Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by μ instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVH-171DVD/XNUC	
B:AVH-170DVD/XNUC	
C:AVH-170DVD/XNEW5	
D:AVH-175DVD/XNRC	
E:AVH-175DVD/XNRD	
F:AVH-175DVD/XNRI	
G:AVH-179DVD/XNID	
Unit Number : CWN8741(A)	
Unit Number : CWN8734(B)	
Unit Number : CWN8732(C)	
Unit Number : CWN8736(D)	
Unit Number : CWN8737(E)	
Unit Number : CWN8738(F)	
Unit Number : CWN8739(G)	
Unit Name : Mother Unit	
Unit Number : CWN8753(A,B,D,E,F,G)	
Unit Number : CWN8754(C)	
Unit Name : Monitor Key Unit	
Unit Number :	
Unit Name : Relay Unit	

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	
Unit Number : CWN8741(A)	
Unit Number : CWN8734(B)	
Unit Number : CWN8732(C)	
Unit Number : CWN8736(D)	
Unit Number : CWN8737(E)	
Unit Number : CWN8738(F)	
Unit Number : CWN8739(G)	

Unit Name : Mother Unit

MISCELLANEOUS

IC 101	(B,58,66) Regulator IC	NJW4181U3-33B
IC 111	(A,77,75) Regulator IC	NJW4184DL3-08A
IC 151	(B,69,42) Regulator IC	S-1172B33-E6
IC 161	(B,78,38) Regulator IC	MM3479A13P
IC 201	(A,74,25) Regulator IC	MM3479A33P
IC 211	(B,38,68) Regulator IC	MM3571A33P
IC 231	(B,137,75) IC	S-1200B50-M5
IC 271	(B,162,15) IC	NJM2886DL3-05
IC 301	(B,155,43) IC	AN33012UA
IC 401	(A,52,47) Flash Blank UC IC	MN103LF15RXW
IC 402	(A,55,65) Serial Flash Memory IC	MX25L1606EM2I-12G
IC 601	(B,117,41) AUD DSP SYS LSI	SPHE8202GQ-HL11P
IC 701	(B,122,62) IC(A,B,C,D,E,F)	337S3959
IC 721	(A,112,28) Flash ROM Unit(A)	CWJ1722
	(A,112,28) Flash ROM Unit(B)	CWJ1665
	(A,112,28) Flash ROM Unit(C)	CWJ1666
	(A,112,28) Flash ROM Unit(D)	CWJ1668
	(A,112,28) Flash ROM Unit(E)	CWJ1669
	(A,112,28) Flash ROM Unit(F)	CWJ1670
	(A,112,28) Flash ROM Unit(G)	CWJ1671
IC 741	(A,108,45) RAM IC	A3V28S40JTP-60
IC 821	(B,133,23) Logic IC	74VHC4053AFT
IC 822	(B,136,31) Logic IC	74VHC4053AFT
IC 861	(B,99,20) IC	BA5839FP
IC 1111	(A,135,79) V AMP IC	BH7673G
IC 1112	(A,126,61) V AMP IC	BH7673G

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

IC 1113 (A,129,79) V AMP IC BH7673G
 IC 1131 (A,127,70) Video Driver IC NJM41050V
 IC 1132 (A,135,73) V SW IC NJM41010F1
 IC 1201 (B,91,75) IC PM9012A
 IC 1251 (B,103,63) OP AMP IC NJM8065RB1

D 2402 (A,169,72) Diode RB060M-30
 D 3101 (B,133,100) Diode DZ2S068C
 D 3102 (B,140,96) Diode DZ2S068C
 D 3103 (B,135,98) Diode DZ2S068C

IC 1252 (B,79,64) OP AMP IC NJM8065RB1
 IC 1301 (A,89,121) Power AMP IC PA2032A
 IC 2201 (A,21,79) Tuner IC TEF6686HN
 IC 2401 (B,162,80) DC/DC CONV IC AN33014UA
 Q 301 (A,161,46) Power MOS FET ATP112-H

D 3191 (B,159,91) Diode EZAEG2A50AX
 D 3192 (B,159,89) Diode EZAEG2A50AX
 L 301 (A,161,27) Inductor CTH1254
 L 302 (A,148,27) Inductor CTH1253
 L 601 (A,124,54) Inductor LCTC2R2K1608

Q 302 (A,149,46) Power MOS FET ATP112-H
 Q 501 (A,16,41) Chip Transistor HN1C03FU
 Q 502 (A,25,46) Transistor UMF5N
 Q 503 (A,25,41) Transistor UMF5N
 Q 601 (B,131,61) Chip Transistor RN4982

L 602 (A,87,24) Inductor LCTC2R2K1608
 L 603 (A,90,24) Inductor LCTC2R2K1608
 L 604 (A,94,25) Inductor LCTC2R2K1608
 L 721 (A,105,28) Inductor CTF1786
 L 741 (A,109,32) Inductor CTF1786

Q 602 (B,131,57) Chip Transistor HN1C01FU
 Q 701 (B,116,62) Bipolar TR(A,B,C,D,E,F) LSAR523UB
 Q 841 (B,119,14) Transistor 2SAR293PGZE
 Q 842 (B,126,14) Transistor 2SAR293PGZE
 Q 843 (B,145,10) Bipolar TR LSCR523UB

L 901 (A,149,62) Choke Coil 10 uH CTH1486
 L 902 (A,58,96) Choke Coil 600 uH CTH1221
 L 2202 (A,16,96) Inductor CTF1389
 L 2204 (A,24,99) Inductor LCMAR27J1608
 L 2206 (A,16,90) Inductor LCYC150K1608

Q 844 (B,146,16) Bipolar TR LSCR523UB
 Q 845 (B,140,16) Bipolar TR LSCR523UB
 Q 846 (B,140,12) Bipolar TR LSCR523UB
 Q 910 (A,46,71) Chip Transistor HN1C01FU
 Q 920 (B,44,65) Resistor Built-IN TR LTC014EEB

L 2401 (A,160,73) SMD SPL Inductor CTH1524
 L 2402 (A,165,72) Inductor CTF1793
 L 3191 (B,154,90) Inductor CTF1713
 X 401 (A,34,47) Crystal Resonator 12.500 MHz CSS1839
 X 601 (B,134,40) Resonator 27.000 MHz CSS1768

Q 930 (B,53,86) Bipolar TR LSCR523UB
 Q 950 (B,38,76) Bipolar TR LSAR523UB
 Q 1251 (A,94,66) Bipolar TR LSCR523UB
 Q 1301 (A,74,87) Bipolar TR LSCR523UB
 Q 1302 (B,72,85) Transistor RN4987

X 2201 (A,31,84) Crystal Resonator 9.216 MHz CSS1867
 ⚠ P301 (A,65,19) Fuse 500 mA(A) CEK1279
 ⚠ (A,65,19) Fuse 750 mA(B,C,D,E,F,G) CEK1380
 P 2202 (B,22,103) Surge Absorber IMSA-6803-01Y900
 P 3121 (A,36,113) Poly Switch FSMD075-24R
 P 3151 (B,125,88) Poly Switch FSMD075-24R

Q 1304 (B,76,87) Chip Transistor RN1903
 Q 3121 (A,31,60) Chip Transistor(D,E,F,G) RN4982
 Q 3122 (A,31,54) Chip Transistor(D,E,F,G) RN4982
 Q 3123 (A,35,60) Chip Transistor(D,E,F,G) RN4982
 Q 3124 (A,35,54) Chip Transistor(D,E,F,G) RN4982

P 3161 (B,125,94) Poly Switch FSMD075-24R
 BZ401 (A,23,61) Buzzer CPV1062
 CN801 (A,118,11) 30P Connector VKN1620
 CN3201 (A,82,15) FFC/FPC Connector CKS6672
 JA901 (A,55,122) Connector CKM1613

Q 3161 (B,112,81) Chip Transistor HN1C01FU
 Q 3162 (B,105,81) Chip Transistor HN1C01FU
 D 101 (A,67,87) Diode D1F60-5053
 D 161 (B,77,48) Diode D1F60-5053

JA2201 (A,14,116) Antenna Jack YKS5041
 JA3101 (A,143,117) 3.5 DIA Jack CKN1106
 JA3121 (A,28,121) 3.5 DIA Jack CKS6437
 JA3151 (A,156,115) Jack CKB1108
 JA3161 (A,123,112) Jack CKB1109

D 162 (B,80,48) Diode D1F60-5053
 D 301 (A,159,37) Diode RB056L-40
 D 302 (A,151,37) Diode RB056L-40
 D 402 (A,39,60) Schottky Diode DB2J31400
 D 403 (B,49,61) Schottky Diode DB2J31400

JA3191 (A,169,98) USB Jack CKN1097
 VL2201 (A,22,91) Variable Coil CTC1216

D 501 (A,18,39)
 D 901 (A,149,68) Diode RB080L-30
 D 902 (A,69,105) Diode D1F60-5053
 D 903 (A,69,108) Diode D1F60-5053
 D 911 (A,47,77) Diode DZ2J062M0

R 151 (A,102,29) RS1/10SR0R0J
 R 152 (B,132,50) RS1/10SR0R0J
 R 153 (B,127,57) RS1/10SR0R0J
 R 154 (A,126,42) RS1/10SR0R0J
 R 156 (A,125,38) RS1/10SR0R0J

D 912 (A,49,77) Diode DZ2J068M0
 D 920 (B,50,64) Rectifier Diode DA2J101
 D 930 (B,57,86) Diode DZ2J056M0
 D 940 (A,42,87) Diode CRG03
 D 950 (B,38,80) Rectifier Diode DA2J101

R 161 (B,83,31) RS1/10SR0R0J
 R 162 (A,122,39) RS1/16SS0R0J
 R 271 (B,153,18) RS1/8SQ0R0J
 R 301 (B,162,36) RS1/10SR0R0J
 R 303 (B,161,39) RS1/16SS511J

D 1301 (A,68,80) Rectifier Diode DA2J101
 D 1303 (A,71,86) Diode DZ2J082M0
 D 1304 (B,68,86) Rectifier Diode DA2J101
 D 2201 (A,16,100) Diode EZAEG2A50AX
 D 2202 (A,25,101) Diode EZAEG2A50AX

R 304 (B,162,39) RS1/16SS2702D
 R 305 (B,163,41) RS1/16SS1101D
 R 306 (B,163,39) RS1/16SS2701D
 R 307 (B,163,42) RS1/16SS153J
 R 308 (B,157,37) RS1/16SS103J

D 2401 (A,151,74) Diode D1F60-5053

RESISTORS

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
R 310	(B,158,49)	12 mohm	CCN1321			R 453	(B,47,61)		RS1/16SS103J		
R 311	(B,159,37)		RS1/16SS204J			R 454	(B,48,48)		RS1/16SS473J		
R 312	(B,160,37)		RS1/16SS394J			R 455	(B,52,62)		RS1/16SS473J		
R 313	(B,151,49)	12 mohm	CCN1321								A
R 314	(B,155,37)		RS1/16SS224J			R 458	(B,63,43)		RS1/16SS473J		
						R 460	(B,59,56)		RS1/16SS473J		
R 315	(B,148,42)		RS1/16SS123J			R 461	(A,45,63)		RS1/16SS1002D		
R 316	(B,148,39)		RS1/16SS1002F			R 464	(A,70,53) (F,G)		RS1/16SS104J		
R 317	(B,148,38)		RS1/16SS0R0J			R 465	(A,67,53) (C,D,E)		RS1/16SS104J		
R 318	(B,148,41)		RS1/16SS3302D			R 466	(B,47,56)		RS1/16SS0R0J		
R 319	(B,147,40)		RS1/16SS561J			R 467	(B,49,56)		RS1/16SS183J		
R 321	(B,145,40)		RS1/10SR0R0J			R 468	(A,35,40)		RS1/16SS102J		
R 322	(A,75,43)		RS1/16SS473J			R 469	(A,50,64)		RS1/16SS473J		
R 323	(A,76,43)		RS1/16SS473J			R 470	(A,61,66)		RS1/16SS473J		
R 324	(A,161,7)		RS1/10SR0R0J			R 501	(A,15,39)		RS1/16SS102J		
R 401	(A,51,68)		RS1/16SS473J			R 502	(A,16,43)		RS1/16SS102J		B
R 402	(A,57,61)		RS1/16SS473J			R 503	(A,18,41)		RS1/16SS222J		
R 403	(B,49,71)		RS1/16SS473J			R 504	(A,13,42)		RS1/16SS222J		
R 406	(B,56,40)		RS1/16SS473J			R 505	(A,28,45)		RS1/16SS103J		
R 407	(B,52,39)		RS1/16SS473J			R 506	(A,28,47)		RS1/16SS103J		
R 408	(B,57,36)		RS1/16SS473J			R 507	(A,28,40)		RS1/16SS103J		
R 410	(B,54,64)		RS1/16SS0R0J			R 508	(A,28,42)		RS1/16SS103J		
R 411	(A,36,47)		RS1/16SS0R0J			R 509	(A,23,45)		RS1/16SS105J		
R 412	(A,43,60)		RS1/16SS473J			R 510	(A,24,39)		RS1/16SS105J		
R 413	(A,38,59)		RS1/16SS103J			R 601	(B,107,31)		RS1/16SS221J		
R 414	(A,37,41)		RS1/16SS102J			R 602	(B,107,30)		RS1/16SS473J		
											C
R 415	(B,42,42)		RS1/16SS473J			R 603	(B,105,31)		RS1/16SS103J		
R 416	(B,36,41)		RS1/16SS104J			R 604	(B,107,32)		RS1/16SS103J		
R 417	(A,70,54) (D,E)		RS1/16SS104J			R 605	(B,105,33)		RS1/16SS103J		
R 418	(A,67,54) (C,F,G)		RS1/16SS104J			R 606	(A,105,31)		RS1/16SS473J		
R 419	(A,70,55) (E,G)		RS1/16SS104J			R 607	(A,106,33)		RS1/16SS221J		
R 420	(A,67,55) (C,D,F)		RS1/16SS104J								
R 422	(A,67,57)		RS1/16SS104J			R 608	(B,118,60)		RS1/16SS473J		
R 423	(A,33,40)		RS1/16SS101J			R 609	(B,120,58)		RS1/16SS473J		
R 424	(A,49,33)		RS1/16SS101J			R 611	(A,125,50)		RS1/16SS1001D		
						R 612	(A,124,52)		RS1/16SS3000D		
R 425	(A,51,33)		RS1/16SS101J			R 613	(A,84,24)		RS1/16SS0R0J		
R 426	(B,57,41)		RS1/16SS101J								
R 427	(A,56,34)		RS1/16SS101J			R 616	(B,131,40)		RS1/16SS105J		D
R 428	(A,58,34)		RS1/16SS561J			R 617	(B,129,40)		RS1/16SS152J		
R 429	(A,66,38)		RS1/16SS471J			R 618	(B,127,38)		RS1/16SS103J		
						R 619	(A,123,34)		RS1/16SS0R0J		
R 430	(A,67,51)		RS1/16SS101J			R 620	(A,120,33)		RS1/16SS223J		
R 431	(B,57,42)		RS1/16SS101J								
R 432	(A,67,38)		RS1/16SS822J			R 621	(A,119,32)		RS1/16SS223J		
R 433	(A,49,60)		RS1/16SS101J			R 622	(A,118,32)		RS1/16SS222J		
R 434	(A,52,59)		RS1/16SS101J			R 623	(B,115,24)		RS1/16SS222J		
						R 624	(B,112,22)		RS1/16SS103J		
R 435	(A,61,64)		RS1/16SS101J			R 625	(B,112,23)		RS1/16SS101J		
R 436	(A,39,48)		RS1/16SS102J								
R 438	(A,37,39)		RS1/16SS473J			R 626	(B,113,24)		RS1/16SS101J		
R 439	(B,29,37)		RS1/16SS473J			R 627	(B,108,47)		RS1/16SS560J		E
R 440	(B,39,37)		RS1/16SS473J			R 628	(B,110,25)		RS1/16SS472J		
						R 629	(B,132,59)		RS1/16SS472J		
R 441	(B,33,38)		RS1/16SS473J			R 630	(B,130,59)		RS1/16SS472J		
R 442	(B,22,40)		RS1/16SS102J								
R 443	(A,66,45)		RS1/16SS473J			R 631	(B,132,63)		RS1/16SS102J		
R 444	(A,66,44)		RS1/16SS473J			R 632	(B,129,61)		RS1/16SS471J		
R 445	(A,66,49)		RS1/16SS473J			R 633	(B,106,37)		RS1/16SS101J		
						R 634	(B,105,38)		RS1/16SS101J		
R 446	(B,64,50)		RS1/16SS473J			R 635	(B,107,37)		RS1/16SS104J		
R 447	(B,62,68)		RS1/16SS473J								
R 448	(B,62,69)		RS1/16SS104J			R 636	(B,119,55)		RS1/16SS0R0J		
R 449	(B,46,55)		RS1/16SS471J			R 637	(B,128,51)		RS1/16SS821J		F
R 450	(B,45,55)		RS1/16SS471J			R 638	(B,128,52)		RS1/16SS821J		
						R 639	(B,134,61)		RS1/16SS223J		
R 451	(B,49,54)		RS1/16SS472J			R 640	(B,128,62)		RS1/16SS223J		
R 452	(B,49,53)		RS1/16SS472J								

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 641	(A,87,26)	RS1/16SS3000D	R 876	(B,96,28)	RS1/16SS113J
	R 642	(A,89,26)	RS1/16SS3000D	R 877	(B,102,27)	RS1/16SS221J
	R 643	(A,93,27)	RS1/16SS3000D	R 878	(A,107,7)	RS1/16SS3902D
	R 701	(B,116,59) (A,B,C,D,E,F)	RS1/16SS473J	R 879	(B,105,7)	RS1/16SS3902D
	R 702	(B,117,60) (A,B,C,D,E,F)	RS1/16SS472J	R 880	(B,143,15)	RS1/16SS104J
	R 703	(B,121,60) (A,B,C,D,E,F)	RS1/16SS222J	R 881	(B,142,15)	RS1/16SS0R0J
	R 704	(B,123,60) (A,B,C,D,E,F)	RS1/16SS222J	R 882	(B,141,10)	RS1/16SS0R0J
	R 705	(B,118,63) (A,B,C,D,E,F)	RS1/16SS183J	R 883	(B,144,17)	RS1/16SS5600F
	R 706	(B,125,62) (A,B,C,D,E,F)	RS1/16SS101J	R 884	(B,142,17)	RS1/16SS470J
	R 707	(B,118,58) (A,B,C,D,E,F)	RS1/16SS101J	R 885	(B,140,10)	RS1/16SS104J
B	R 708	(B,119,60) (A,B,C,D,E,F)	RS1/16SS221J	R 886	(B,142,14)	RS1/16SS101J
	R 721	(B,108,28)	RS1/16SS101J	R 887	(B,138,12)	RS1/16SS470J
	R 722	(B,108,29)	RS1/16SS101J	R 888	(B,147,9)	RS1/16SS5100F
	R 723	(A,106,31)	RS1/16SS473J	R 889	(B,141,12)	RS1/16SS121J
	R 724	(A,114,24)	RS1/16SS473J	R 890	(B,138,17)	RS1/16SS104J
	R 725	(A,109,24)	RS1/16SS473J	R 891	(B,138,14)	RS1/16SS104J
	R 726	(B,112,28)	RS1/16SS0R0J	R 892	(B,136,18)	RS1/16SS103J
	R 727	(B,111,28)	RS1/16SS101J	R 893	(B,136,16)	RS1/16SS103J
	R 741	(A,97,38)	RAB4CQ330J	R 894	(B,145,13)	RS1/16SS0R0J
	R 742	(A,97,42)	RAB4CQ330J	R 895	(B,146,12)	RS1/16SS0R0J
C	R 746	(A,117,39)	RAB4CQ330J	R 911	(A,47,73)	RS1/16SS103J
	R 747	(A,118,42)	RAB4CQ330J	R 913	(A,47,75)	RS1/16SS473J
	R 801	(A,115,22)	RS1/16SS561J	R 914	(A,47,81)	RS1/16SS472J
	R 802	(B,114,21)	RS1/16SS681J	R 915	(A,49,73)	RS1/16SS104J
	R 815	(B,129,17)	RS1/16SS105J	R 916	(A,49,75)	RS1/16SS473J
	R 816	(B,128,18)	RS1/16SS105J	R 917	(A,44,82)	RS1/4SA102J
	R 821	(B,150,19)	RS1/10SR0R0J	R 920	(B,47,64)	RS1/16SS103J
	R 822	(A,118,16)	RS1/16SS0R0J	R 921	(B,50,66)	RS1/16SS472J
	R 823	(B,141,30)	RS1/16SS0R0J	R 922	(B,48,68)	RS1/4SA102J
	R 824	(B,131,19)	RS1/16SS0R0J	R 930	(B,55,85)	RS1/16SS473J
D	R 825	(A,119,16)	RS1/16SS0R0J	R 931	(B,55,87)	RS1/16SS104J
	R 826	(B,138,27)	RS1/16SS0R0J	R 932	(B,59,86)	RS1/16SS472J
	R 827	(B,138,23)	RS1/16SS0R0J	R 933	(B,55,90)	RS1/4SA102J
	R 841	(B,145,14)	RS1/16SS4300F	R 950	(B,38,73)	RS1/16SS102J
	R 842	(B,144,12)	RS1/16SS4300F	R 951	(B,39,75)	RS1/16SS473J
	R 843	(B,119,21)	RS1/16SS3R3J	R 952	(B,37,78)	RS1/16SS223J
	R 844	(B,124,22)	RS1/16SS3R3J	R 953	(B,37,82)	RS1/16SS103J
	R 845	(B,121,22)	RS1/10SR3R3J	R 1114	(B,140,90)	RS1/10SR101J
	R 846	(B,121,21)	RS1/10SR2R2J	R 1115	(B,138,90)	RS1/10SR101J
	R 847	(B,121,19)	RS1/10SR2R2J	R 1117	(B,131,90)	RS1/10SR101J
E	R 848	(B,121,18)	RS1/10SR3R3J	R 1118	(B,129,90)	RS1/10SR101J
	R 849	(B,125,19)	RS1/10SR3R3J	R 1131	(A,128,76)	RS1/16SS0R0J
	R 850	(B,130,15)	RS1/10SR1R8J	R 1132	(A,127,64)	RS1/16SS0R0J
	R 851	(B,130,13)	RS1/10SR1R8J	R 1133	(A,133,77)	RS1/16SS0R0J
	R 852	(B,131,13)	RS1/10SR3R3J	R 1134	(A,121,68)	RS1/16SS563J
	R 861	(B,93,11)	RS1/16SS163J	R 1135	(A,121,69)	RS1/16SS563J
	R 862	(B,93,12)	RS1/16SS183J	R 1136	(A,131,66)	RS1/16SS473J
	R 863	(B,95,12)	RS1/16SS822J	R 1139	(A,127,76)	RS1/16SS0R0J
	R 864	(B,95,13)	RS1/16SS752J	R 1140	(A,120,68)	RS1/16SS564J
	R 865	(B,102,13)	RS1/16SS221J	R 1141	(A,124,57)	RS1/16SS3000D
F	R 866	(B,105,9)	RS1/16SS5102D	R 1142	(A,120,69)	RS1/16SS564J
	R 867	(B,108,10)	RS1/16SS5102D	R 1201	(B,98,79)	RS1/16SS221J
	R 868	(B,105,10)	RS1/8SQ1R0J	R 1202	(B,98,80)	RS1/16SS221J
	R 869	(B,105,12)	RS1/16SS0R0J	R 1203	(B,98,81)	RS1/16SS221J
	R 870	(B,106,12)	RS1/16SS0R0J	R 1251	(A,94,63)	RS1/16SS471J
	R 871	(B,107,12)	RS1/16SS0R0J	R 1252	(A,90,67)	RS1/16SS103J
	R 872	(B,108,12)	RS1/16SS0R0J	R 1253	(A,94,68)	RS1/16SS682J
	R 873	(B,93,27)	RS1/16SS473J	R 1255	(B,107,61)	RS1/16SS102J
	R 874	(B,93,28)	RS1/16SS113J	R 1256	(B,109,61)	RS1/16SS183J
	R 875	(B,96,27)	RS1/16SS473J	R 1258	(B,108,63)	RS1/16SS102J

5			6			7			8		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.		
R 1259	(B,108,64)		RS1/16SS183J			R 3102	(B,100,66)		RS1/10SR331J		
R 1260	(B,98,61)		RS1/16SS102J			R 3103	(B,133,90)		RS1/10SR101J		
R 1261	(B,97,63)		RS1/16SS102J			R 3104	(B,136,90)		RS1/10SR101J		
R 1262	(B,96,61)		RS1/16SS183J			R 3106	(B,134,88)		RS1/16SS223J		A
R 1263	(B,97,64)		RS1/16SS183J			R 3107	(B,136,88)		RS1/16SS223J		
R 1264	(B,98,60)		RS1/16SS113J			R 3108	(B,131,96)		RS1/16SS750J		
R 1265	(B,95,64)		RS1/16SS113J			R 3127	(A,39,57)		RS1/16SS1001D		
R 1266	(B,86,62)		RS1/16SS113J			R 3128	(A,37,57)		RS1/16SS1001D		
R 1267	(B,84,62)		RS1/16SS102J			R 3129	(A,33,59) (D,E,F,G)		RS1/16SS6800D		
R 1268	(B,83,61)		RS1/16SS183J			R 3130	(A,30,55) (D,E,F,G)		RS1/16SS6800D		
R 1269	(B,86,64)		RS1/16SS113J			R 3132	(A,33,55) (D,E,F,G)		RS1/16SS8201D		
R 1270	(B,84,64)		RS1/16SS102J			R 3133	(A,36,57) (D,E,F,G)		RS1/16SS8201D		
R 1271	(B,84,65)		RS1/16SS183J			R 3151	(A,125,73)		RS1/16SS75R0D		
R 1272	(B,74,63)		RS1/16SS102J			R 3152	(B,144,92)		RS1/16SS750J		
R 1273	(B,74,64)		RS1/16SS102J								
R 1274	(B,74,62)		RS1/16SS183J			R 3161	(B,110,81)		RS1/16SS821J		B
R 1275	(B,74,65)		RS1/16SS183J			R 3162	(B,110,83)		RS1/16SS223J		
R 1302	(A,67,82)		RS1/16SS103J			R 3163	(B,112,78)		RS1/16SS472J		
R 1303	(A,72,85)		RS1/16SS104J			R 3164	(B,114,83)		RS1/16SS223J		
R 1304	(A,72,84)		RS1/16SS473J			R 3165	(B,113,78)		RS1/16SS472J		
R 1305	(B,69,88)		RS1/16SS102J			R 3166	(B,115,81)		RS1/16SS821J		
R 1307	(B,36,91)		RS1/16SS473J			R 3167	(B,102,81)		RS1/16SS821J		
R 1308	(B,37,91)		RS1/16SS102J			R 3168	(B,103,83)		RS1/16SS223J		
R 1309	(B,78,84)		RS1/16SS683J			R 3169	(B,104,78)		RS1/16SS472J		
R 1310	(B,78,88)		RS1/16SS683J			R 3170	(B,105,78)		RS1/16SS472J		
R 1311	(B,78,86)		RS1/16SS152J			R 3171	(B,107,83)		RS1/16SS223J		C
R 1312	(A,40,48)		RS1/16SS103J			R 3172	(B,107,81)		RS1/16SS821J		
R 1313	(B,80,85)		RS1/16SS101J								
R 1314	(B,46,48)		RS1/16SS0R0J			CAPACITORS					
R 2201	(A,39,95)		RS1/10SR0R0J			C 114	(A,58,74)		XCEAT102M16		
R 2202	(A,25,75)		RS1/16SS101J			C 115	(B,54,66)		CKSRYB104K50		
R 2203	(A,14,99)		RS1/16SS105J			C 117	(B,57,61) 47 uF		CCG1256		
R 2204	(A,14,98)		RS1/16SS105J			C 121	(A,78,83) 10 uF		CCG1393		
R 2205	(A,14,90)		RS1/16SS391J			C 123	(A,72,82) 4.7 uF		CCG1331		
R 2206	(A,21,85)		RS1/16SS0R0J								
R 2207	(A,20,85)		RS1/16SS0R0J			C 155	(B,70,47) 4.7 uF		CCG1201		
R 2211	(A,28,78)		RS1/16SS103J			C 157	(B,70,38) 4.7 uF		CCG1201		
R 2212	(A,27,78)		RS1/16SS103J			C 160	(A,102,27) 10 uF		CCG1244		D
R 2216	(A,24,75)		RS1/16SS101J			C 165	(B,79,42) 1 uF		DCH1246		
R 2220	(A,25,72)		RS1/16SS472J			C 167	(B,78,34) 1 uF		DCH1246		
R 2221	(A,24,72)		RS1/16SS472J			C 168	(B,74,40)		CKSSYB104K10		
R 2222	(B,33,66)		RS1/10SR0R0J			C 201	(A,77,27)		CKSSYB104K10		
R 2225	(B,21,76)		RS1/10SR0R0J			C 203	(A,73,31) 1 uF		DCH1246		
R 2401	(B,159,85)		RS1/16SS152J			C 205	(A,74,22) 1 uF		DCH1246		
R 2402	(A,167,92)		RS1/10SR471J			C 211	(B,37,64)		CKSRYB474K16		
R 2403	(B,159,86)		RS1/16SS3302D			C 212	(B,37,71)		CKSRYB474K16		
R 2404	(B,157,86)		RS1/16SS0R0J			C 233	(B,138,77)		CKSSYB104K10		
R 2405	(B,155,86)		RS1/16SS0R0J			C 234	(B,138,72)		CKSSYB104K10		
R 2406	(B,154,86)		RS1/16SS8201D			C 274	(B,154,16) 2.2 uF		CCG1379		E
R 2407	(A,167,93)		RS1/10SR471J			C 275	(B,154,14)		CKSRYB105K16		
R 2408	(A,167,89)		RS1/10SR471J			C 301	(A,158,11)		CKSSYB102K50		
R 2409	(A,167,90)		RS1/10SR471J			C 302	(A,158,10)		CKSSYB104K10		
R 2410	(B,155,84)		RS1/16SS102J			C 303	(A,159,16) 10 uF		CCG1192		
R 2411	(B,156,79)		RS1/16SS0R0J			C 304	(A,159,13) 10 uF		CCG1192		
R 2412	(A,160,78) 56 mohm		ACN7160			C 305	(A,159,19) 47 uF		CCG1233		
R 2413	(B,164,85)		RS1/16SS204J			C 308	(B,155,51)		CKSRYB102K50		
R 2415	(B,166,85)		RS1/16SS394J			C 309	(B,161,40)		CCSCH561J50		
R 2417	(B,168,84)		RS1/16SS224J			C 311	(B,162,54) 10 uF		CCG1236		
R 2418	(B,170,81)		RS1/16SS4702D			C 312	(B,156,37)		CKSSYB104K10		F
R 2419	(B,168,82)		RS1/16SS104J			C 313	(B,160,54) 10 uF		CCG1236		
								C 314	(B,163,43)	CKSSYB822K16	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	C 315	(B,164,54) 10 uF	CCG1236				
	C 316	(B,161,42)	CCSSCH8R0D50	C 627	(B,128,47)	CKSSYB104K10	
	C 317	(B,163,44)	CKSSYB104K16	C 628	(A,122,41)	CKSSYB104K10	
	C 318	(B,150,44)	CKSSYB104K16	C 629	(A,122,42)	CKSSYB104K10	
				C 630	(A,124,42)	CKSSYB104K10	
	C 319	(B,150,42)	CCSSCH8R0D50	C 631	(B,132,40)	CCSSCH120J50	
	C 320	(B,148,43)	CKSSYB103K16				
	C 321	(B,154,37)	CKSSYB104K10	C 632	(B,137,40)	CCSSCH120J50	
	C 322	(B,150,40)	CKSRYB105K10	C 633	(A,124,40)	CKSSYB104K10	
	C 323	(B,148,40)	CKSSYB471K50	C 634	(A,122,40)	CKSSYB104K10	
	C 326	(A,151,19) 47 uF	CCG1233	C 635	(A,125,36)	CKSSYB103K16	
	C 327	(A,151,16) 10 uF	CCG1192	C 636	(A,125,35)	CKSSYB103K16	
	C 328	(A,151,13) 10 uF	CCG1192				
	C 329	(A,152,11)	CKSSYB104K10	C 637	(A,125,34)	CKSSYB104K10	
	C 330	(A,152,10)	CKSSYB102K50	C 638	(B,129,38)	CKSSYB104K10	
B	C 332	(A,168,33) 10 uF	CCG1192	C 639	(B,124,25)	CKSSYB104K10	
	C 401	(B,52,65)	CKSSYB104K10	C 640	(B,124,23)	CKSSYB103K16	
	C 402	(A,38,57) (D,E,F,G)	CKSSYB104K10	C 641	(B,124,24)	CKSSYB103K16	
	C 403	(B,50,59) (D,E,F,G)	CKSSYB104K10				
	C 405	(A,40,44)	CKSSYB104K10	C 642	(B,116,25)	CKSSYB104K10	
	C 406	(A,60,35)	CKSSYB104K10	C 643	(B,116,26)	CKSSYB103K16	
	C 407	(A,65,48)	CKSSYB104K10	C 644	(B,116,27)	CKSSYB103K16	
				C 645	(B,122,27) 4.7 uF	CCG1201	
				C 646	(B,122,25)	CKSSYB104K10	
	C 408	(A,47,60)	CKSSYB104K10	C 647	(B,119,27) 4.7 uF	CCG1201	
	C 409	(A,44,60)	CKSSYB104K10	C 648	(B,119,25)	CKSSYB104K10	
	C 410	(A,34,50)	CCSSCH8R0D50	C 649	(A,120,30)	CKSSYB102K50	
	C 411	(A,36,45)	CCSSCH100D50	C 650	(A,119,30)	CKSSYB102K50	
	C 413	(A,36,43)	CKSSYB104K10	C 651	(A,118,30)	CKSSYB104K10	
C	C 415	(A,38,41)	CKSSYB104K10				
	C 420	(A,52,61)	CKSSYB104K10	C 652	(B,115,22)	CKSSYB104K10	
	C 424	(A,60,31)	CKSRYB103K50	C 653	(B,132,53) 4.7 uF	CCG1201	
	C 425	(A,47,62)	CKSSYB103K16	C 654	(B,129,55) 4.7 uF	CCG1201	
	C 426	(A,38,39)	CKSSYB104K10	C 655	(A,87,27)	CCSSCH220J50	
				C 656	(A,89,25)	CCSSCH220J50	
	C 427	(B,67,63)	CKSRYB104K16	C 657	(A,93,28)	CCSSCH220J50	
	C 428	(A,38,53)	CKSSYB102K50	C 658	(A,108,6)	CKSSYB102K50	
	C 501	(A,16,44)	CKSSYB473K16	C 659	(A,114,6)	CKSSYB102K50	
D	C 502	(A,28,44)	CKSSYB104K10	C 701	(B,119,63) (A,B,C,D,E,F)	CKSSYB104K10	
	C 503	(A,22,45)	CKSSYB102K50	C 702	(B,119,62) (A,B,C,D,E,F)	CKSSYB102K50	
	C 504	(A,24,38)	CKSSYB102K50	C 721	(A,106,26)	CKSSYB104K10	
	C 505	(A,16,39)	CKSSYB473K16	C 741	(A,100,38)	CKSSYB104K10	
	C 601	(B,107,34)	CKSSYB104K10	C 742	(A,100,43)	CKSSYB104K10	
	C 602	(B,106,34)	CKSSYB104K10	C 743	(A,111,32)	CKSSYB104K10	
	C 603	(A,108,33)	CKSSYB103K16	C 744	(A,112,33)	CKSSYB104K10	
	C 604	(B,102,37)	CKSSYB104K10	C 745	(A,116,41)	CKSSYB104K10	
	C 605	(B,101,37)	CKSSYB104K10	C 746	(A,116,46)	CKSSYB104K10	
	C 607	(B,106,48)	CKSSYB104K10	C 747	(A,115,57)	CKSSYB104K10	
	C 608	(B,105,48)	CKSSYB104K10	C 801	(A,116,15)	CKSSYB103K16	
	C 609	(B,124,56)	CKSSYB104K10	C 802	(A,117,7)	CKSSYB103K16	
E	C 610	(B,123,55) 10 uF	CCG1192				
	C 611	(B,124,54)	CKSSYB104K10	C 803	(A,122,27)	CKSRYB224K16	
	C 612	(B,125,54)	CKSSYB104K10	C 804	(A,124,27)	CKSRYB224K16	
	C 613	(A,124,56)	CCSSCH180J50	C 821	(B,131,32)	CKSSYB104K10	
	C 614	(A,124,51)	CCSSCH150J50	C 822	(B,130,27)	CKSSYB104K10	
				C 823	(B,129,36)	CKSSYB104K10	
	C 615	(A,87,22)	CCSSCH101J50	C 841	(B,118,23) 10 uF	CCG1192	
	C 616	(A,103,31)	CKSSYB104K10	C 842	(B,117,19) 22 uF	DCH1256	
	C 617	(A,89,22)	CCSSCH101J50	C 843	(B,124,19) 22 uF	DCH1256	
	C 619	(A,93,24)	CCSSCH101J50	C 844	(B,119,18)	CKSSYB104K16	
	C 621	(A,125,54)	CCSSCH150J50	C 845	(B,125,22)	CKSSYB104K16	
F	C 622	(A,86,24)	CCSSCH150J50	C 861	(A,104,21)	CEVW101M16	
	C 623	(A,89,24)	CCSSCH150J50	C 862	(A,113,20) 4.7 uF	CCG1222	
	C 624	(A,92,25)	CCSSCH150J50	C 863	(A,111,20)	CCG1332	
	C 625	(B,129,50)	CKSRYB105K10	C 864	(A,114,20)	CKSSYB104K16	
	C 626	(B,127,49)	CKSSYB104K10	C 865	(B,93,13)	CKSSYB473K16	

1

2

3

4

5		6	7		8
Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 866	(B,95,14)	CKSSYB224K6R3	C 1266	(B,93,64) 10 uF	CCG1192
C 867	(B,105,14)	CKSSYB104K16	C 1267	(B,101,60) 10 uF	CCG1192
C 868	(B,107,14)	CKSSYB104K16	C 1269	(B,83,62)	CCSSCH221J50
C 869	(B,91,14)	CKSSYB104K16	C 1270	(B,83,64)	CCSSCH221J50
C 870	(B,103,14)	CKSSYB104K16	C 1271	(B,88,64) 10 uF	CCG1192
C 871	(B,104,27)	CKSSYB104K16	C 1272	(B,85,62)	CKSSYB122K50
C 902	(B,158,54) 10 uF	CCG1236	C 1273	(B,88,62) 10 uF	CCG1192
C 903	(A,162,62)	XCEAT222M16	C 1305	(A,68,78) 10 uF	CCG1192
C 920	(B,46,65)	CKSRYB105K16	C 1306	(A,68,69)	CEVW101M16
C 930	(B,59,85)	CKSSYB102K50	C 1307	(B,80,87) 4.7 uF	CCG1201
C 940	(A,44,86)	CKSRYB104K50	C 1309	(A,89,105)	CKSRYB474K16
C 1111	(A,135,77)	CKSSYB104K10	C 1310	(A,86,105)	CKSRYB474K16
C 1112	(A,125,64)	CKSSYB104K10	C 1311	(A,95,105)	CKSRYB474K16
C 1113	(A,129,77)	CKSSYB104K10	C 1312	(A,92,105)	CKSRYB474K16
C 1114	(A,137,78) 10 uF	CCG1192	C 1313	(B,81,108)	CKSSYB104K16
C 1115	(A,124,65) 10 uF	CCG1192	C 1314	(B,79,108) 10 uF/16 V	DCH1263
C 1116	(A,130,74) 10 uF	CCG1192	C 1315	(B,100,107) 2.2 uF	DCH1229
C 1117	(A,128,83) 4.7 uF	CCG1331	C 1319	(A,72,96)	XCEHAT332M16
C 1118	(A,128,58) 4.7 uF	CCG1331	C 1320	(B,76,107)	CKSRYB104K50
C 1119	(A,134,83) 4.7 uF	CCG1331	C 2202	(A,16,99)	CKSSYB471K50
C 1120	(A,130,83) 4.7 uF	CCG1331	C 2203	(A,20,99)	CCSSCH820J50
C 1121	(A,124,58) 4.7 uF	CCG1331	C 2204	(A,23,99)	CCSSCH220J50
C 1122	(A,136,83) 4.7 uF	CCG1331	C 2209	(A,23,101)	CCSSCH100D50
C 1131	(A,120,72)	CKSSYB104K10	C 2211	(A,16,88)	CKSRYB102K50
C 1132	(A,121,72) 10 uF	CCG1192	C 2213	(A,22,85)	CKSSYB102K50
C 1133	(A,119,67)	CKSSYB104K10	C 2217	(A,25,83)	CKSSYB104K10
C 1134	(A,119,70) 1 uF	DCH1246	C 2218	(A,23,84)	CKSSYB224K6R3
C 1135	(A,127,66)	CKSSYB104K10	C 2219	(A,18,85)	CKSSYB104K10
C 1136	(A,128,74)	CKSSYB104K10	C 2223	(A,16,80)	CKSSYB152K50
C 1137	(A,137,74)	CKSSYB104K10	C 2226	(B,33,79)	CKSRYB105K10
C 1138	(A,139,73) 10 uF	CCG1192	C 2227	(A,21,75)	CKSSYB104K10
C 1139	(A,133,76)	CKSSYB104K10	C 2228	(A,25,81)	CCSSCH390J50
C 1140	(A,132,74)	CKSSYB104K10	C 2229	(A,36,67)	CKSRYB104K16
C 1203	(B,100,72)	CKSRYB105K10	C 2230	(A,168,5)	CKSRYB102K50
C 1204	(B,100,70)	CKSRYB105K10	C 2231	(A,153,98)	CKSRYB104K16
C 1205	(B,100,67)	CKSRYB105K10	C 2401	(A,154,86)	CEVW101M16
C 1206	(B,97,67)	CKSRYB105K10	C 2402	(A,157,80) 10 uF	CCG1236
C 1207	(B,83,66)	CKSRYB105K10	C 2403	(B,157,85)	CKSSYB222K50
C 1208	(B,83,69)	CKSRYB105K10	C 2405	(B,156,84)	CCSSCH270J50
C 1209	(B,83,71)	CKSRYB105K10	C 2406	(B,155,83)	CKSSYB472K50
C 1210	(A,104,62)	CKSSYB104K10	C 2407	(A,169,84)	CEVW101M16
C 1211	(A,93,63)	CKSSYB104K10	C 2408	(A,161,81)	CKSSYB104K16
C 1212	(A,78,63)	CKSSYB104K10	C 2409	(B,156,81)	CKSRYB104K50
C 1215	(B,83,78) 10 uF	CCG1192	C 2410	(A,159,80) 22 uF	DCH1256
C 1216	(B,85,79)	CKSSYB104K16	C 2411	(B,165,87)	CKSRYB105K10
C 1219	(B,91,84) 10 uF	CCG1192	C 2413	(B,167,77)	CKSSYB104K16
C 1220	(B,89,84) 10 uF	CCG1192	C 2414	(B,168,79)	CKSSYB104K16
C 1222	(B,83,74)	CKSRYB105K10	C 2415	(B,168,83)	CKSSYB102K50
C 1223	(B,83,75)	CKSRYB105K10	C 2416	(B,168,85)	CKSSYB472K25
C 1224	(B,100,76)	CKSRYB105K10	C 3101	(B,130,100)	CKSRYB104K16
C 1225	(B,100,77)	CKSRYB105K10	C 3102	(B,137,96)	CKSRYB104K16
C 1226	(B,83,68)	CKSRYB105K10	C 3125	(A,37,61) (D,E,F,G)	CKSSYB104K10
C 1227	(B,100,69)	CKSRYB105K10	C 3151	(A,121,78)	CEVW471M10
C 1252	(B,74,72) 10 uF	CCG1192	C 3153	(B,142,94)	CKSRYB104K50
C 1253	(A,94,62)	CKSSYB104K10	C 3161	(B,110,78) 4.7 uF	CCG1201
C 1256	(A,96,72)	CEVW101M16	C 3164	(B,115,78) 4.7 uF	CCG1201
C 1257	(A,91,68) 10 uF	CCG1192	C 3165	(B,102,78) 4.7 uF	CCG1201
C 1263	(B,98,62)	CCSSCH221J50	C 3169	(B,107,78) 4.7 uF	CCG1201
C 1264	(B,99,63)	CCSSCH221J50	C 3170	(B,126,100)	CKSRYB104K16
C 1265	(B,96,62)	CKSSYB122K50	C 3171	(B,125,98)	CKSRYB104K16

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 3191 (A,167,95)

CKSRYB104K16

CN5001 (A,123,12) FFC/FPC Connector CKS6625

CN5002 (A,140,18) Connector CKS4428

CN5003 (A,98,64) FFC/FPC Connector CKS6672

C 3192 (A,83,30)

CKSRYB102K50

C 3193 (A,90,30)

CKSRYB102K50

C 3201 (A,84,21)

CKSSYB104K10

CN5004 (A,123,37) Connector CKS6063

C 3202 (A,80,21)

CKSSYB104K10

CN5301 (A,40,37) FFC/FPC Connector CKS6672

C 3203 (A,69,19)

CKSSYB104K10

CN5601 (B,15,43) Connector CKS6063

C 3204 (A,92,20) 10 uF

CCG1234

RESISTORS**Monitor Key Unit****Consists of
Monitor PCB
Key PCB****BD****Unit Number: CWN8753(A,B,D,E,F,G)****Unit Number: CWN8754(C)****Unit Name : Monitor Key Unit****MISCELLANEOUS**

IC 5001 (A,67,65) Regulator IC

MM3571A18P

IC 5101 (A,139,54) Display IC

OZ527ILN

IC 5201 (A,35,64) DC/DC CONV IC

R1290K103A

IC 5401 (A,72,57) Flash ROM Unit

CWW8585

IC 5402 (A,74,37) Display IC

TW8832SAT-LB1-GRSH

IC 5601 (A,8,92) IR RC Rec Module

PNJ4833M

Q 5001 (A,107,46) Bipolar TR

LSCR523UB

Q 5201 (A,40,70) Resistor Built-IN TR

LTC024EEB

Q 5202 (A,28,65) Transistor

2SAR502UB

Q 5301 (A,28,50) Bipolar TR

LSAR523UB

Q 5302 (A,31,46) Bipolar TR

LSCR523UB

D 5101 (A,118,64) Diode

CRG03

D 5102 (A,137,61) Diode

RB060M-30

D 5103 (A,118,59) Diode

CRG03

D 5201 (A,30,57) Schottky Diode

DB2J41100

D 5202 (B,29,73) Schottky Diode

DB3S308F0

D 5203 (B,32,73) Schottky Diode

DB3S308F0

D 5204 (B,26,68) Schottky Diode

DB3S308F0

D 5601 (A,6,45) Blue LED(A,B,D,E,F)
Red LED(C)FM-3528BK-470M
FM-3528SXXK620H08

L 5101 (A,132,62) Inductor

ATH7068

L 5201 (A,29,61) Choke Coil 22 uH

CTH1426

L 5301 (A,38,53) Inductor

CTF1635

L 5402 (B,75,36) Inductor

CTF1547

L 5403 (B,66,39) Inductor

CTF1547

L 5404 (B,75,37) Inductor

CTF1547

L 5405 (A,74,68) Inductor

CTF1547

TH5001 (A,112,12) Thermistor

CCX1084

X 5401 (A,70,50) Resonator 27.000 MHz

CSS1768

S 5601 (A,16,94) Push Switch

CSG1155

S 5602 (A,26,95) Push Switch

CSG1155

S 5603 (A,12,52) Push Switch

CSG1155

S 5604 (A,12,78) Push Switch

CSG1155

S 5605 (A,12,69) Push Switch

CSG1155

S 5606 (A,12,21) Push Switch

CSG1155

S 5607 (A,12,13) Push Switch

CSG1155

S 5608 (A,12,39) Push Switch

CSG1155

S 5609 (A,15,45) Push Switch

CSG1155

R 5001 (B,116,49)

RS1/16SS101J

R 5002 (A,128,20)

RS1/16SS0R0J

R 5003 (A,123,20)

RS1/16SS0R0J

R 5004 (A,122,20)

RS1/16SS0R0J

R 5005 (A,118,19)

RS1/16SS0R0J

R 5006 (A,107,49)

RS1/16SS221J

R 5009 (A,108,49)

RS1/16SS472J

R 5017 (A,93,70)

RS1/16SS0R0J

R 5018 (B,100,35)

RS1/16SS0R0J

R 5019 (A,92,72)

RS1/16SS0R0J

R 5102 (B,140,60)

RS1/16SS102J

R 5103 (A,133,54)

RS1/16SS0R0J

R 5104 (B,140,57)

RS1/16SS104J

R 5105 (B,135,53)

RS1/16SS104J

R 5106 (B,133,57)

RS1/16SS102J

R 5107 (A,134,51)

RS1/16SS223J

R 5108 (A,136,50)

RS1/16SS563J

R 5109 (A,139,50)

RS1/16SS104J

R 5110 (A,140,50)

RS1/16SS0R0J

R 5111 (A,142,58)

RS1/16SS102J

R 5112 (A,142,57)

RS1/16SS2702D

R 5113 (A,144,57)

RS1/16SS3901D

R 5118 (B,142,60)

RS1/16SS1004D

R 5119 (B,142,59)

RS1/16SS0R0J

R 5120 (B,143,58)

RS1/16SS1503D

R 5122 (A,136,58)

RS1/8SQ2R2J

R 5201 (A,37,70)

RS1/16SS8201D

R 5202 (A,37,68)

RS1/16SS6800D

R 5203 (A,38,69)

RS1/16SS1502D

R 5205 (A,39,58)

RS1/16SS0R0J

R 5206 (B,28,65)

RS1/16SS9102D

R 5207 (B,37,67)

RS1/16SS1802D

R 5208 (B,37,66)

RS1/16SS203J

R 5209 (B,38,62)

RS1/16SS104J

R 5210 (A,29,64)

RS1/16SS103J

R 5211 (A,41,66)

RS1/16SS472J

R 5212 (B,34,68)

RS1/16SS1003D

R 5213 (B,35,69)

RS1/16SS9101D

R 5214 (A,29,57)

RS1/10SR2R2J

R 5216 (A,40,60)

RS1/16SS1203D

R 5217 (A,40,61)

RS1/16SS3001D

R 5218 (A,41,62)

RS1/16SS1502D

R 5219 (A,39,60)

RS1/16SS472J

R 5220 (A,36,58)

RS1/16SS0R0J

R 5301 (A,23,49)

RS1/8SQ0R0J

R 5302 (A,16,48)

RS1/16SS3R9J

R 5303 (A,17,48)

RS1/16SS27R0D

R 5304 (A,17,46)

RS1/16SS2200D

R 5305 (A,18,45)

RS1/16SS75R0D

R 5306 (A,17,44)

RS1/16SS56R0D

R 5307 (A,18,43)

RS1/16SS0R0J

5		6		7		8	
Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.		
R 5308	(A,17,42)	RS1/16SS51R0D	R 5426	(A,63,34)	RAB4CQ221J		
R 5309	(A,18,41)	RS1/16SS0R0J	R 5427	(A,68,29)	RAB4CQ221J		
R 5310	(A,17,40)	RS1/16SS1500D	R 5428	(A,72,27)	RAB4CQ221J		
R 5311	(A,18,39)	RS1/16SS27R0D	R 5429	(A,75,27)	RAB4CQ221J	A	
R 5312	(A,17,38)	RS1/16SS1300D	R 5430	(B,86,35)	RS1/16SS3000D		
R 5313	(A,18,37)	RS1/16SS1300D	R 5431	(B,86,36)	RS1/16SS3000D		
R 5314	(A,17,37)	RS1/16SS1500D	R 5432	(A,89,35)	RS1/16SS0R0J		
R 5315	(A,18,36)	RS1/16SS24R0D	R 5433	(A,89,36)	RS1/16SS0R0J		
R 5316	(A,17,35)	RS1/16SS33R0D	R 5434	(B,86,33)	RS1/16SS151J		
R 5317	(A,18,34)	RS1/16SS27R0D	R 5435	(B,86,34)	RS1/16SS3000D		
R 5318	(A,17,33)	RS1/16SS51R0D	R 5436	(A,89,33)	RS1/16SS151J		
R 5319	(A,18,32)	RS1/16SS22R0D	R 5437	(A,89,34)	RS1/16SS0R0J		
R 5320	(A,17,31)	RS1/16SS1500D	R 5501	(A,89,32)	RS1/16SS0R0J		
R 5321	(A,18,30)	RS1/16SS1500D	R 5518	(A,91,46)	RS1/16SS0R0J		
							B
R 5322	(A,17,29)	RS1/16SS33R0D	R 5519	(A,93,46)	RS1/16SS0R0J		
R 5323	(A,16,28)	RS1/16SS1R0J	R 5520	(A,95,46)	RS1/16SS0R0J		
R 5324	(B,33,39)	RS1/16SS473J	R 5522	(A,99,46)	RS1/16SS0R0J		
R 5325	(B,41,35)	RS1/16SS473J	R 5601	(B,8,78)	RS1/16SS101J		
R 5327	(B,58,44)	RS1/10SR0R0J	R 5602	(B,13,78)	RS1/16SS470J		
R 5328	(A,25,49)	RS1/8SQ0R0J	R 5603	(A,15,41)	RS1/16SS392J		
R 5329	(A,32,51)	RS1/16SS153J	R 5604	(A,16,25)	RS1/16SS472J		
R 5331	(A,30,51)	RS1/16SS105J	R 5605	(A,16,23)	RS1/16SS123J		
R 5333	(A,30,48)	RS1/16SS153J	R 5606	(A,16,78)	RS1/16SS182J		
R 5334	(A,29,45)	RS1/16SS472J	R 5607	(A,16,80)	RS1/16SS222J		
R 5335	(A,31,43)	RS1/16SS101J	R 5608	(A,16,83)	RS1/16SS472J	C	
R 5337	(A,34,51)	RS1/8SQ0R0J	CAPACITORS				
R 5338	(A,32,48)	RS1/16SS273J					
R 5339	(A,29,47)	RS1/16SS474J					
R 5340	(A,42,42)	RS1/16SS0R0J					
R 5341	(A,44,43)	RS1/16SS0R0J	C 5008	(A,113,12)	CKSSYB104K10		
R 5342	(B,36,35)	RS1/16SS473J	C 5010	(A,66,61)	CKSSYB474K6R3		
R 5343	(B,40,35)	RS1/16SS473J	C 5011	(A,66,69)	CKSSYB474K6R3		
R 5344	(B,39,35)	RS1/16SS473J	C 5012	(A,114,42)	CKSSYB104K10		
R 5345	(B,37,39)	RS1/16SS473J	C 5101	(A,137,64)	CKSSYB102K50		
R 5346	(A,57,43)	RS1/10SR0R0J	C 5102	(A,120,54) 10 uF	CCG1236		
R 5401	(B,79,48)	RS1/16SS472J	C 5106	(A,135,53)	CKSRYB105K16		
R 5402	(B,80,48)	RS1/16SS472J	C 5107	(A,133,55)	CKSRYB105K16	D	
R 5403	(A,63,40)	RAB4CQ221J	C 5108	(A,128,61)	CKSRYB104K16		
R 5404	(B,64,42)	RS1/16SS470J	C 5109	(A,137,50)	CKSRYB105K16		
R 5405	(B,64,41)	RS1/16SS470J	C 5110	(A,138,50)	CCSSCH101J50		
R 5406	(B,64,44)	RS1/16SS470J	C 5112	(A,141,62) 10 uF	CCG1236		
R 5407	(A,77,58)	RS1/16SS473J	C 5114	(A,145,59)	CKSRYB224K16		
R 5408	(A,81,46)	RS1/16SS104J	C 5118	(A,133,58)	CKSSYB332K50		
R 5409	(A,77,49)	RS1/16SS330J	C 5201	(A,42,67)	CKSSYB224K6R3		
R 5410	(A,76,48)	RS1/16SS330J	C 5203	(A,42,69)	CKSRYB105K10		
R 5411	(A,75,49)	RS1/16SS330J	C 5204	(A,42,68)	CKSSYB224K6R3		
R 5412	(A,75,48)	RS1/16SS330J	C 5205	(A,35,69)	CKSRYB224K16		
R 5413	(B,72,59)	RS1/16SS473J	C 5206	(A,28,55)	CKSSYB472K50	E	
R 5414	(A,66,57)	RS1/16SS473J	C 5207	(A,36,59)	CKSSYB102K50		
R 5415	(A,76,53)	RS1/16SS473J	C 5208	(B,25,70)	CKSRYB105K16		
R 5416	(B,69,56)	RS1/16SS473J	C 5209	(B,38,60)	CKSRYB105K10		
R 5417	(A,78,48)	RS1/16SS330J	C 5210	(B,35,73)	CKSQYB105K25		
R 5418	(A,68,45)	RS1/16SS330J	C 5212	(B,33,71)	CKSQYB105K25		
R 5419	(A,73,48)	RS1/16SS330J	C 5213	(B,28,66)	CKSRYB104K50		
R 5420	(A,81,49)	RS1/16SS101J	C 5214	(B,29,70)	CKSRYB104K50		
R 5421	(A,80,48)	RS1/16SS0R0J	C 5215	(B,30,71)	CKSRYB104K50		
R 5422	(A,79,49)	RS1/16SS0R0J	C 5217	(A,31,70)	CKSYB475K16		
R 5423	(A,69,47)	RS1/16SS152J	C 5218	(A,41,64)	CKSRYB682K50		
R 5424	(A,71,47)	RS1/16SS105J	C 5219	(A,26,58) 4.7 uF	CCG1212	F	
R 5425	(A,63,37)	RAB4CQ221J	C 5220	(A,36,70)	CCSSCH101J50		
			C 5221	(B,34,69)	CKSSYB561K50		

1

Circuit Symbol and No.

C 5222 (A,32,56)
C 5224 (A,39,61)
C 5225 (B,38,57)

A

C 5226 (A,37,57)
C 5303 (A,23,43)
C 5304 (A,22,47) 4.7 uF
C 5305 (A,22,52)
C 5306 (A,15,47) 4.7 uF

■

C 5307 (A,16,45)
C 5314 (A,16,39)
C 5315 (A,16,38)
C 5316 (A,16,37)
C 5317 (A,16,36)

B

C 5324 (A,16,30)
C 5325 (A,16,29)
C 5326 (A,37,44)
C 5328 (A,37,45)
C 5330 (A,38,51) 10 uF

■

C 5331 (A,41,54)
C 5333 (B,56,41)
C 5334 (B,55,41)
C 5335 (B,54,41)
C 5336 (B,58,40) 10 uF

C

C 5339 (A,25,45)
C 5340 (A,26,47)
C 5341 (A,25,52)
C 5342 (A,34,43)
C 5343 (A,31,51)

■

C 5344 (A,34,47) 10 uF
C 5347 (A,36,42)
C 5349 (A,55,42)
C 5350 (B,38,40)
C 5351 (A,32,43) 10 uF

D

C 5352 (A,33,43)
C 5401 (B,62,43)
C 5402 (B,64,45)
C 5403 (B,63,40)
C 5404 (A,81,48)

■

C 5405 (B,69,42)
C 5406 (B,77,41)
C 5407 (A,73,61)
C 5409 (A,73,53)
C 5410 (A,67,44)

E

C 5411 (B,77,35) 10 uF
C 5412 (B,77,38) 10 uF
C 5413 (B,74,39)
C 5414 (A,82,39)
C 5415 (B,75,39) 10 uF

■

C 5416 (A,74,65)
C 5417 (B,71,34)
C 5418 (A,74,66) 10 uF
C 5420 (A,83,33)
C 5421 (A,83,34)

F

C 5422 (A,83,36)
C 5423 (A,83,35)
C 5425 (A,72,50)
C 5426 (A,68,50)
C 5427 (B,67,37)

C 5432 (A,83,37)
C 5433 (B,80,39) 10 uF

2

Part No.

CKSYB475K16
CKSSYB152K50
CKSRYB105K16

CKSSYB104K10
CKSSYB104K16
CCG1222
CKSQYB225K16
CCG1222

CKSSYB104K16
CKSSYB102K50
CKSSYB104K16
CKSSYB102K50
CKSSYB104K16

CKSSYB102K50
CKSSYB104K16
CKSSYB102K50
CKSSYB104K16
CCG1236

CKSSYB102K50
CCSSCH101J50
CKSSYB102K50
CKSSYB104K10
CCG1192

CKSRYB104K50
CKSQYB334K50
CKSRYB103K50
CCG1379
CKSSYB104K10

CCG1236
CKSSYB102K50
CKSSYB102K50
CKSRYB105K10
CCG1234

CKSSYB102K50
CCSSCH470J50
CCSSCH470J50
CCSSCH470J50
CKSSYB102K50

CCSSCH100D50
CCSSCH101J50
CKSSYB104K10
CCSSCJ3R0C50
CCSSCH100D50

CCG1244
CCG1244
CKSSYB104K10
CCSSCH101J50
CCG1244

CKSSYB104K10
CCSSCH101J50
CCG1244
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CCSSCH150J50
CCSSCH120J50
CCSSCH101J50

CKSSYB104K10
CCG1244

3

Circuit Symbol and No.

C 5434 (B,68,38) 10 uF
C 5435 (B,77,43)
C 5436 (B,72,35)

C 5437 (A,75,70)
C 5438 (B,68,39)
C 5439 (B,69,44)
C 5602 (B,9,93) 10 uF

4

Part No.

CCG1244
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1192

**Unit Number :****Unit Name : Relay Unit****MISCELLANEOUS**

S 101 (A,47,55) Spring Switch(HOME) CSN1080
S 102 (B,26,12) Spring Switch(12EJ) CSN1081
VR101 (A,8,63) Semi-fixed 6.8 kohm(B) CCP1447
VR102 (A,7,59) Semi-fixed 15 kohm(B) CCP1449
CN101 (A,21,63) FFC/FPC Connector CKS6631

CN102 (A,42,10) Connector CKS6025

RESISTORS

R 101 (A,11,60) RS1/10SR822J
R 102 (B,54,27) RS1/10SR0R0J