


KCA-BT200

EXPLODED VIEW

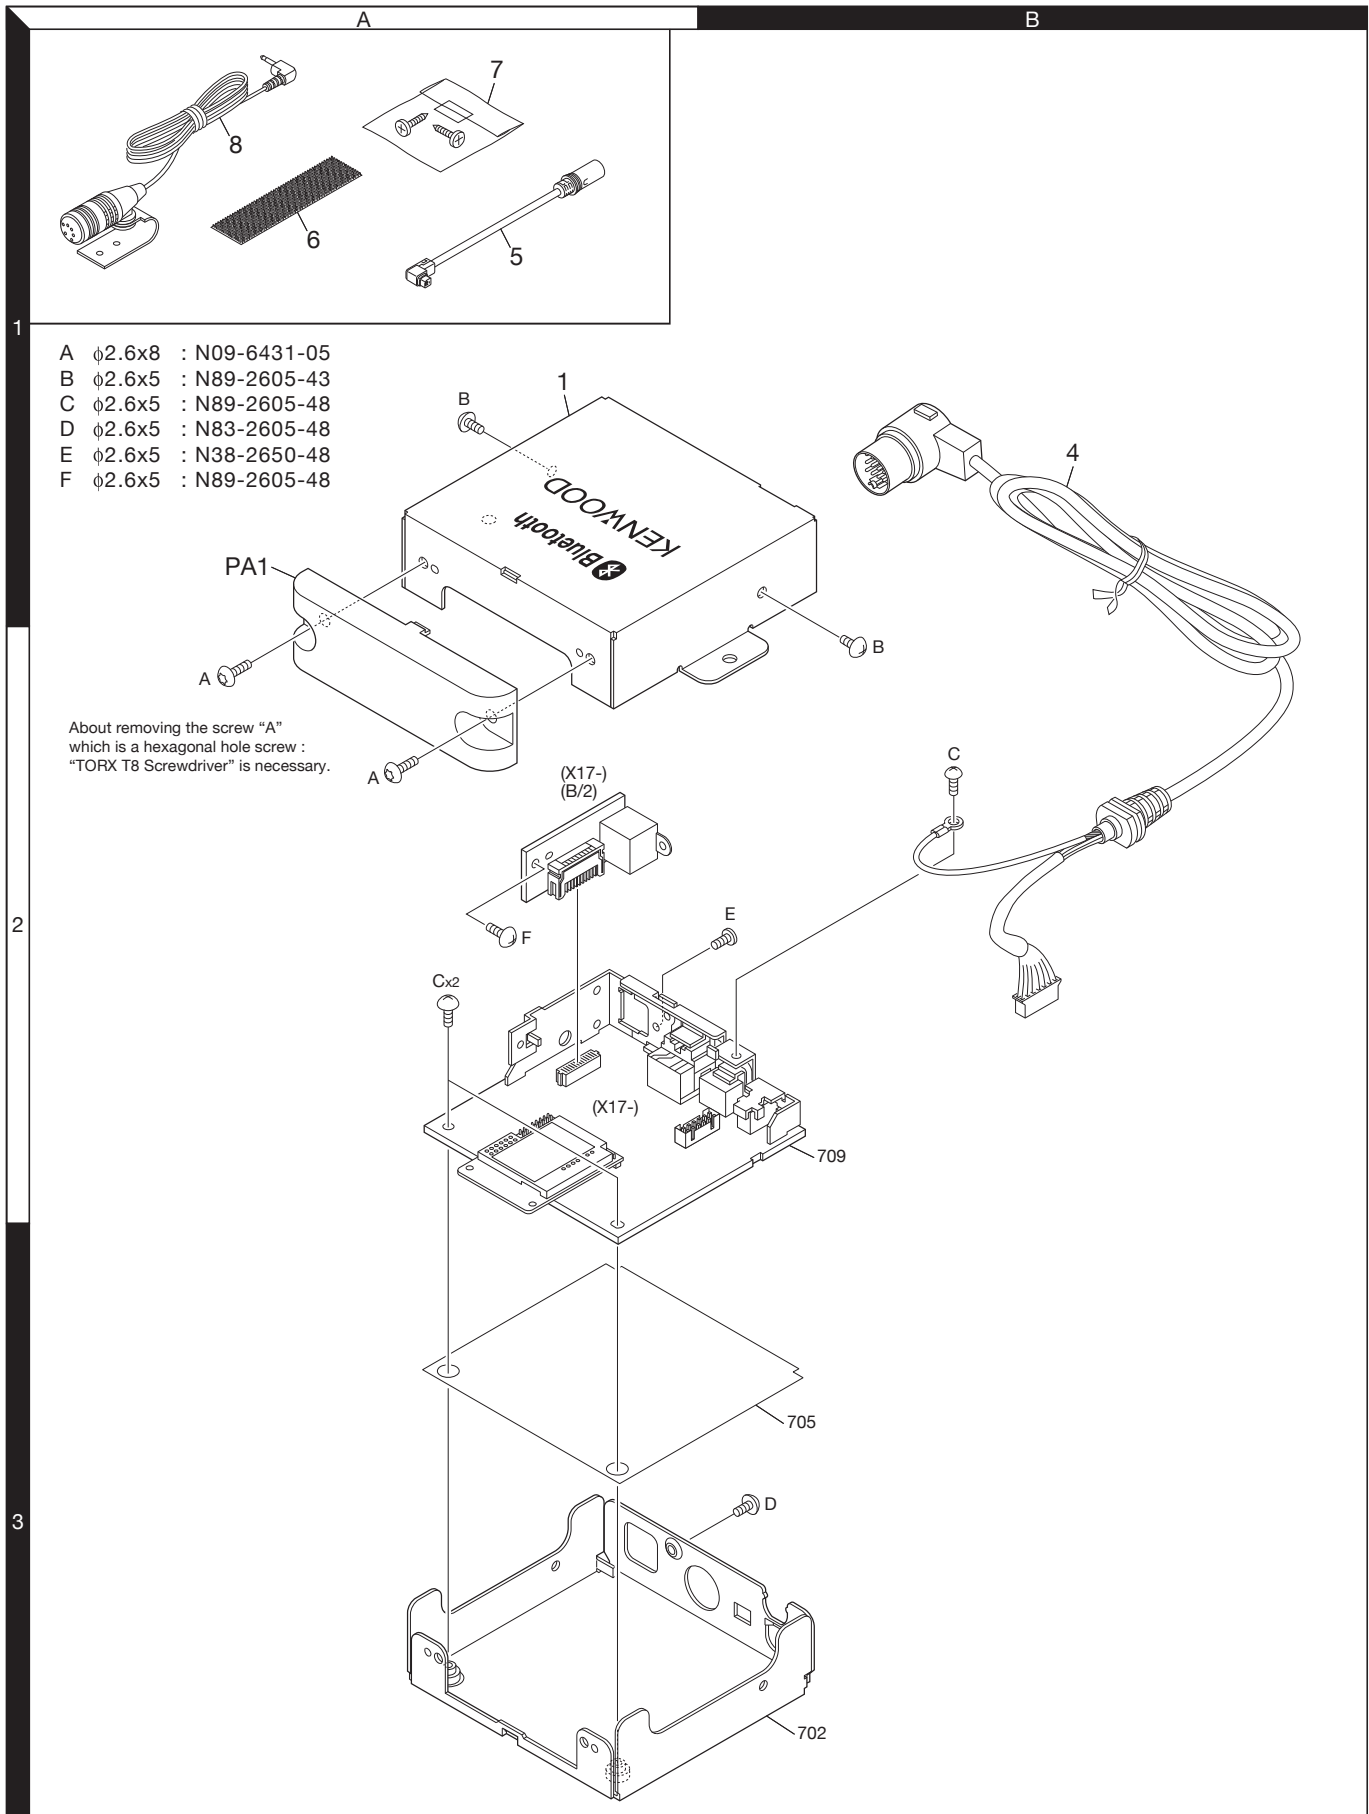

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KCA-BT200					
1	1A	*	A01-4444-02	METALLIC CABINET	EK1 E M1
PA1	1A	*	A64-4557-02	PANEL	
-		*	B64-4121-00	INST. MANUAL (ENG.FRE.SPA.)	
-		*	B64-4122-00	INST. MANUAL (GER.DUT.ITA.POR.)	
-		*	B64-4124-00	INST. MANUAL (ENG.ARA.S-CHI.)	
4	1B		E30-6645-05	CORD WITH DIN CONNECTOR	
5	1A	*	E30-6828-05	CORD WITH PLUG (100mm,13-PIN)	
6	1A		H30-0600-04	MAGIC TAPE	
-		*	H54-4294-03	ITEM CARTON CASE	
7	1A		N99-1789-05	SCREW SET	
A	2A		N09-6431-05	DRESSED SCREW	
B	1A		N89-2605-43	BINDING HEAD TAPTITE SCREW	
C	2A		N89-2605-48	BINDING HEAD TAPTITE SCREW	
D	3B		N83-2605-48	PAN HEAD TAPTITE SCREW	
8	1A	*	W01-1718-05	MICROPHONE (3m)	
PROCESSOR UNIT (X17-2012-70)					
C1			CK73GB1H104K	CHIP C 0.10UF K	
C4			CK73GB1H103K	CHIP C 0.010UF K	
C5-8			CK73GB1H104K	CHIP C 0.10UF K	
C10			CE32BJ1C101M	CHIP EL 100UF 16WV	
C12			CE32BJ1C100M	CHIP EL 10UF 16WV	
C13			CK73GB1H104K	CHIP C 0.10UF K	
C14			CC73GCH1H101J	CHIP C 100PF J	
C17-20			CK73GB1A105K	CHIP C 1.0UF K	
C21-24			CC73GCH1H220J	CHIP C 22PF J	
C25			CK73GB1H104K	CHIP C 0.10UF K	
C26			CK73GB1A474K	CHIP C 0.47UF K	
C27			CE32BJ1C101M	CHIP EL 100UF 16WV	
C28			CK73GB1H103K	CHIP C 0.010UF K	
C29			CE32BQ1E101M	CHIP EL 100UF 25WV	
C30			CE32BQJ331M	CHIP EL 330UF 6.3WV	
C31			CK73GB1H103K	CHIP C 0.010UF K	
C33			CK73FB1H334K	CHIP C 0.33UF K	
C34			CK73EB0J226K	CHIP C 22UF K	
C35,36			CK73GB1H104K	CHIP C 0.10UF K	
C37			CK73GB1A474K	CHIP C 0.47UF K	
C38			CK73GB1H104K	CHIP C 0.10UF K	
C41			CD04BJ1E331M	ELECTRO 330UF 25WV	
C42			CK73GB1H103K	CHIP C 0.010UF K	
C43-46			CE32BJ1C100M	CHIP EL 10UF 16WV	
C47			CK73GB1H104K	CHIP C 0.10UF K	
C51,52			CE32BJ1C100M	CHIP EL 10UF 16WV	
C53,54			CC73GCH1H470J	CHIP C 47PF J	
C57			CK73GB1H104K	CHIP C 0.10UF K	
C58,59			CC73GCH1H561J	CHIP C 560PF J	
C60,61			CC73GCH1H102J	CHIP C 1000PF J	
C62,63			CC73GCH1H681J	CHIP C 680PF J	
C64,65			CK73GB1H472K	CHIP C 4700PF K	
CN1			E41-2616-05	PIN ASSY	
CN2		*	E41-2995-05	PIN ASSY	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
CN3		*	E41-2996-05	SOCKET FOR PIN ASSY	
J1			E56-0865-05	CYLINDRICAL RECEPTACLE	
J2			E58-1097-05	RECTANGULAR RECEPTACLE	
J3			E11-0638-05	PHONE JACK	
F1			F53-0306-05	FUSE (UL,CSA) (5A)	
L1,2			L92-0373-05	CHIP FERRITE	
L3			L33-2262-05	CHOKE COIL	
X1			L78-0872-05	RESONATOR (12MHZ)	
E	2B	*	N38-2650-48	PAN HEAD MACHINE SCREW	
F	2A		N89-2605-48	BINDING HEAD TAPTITE SCREW	
R1,2			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R3-6			RK73GB2A101J	CHIP R 100 J 1/10W	
R7			RK73GB2A104J	CHIP R 100K J 1/10W	
R8			RK73GB2A473J	CHIP R 47K J 1/10W	
R9			RK73GB2A101J	CHIP R 100 J 1/10W	
R10-15			RK73GB2A473J	CHIP R 47K J 1/10W	
R16-18			RK73GB2A101J	CHIP R 100 J 1/10W	
R19-21			RK73GB2A473J	CHIP R 47K J 1/10W	
R22,23			RK73GB2A223J	CHIP R 22K J 1/10W	
R24,25			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R30			RK73GB2A473J	CHIP R 47K J 1/10W	
R35-38			RK73GB2A223J	CHIP R 22K J 1/10W	
R39-42			RK73GB2A104J	CHIP R 100K J 1/10W	
R43			RK73GB2A153J	CHIP R 15K J 1/10W	
R46,47			RK73PB2H1R0J	CHIP R 1.0 J 1/2W	
R48			RK73GB2A183J	CHIP R 18K J 1/10W	
R49,50			RK73GB2A223J	CHIP R 22K J 1/10W	
R51			RK73GB2A104J	CHIP R 100K J 1/10W	
R52			RK73GB2A473J	CHIP R 47K J 1/10W	
R53			RK73GB2A223J	CHIP R 22K J 1/10W	
R61,62			RK73EB2E470J	CHIP R 47 J 1/4W	
R63-69			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R70			RK73EB2E221J	CHIP R 220 J 1/4W	
R71,72			RK73GB2A471J	CHIP R 470 J 1/10W	
R75,76			RK73GB2A224J	CHIP R 220K J 1/10W	
R77,78			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R79			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R80			RK73EB2E471J	CHIP R 470 J 1/4W	
R81			RK73GB2A471J	CHIP R 470 J 1/10W	
R82-85			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R86			RK73EB2E221J	CHIP R 220 J 1/4W	
R87,88			RK73EB2E470J	CHIP R 47 J 1/4W	
R89,90			RK73GB2A104J	CHIP R 100K J 1/10W	
R91,92			RK73GB2A470J	CHIP R 47 J 1/10W	
R93			RK73EB2E221J	CHIP R 220 J 1/4W	
R95,96			RK73EB2E470J	CHIP R 47 J 1/4W	
R99,100			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R102			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R103			RK73EB2E101J	CHIP R 100 J 1/4W	
R104			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R105			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R106,107			RK73GB2A103J	CHIP R 10K J 1/10W	
R108			RK73GB2A472J	CHIP R 4.7K J 1/10W	

E : Europe K : North America M : Other Areas

△ Indicates safety critical components.

PARTS LIST

Ref. No.	Add	New	Parts No.	Description				Destination						
R109			RK73EB2E101J	CHIP R	100	J	1/4W							
R110			RK73GB2A473J	CHIP R	47K	J	1/10W							
R111			RK73GB2A102J	CHIP R	1.0K	J	1/10W							
R113			RK73GB2A102J	CHIP R	1.0K	J	1/10W							
R114			RK73GB2A473J	CHIP R	47K	J	1/10W							
R115			RK73GB2A104J	CHIP R	100K	J	1/10W							
R116			RK73GB2A103J	CHIP R	10K	J	1/10W							
R119-121			RK73GB2A473J	CHIP R	47K	J	1/10W							
R122-125			RK73GB2A000J	CHIP R	0.0	J	1/10W							
R126-129			RK73GB2A103J	CHIP R	10K	J	1/10W							
R130-133			RK73GB2A472J	CHIP R	4.7K	J	1/10W							
R134			RK73GB2A473J	CHIP R	47K	J	1/10W							
R135			RK73GB2A103J	CHIP R	10K	J	1/10W							
S1			✱	S79-0864-05	DIP SWITCHES									
D1,2					UDZ5.6B	ZENER DIODE								
D3					DAN202U	DIODE								
D4-7					DA204U	DIODE								
D8,9					FTZ6.8E	ZENER DIODE								
D10-12					DA204U	DIODE								
D13-15					FTZ6.8E	ZENER DIODE								
D16					DAN202U	DIODE								
D19					DA204U	DIODE								
D20,21					DAP202U	DIODE								
D22					RB160L-40	DIODE								
D23					DAN202U	DIODE								
D24					CVS10A180M	VARISTOR								
D25					1SS355	DIODE								
IC1					BR24L02FV-W	ROM IC								
IC2					BR24L04FV-W	ROM IC								
IC3							M30626FHPGP		MICROPROCESSOR IC					
IC4							74AHC2G126DP		MOS-IC					
IC5							74AHCT2G126DP		MOS-IC					
IC7							NJM2100V-ZB		ANALOGUE IC					
IC8							SI-8050JDNF		ANALOGUE IC					
IC10							SI-3033KMS		ANALOGUE IC					
IC11	S-80835CNNB-G	MOS-IC												
IC12	TC4066BFT (N)	MOS-IC												
IC13	NJM2100V-ZB	ANALOGUE IC												
Q1	DTC124EUA	DIGITAL TRANSISTOR												
Q2	DTA114EUA	DIGITAL TRANSISTOR												
Q3	2SB1184	TRANSISTOR												
Q4,5	2SC4081	TRANSISTOR												
Q6	DTC124EUA	DIGITAL TRANSISTOR												
Q7	IMX9	TRANSISTOR												
Q8,9	2SC4081	TRANSISTOR												
Q10	TPC8110-F	FET												
Q11	2SC4081	TRANSISTOR												
Q13,14	DTC643TU	DIGITAL TRANSISTOR												
Q15	DTA144EUA	DIGITAL TRANSISTOR												
Q16,17	DTC144EUA	DIGITAL TRANSISTOR												
A1	✱	W02-5315-05	ELECTRIC CIRCUIT MODULE											

Ref. No.	Add	New	Parts No.	Description	Destination

⚠ Indicates safety critical components.