


EXPLODED VIEW / PARTS LIST

Main section

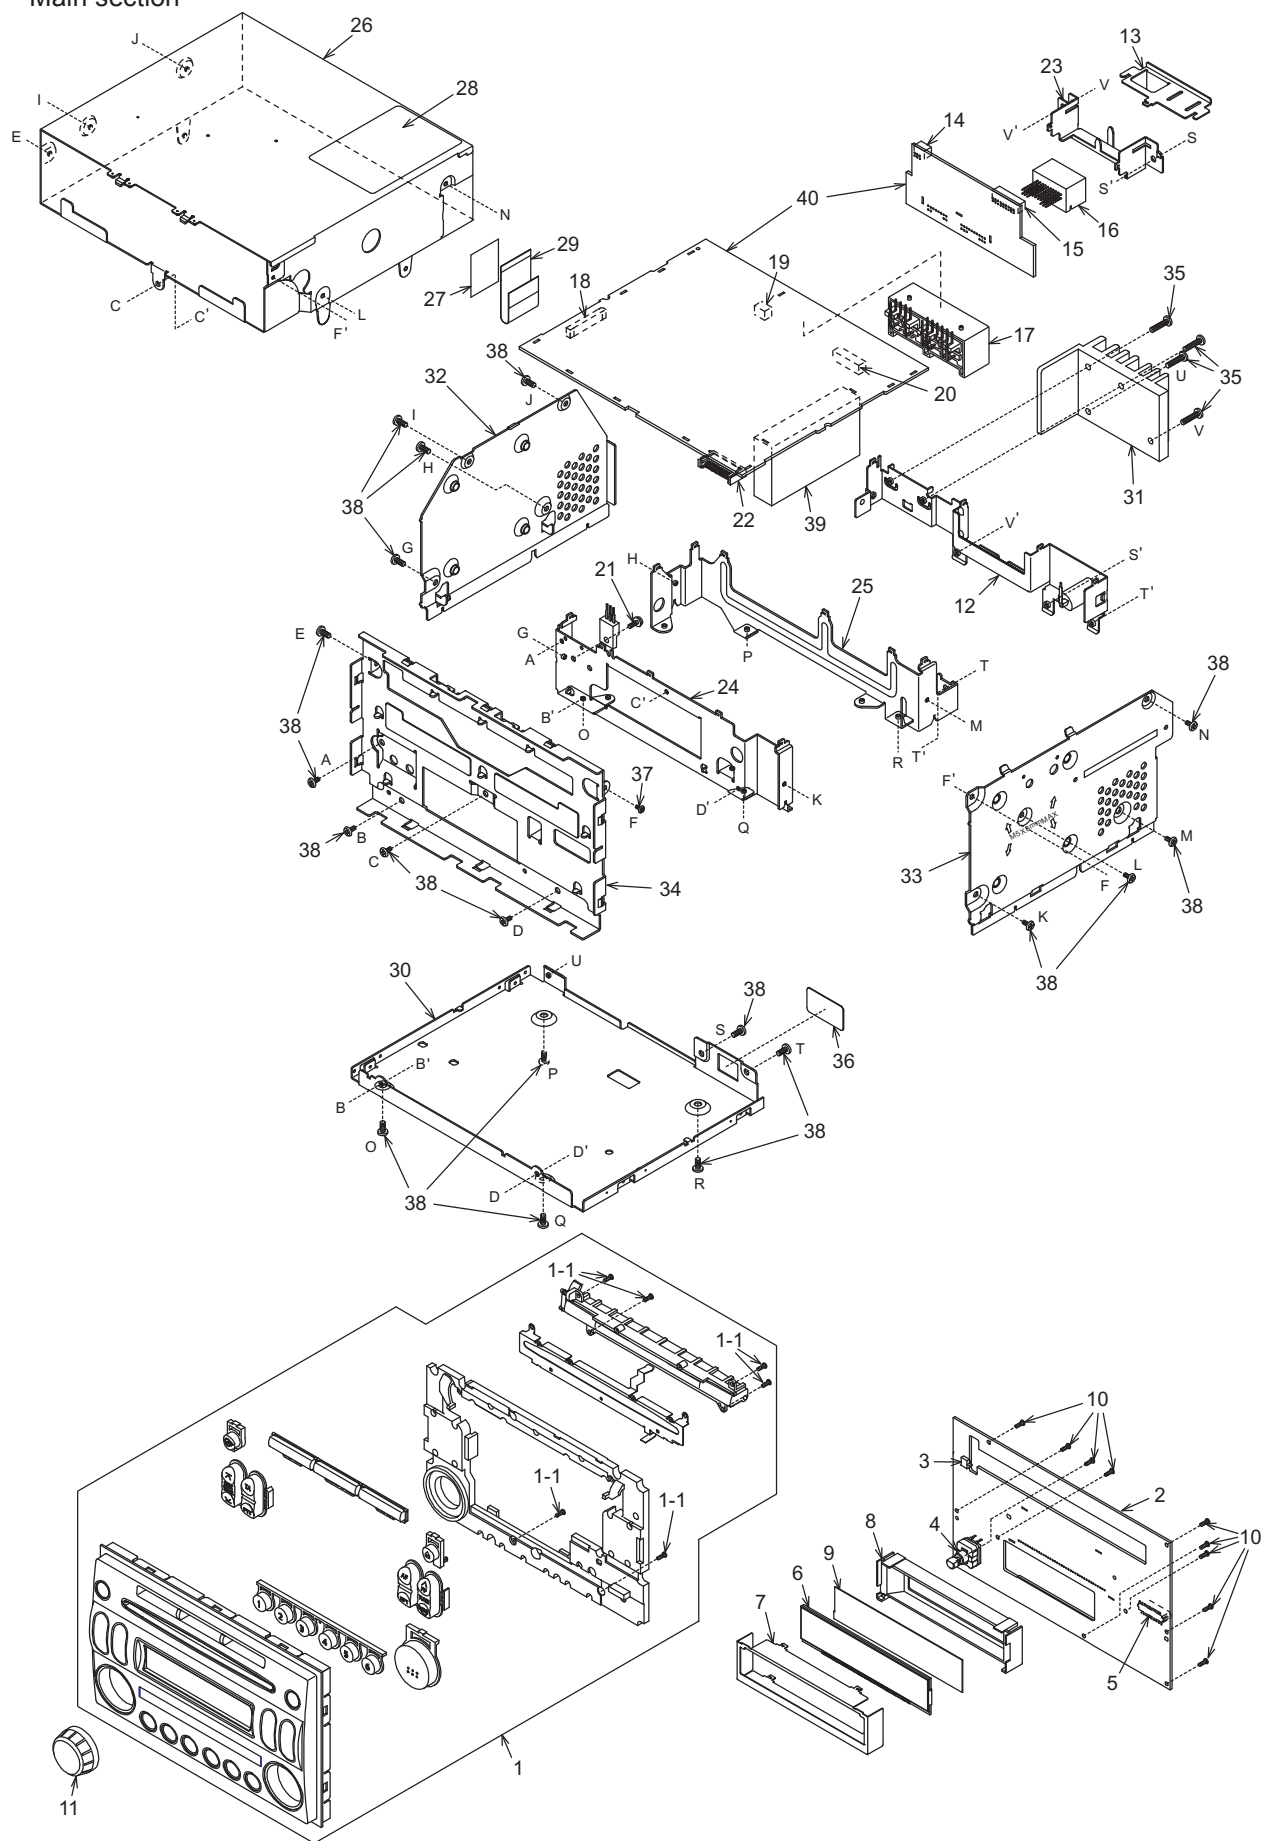


Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8079-00 940-8079-10	ESCUTCHEON ASSY (PN-2649N-A) ESCUTCHEON ASSY (PN-2649N-B)	1
1-1	716-0778-00	WAVE SCREW(2 x 6)	6
2	-----	SWITCH PWB	1
3	013-7415-50	DETECTOR SWITCH	1
4	016-0013-04	VARIABLE RESISTOR	1
5	074-1279-68	OUTLET SOCKET(18P) (TO MAIN PWB)	1
6	379-1286-40	INDICATOR(LCD)	1
7	331-3684-21	LCD COVER	1
8	335-7015-01	LCD HOLDER	1
9	335-7054-01	LCD REFLECTOR	1
10	716-0778-00	WAVE SCREW(2 x 6)	9
11	380-5568-00	KNOB	1
12	331-3238-31 331-3238-11	REAR PLATE(with ANT.recept) (PN-2649N-A) REAR PLATE(with ANT.recept) (PN-2649N-B)	1
13	331-3257-21	CONNECTOR HOLDER B	1
14	074-0898-06	OUTLET SOCKET (6P) (TO MAIN PWB)	1
15	074-0898-18	OUTLET SOCKET (18P) (TO MAIN PWB)	1
16	074-1087-12	OUTLET SOCKET (A16)	1
17	074-1141-00	OUTLET SOCKET (NS06/10)	1
18	074-1192-22	OUTLET SOCKET (22P) (TO CD CHANGER)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	076-0368-06	PLUG (6P)	1
20	076-0368-18	PLUG (18P)	1
21	716-1494-00	IT SCREW (M2.6 x 6)	1
22	076-0648-18	PLUG (18P) (TO SWITCH PWB)	1
23	331-2025-21	CONNECTOR HOLDER A	1
24	331-3236-22	MECHANISM BRACKET (FR)	1
25	331-3237-21	MECHANISM BRACKET (RR)	1
26	929-0196-80	CD CHANGER MODULE	1
27	335-6788-01	MOLDED PART	1
28	286-6514-54 286-6514-55	SETPLATE(PN-2649N-A) SETPLATE(PN-2649N-B)	1
29	816-2563-10	FLAT WIRE(TO CD CHANGER)	1
30	311-1834-23	LOWER CASE	1
31	313-1933-10	HEAT SINK	1
32	331-3258-22	SIDE CASE (L)	1
33	331-3259-22	SIDE CASE (R)	1
34	331-3265-21	ESCUTCHEON PLATE	1
35	714-2612-81	MACHINE SCREW (M2.6 x 12)	4
36	347-6623-01	SPACER	1
37	714-2004-81	MACHINE SCREW (M2 x 4)	1
38	714-2605-81	MACHINE SCREW (M2.6 x 5)	19
39	880-2090Q 880-2090T	AM/FM TUNER(PN-2649N-A) AM/FM TUNER(PN-2649N-B)	1
40	-----	MAIN PWB	1


Main section : CD changer module

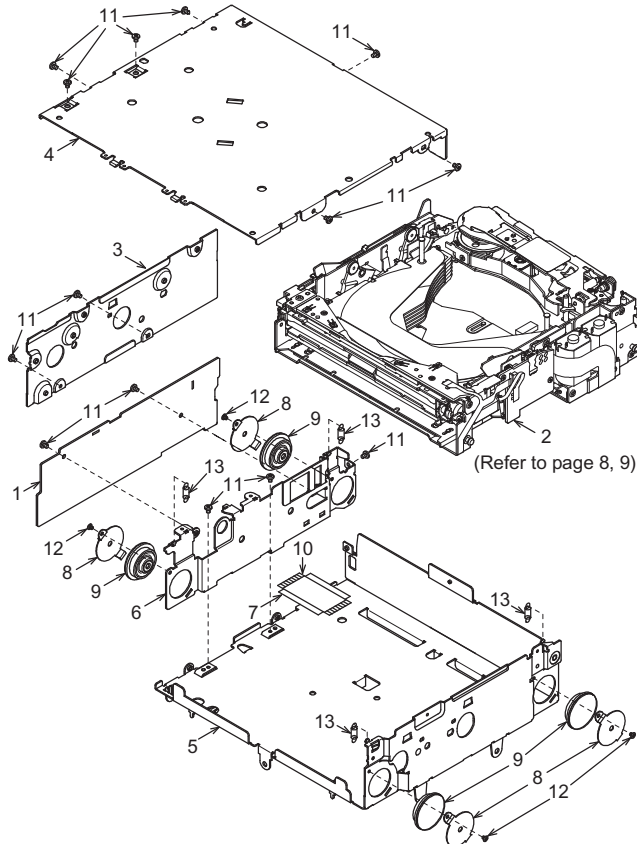


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SIDE PWB	1
2	-----	CD CHANGER MECHANISM	1
3	305-0315-21	SIDE CVR	1
4	310-1741-23	UPPER CASE	1
5	311-1837-25	LOWER CASE	1
6	331-3266-24	PWB-HOLDER	1
7	347-6619-00	INSULATOR	1
8	620-1086-20	DAMPER-H-PLT	4
9	629-0083-01	DAMPER	4
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-1716-00	SCREW (M2 x 3)	14
12	716-3450-00	SCREW (M1.7 x 2)	4
13	750-3491-00	FL-SPRING	4

CD changer mechanism section : CD changer module

* The parts list is on page 10.

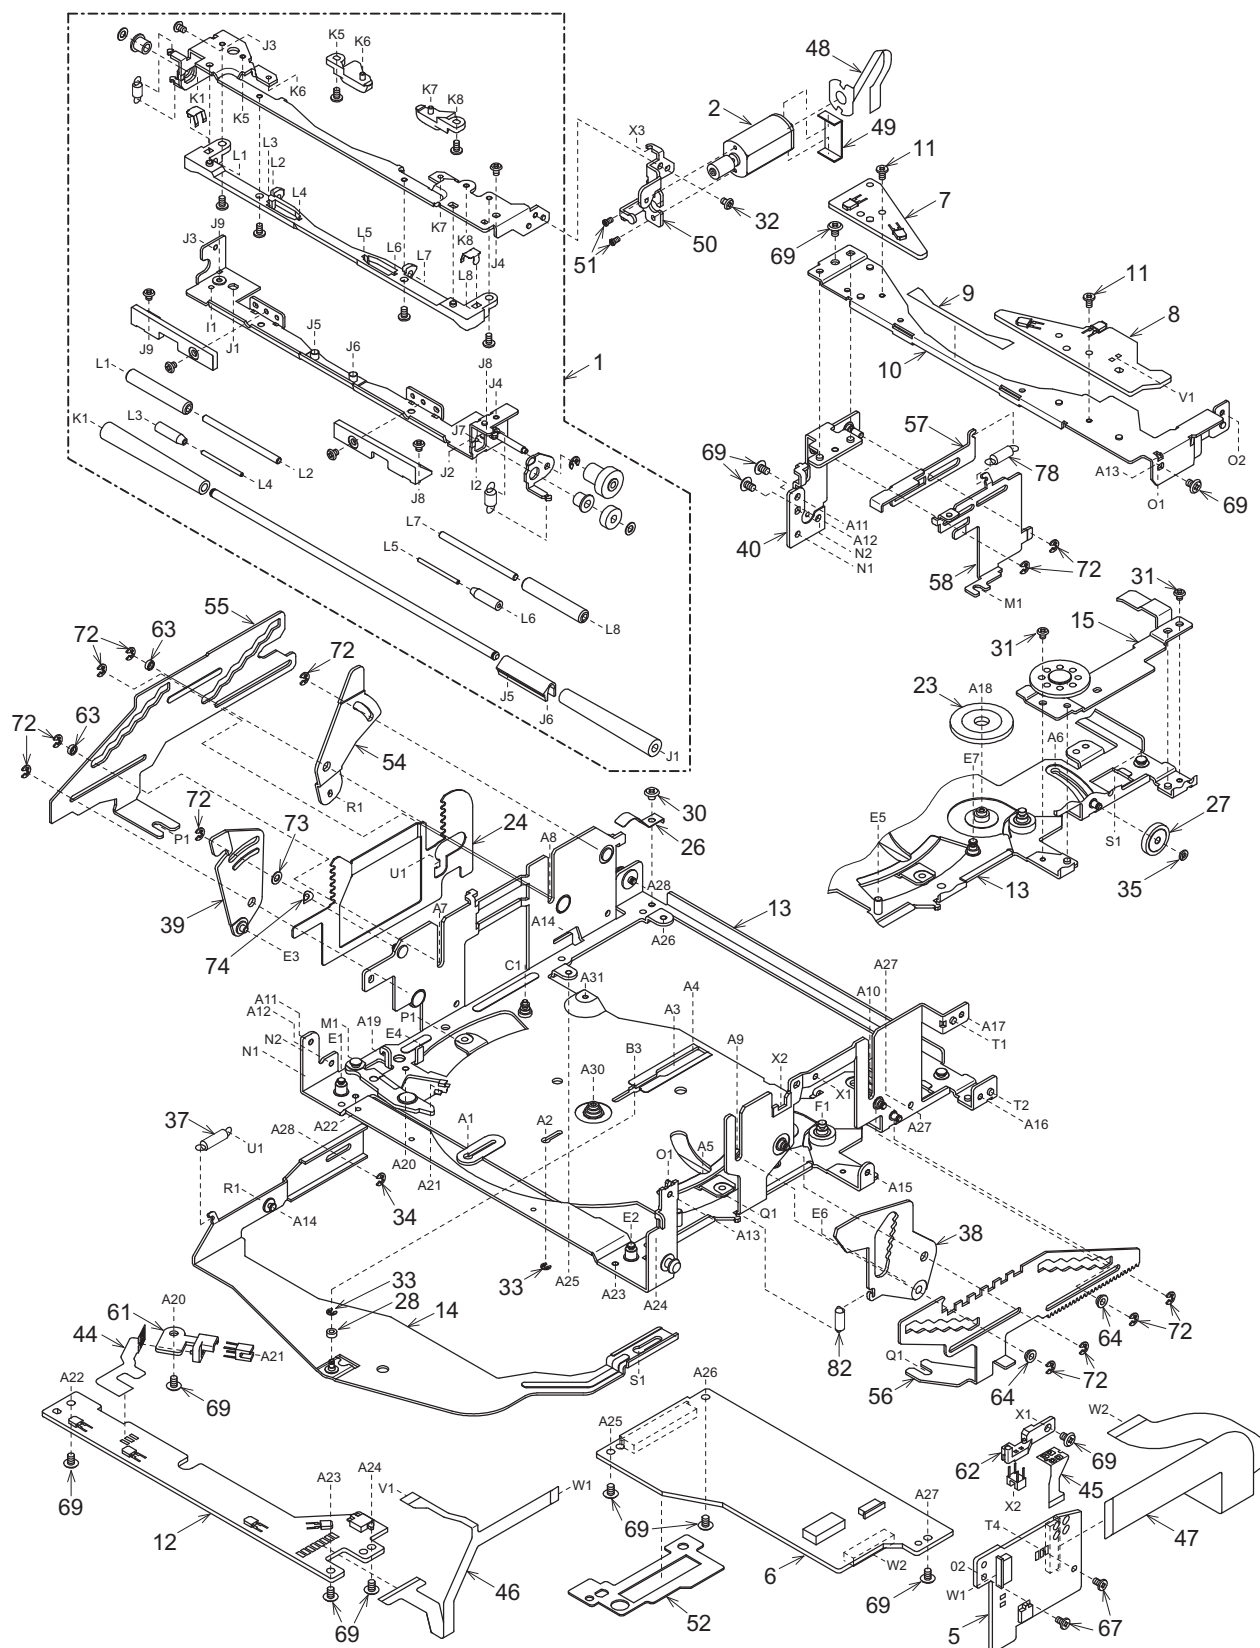


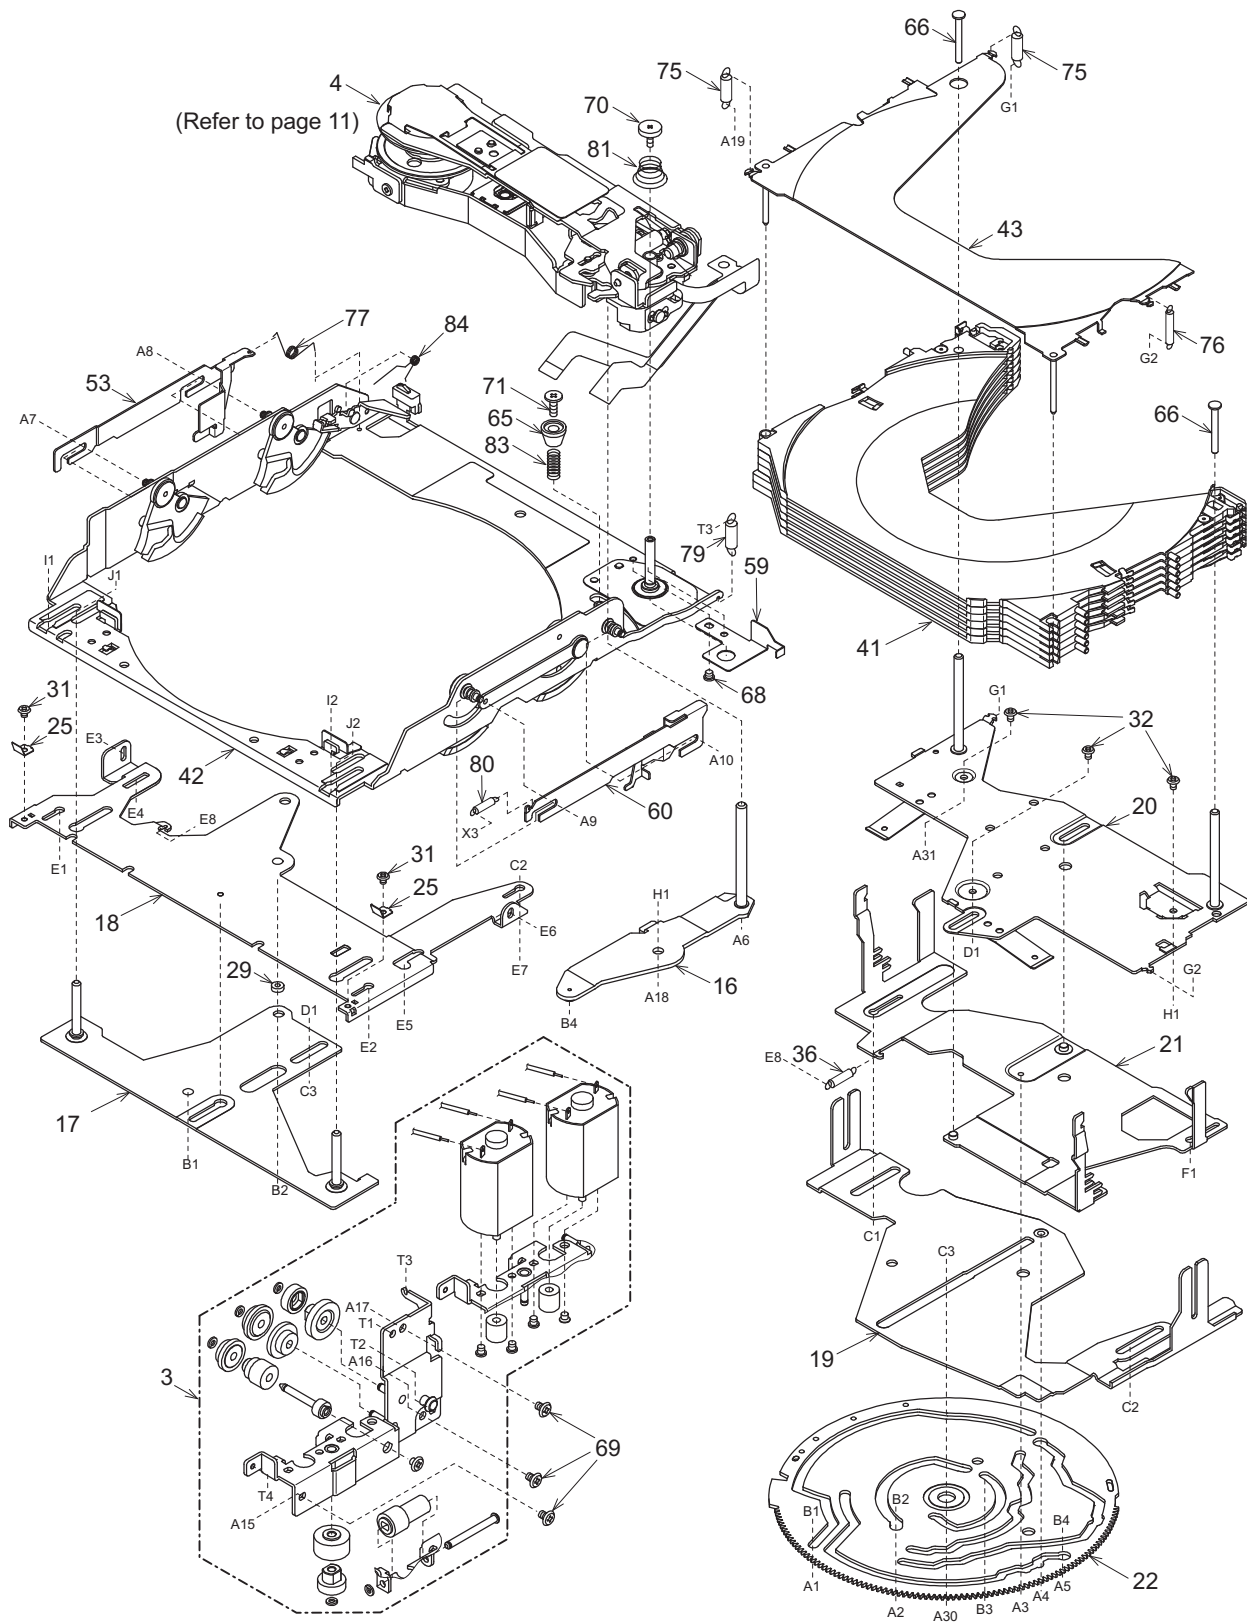

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR-ASSY	1
3	HBS-530-100	MTR-P-SUB-ASSY	1
4	HBS-531-103	DRIVE UNIT	1
5	-----	DRIVER PWB	1
6	-----	CD-PWB	1
7	-----	LED-L-PWB	1
8	-----	LED-R-PWB	1
9	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1
10	620-1577-20	FRONT-PLATE	1
11	716-1866-00	SCREW (M1.7 x 3)	2
12	-----	SENSOR PWB	1
13	966-0597-24	CHASSIS-ASSY	1
14	966-0600-23	LOCK-P-RE-ASSY	1
15	966-0601-21	M-GEAR-P-ASSY	1
16	966-0602-24	DR-LINK-ASSY	1
17	966-0603-21	MODE-P-ASSY	1
18	966-0604-24	LOCK-PF-ASSY	1
19	966-0605-20	SHIFT-P-ASSY	1
20	966-0607-26	COV-PLATE-ASSY	1
21	966-0606-23	HLC-PLATE-ASSY	1
22	620-1041-26	GEAR PLATE	1
23	620-1042-20	M-GEAR-H	1
24	620-1090-20	GAP PLATE	1
25	620-1568-20	RATTLE PLATE-F	2
26	620-1604-20	DR-PLATE-SPRING	1
27	621-0640-20	V-GEAR-G	1
28	622-1651-00	LOCK-RE-ROLLER	1
29	622-1652-00	LOCK-PF-ROLLER	1
30	716-1850-01	SCREW (M2 x 2)	1
31	716-3450-00	SCREW (M1.7 x 2)	4
32	716-3451-00	SCREW (M1.7 x 2.5)	4
33	743-1200-10	E-RING	2
34	743-1500-10	E-RING	1
35	746-0761-00	SPECIAL WASHER	1
36	750-3485-01	TENTION-SP-L	1
37	750-3497-00	GAP-P-SPRING L	1
38	966-0615-21	LOCK-L-RF-ASSY	1
39	966-0616-20	LOCK-L-LF-ASSY	1
40	966-0618-21	EJECT-B-ASSY	1
41	966-0624-27	DISC-HOL-ASSY	1
42	966-0652-22	DR-BASE-P-ASSY	1
43	HBS-535-100	TOP PLATE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
44	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
45	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
46	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
47	039-2013-02	MOS-FPC (WITHOUT COMPONENT)	1
48	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
49	347-6657-01	LO-COVER SHEET	1
50	620-1576-20	LO-MOTOR-PLT	1
51	738-1422-11	SCREW (M1.4 x 2.2)	2
52	347-6974-21	FPC COVER	1
53	620-1056-22	HLR-PLATE-L	1
54	620-1066-20	LOCK LINK-LR	1
55	620-1067-21	SLIDE PLATE L	1
56	620-1068-22	SLIDE PLATE-R	1
57	620-1071-21	EJECT ARM	1
58	620-1072-20	EJECT PLATE	1
59	620-1083-20	FPC-PLATE	1
60	620-1580-20	HLR-PLATE-R	1
61	621-0641-21	PI-HOLDER-M	1
62	621-0656-21	PI-HOLDER-V	1
63	622-1622-20	SL-G-ROLLER	2
64	622-1623-00	SL-G-ROLLER-R	2
65	622-1648-23	DU-STP-SLEEVE	1
66	622-1650-23	COV-PLATE PIN B	2
67	716-1866-00	SCREW (M1.7 x 3)	2
68	716-1873-00	SCREW (M2 x 1.6)	1
69	716-3449-00	SCREW (M2 x 3)	15
70	716-3459-00	SCREW (M1.7 x 5)	1
71	716-3466-02	SCREW (M2 x 6)	1
72	743-1500-10	E-RING	12
73	746-0624-00	WASHER	1
74	746-0712-23	WASHER	1
75	750-3478-01	TOP-P-SP-L	2
76	750-3479-01	TOP-P-SP-R	1
77	750-3480-01	DR-LOCK-SP	1
78	750-3483-00	EJECT-A-SPRING	1
79	750-3484-01	DR-BASE-SPRING	1
80	750-3486-01	LO-TENSION-SP	1
81	750-3489-01	DRIVE-P-SPRING	1
82	750-3496-00	GAP-P-SPRING R	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1

Drive unit section : CD changer module

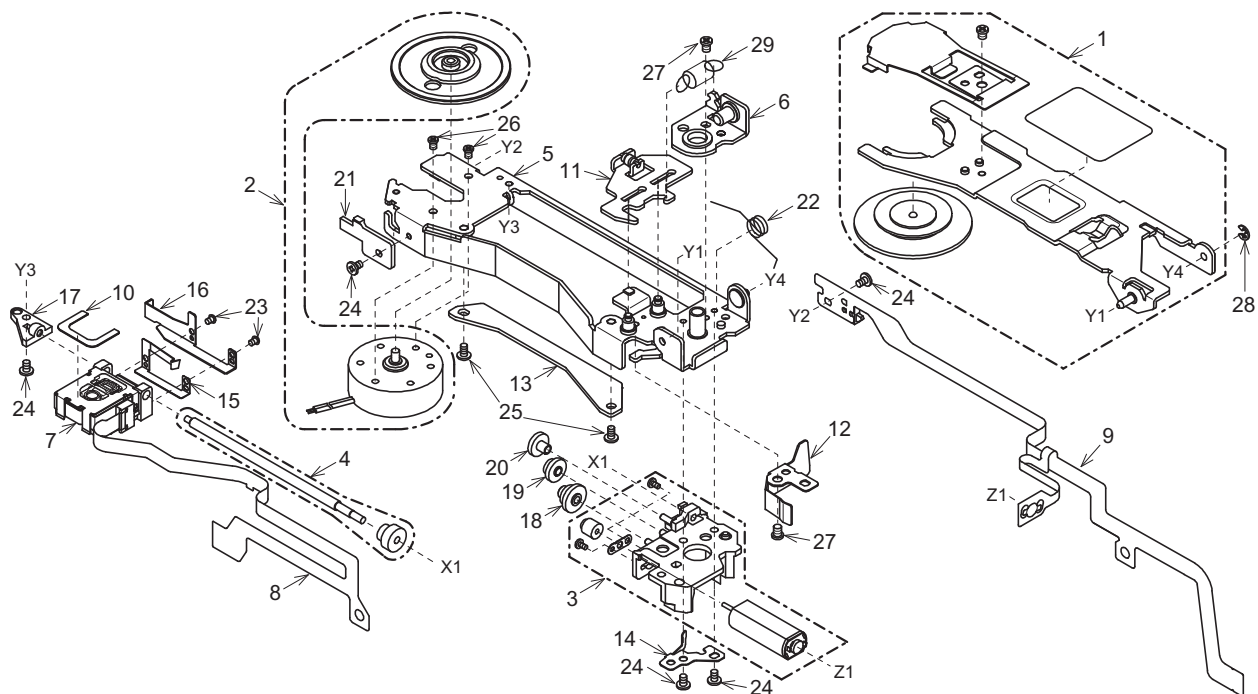

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMP SUB-ASSY	1	15	620-1587-83	SH-SPRING-PLT	1
2	SMA-193-100	SPINDLE MOTOR-ASSY	1	16	620-1730-81	SCREW-HOL-PLT	1
3	SMA-191-100	SLED MOTOR-ASSY	1	17	621-0670-20	LS-HOLDER-L	1
4	HBS-515-101	LS-ASSY	1	18	621-0673-20	D-GEAR-A	1
5	966-0649-82	DRIVE PLT-ASSY	1	19	621-0674-20	D-GEAR-B	1
6	966-0650-20	SPRING-PLT-ASSY	1	20	621-0675-20	D-GEAR-C	1
7	969-0011-01	PICK UP-ASSY	1	21	621-0683-21	DU-STOPPER	1
8	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1	22	750-3504-00	CLAMP-A-SPRING	1
9	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1	23	716-3511-00	SCREW(1.4 x 3)	2
10	347-6632-00	PU-SHEET	1	24	716-3470-00	SCREW(M1.7 x 3)	5
11	HBS-542-101	D-SHIFT-P-ASSY	1	25	716-3474-00	SCREW(M1.7 x 3)	2
12	620-1078-20	PUSH PLATE	1	26	738-1720-17	PRECISION SCREW(M1.7 x 2)	2
13	620-1080-22	PU-GUIDE-PLATE	1	27	738-2025-17	PRECISION SCREW(M2 x 2.5)	2
14	620-1081-20	SCREW PUSH-PLT	1	28	743-1500-10	E-RING	1
				29	750-3487-00	SHIFT-P-SPRING	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	331-3238-31	REAR PLATE with ANT.recept (PN-2649N-A)	C157	168-6812-55	680pF K (PN-2649N-B)	C607	168-2222-55	2200pF K
ANT102	331-3238-11	REAR PLATE with ANT.recept (PN-2649N-B)	C158	168-1032-55	0.01uF K (PN-2649N-B)	C608	168-2222-55	2200pF K
BL101	880-2090Q	TUNER PACK (PN-2649N-A)	C159	168-3332-78	0.033uF K (PN-2649N-B)	C609	168-2222-55	2200pF K
BL101	880-2090T	TUNER PACK (PN-2649N-B)	C160	168-3922-55	3900pF K (PN-2649N-B)	C610	168-2222-55	2200pF K
C101	168-8222-55	8200pF K	C161	168-1032-55	0.01uF K (PN-2649N-B)	C611	172-1041-15	0.1uF
C102	168-2232-55	0.022uF K	C162	168-1032-55	0.01uF K (PN-2649N-B)	C612	189-3383-32	16V 3300uF
C103	168-1042-78	16V 0.1uF	C163	187-1053-67	50V1uF (PN-2649N-B)	C613	188-1053-68	50V 1uF
C104	187-4763-17	6.3V47uF	C301	168-1042-78	16V 0.1uF	C614	172-1041-15	0.1uF
C105	168-2722-55	2700pF K	C305	042-1562-68	16V 22uF	C615	188-1063-38	16V 10uF
C106	187-1053-67	50V1uF	C307	042-1562-36	50V 1uF	C743	042-1562-17	16V 10uF
C107	166-1011-50	100pF CH	C312	042-1562-36	50V 1uF	C744	042-1562-15	10V 220uF
C108	166-1011-50	100pF CH	C313	178-4742-78	0.47uF	C745	166-2201-50	22pF CH
C109	168-3312-55	330pF K	C314	178-4742-78	0.47uF	C866	168-5622-55	5600pF K
C110	166-1501-50	15pF CH	C315	168-1222-55	1200pF K	C867	168-1032-55	0.01uF K
C111	166-1801-50	18pF CH	C316	042-1562-36	50V 1uF	C872	168-1032-55	0.01uF K
C113	166-1007-50	10pF CH	C317	042-1562-36	50V 1uF	C877	168-1042-78	16V 0.1uF
C114	168-1032-55	0.01uF K	C318	168-1222-55	1200pF K	C878	168-1042-78	16V 0.1uF
C115	166-2201-50	22pF CH	C323	178-1842-78	0.18uF	C883	042-0592-73	50V 1uF
C116	187-4763-17	6.3V47uF	C324	178-1842-78	0.18uF	C884	172-3931-15	0.039uF
C117	168-1022-55	1000pF K	C325	178-1842-78	0.18uF	C885	172-3931-15	0.039uF
C118	168-1042-78	16V 0.1uF	C326	178-1842-78	0.18uF	C886	172-3931-15	0.039uF
C119	168-2232-55	0.022uF K	C327	168-8212-55	820pF K	C887	172-3931-15	0.039uF
C120	187-4763-37	16V47uF	C328	168-8212-55	820pF K	C888	188-1063-38	16V 10uF
C121	168-5612-55	560pF Z	C329	168-8212-55	820pF K	C890	187-1053-67	50V1uF
C122	168-1032-55	0.01uF K	C330	168-8212-55	820pF K	C894	178-1052-78	1uF
C123	168-1022-55	1000pF K	C331	042-1562-17	16V 10uF	C895	178-1052-78	1uF
C124	187-4763-37	16V47uF	C332	042-1562-17	16V 10uF	C896	178-1052-78	1uF
C125	166-4701-50	47pF CH	C333	168-1832-55	0.018uF K	C897	178-1052-78	1uF
C126	168-3312-55	330pF K	C407	168-1042-78	16V 0.1uF	C898	163-4753-55	35V4.7uF
C127	168-2232-55	0.022uF K	C409	168-2232-55	0.022uF K	C899	163-4753-55	35V4.7uF
C128	166-5601-50	56pF CH	C411	168-4722-55	4700pF K	C1014	187-1066-37	16V10uFNP
C129	187-2253-67	50V2.2uF	C413	166-1011-50	100pF CH	C1015	187-1066-37	16V10uFNP
C130	168-2232-55	0.022uF K	C415	166-1011-50	100pF CH	CCT1	050-0140-54	1/32W 1k ohm x4J
C131	187-1073-37	16V100uF	C416	166-1011-50	100pF CH	CCT402	050-0140-54	1/32W 1k ohm x4J
C132	168-2232-55	0.022uF K	C417	166-1011-50	100pF CH	CCT403	050-0140-54	1/32W 1k ohm x4J
C133	178-1052-78	1uF	C420	188-4763-17	6.3V 47uF	CCT409	050-0140-54	1/32W 1k ohm x4J
C134	187-4753-67	50V4.7uF	C421	168-1042-78	16V 0.1uF	CCT411	050-0140-54	1/32W 1k ohm x4J
C135	168-6812-55	680pF K	C422	168-1022-55	1000pF K	CCT412	050-0140-54	1/32W 1k ohm x4J
C136	168-1042-78	16V 0.1uF	C423	168-1042-78	16V 0.1uF	CCT413	050-0140-54	1/32W 1k ohm x4J
C137	168-2232-55	0.022uF K	C424	168-1032-55	0.01uF K	CCT414	050-0140-54	1/32W 1k ohm x4J
C138	168-1032-55	0.01uF K	C427	168-1042-78	16V 0.1uF	CCT416	050-0140-54	1/32W 1k ohm x4J
C139	168-2732-55	16V 0.027uF K	C429	166-1011-50	100pF CH	CCT417	050-0140-54	1/32W 1k ohm x4J
C140	168-2732-55	16V 0.027uF K	C430	168-1032-55	0.01uF K	D101	001-0516-90	MA111
C141	168-2732-55	16V 0.027uF K	C501	168-1042-78	16V 0.1uF	D102	001-0516-90	MA111
C142	168-1042-78	16V 0.1uF	C502	187-1073-37	16V100uF	D150	001-3205-90	1SV251 (PN-2649N-B)
C143	168-1042-78	16V 0.1uF	C504	042-1548-03	16V 100uF	D151	001-3205-90	1SV251 (PN-2649N-B)
C145	168-8212-55	820pF K	C505	168-1042-78	16V 0.1uF	D403	001-0516-90	MA111
C146	168-1045-56	0.1uF Z	C506	163-1073-35	16V100uF	D406	001-0516-90	MA111
C147	168-1032-55	0.01uF K	C507	187-1073-37	16V100uF	D502	001-0504-48	HZS9C2L
C148	168-1022-55	1000pF K	C508	187-1073-37	16V100uF	D503	001-0466-90	S5688B
C150	119-0000-05	1/10W 0 ohm JW (PN-2649N-A)	C509	042-0423-94	10V 4.7uF	D504	001-0466-90	S5688B
C150	166-1511-50	150pF CH (PN-2649N-B)	C510	168-1042-78	16V 0.1uF	D506	001-0504-48	HZS9C2L
C151	166-4701-50	47pF CH (PN-2649N-B)	C511	042-0592-58	16V 10uF	D552	001-0504-49	HZS9 C3L
C152	168-4722-55	4700pF K	C515	163-4763-35	16V47uF	D602	001-0347-34	MA4062L
C153	166-4701-50	47pF CH (PN-2649N-B)	C516	168-1042-78	16V 0.1uF	D605	001-0466-90	S5688B
C154	168-1022-55	1000pF K (PN-2649N-B)	C517	042-0595-62	16V 10uF	D606	001-0330-90	1SS119
C155	166-2201-50	22pF CH (PN-2649N-B)	C554	187-1063-57	35V10uF	D607	001-2015-00	RL253
C156	168-4732-78	0.047uF K (PN-2649N-B)	C555	168-2232-55	0.022uF K	D608	001-0466-90	S5688B
			C601	168-2232-55	0.022uF K	D1050	001-0466-90	S5688B
			C602	168-2222-55	2200pF K	IC101	051-6201-90	LC72146M
			C603	168-2222-55	2200pF K	IC102	051-4607-90	SAA6581T
			C604	168-2222-55	2200pF K	IC103	051-0350-93	NJM4558M
			C605	168-2222-55	2200pF K	IC104	051-4603-90	TA2083FN (PN-2649N-B)
			C606	168-2222-55	2200pF K	IC302	051-5027-00	LC75412WH
						IC402	051-9400-29	BR93L46F-W
						IC403	051-0350-93	NJM4558M
						IC404	052-3185-30	M30624MGA-586GP
						IC405	051-5436-08	S-80933ANMP-DDX

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC501	051-1834-00	LM2936Z-5.0	Q1050	125-2005-91	UN2211	R415	119-1021-15	1/10W 1k ohm
IC601	051-5418-08	S-80827ANMP-EDQ	Q1051	191-0709-00	2SB709A Q,R,S	R417	119-1021-15	1/10W 1k ohm
IC707	051-0350-93	NJM4558M	Q1052	193-0601-00	2SD601A	R418	119-4731-15	1/10W 47k ohm
IC808	051-2042-00	TA8275H	R101	119-2221-15	1/10W 2.2k ohm	R419	119-1041-15	1/10W 100k ohm
J402	074-1192-22	22P	R102	119-1231-15	1/10W 12k ohm	R420	119-4721-15	1/10W 4.7k ohm
J601	074-1141-00	NS10+6	R103	119-2711-15	1/10W 270 ohm	R421	119-2241-15	1/10W 220k ohm
J1001	074-1087-12	OUTLET SOCKET	R104	119-1021-15	1/10W 1k ohm	R423	119-4731-15	1/10W 47k ohm
L101	010-6009-88	220uH	R105	119-5631-15	1/10W 56k ohm	R425	119-2231-15	1/10W 22k ohm
L103	010-6009-88	220uH	R106	119-1031-15	1/10W 10k ohm	R426	119-4731-15	1/10W 47k ohm
L150	010-2198-65	0.1uH	R107	116-1201-15	1/4W 12 ohm	R427	119-3311-15	1/10W 330 ohm
		(PN-2649N-B)	R108	116-3311-15	1/4W 330 ohm	R430	119-3311-15	1/10W 330 ohm
L151	010-2198-53	5.6uH	R109	119-2221-15	1/10W 2.2k ohm	R431	119-4731-15	1/10W 47k ohm
		(PN-2649N-B)	R110	119-1031-15	1/10W 10k ohm	R432	119-4731-15	1/10W 47k ohm
L152	010-2003-04	30uH	R111	116-3301-15	1/4W 33 ohm	R433	119-4731-15	1/10W 47k ohm
L153	010-2312-52	0.27uH	R112	116-5691-15	1/4W 5.6 ohm	R435	119-4731-15	1/10W 47k ohm
		(PN-2649N-B)	R113	119-1021-15	1/10W 1k ohm	R436	119-2231-15	1/10W 22k ohm
L154	010-2046-41	560uF	R114	119-2221-15	1/10W 2.2k ohm	R438	119-2231-15	1/10W 22k ohm
		(PN-2649N-B)	R115	119-1021-15	1/10W 1k ohm	R439	032-0140-89	1/10W 47k ohm F
L401	010-3406-66	NLV25 22uH J	R116	119-4721-15	1/10W 4.7k ohm	R440	119-4731-15	1/10W 47k ohm
L601	010-8021-00	490uH	R117	119-2221-15	1/10W 2.2k ohm	R441	119-1021-15	1/10W 1k ohm
P1	076-0648-18	18P	R118	119-1031-15	1/10W 10k ohm	R443	119-2231-15	1/10W 22k ohm
P201	076-0368-18	18P	R119	119-1021-15	1/10W 1k ohm	R444	119-4731-15	1/10W 47k ohm
P202	076-0368-06	PLUG(6P)	R120	119-5621-15	1/10W 5.6k ohm	R446	032-0140-89	1/10W 47k ohm F
P1001	074-0898-18	18P	R121	119-3311-15	1/10W 330 ohm	R447	119-4731-15	1/10W 47k ohm
P1002	074-0898-06	OUTLET	R122	119-3331-15	1/10W 33k ohm	R450	032-0140-57	1/10W 5.6k ohm F
		SOCKET(6P)	R123	119-1041-15	1/10W 100k ohm	R451	032-0140-57	1/10W 5.6k ohm F
Q101	198-0669-00	2SK669	R124	119-2211-15	1/10W 220 ohm	R452	119-1031-15	1/10W 10k ohm
Q102	190-1162-00	2SA1162	R126	119-0000-05	1/10W 0 ohm JW	R453	119-4731-15	1/10W 47k ohm
Q103	190-1162-00	2SA1162	R127	119-1031-15	1/10W 10k ohm	R456	119-4731-15	1/10W 47k ohm
Q104	192-2712-50	2SC2712 Y,G,L	R128	119-3321-15	1/10W 3.3k ohm	R457	119-4731-15	1/10W 47k ohm
Q105	125-0001-91	UN2111	R130	119-0000-05	1/10W 0 ohm JW	R458	119-4731-15	1/10W 47k ohm
Q106	125-2005-91	UN2211	R133	119-1021-15	1/10W 1k ohm	R459	119-4731-15	1/10W 47k ohm
Q107	125-2005-91	UN2211	R134	119-4721-15	1/10W 4.7k ohm	R460	119-1041-15	1/10W 100k ohm
Q108	125-2005-91	UN2211	R135	119-1021-15	1/10W 1k ohm	R461	119-3331-15	1/10W 33k ohm
Q150	125-2005-91	UN2211	R136	119-1021-15	1/10W 1k ohm	R463	119-4731-15	1/10W 47k ohm
		(PN-2649N-B)	R150	119-0000-05	1/10W 0 ohm JW	R466	119-6821-15	1/10W 6.8k ohm
Q151	193-0601-00	2SD601A			(PN-2649N-A)	R469	119-1031-15	1/10W 10k ohm
		(PN-2649N-B)	R151	119-0000-05	1/10W 0 ohm JW	R470	119-1031-15	1/10W 10k ohm
Q152	193-0601-00	2SD601A			(PN-2649N-B)	R471	119-4731-15	1/10W 47k ohm
		(PN-2649N-B)	R152	119-0000-05	1/10W 0 ohm JW	R472	119-1041-15	1/10W 100k ohm
Q153	125-2005-91	UN2211			(PN-2649N-B)	R474	119-0000-05	1/10W 0 ohm JW
		(PN-2649N-B)	R153	119-4741-15	1/10W 470k ohm	R475	119-5631-15	1/10W 56k ohm
Q406	125-2005-91	UN2211			(PN-2649N-B)	R477	119-1031-15	1/10W 10k ohm
Q407	125-2005-91	UN2211	R154	119-1031-15	1/10W 10k ohm	R478	119-1031-15	1/10W 10k ohm
Q408	125-0006-90	UN2110			(PN-2649N-B)	R479	119-1021-15	1/10W 1k ohm
Q415	125-2005-91	UN2211	R155	119-1021-15	1/10W 1k ohm	R481	119-4731-15	1/10W 47k ohm
Q416	193-0601-00	2SD601A			(PN-2649N-B)	R483	119-4731-15	1/10W 47k ohm
Q417	125-2005-91	UN2211	R156	119-1021-15	1/10W 1k ohm	R485	119-4731-15	1/10W 47k ohm
Q418	125-0001-91	UN2111			(PN-2649N-B)	R486	119-4731-15	1/10W 47k ohm
Q502	193-2118-00	2SD2118F5 Q,R,S	R157	119-8201-15	1/10W 82 ohm	R488	119-4731-15	1/10W 47k ohm
Q503	193-1858-00	2SD1858			(PN-2649N-B)	R491	119-4731-15	1/10W 47k ohm
Q505	125-2005-91	UN2211	R159	119-6841-15	1/10W 680k ohm	R493	119-4731-15	1/10W 47k ohm
Q506	190-1048-00	2SA1048			(PN-2649N-B)	R494	119-4731-15	1/10W 47k ohm
Q507	191-1205-60	2SB1205 R,S,T	R160	119-6841-15	1/10W 680k ohm	R496	119-4731-15	1/10W 47k ohm
Q508	125-0001-91	UN2111			(PN-2649N-B)	R497	119-1021-15	1/10W 1k ohm
Q509	125-2005-91	UN2211	R161	119-1841-15	1/10W 180k ohm	R498	119-1021-15	1/10W 1k ohm
Q512	193-1858-00	2SD1858			(PN-2649N-B)	R499	119-4721-15	1/10W 4.7k ohm
Q513	125-2005-91	UN2211	R162	119-1241-15	1/10W 120k ohm	R502	116-3911-15	1/4W 390 ohm
Q514	191-1197-50	2SB1197K Q,R			(PN-2649N-B)	R503	119-1031-15	1/10W 10k ohm
Q553	103-2353-00	2SD2353	R163	119-2231-15	1/10W 22k ohm	R504	116-1011-15	1/4W 100 ohm
Q554	125-0001-91	UN2111			(PN-2649N-B)	R505	119-4721-15	1/10W 4.7k ohm
Q555	125-2005-91	UN2211	R164	119-1031-15	1/10W 10k ohm	R506	119-1021-15	1/10W 1k ohm
Q603	193-0601-00	2SD601A			(PN-2649N-B)	R507	119-1031-15	1/10W 10k ohm
Q607	125-2005-91	UN2211	R314	119-1821-15	1/10W 1.8k ohm	R508	116-7501-15	1/4W 75 ohm
Q608	191-0709-00	2SB709A Q,R,S	R315	119-1821-15	1/10W 1.8k ohm	R509	116-2201-15	1/4W 22 ohm
Q609	100-1359-00	2SA1359	R316	119-3931-15	1/10W 39k ohm	R510	116-2201-15	1/4W 22 ohm
Q701	125-2005-91	UN2211	R317	119-3931-15	1/10W 39k ohm	R512	116-2211-15	1/4W 220 ohm
Q804	125-4001-90	XN1504	R351	119-4721-15	1/10W 4.7k ohm	R514	119-1031-15	1/10W 10k ohm
Q805	125-4001-90	XN1504	R352	119-4721-15	1/10W 4.7k ohm	R515	119-1021-15	1/10W 1k ohm
Q806	125-0006-90	UN2110	R355	119-4721-15	1/10W 4.7k ohm	R552	111-2211-98	1/4W 220 ohm
Q807	125-0006-90	UN2110	R356	119-4721-15	1/10W 4.7k ohm	R554	119-1041-15	1/10W 100k ohm
Q808	125-9003-92	IMD3	R411	119-4721-15	1/10W 4.7k ohm	R601	119-4741-15	1/10W 470k ohm
Q1010	125-2005-91	UN2211	R413	119-3311-15	1/10W 330 ohm	R602	119-2741-15	1/10W 270k ohm
Q1011	125-0001-91	UN2111	R414	119-1521-15	1/10W 1.5k ohm	R605	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R606	119-5611-15	1/10W 560 ohm	R910	119-1031-15	1/10W 10k ohm	R1052	119-3321-15	1/10W 3.3k ohm
R611	116-1221-15	1/4W 1.2k ohm	R912	119-0000-05	1/10W 0 ohm JW	R1053	119-1031-15	1/10W 10k ohm
R612	119-4721-15	1/10W 4.7k ohm	R913	119-1031-15	1/10W 10k ohm	R1054	119-4731-15	1/10W 47k ohm
R613	116-1221-15	1/4W 1.2k ohm	R914	119-1031-15	1/10W 10k ohm	R1055	119-1031-15	1/10W 10k ohm
R614	111-5691-98	1/4W 5.6 ohm	R915	119-1031-15	1/10W 10k ohm	R1056	119-1241-15	1/10W 120k ohm
R615	111-5691-98	1/4W 5.6 ohm	R916	119-1031-15	1/10W 10k ohm	R1057	119-3331-15	1/10W 33k ohm
R616	116-1531-15	1/4W 15k ohm	R919	119-1031-15	1/10W 10k ohm	R1058	119-6801-15	1/10W 68 ohm
R617	114-2291-18	1W 2.2 ohm	R920	119-1031-15	1/10W 10k ohm	R1059	119-2241-15	1/10W 220k ohm
R624	119-0000-05	1/10W 0 ohm JW	R921	119-8221-15	1/10W 8.2k ohm	SUP101	060-0122-91	DSP-141N-S00B (PN-2649N-B)
R703	119-2221-15	1/10W 2.2k ohm	R922	119-8221-15	1/10W 8.2k ohm	SUP102	060-0122-91	DSP-141N-S00B (PN-2649N-B)
R758	119-4731-15	1/10W 47k ohm	R923	119-1231-15	1/10W 12k ohm	VR101	012-5203-63	470k ohm
R759	119-4731-15	1/10W 47k ohm	R924	119-1231-15	1/10W 12k ohm	VR150	012-5203-63	470k ohm (PN-2649N-B)
R875	119-1231-15	1/10W 12k ohm	R925	119-2241-15	1/10W 220k ohm	X101	061-1066-00	7.2MHz
R878	119-1831-15	1/10W 18k ohm	R926	119-2241-15	1/10W 220k ohm	X102	061-3013-00	4.33MHz
R904	119-1031-15	1/10W 10k ohm	R927	119-2241-15	1/10W 220k ohm	X401	060-1505-50	CSTCC10.0MG-TC
R905	119-1031-15	1/10W 10k ohm	R928	119-2241-15	1/10W 220k ohm	PWB	039-2378-21	PWB(WITHOUT COMPONENT)
R906	119-1031-15	1/10W 10k ohm	R1023	119-3011-15	1/10W 300 ohm			
R907	119-1031-15	1/10W 10k ohm	R1027	119-4731-15	1/10W 47k ohm			
R908	119-1031-15	1/10W 10k ohm	R1050	119-1031-15	1/10W 10k ohm			
R909	119-1031-15	1/10W 10k ohm	R1051	119-2231-15	1/10W 22k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1101	166-8211-50	820pF	D1148	001-0516-90	MA111	S1103	013-6312-50	SKRP-ABE-010
C1102	168-4732-78	0.047uF	D1149	001-0516-90	MA111	S1104	013-6312-50	SKRP-ABE-010
C1103	168-4732-78	0.047uF	IC1	051-6013-00	LC75854W	S1105	013-6312-50	SKRP-ABE-010
C1104	168-1042-78	16V 0.1uF	J101	074-1279-68	18P	S1106	013-6312-50	SKRP-ABE-010
C1105	042-0416-59	10V33uF	LCD1	379-1286-40	INDICATOR(LCD)	S1107	013-6312-50	SKRP-ABE-010
CCT1101	050-0140-53	1/32W 0 ohm x4J	PL1101	017-0433-88	14V40mA	S1108	013-6312-50	SKRP-ABE-010
D1100	001-7048-96	RAY1112H-75M	PL1102	017-0433-88	14V40mA	S1109	013-6312-50	SKRP-ABE-010
D1101	001-7048-96	RAY1112H-75M	PL1103	017-0433-88	14V40mA	S1110	013-6312-50	SKRP-ABE-010
D1102	001-7048-96	RAY1112H-75M	PL1104	017-0433-88	14V40mA	S1111	013-6312-50	SKRP-ABE-010
D1103	001-7048-96	RAY1112H-75M	PL1105	017-0433-88	14V40mA	S1112	013-6312-50	SKRP-ABE-010
D1104	001-7048-96	RAY1112H-75M	PL1106	017-0433-88	14V40mA	S1113	013-6312-50	SKRP-ABE-010
D1105	001-7048-96	RAY1112H-75M	PL1107	017-0433-88	14V40mA	S1114	013-6312-50	SKRP-ABE-010
D1106	001-7048-96	RAY1112H-75M	PL1108	017-0433-88	14V40mA	S1115	013-6312-50	SKRP-ABE-010
D1107	001-7048-96	RAY1112H-75M	R1101	119-6831-15	1/10W 68k ohm	S1116	013-6312-50	SKRP-ABE-010
D1108	001-7048-96	RAY1112H-75M	R1102	119-7511-15	1/10W 750 ohm	S1117	013-6312-50	SKRP-ABE-010
D1109	001-7048-96	RAY1112H-75M	R1103	119-7511-15	1/10W 750 ohm	S1118	013-6312-50	SKRP-ABE-010
D1110	001-7048-96	RAY1112H-75M	R1104	119-7511-15	1/10W 750 ohm	S1119	013-6312-50	SKRP-ABE-010
D1111	001-7048-96	RAY1112H-75M	R1105	119-7511-15	1/10W 750 ohm	S1121	013-6312-50	SKRP-ABE-010
D1112	001-7048-96	RAY1112H-75M	R1106	119-7511-15	1/10W 750 ohm	S1122	013-7415-50	SPVG110400
D1113	001-7048-96	RAY1112H-75M	R1107	119-7511-15	1/10W 750 ohm	VR101	016-0013-04	VR
D1145	001-0516-90	MA111	R1108	119-7511-15	1/10W 750 ohm	PWB	039-2380-20	PWB(WITHOUT COMPONENT)
D1146	001-0516-90	MA111	S1101	013-6312-50	SKRP-ABE-010			
D1147	001-0516-90	MA111	S1102	013-6312-50	SKRP-ABE-010			

Side PWB(B3) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF Z	C502	168-1045-56	0.1uF Z	Q504	192-2712-00	2SC2712
C102	168-1042-78	16V 0.1uF	C503	168-4735-56	0.047uF Z	Q505	125-2004-92	RN1402
C104	163-1073-15	6.3V100uF	C504	168-1045-56	0.1uF Z	Q506	125-0014-92	DTA114EK
C106	163-1063-35	16V10uF	D100	001-0516-90	MA111	Q507	125-0002-92	RN2402
C107	163-1073-15	6.3V100uF	D103	001-0504-07	HZS4BLL	Q508	192-2712-00	2SC2712
C108	168-1042-78	16V 0.1uF	D104	001-0516-90	MA111	R101	119-4711-15	1/10W 470 ohm
C109	168-1042-78	16V 0.1uF	D105	001-0529-31	MA8056-L	R102	119-2231-15	1/10W 22k ohm
C110	168-1042-78	16V 0.1uF	IC501	051-9400-28	BR93LC46F-WE2	R103	119-1821-15	1/10W 1.8k ohm
C111	163-1073-35	16V100uF	IC502	052-5047-23	M30621MCM-8C7GP	R104	119-1831-15	1/10W 18k ohm
C112	168-2722-55	2700pF K	IC503	051-5418-08	S-80827ANMP-EDQ	R105	116-1211-15	1/4W 120 ohm
C113	163-2263-35	16V22uF	IC504	051-1407-90	NJM4556AM	R106	119-1041-15	1/10W 100k ohm
C114	163-2263-35	16V22uF	J101	074-1189-95	45P	R107	119-4731-15	1/10W 47k ohm
C115	166-3311-50	330pF CH	J102	074-1191-22	22P	R108	119-1031-15	1/10W 10k ohm
C116	166-3311-50	330pF CH	L101	010-3071-65	18uH	R109	119-1031-15	1/10W 10k ohm
C117	166-1011-50	100pF CH	L102	010-3407-68	NLV32 33uH J	R110	119-4741-15	1/10W 470k ohm
C118	166-1011-50	100pF CH	Q101	125-2004-92	RN1402	R111	119-4741-15	1/10W 470k ohm
C119	168-2722-55	2700pF K	Q102	131-1188-50	2SB1188PQR	R112	119-2731-15	1/10W 27k ohm
C120	168-1022-55	1000pF K	Q103	193-1758-00	2SD1758TK P,Q,R	R113	119-2731-15	1/10W 27k ohm
C121	163-2263-35	16V22uF	Q104	193-1758-00	2SD1758TK P,Q,R	R114	119-2731-15	1/10W 27k ohm
C122	168-1022-55	1000pF K	Q105	125-0014-92	DTA114EK	R115	119-2731-15	1/10W 27k ohm
C123	163-2263-35	16V22uF	Q106	125-2004-92	RN1402	R116	119-5611-15	1/10W 560 ohm
C124	042-0403-55	16V 33uF	Q502	190-1162-00	2SA1162	R117	119-5611-15	1/10W 560 ohm
C125	042-0403-55	16V 33uF	Q503	190-1162-00	2SA1162	R118	119-4731-15	1/10W 47k ohm
C501	163-1063-35	16V10uF				R119	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R120	119-3941-15	1/10W 390k ohm	R514	119-2241-15	1/10W 220k ohm	R539	119-5631-15	1/10W 56k ohm
R121	119-1041-15	1/10W 100k ohm	R515	119-2241-15	1/10W 220k ohm	R541	119-1021-15	1/10W 1k ohm
R123	119-1041-15	1/10W 100k ohm	R516	119-2241-15	1/10W 220k ohm	R542	119-4721-15	1/10W 4.7k ohm
R124	119-1041-15	1/10W 100k ohm	R517	119-1041-15	1/10W 100k ohm	R543	119-1041-15	1/10W 100k ohm
R125	119-1041-15	1/10W 100k ohm	R518	119-2241-15	1/10W 220k ohm	R544	119-1041-15	1/10W 100k ohm
R126	119-2221-15	1/10W 2.2k ohm	R522	119-1041-15	1/10W 100k ohm	R545	119-1041-15	1/10W 100k ohm
R504	119-5621-15	1/10W 5.6k ohm	R524	119-1041-15	1/10W 100k ohm	R546	119-1021-15	1/10W 1k ohm
R505	119-1031-15	1/10W 10k ohm	R526	119-4731-15	1/10W 47k ohm	R547	119-1021-15	1/10W 1k ohm
R506	119-1041-15	1/10W 100k ohm	R529	119-1021-15	1/10W 1k ohm	R548	119-1021-15	1/10W 1k ohm
R507	119-0000-05	1/10W 0 ohm JW	R531	119-1021-15	1/10W 1k ohm	R549	119-1021-15	1/10W 1k ohm
R509	119-4731-15	1/10W 47k ohm	R532	119-1021-15	1/10W 1k ohm	X501	060-1505-50	10MHz
R510	119-1031-15	1/10W 10k ohm	R533	119-1021-15	1/10W 1k ohm	PWB	039-2433-20	PWB(WITHOUT COMPONENT)
R511	119-1031-15	1/10W 10k ohm	R535	119-2231-15	1/10W 22k ohm			
R512	050-0145-54	1/16W 47k ohm x4	R536	119-2231-15	1/10W 22k ohm			
R513	119-1041-15	1/10W 100k ohm	R538	119-1031-15	1/10W 10k ohm			

CD PWB(B4) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF	C40	045-1211-50	120pF	R18	033-1031-15	1/10W 10k ohm
C3	168-1042-78	16V 0.1uF	C41	045-1011-50	100pF	R19	033-5621-15	1/10W 5.6k ohm
C4	042-0636-54	4V 220uF	C42	168-1042-78	16V 0.1uF	R20	033-6831-15	1/10W 68k ohm
C5	168-1042-78	16V 0.1uF	C43	042-0636-52	4V 47uF	R21	033-5621-15	1/10W 5.6k ohm
C6	046-1032-78	0.01uF	C50	168-1042-78	16V 0.1uF	R22	033-1031-15	1/10W 10k ohm
C7	168-1042-78	16V 0.1uF	C51	168-1042-78	16V 0.1uF	R23	033-1031-15	1/10W 10k ohm
C8	178-4742-78	0.47uF	C60	168-5612-55	560pF Z	R24	033-4731-15	1/10W 47k ohm
C9	178-2242-78	0.22uF	D1	001-0367-91	1SS226	R25	033-3931-15	1/10W 39k ohm
C10	168-1042-78	16V 0.1uF	IC1	051-6365-00	MN662785TBUC	R26	033-6831-15	1/10W 68k ohm
C11	168-1042-78	16V 0.1uF	IC2	051-9318-00	MSM51V17400D-	R27	033-6831-15	1/10W 68k ohm
C12	168-1042-78	16V 0.1uF				R28	033-1031-15	1/10W 10k ohm
C13	046-2232-78	0.022uF	IC3	051-6060-08	BD7961FM-E2	R29	033-2201-15	1/10W 22 ohm
C14	168-5612-55	560pF Z	IC4	051-5711-90	AN8882SB-E1	R31	033-8211-15	1/10W 820 ohm
C15	168-1042-78	16V 0.1uF	J1	074-1189-95	45P	R32	033-5631-15	1/10W 56k ohm
C16	046-2212-58	220pF	J4	074-1138-56	6P	R33	033-6831-15	1/10W 68k ohm
C17	046-2212-58	220pF	J5	074-1201-65	15P	R34	033-3331-15	1/10W 33k ohm
C18	168-1222-55	1200pF K	J6	074-1059-76	26P	R35	033-6831-15	1/10W 68k ohm
C19	046-3322-58	3300pF	L2	010-2155-93	10uH	R38	033-3931-15	1/10W 39k ohm
C20	168-3932-78	0.039uF K	Q2	131-1188-00	2SB1188	R39	033-1831-15	1/10W 18k ohm
C21	168-3932-78	0.039uF K	Q3	131-1188-00	2SB1188	R40	117-1001-15	1/8W 10 ohm
C22	042-0416-52	10V 10uF M TAN	R2	033-1041-15	1/10W 100k ohm	R41	033-6821-15	1/10W 6.8k ohm
C25	178-1052-78	1uF	R4	033-3311-15	1/10W 330 ohm	R42	033-6821-15	1/10W 6.8k ohm
C26	042-0472-91	16V 47uF	R5	033-1041-15	1/10W 100k ohm	R43	033-3331-15	1/10W 33k ohm
C27	178-3342-78	0.33uF	R6	033-3931-15	1/10W 39k ohm	R44	033-5631-15	1/10W 56k ohm
C29	168-2732-55	16V 0.027uF K	R7	033-1041-15	1/10W 100k ohm	R45	116-4711-15	1/4W 470 ohm
C30	042-0416-58	4V 100uF M TAN	R8	033-5611-15	1/10W 560 ohm	R46	117-1811-15	1/8W 180 ohm
C31	042-0636-52	4V 47uF	R9	033-5611-15	1/10W 560 ohm	R47	116-4711-15	1/4W 470 ohm
C32	046-1022-58	1000pF	R10	033-1011-15	1/10W 100 ohm	R48	033-1031-15	1/10W 10k ohm
C33	046-3322-58	3300pF	R11	033-3911-15	1/10W 390 ohm	R49	033-1011-15	1/10W 100 ohm
C34	168-2732-55	16V 0.027uF K	R12	033-2221-15	1/10W 2.2k ohm	R50	050-0140-74	1/32W 12k ohm x 4J
C35	178-2742-78	0.27uF	R13	033-6831-15	1/10W 68k ohm	R60	033-2221-15	1/10W 2.2k ohm
C36	178-1052-78	1uF	R14	033-5621-15	1/10W 5.6k ohm	TM1	073-0768-90	TERMINAL
C37	168-1042-78	16V 0.1uF	R15	033-1021-15	1/10W 1k ohm	X1	060-1527-90	33.8688MHz
C38	042-0472-91	16V 47uF	R16	033-5631-15	1/10W 56k ohm	PWB	039-2398-20	PWB(WITHOUT COMPONENT)
C39	042-0636-50	6.3V 100uF	R17	033-1031-15	1/10W 10k ohm			

Sensor PWB(B5) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	PT5	060-0252-01	PT4850F	S1	013-7414-50	SPVG22
PT4	060-0252-01	PT4850F	PT6	060-0252-01	PT4850F	PWB	039-1956-00	PWB(WITHOUT COMPONENT)

PIM-FPC(B6) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF Z	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100uF	J2	074-1100-59	9P	S2	013-7412-50	SPVG21
D1	001-0529-29	MA8051-M	R1	033-1021-15	1/10W 1k ohm	PWB	039-2242-00	PWB(WITHOUT COMPONENT)
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC(B8) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	LED4	001-7042-00	GL4800	PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B10) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	LED6	001-7042-00	GL4800	PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B11) section : CD changer module

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B12) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-193-100	SPINDLE	M3	SMA-191-100	SLED	S3	013-7414-50	SPVG22