


EXPLODED VIEW / PARTS LIST

Main section

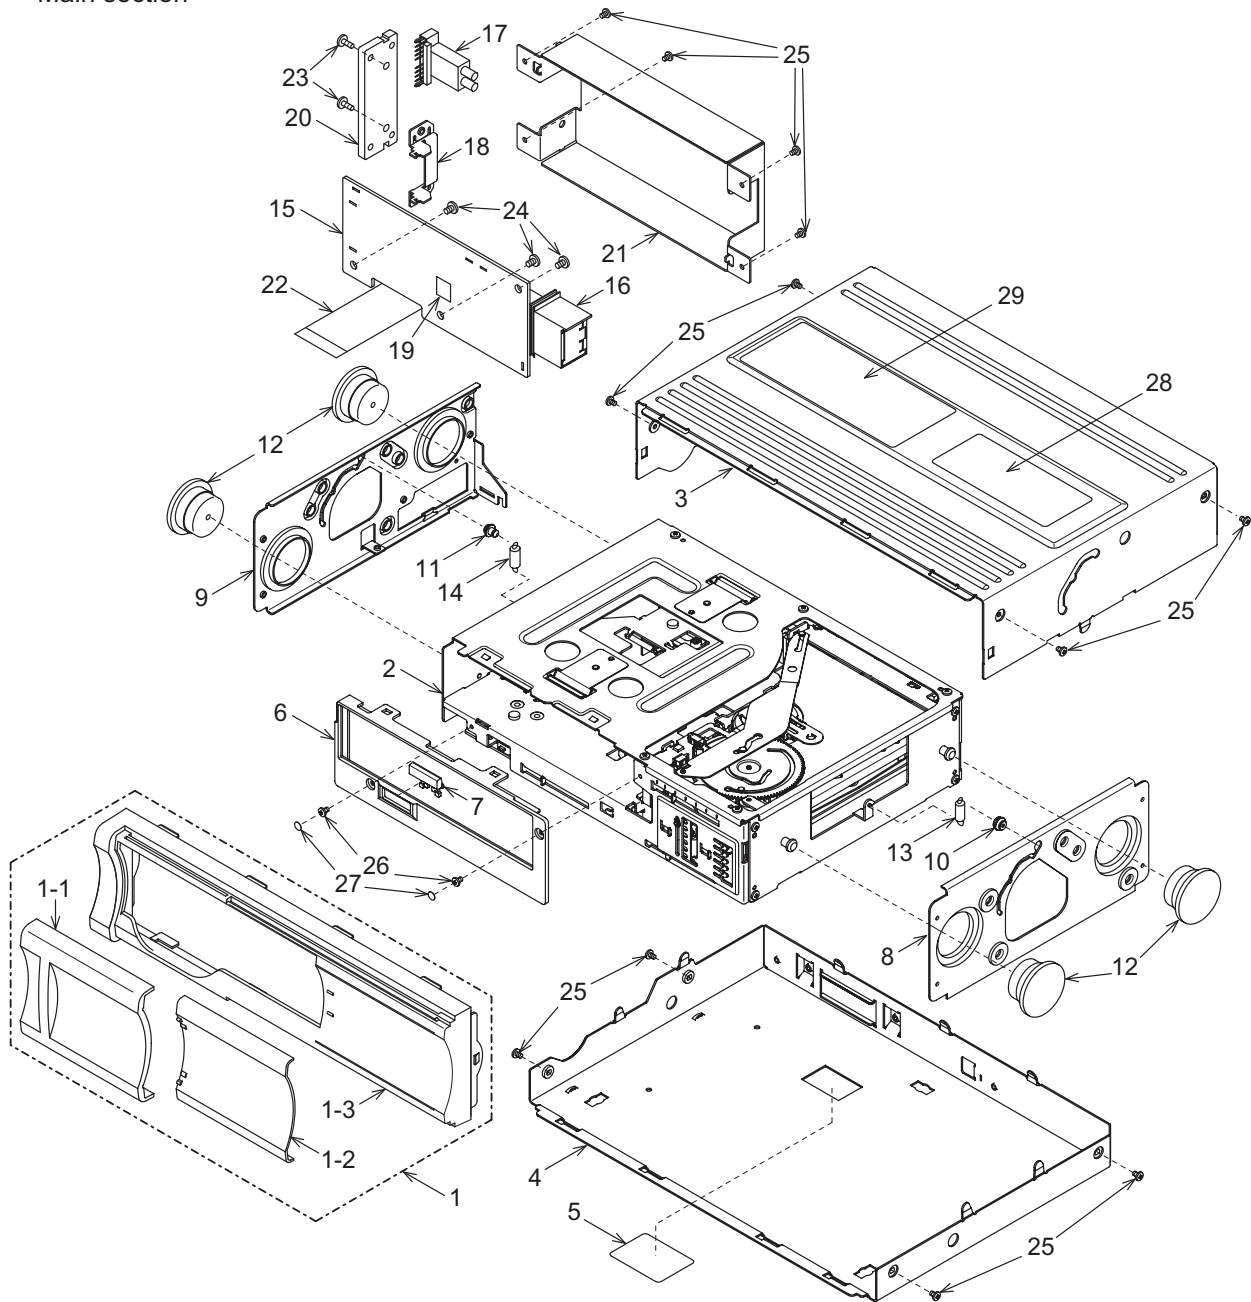

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7993-20	ESCUTCHEON-ASSY	1
1-1	320-0591-24	DUSTPROOF-CVR	1
1-2	320-0592-24	DUSTPROOF-CVR	1
1-3	370-9610-23	ESCUTCHEON	1
2	-----	CD CHANG-MECHANISM (028520)	1
3	310-1757-10	UPPER CASE	1
4	311-1856-10	LOWER CASE	1
5	347-7216-00	PROTECTOR	1
6	371-5693-22	TRIM PLATE	1
7	382-6254-20	BUTTON	1
8	620-0996-21	DAMPER PLATE R	1
9	620-0997-20	DAMPER PLATE F	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	622-1545-20	FL PIN R	1
11	622-1546-20	FL PIN L	1
12	629-0080-00	DAMPER	4
13	750-3459-21	FL-SPRING R	1
14	750-3460-21	FL-SPRING L	1
15	-----	CONNECTOR PWB	1
16	074-1293-01	OUTLET SOCKET	1
17	074-1294-00	OUTLET SOCKET	1
18	331-3386-00	TR-HOLDER	1
19	345-5193-00	ABSORPTION SHEET	1
20	313-1859-00	HEAT SINK	1
21	331-3404-01	CONN-BRKT	1
22	039-2152-01	FPC(WITHOUT COMPONENT)	1


NO.	PART NO.	DESCRIPTION	Q'TY
23	714-2608-81	MACHINE SCREW(M2.6 x 8)	2
24	716-1494-00	IT SCREW(M2.6 x 6)	3
25	716-1716-00	SCREW(M2 x 2.5)	12
26	716-3486-00	SPECIAL SCREW	2

NO.	PART NO.	DESCRIPTION	Q'TY
27	746-0767-00	SPECIAL WASHER	2
28	285-1939-00	GUIDE LABEL	1
29	286-6306-01 286-6306-02	SETPLATE(PU2610AA) SETPLATE(PU2610AB)	1

Note)Only setplates differ in Main section.


The model name is specified in the description.

CD changer mechanism section

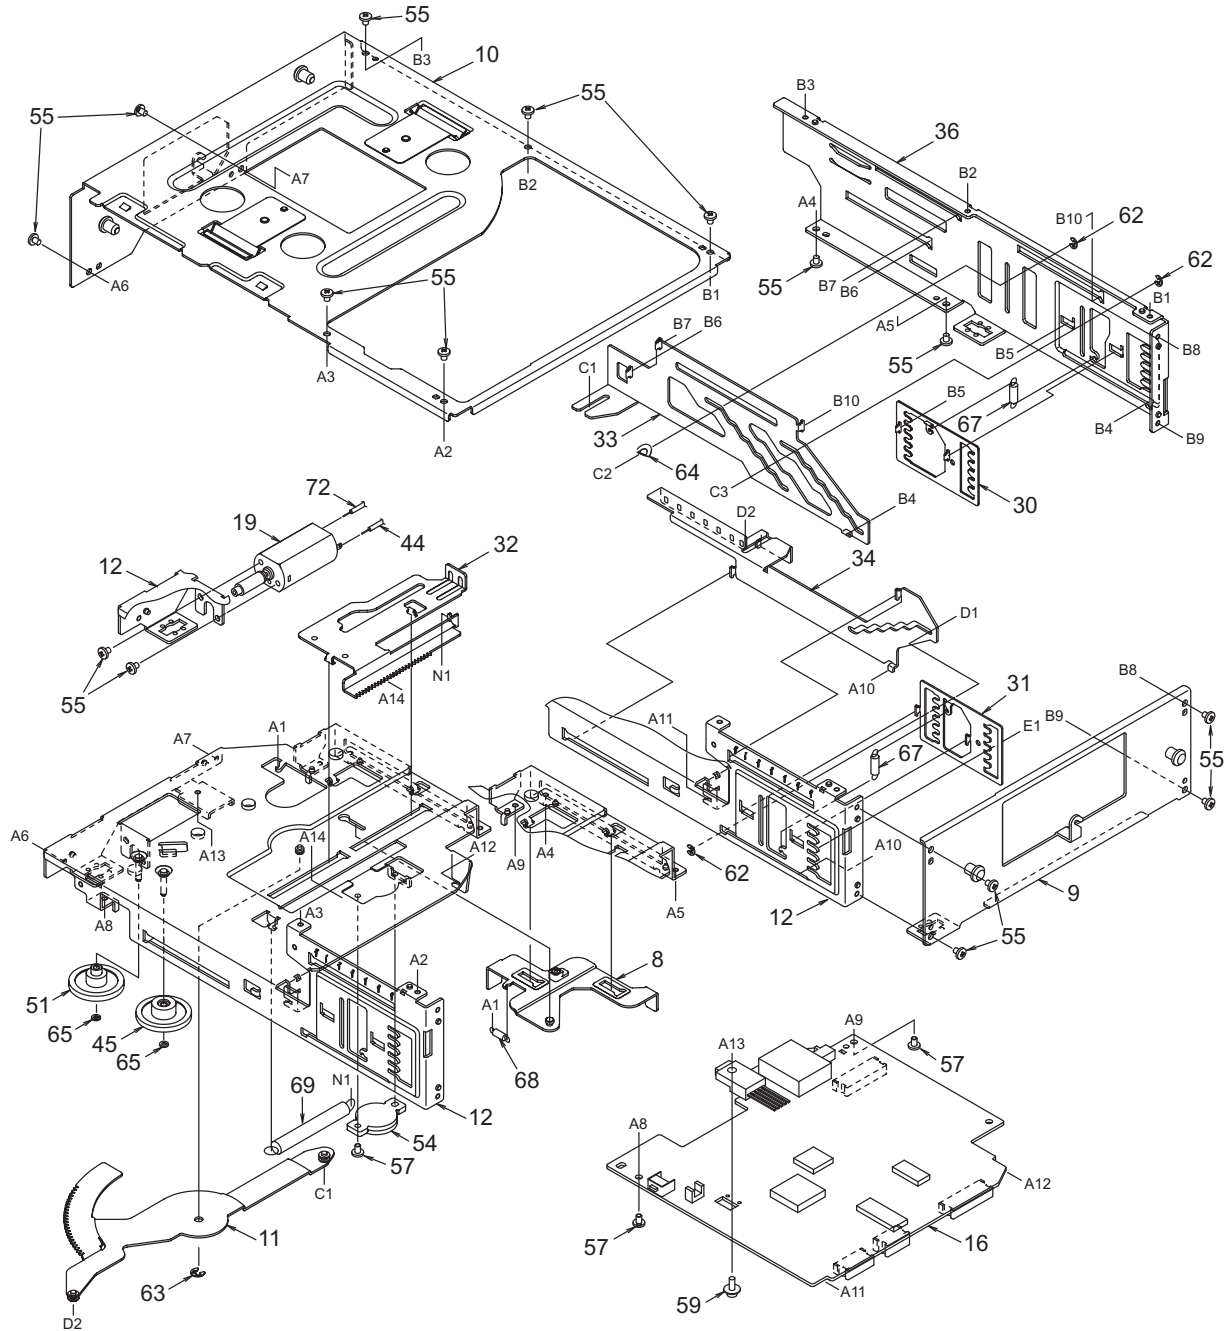

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0582-23	DRIVE-P-ASSY	1
2	966-0583-20	DISC HOLD-ASSY	1
3	966-0584-23	CLAMP-P-ASSY F	1
4	966-0585-22	CAM GEAR-ASSY	1
5	966-0586-22	MOTOR-P-ASSY	1
6	966-0588-23	HOLDER-L-ASSY	1
7	966-0589-24	L-UPPER-P-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
8	966-0590-20	MG-LO-P-ASSY	1
9	966-0591-21	REAR PANEL-ASSY	1
10	966-0592-20	UP-PLATE-ASSY	1
11	966-0593-20	UD-GEAR-P-ASSY	1
12	966-0594-24	V-CHASSIS-ASSY	1
13	966-0454-00	SH-RACK-ASSY	1
14	966-0623-23	L-LOWER-P-ASSY	1

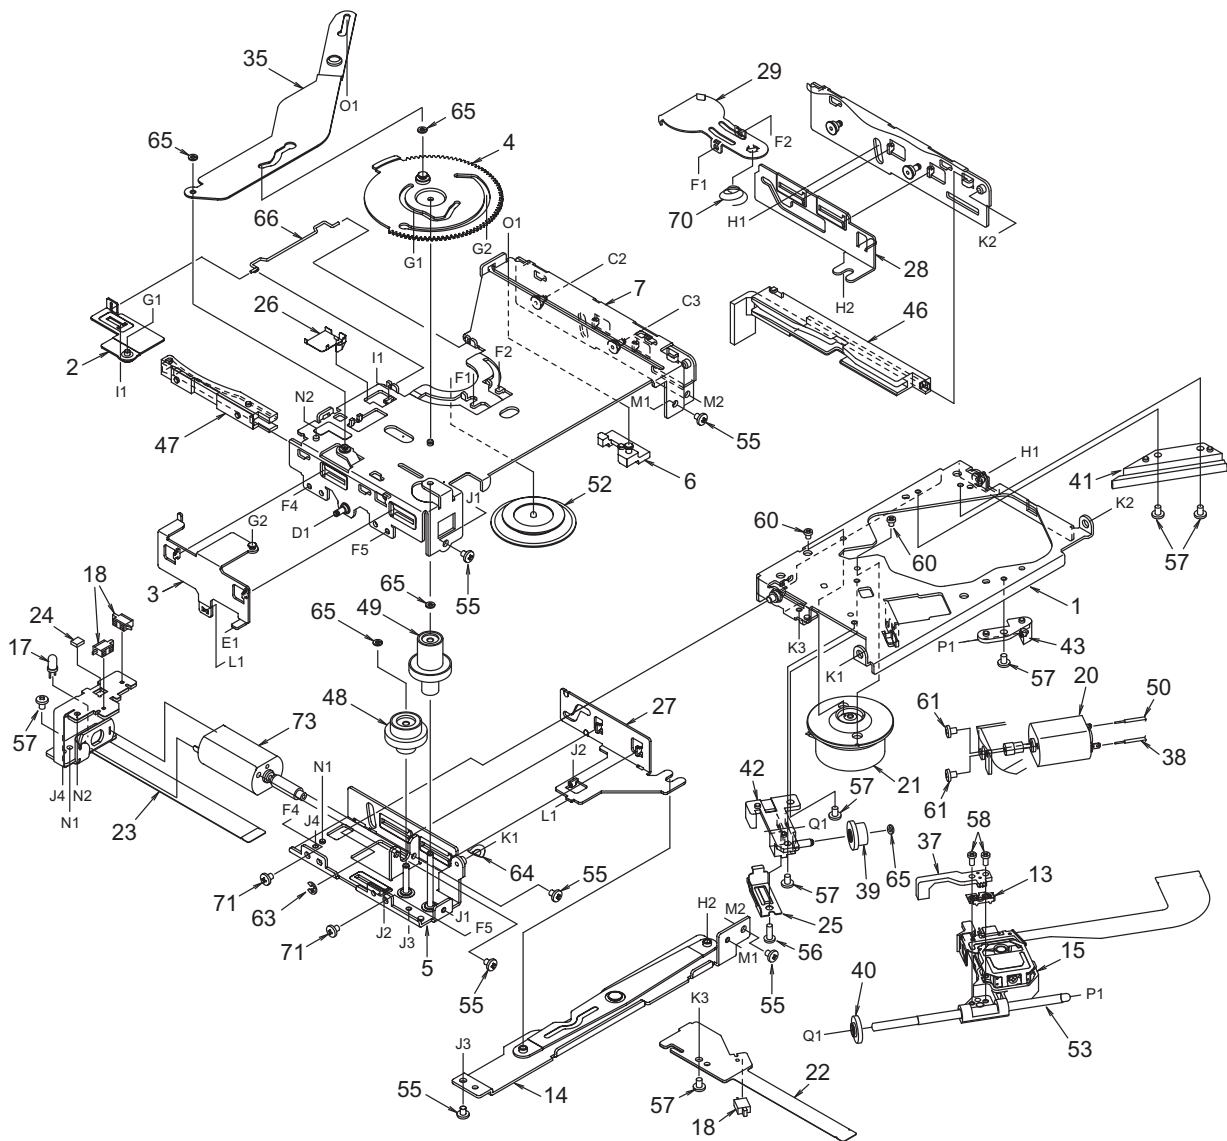

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
15	969-0066-30	PICK UP-ASSY	1	34	620-1020-21	SLIDE PLATE F	1
16	-----	MAIN PWB	1	35	620-1031-22	LOADING ARM	1
17	001-0563-00	LED	1	36	620-1034-24	SIDE PANEL	1
18	013-7413-50	DETECTOR SWITCH	3	37	621-0587-21	SCREW HOLD BASE	1
19	SMA-180-100	MOTOR-ASSY(UP/DOWN)	1	38	801-4912-60	VINYL-COAT-WIRE(BRN)	1
20	SMA-181-100	MOTOR-ASSY(SLED)	1	39	621-0589-20	SECOND GEAR	1
21	SMA-179-100	MOTOR-ASSY(SPINDLE)	1	40	621-0590-20	LS GEAR	1
22	039-1949-21	DRIVE FPC (WITHOUT COMPONENT)	1	41	621-0591-20	PICK UP GUIDE	1
23	039-1950-21	LOADING FPC (WITHOUT COMPONENT)	1	42	621-0592-21	LS-HOLDER	1
24	060-0252-01	PHOTO-TR	1	43	621-0593-21	LS GUIDE	1
25	620-0999-21	LS-SPRING	1	44	802-4906-60	VINYL-COAT-WIRE(RED)	1
26	620-1575-22	SWITCH PLATE	1	45	621-0423-00	V-GEAR A	1
27	620-1007-23	CLAMP PLATE M	1	46	621-0630-22	HOLDER-G-RAIL R	1
28	620-1008-24	CLAMP PLATE R	1	47	621-0631-21	HOLDER-G-RAIL L	1
29	620-1009-22	CLAMPER PLATE	1	48	621-0703-20	L-GEAR A	1
30	620-1016-20	GAP PLATE R	1	49	621-0633-20	L-GEAR B	1
31	620-1017-20	GAP PLATE F	1	50	805-4912-60	VINYL-COAT-WIRE(GRN)	1
32	620-1018-20	MG EJECT PLATE	1	51	621-0635-20	V-HELICAL GEAR	1
33	620-1019-20	SLIDE PLATE R	1	52	621-0636-21	CLAMPER RING	1
				53	624-3022-00	LEAD SCREW	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
54	629-0061-00	GEAR DAMPER	1	64	745-0789-01	DRIVE WASHER	2
55	716-0484-00	SCREW(M2 x 2.5)	21	65	746-0761-00	WASHER	7
56	716-0675-00	SCREW(M2 x 5.5)	1	66	750-3461-21	DISC-H-SPRING	1
57	716-1716-00	SCREW(M2 x 3)	10	67	750-3462-21	GAP SPRING	2
58	716-3469-00	SCREW(M1.7 x 4)	2	68	750-3463-20	MG LOCK SPRING	1
59	735-2006-11	D-SEMS-SCREW(M2 x 6)	1	69	750-3464-20	MG EJECT SPRING	1
60	739-1722-17	SCREW(M1.7 x 2.2)	2	70	750-3492-22	CLAMPER SPRING	1
61	739-2022-17	SCREW(M2 x 2.2)	2	71	716-1799-10	SPECIAL SCREW(M2 x 2.5)	2
62	743-1500-10	E-RING	3	72	800-4906-60	VINYL-COAT-WIRE(BLK)	1
63	743-2000-10	E-RING	2	73	SMA-188-100	MOTOR-ASSY(LOADING)	1

ELECTRICAL PARTS LIST

Connector PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1042-78	16V 0.1uF	C508	166-1021-56	1000pF	R104	033-4711-15	1/10W 470 ohm
C102	045-1011-50	100pF	C509	045-1011-50	100pF	R201	033-4721-15	1/10W 4.7k ohm
C201	163-1063-35	16V10uF	C510	168-1042-78	16V 0.1uF	R202	033-1011-15	1/10W 100 ohm
C202	168-1042-78	16V 0.1uF	C511	045-1011-50	100pF	R203	033-4721-15	1/10W 4.7k ohm
C203	168-1042-78	16V 0.1uF	C512	168-1042-78	16V 0.1uF	R204	033-1511-15	1/10W 150 ohm
C204	163-1063-35	16V10uF	C513	043-0546-50	0.1uF	R205	033-1011-15	1/10W 100 ohm
C205	168-1042-78	16V 0.1uF	C601	178-3342-78	0.33uF	R206	033-2221-15	1/10W 2.2k ohm
C206	168-1042-78	16V 0.1uF	C602	163-2273-25	10V 220uF	R207	033-3941-15	1/10W 390k ohm
C207	163-1063-35	16V10uF	C603	168-1042-78	16V 0.1uF	R208	033-1031-15	1/10W 10k ohm
C208	168-1042-78	16V 0.1uF	C604	042-0423-97	16V10uF	R209	033-0000-05	1/10W 0 ohm
C209	045-2201-50	22pF	C605	042-0403-57	35V 10uF	R401	033-2241-15	1/10W 220k ohm
C210	045-2201-50	22pF	D401	001-2403-90	M1F60	R402	033-0000-05	1/10W 0 ohm
C211	168-1042-78	16V 0.1uF	D501	001-2015-00	RL253	R403	033-2241-15	1/10W 220k ohm
C212	168-1022-55	1000pF	IC101	051-6919-08	NJU6391PE-TE1	R404	116-2291-15	1/4W 2.2 ohm
C213	168-1042-78	16V 0.1uF	IC201	051-6632-08	OS8104	R405	033-2241-15	1/10W 220k ohm
C301	178-3342-78	0.33uF	IC301	051-3289-00	BA09ST	R406	033-5641-15	1/10W 560k ohm
C302	163-2273-25	10V 220uF	IC401	051-1556-09	S-80840CNUA-B8Z	R501	033-3331-15	1/10W 33k ohm
C303	168-1042-78	16V 0.1uF	IC402	051-3298-90	TDA3664/N1	R502	033-3331-15	1/10W 33k ohm
C401	168-2245-79	0.22uF	IC403	051-1556-09	S-80840CNUA-B8Z	R503	033-1511-15	1/10W 150 ohm
C403	163-2273-25	10V 220uF	IC601	051-3260-00	BA05ST	R504	033-1031-15	1/10W 10k ohm
C404	046-1032-78	0.01uF	J101	074-1189-90	40P	R505	033-0000-05	1/10W 0 ohm
C405	042-0427-94	16V47uF TAN	J501	074-1293-01	4P	T501	009-9006-20	CHOKES
C406	046-1032-78	0.01uF	L101	010-3110-50	BK1608LM252	TM101	073-0762-90	TERMINAL
C408	046-1032-78	0.01uF	L201	010-2285-64	BLM11A102SPB	TM102	073-0762-90	TERMINAL
C409	046-1022-58	1000pF	L501	010-2285-64	BLM11A102SPB	TM103	073-0762-90	TERMINAL
C410	163-4763-35	16V47uF	L502	010-2285-64	BLM11A102SPB	TM201	073-0766-90	TERMINAL
C501	189-3383-42	25V3300uF	P501	074-1294-00	8P	TM202	073-0766-90	TERMINAL
C502	043-0499-51	0.1uF	Q101	192-2712-00	2SC2712	TM203	073-0766-90	TERMINAL
C503	163-1073-15	6.3V100uF	Q501	125-2004-92	RN1402	TM204	073-0766-90	TERMINAL
C504	168-1042-78	16V 0.1uF	Q502	125-0002-92	RN2402	TR501	010-3401-90	SBS9080-509T
C505	163-1073-15	6.3V100uF	R101	033-4731-15	1/10W 47k ohm	X201	061-1080-00	12.288MHz
C506	168-1042-78	16V 0.1uF	R102	033-1031-15	1/10W 10k ohm	PWB	039-2419-01	PWB(WITHOUT COMPONENT)
C507	172-1031-11	0.01uF	R103	033-1031-15	1/10W 10k ohm			

CD changer mechanism section

Note)Some parts depend on each model.

Main PWB(B2) section

The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	046-4722-58	4700pF	C17	046-1032-78	0.01uF	C35	168-1042-78	16V 0.1uF
C2	168-1042-78	16V 0.1uF	C18	045-4701-50	47pF	C36	163-4763-15	6.3V47uF
C3	046-1032-78	0.01uF	C19	046-4712-58	470pF	C37	178-1052-78	1uF
C4	168-1042-78	16V 0.1uF	C20	168-1042-78	16V 0.1uF	C38	045-6801-50	68pF
C5	168-1042-78	16V 0.1uF	C21	046-1532-78	0.015uF	C39	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF	C22	168-1042-78	16V 0.1uF	C40	168-1042-78	16V 0.1uF
C8	168-1042-78	16V 0.1uF	C23	046-6822-58	6800pF	C41	046-6812-58	680pF
C10	168-1042-78	16V 0.1uF	C24	046-1032-78	0.01uF	C42	178-1052-78	1uF
C11	163-1073-35	16V100uF	C27	046-3332-78	0.033uF	C43	163-4763-15	6.3V47uF
C12	168-4732-78	0.047uF	C30	046-4722-58	4700pF	C44	168-1042-78	16V 0.1uF
C13	168-4732-78	0.047uF	C31	046-1522-58	1500pF	C45	163-1073-15	6.3V100uF
C14	168-1042-78	16V 0.1uF	C32	168-1042-78	16V 0.1uF	C46	163-1073-15	6.3V100uF
C15	178-1052-78	1uF	C33	046-1532-78	0.015uF	C48	168-1042-78	16V 0.1uF
C16	045-4701-50	47pF	C34	168-1042-78	16V 0.1uF	C51	046-1032-78	0.01uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C52	046-1032-78	0.01uF	IC102	052-5063-00	MBM29DL800BA-90PFTN(PU2610AA)	R27	033-1021-15	1/10W 1k ohm
C53	046-1032-78	0.01uF		052-5063-01	MBM29DL800BA-90PFTN(PU2610AB)	R101	033-1031-15	1/10W 10k ohm
C54	046-1032-78	0.01uF				R102	033-1041-15	1/10W 100k ohm
C56	178-1052-78	1uF	IC103	051-7518-18	SN74LVC139APWR	R103	033-1021-15	1/10W 1k ohm
C57	178-1052-78	1uF	IC104	051-9330-00	K4S641632F-TC60	R104	033-1021-15	1/10W 1k ohm
C58	163-4763-15	6.3V47uF	IC105	051-7203-48	SN74LV74APW	R105	033-4731-15	1/10W 47k ohm
C59	042-0416-57	10V47uF M TAN	IC106	051-6700-00	TMS320DA140PGE160	R107	033-4731-15	1/10W 47k ohm
C101	168-1042-78	16V 0.1uF	IC107	051-3315-90	TPS76316DBVR	R108	033-1041-15	1/10W 100k ohm
C102	168-1042-78	16V 0.1uF	IC201	051-9402-78	BR93L56RFVM-WE2	R109	033-4721-15	1/10W 4.7k ohm
C103	168-1042-78	16V 0.1uF	IC203	051-3260-00	BA05ST	R110	033-4721-15	1/10W 4.7k ohm
C104	168-1042-78	16V 0.1uF	IC204	052-0311-00	M30624FGAGP	R111	033-4731-15	1/10W 47k ohm
C105	168-1032-55	0.01uF	IC205	051-5831-90	LM20BIM7	R112	033-1021-15	1/10W 1k ohm
C106	168-1042-78	16V 0.1uF	IC206	051-7511-38	TC74LCX07FTEL	R113	033-1021-15	1/10W 1k ohm
C107	046-1032-78	0.01uF	IC207	051-7239-38	SN74AHCT08PWR	R114	033-1021-15	1/10W 1k ohm
C108	163-4763-15	6.3V47uF	J1	074-1138-65	15P	R115	033-4731-15	1/10W 47k ohm
C109	178-1052-78	1uF	J2	074-1158-56	6P	R116	033-4731-15	1/10W 47k ohm
C110	046-1032-78	0.01uF	J3	074-1158-58	8P	R117	033-1031-15	1/10W 10k ohm
C111	168-1042-78	16V 0.1uF	J4	074-1205-90	40P	R118	033-2211-15	1/10W 220 ohm
C112	168-1042-78	16V 0.1uF	J5	074-1313-68	18P	R119	033-1031-15	1/10W 10k ohm
C113	168-1042-78	16V 0.1uF	L1	010-3105-62	MMZ1608S1	R120	033-1021-15	1/10W 1k ohm
C114	046-1032-78	0.01uF	L2	010-3105-62	MMZ1608S1	R121	033-4731-15	1/10W 47k ohm
C115	042-0416-57	10V47uF M TAN	L3	010-3105-62	MMZ1608S1	R122	033-4701-15	1/10W 47 ohm
C116	046-1032-78	0.01uF	L4	010-3300-50	MZA2010D330	R123	033-4701-15	1/10W 47 ohm
C117	168-1042-78	16V 0.1uF	L5	010-3300-50	MZA2010D330	R124	033-4701-15	1/10W 47 ohm
C118	045-1201-50	12pF	L6	010-3300-50	MZA2010D330	R125	033-4701-15	1/10W 47 ohm
C119	046-1032-78	0.01uF	L7	010-3300-50	MZA2010D330	R126	033-4701-15	1/10W 47 ohm
C120	046-1032-78	0.01uF	L8	010-3300-50	MZA2010D330	R127	033-4701-15	1/10W 47 ohm
C121	168-1042-78	16V 0.1uF	L9	010-3300-50	MZA2010D330	R206	033-4721-15	1/10W 4.7k ohm
C122	046-1032-78	0.01uF	L10	010-3300-50	MZA2010D330	R207	033-4721-15	1/10W 4.7k ohm
C124	168-1032-55	0.01uF	L11	010-3300-50	MZA2010D330	R208	033-1011-15	1/10W 100 ohm
C125	046-1032-78	0.01uF	L12	010-3300-50	MZA2010D330	R209	033-1011-15	1/10W 100 ohm
C126	168-1032-55	0.01uF	L13	010-3300-50	MZA2010D330	R210	033-4731-15	1/10W 47k ohm
C127	168-1042-78	16V 0.1uF	L14	010-3300-50	MZA2010D330	R211	117-2711-15	1/8W 270 ohm
C128	042-0416-52	10V10uF M TAN	L15	010-3105-62	MMZ1608S1	R212	033-1041-15	1/10W 100k ohm
C130	042-0416-52	10V10uF M TAN	L101	010-3104-50	MPZ1608S3	R213	033-4731-15	1/10W 47k ohm
C201	168-1042-78	16V 0.1uF	L102	010-3104-50	MPZ1608S3	R214	033-4731-15	1/10W 47k ohm
C202	163-4763-35	16V47uF	L103	010-3104-53	MPZ1608S2	R215	033-4721-15	1/10W 4.7k ohm
C203	046-1032-78	0.01uF	L104	010-3104-53	MPZ1608S2	R216	119-4741-15	1/10W 470k ohm
C204	168-1042-78	16V 0.1uF	L105	010-3105-69	MMZ1608D800B	R217	033-4711-15	1/10W 470 ohm
C207	178-1052-78	1uF	L106	010-3105-69	MMZ1608D800B	R218	119-2231-15	1/10W 22k ohm
C208	178-1052-78	1uF	L301	010-3104-53	MPZ1608S2	R219	033-4731-15	1/10W 47k ohm
C209	046-1032-78	0.01uF	Q1	131-1188-50	2SB1188PQR	R220	033-4731-15	1/10W 47k ohm
C210	168-1042-78	16V 0.1uF	Q4	125-2004-91	RN1401	R221	033-1041-15	1/10W 100k ohm
C211	168-1042-78	16V 0.1uF	Q203	131-1188-50	2SB1188PQR	R222	033-4711-15	1/10W 470 ohm
C212	168-1042-78	16V 0.1uF	Q204	125-2004-92	RN1402	R223	033-4711-15	1/10W 470 ohm
C213	168-1042-78	16V 0.1uF	R1	033-1021-15	1/10W 1k ohm	R224	033-4711-15	1/10W 470 ohm
C215	163-4763-15	6.3V47uF	R2	033-1021-15	1/10W 1k ohm	R225	033-4711-15	1/10W 470 ohm
C218	178-3342-78	0.33uF	R3	033-6811-15	1/10W 680 ohm	R226	033-4711-15	1/10W 470 ohm
C219	163-4763-15	6.3V47uF	R4	033-1051-15	1/10W 1M ohm	R227	033-4731-15	1/10W 47k ohm
C220	046-1032-78	0.01uF	R5	033-0000-05	1/10W 0 ohm	R236	119-4711-15	1/10W 470 ohm
C221	042-0416-57	10V47uF M TAN	R7	033-5621-15	1/10W 5.6k ohm	R238	119-1811-15	1/10W 180 ohm
C222	042-0423-97	16V10uF	R8	033-4731-15	1/10W 47k ohm	R239	032-0140-18	1/10W 680k ohm
C223	163-3363-25	10V33uF	R9	033-3341-15	1/10W 330k ohm	R240	032-0140-17	1/10W 270k ohm
CCT1	050-0140-68	1/32W 3.3k ohm x4J	R10	033-2231-15	1/10W 22k ohm	R241	119-4741-15	1/10W 470k ohm
CCT2	050-0140-63	1/32W 47k ohm x4J	R11	033-2231-15	1/10W 22k ohm	R242	119-2241-15	1/10W 220k ohm
CCT4	050-0140-54	1/32W 1k ohm x4J	R12	117-1001-15	1/8W 10 ohm	R400	116-0000-05	1/4W 0 ohm
CCT5	050-0140-54	1/32W 1k ohm x4J	R13	033-1031-15	1/10W 10k ohm	R401	117-0000-05	1/8W 0 ohm JW
CCT102	050-0140-63	1/32W 47k ohm x4J	R14	033-1031-15	1/10W 10k ohm	S1	013-7404-50	DETECTOR SW
D1	001-0367-91	1SS226	R15	033-1531-15	1/10W 15k ohm	S2	013-7404-50	DETECTOR SW
D202	001-0367-91	1SS226	R16	033-2231-15	1/10W 22k ohm	S3	013-6100-10	SKHLLD
IC1	051-6399-00	TC94A15F	R17	033-2211-15	1/10W 220 ohm	X2	060-1535-90	16.934MHz
IC2	051-6060-08	BD7961FM-E2	R18	117-2711-15	1/8W 270 ohm	X202	060-1542-90	16MHz
IC3	051-5806-00	GP1S94	R19	033-1031-15	1/10W 10k ohm	Z101	060-8048-00	NOISE SHEET
IC4	051-3293-90	BA033SFP-E2	R20	033-2721-15	1/10W 2.7k ohm	PWB	039-2420-01	PWB(WITHOUT COMPONENT)
IC5	051-5410-18	S-80820CNMC-8BF	R21	033-3331-15	1/10W 33k ohm			
IC11	051-7221-58	SN74AHC1G04HCKR	R22	033-1031-15	1/10W 10k ohm			
IC101	051-7518-18	SN74LVC139APWR						

Loading FPC(B3) section

REF No.	PART No.	DESCRIPTION
D501	001-0563-00	LED
Q501	060-0252-01	PT4850F
S501	013-7413-50	DETECTOR SW

REF No.	PART No.	DESCRIPTION
S502	013-7413-50	DETECTOR SW
FPC	039-1950-21	FPC(WITHOUT COMPONENT)

Drive FPC(B4) section

REF No.	PART No.	DESCRIPTION
S503	013-7413-50	DETECTOR SW
FPC	039-1949-21	FPC(WITHOUT COMPONENT)