


EXPLODED VIEW/PARTS LIST

Main section

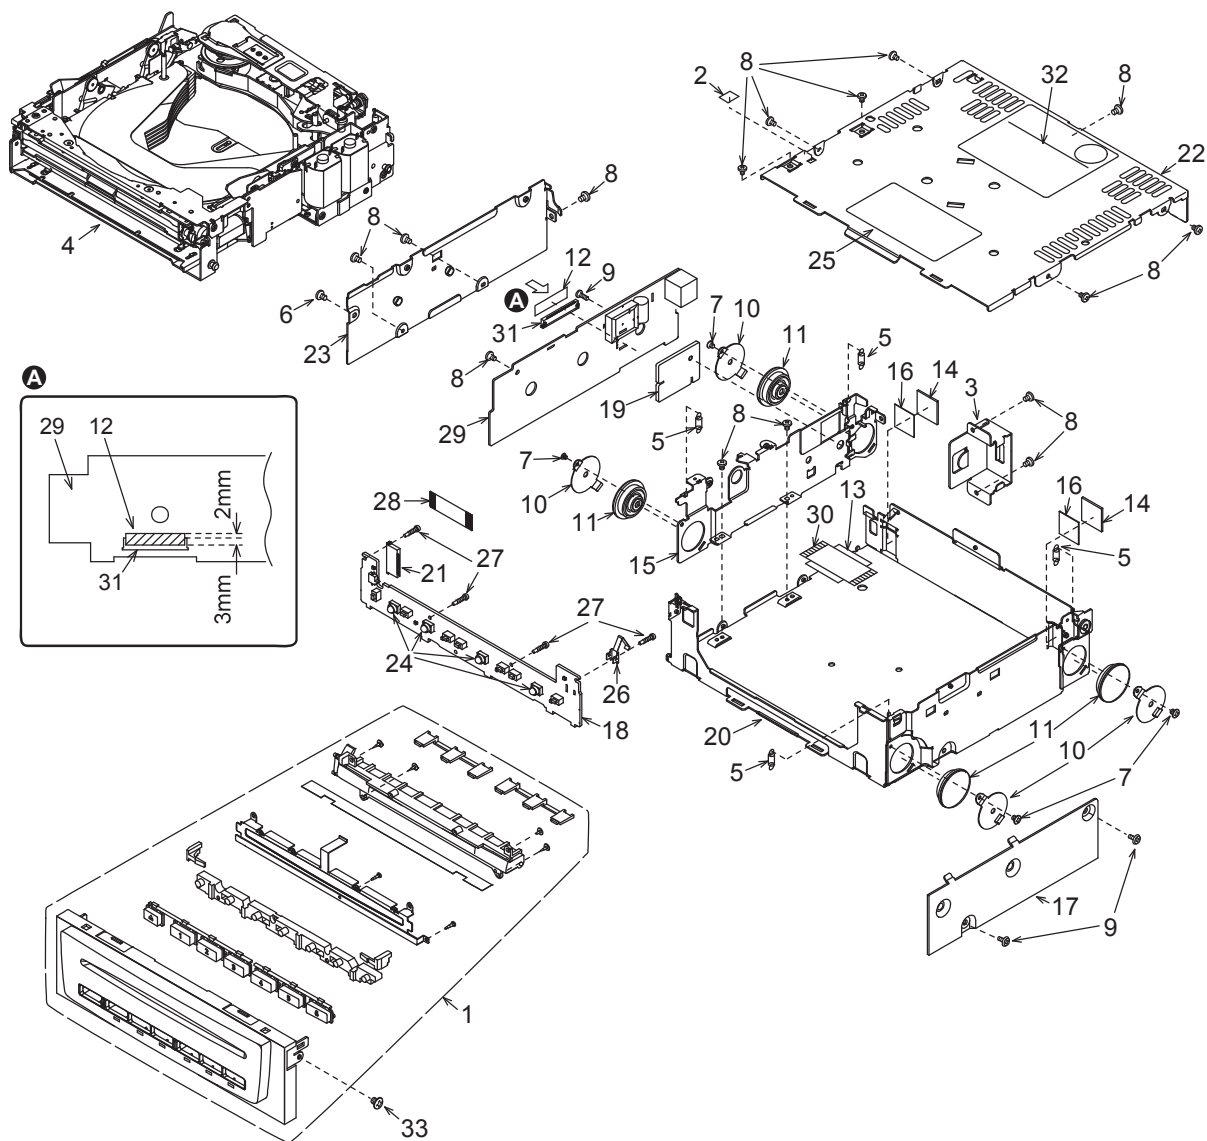

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8015-17	ESCUTCHEON-ASSY	1
2	347-3119-00	PAPER	1
3	331-3498-00	CONNECTOR HOLDE	1
4	HBS-597-100	CD-CHANG-MODULE	1
5	750-3491-00	FL-SPRING	4
6	716-3462-51	SCREW(M2x5 BLK)	1
7	716-3450-00	SCREW(M1.7x2 BLK)	4
8	716-1716-02	SCREW(M2x3)	15
9	714-2606-8B	MACHINE SCREW(M2.6x6)	3
10	620-1086-20	DAMPER-H-PLT	4
11	629-0083-01	DAMPER	4
12	347-7613-00	PIN-COVER-SHEET	1
13	347-6619-00	INSULATOR	1
14	345-5957-00	CUSHION RUBBER	2
15	331-3896-23	PWB-HOLDER	1
16	331-4353-00	PROTECT PLATE	2
17	331-3497-00	SIDE PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	-----	SWITCH PWB	1
19	313-1920-20	HEAT SINK	1
20	311-1836-91	LOWER CASE	1
21	074-1239-76	OUTLET SOCKET	1
22	310-1741-29	UPPER CASE	1
23	305-0315-25	SIDE CVR	1
24	017-0465-55	PILOT LAMP	4
25	285-1968-00	GUIDE LABEL	1
26	331-1861-81	EARTH PLATE	1
27	716-0872-50	PAD SCREW(M1.7x5)	4
28	816-2610-00	FLAT WIRE	1
29	-----	MAIN PWB	1
30	HBS-561-100	FPC	1
31	074-1189-95	OUTLET SOCKET	1
32	286-6666-52	SET PLATE	1
33	716-3461-51	SCREW(M2x3 BLK)	1


CD changer module section (HBS-597-100)


* Exploded view : Page 10 and 11

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-594-100	LOADING UNIT	1	45	620-1071-21	EJECT ARM	1
2	SMA-186-100	LOADING MOTOR ASSY	1	46	620-1072-20	EJECT PLATE	1
3	HBS-530-100	MOTOR PLATE SUB ASSY	1	47	620-1577-20	FRONT PLATE	1
4	HBS-592-100	DRIVE UNIT	1	48	620-1083-20	FPC-PLATE	1
5	-----	DSP PWB	1	49	620-1090-20	GAP PLATE	1
6	-----	DRIVER PWB	1	50	620-1568-21	RATTLE PLATE-F	2
7	966-1751-22	CHASSIS ASSY	1	51	621-0640-20	V-GEAR-G	1
8	966-0600-23	LOCK-P-RE-ASSY	1	52	621-0641-21	PI-HOLDER-M	1
9	966-0601-21	M-GEAR-P-ASSY	1	53	621-0656-21	PI-HOLDER-V	1
10	966-0602-26	DR-LINK-ASSY	1	54	622-1622-20	SL-G-ROLLER	2
11	966-0603-21	MODE-P-ASSY	1	55	622-1623-00	SL-G-ROLLER-R	2
12	966-0604-26	LOCK-PF-ASSY	1	56	622-1648-23	DU-STP-SLEEVE	1
13	966-0605-20	SHIFT-P-ASSY	1	57	622-1650-23	COV-PLATE PIN-B	2
14	966-0606-23	HLC-PLATE-ASSY	1	58	622-1651-00	LOCK-RE-ROLLER	1
15	HBS-560-101	COV-PLATE-ASSY	1	59	622-1652-00	LOCK-PF-ROLLER	1
16	HBS-535-100	TOP-PLATE-ASSY	1	60	716-1866-50	SCREW(M1.7x3)	4
17	966-0652-24	DR-BASE-P-ASSY	1	61	716-1873-00	SCREW(M2x1.6)	1
18	966-0615-21	LOCK-L-RF-ASSY	1	62	716-3449-50	SCREW(M2x3)	15
19	966-0616-20	LOCK-L-LF-ASSY	1	63	716-3450-00	SCREW(M1.7x2)	4
20	966-0618-21	EJECT-B-ASSY	1	64	716-3451-01	SCREW(M1.7x2.5)	4
21	966-1742-20	DISC-HOL-ASSY	1	65	716-3459-01	SCREW(M1.7x5)	1
22	001-7042-00	DIODE (GL4800)	4	66	716-3466-53	SCREW(M2x6)	1
23	013-7414-50	DETECTOR SWITCH	1	67	738-1422-1B	PRECISION SCREW	2
24	-----	LED-L-PWB	1	68	743-1200-10	E-RING	2
25	-----	LED-R-PWB	1	69	743-1500-10	E-RING	13
26	-----	SENSOR PWB	1	70	746-0624-00	WASHER	1
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1	71	746-0712-23	WASHER	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1	72	746-0761-00	WASHER	1
29	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1	73	750-3478-01	TOP-P-SP-L	2
30	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1	74	750-3479-01	TOP-P-SP-R	1
31	039-2013-04	MOS-FPC (WITHOUT COMPONENT)	1	75	750-3480-01	DR-LOCK-SP	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1	76	750-3483-00	EJECT-A-SPRING	1
33	051-5806-01	IC (GPIS93)	1	77	750-3484-01	DR-BASE-SPRING	1
34	051-5806-02	IC (GPIS95)	1	78	750-3485-01	TENSION-SP-L	1
35	060-0252-01	PHOTO-TR	4	79	750-3486-01	LO-TENSION-SP	1
36	347-6657-01	LO-COVER SHEET	1	80	750-3489-01	DRIVE-P-SPRING	1
37	620-1041-26	GEAR PLATE	1	81	750-3496-00	GAP-P-SPRING R	1
38	620-1042-20	M-GEAR-H	1	82	750-3497-00	GAP-P-SPRING L	1
39	620-1056-22	HLR-PLATE-L	1	83	750-6711-01	DU-STP-SPRING	1
40	620-1580-20	HLR-PLATE-R	1	84	750-6712-01	DR-LOCK-SP-B	1
41	620-1576-20	LO-MOTOR-PLT	1	85	621-0651-22	LOAD GEAR-A	1
42	620-1066-20	LOCK LINK-LR	1	86	347-7860-20	FPC COVER	1
43	620-1067-21	SLIDE PLATE-L	1	87	716-1850-01	SCREW	1
44	620-1068-22	SLIDE PLATE-R	1	88	854-4348-01	EXTENSION LEAD	1
				89	620-1604-20	DR-PLATE-SCREW	1
				90	620-1784-00	FPC-H-PLATE	1


CD changer module section (HBS-597-100)

* Parts list : Page 9

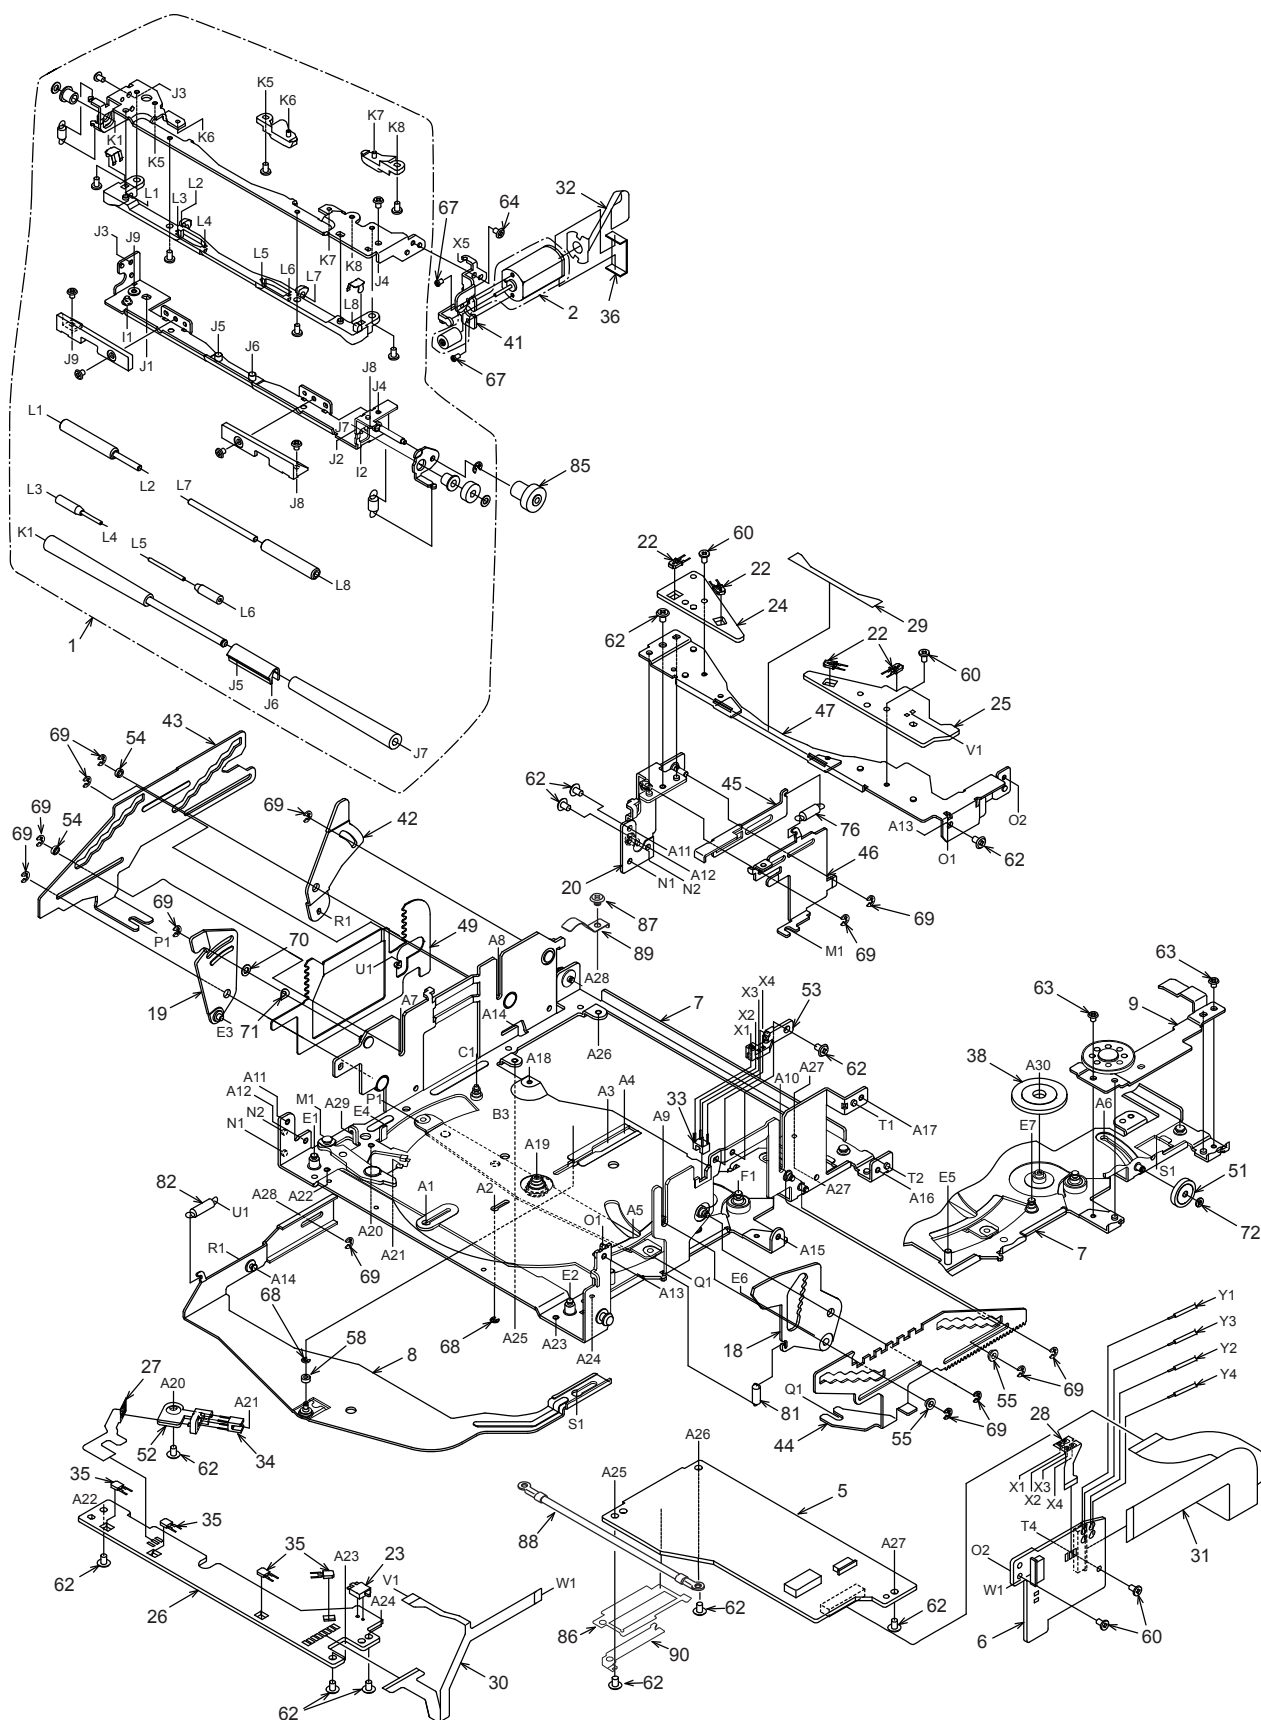



Drive unit section

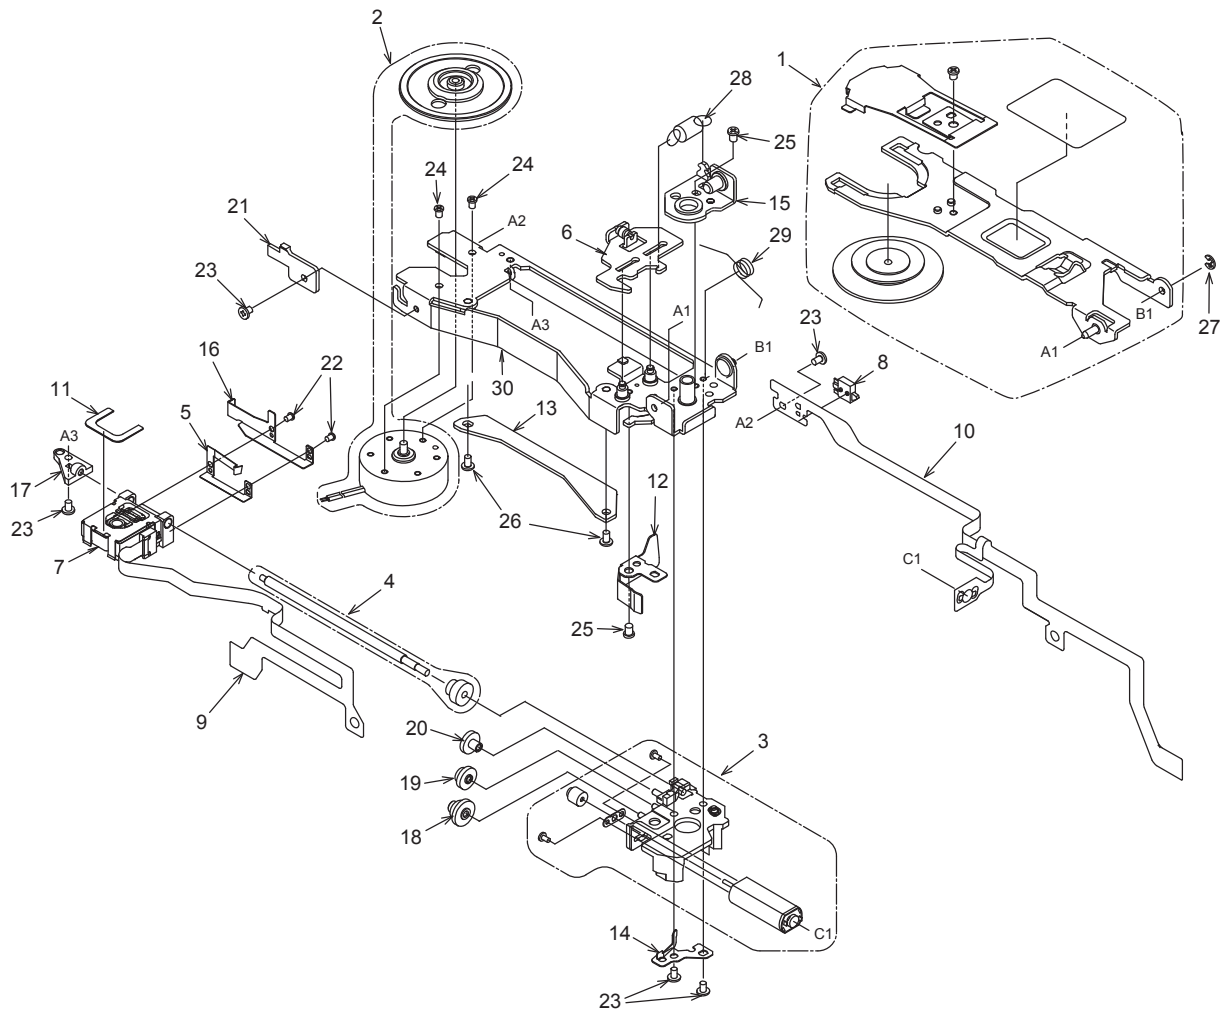

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1	16	620-1730-81	SCREW-HOL-PLT	1
2	SMA-196-100	SPINDLE MOTOR ASSY	1	17	621-0670-20	LS-HOLDER-L	1
3	SMA-191-100	SLED MOTOR ASSY	1	18	621-0673-20	D-GEAR A	1
4	HBS-515-103	LS-ASSY	1	19	621-0674-20	D-GEAR B	1
5	620-1587-83	SH-SP-PLT	1	20	621-0675-20	D-GEAR C	1
6	HBS-542-101	D-SHIFT-P-ASSY	1	21	621-0683-21	DU-STOPPER	1
7	969-0011-01	PICK UP-ASSY	1	22	716-3511-01	SCREW(M1.4x3)	2
8	013-7414-50	DETECT SWITCH	1	23	716-3470-01	SCREW(M1.7x3)	5
9	039-2015-02	P/U-FPC	1	24	716-3527-00	SCREW(M1.7x1.85)	2
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1	25	738-2025-1H	PRECISION SCREW	2
11	347-6632-00	PU-SHEET	1	26	716-3474-01	SCREW(M1.7x3)	2
12	620-1078-21	PUSH PLATE	1	27	743-1500-20	E-RING	1
13	620-1080-22	PU-GUIDE PLATE	1	28	750-3487-00	SHIFT-P-SPRING	1
14	620-1081-20	SCREW PUSH-PLT	1	29	750-3504-00	CLAMP-A-SPRING	1
15	966-0650-20	SPRING PLT ASSY	1	30	966-0649-02	DRIVE PLT-ASSY	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	189-4773-31	16V 470uF	CCT503	050-0140-54	1/32W 1k ohm x4J	R123	116-1531-15	1/4W 15k ohm
C102	168-1045-56	0.1uF Z	CCT504	050-0140-63	1/32W 47k ohm x4J	R124	116-4791-15	1/4W 4.7 ohm
C103	163-1073-15	6.3V 100uF	CCT505	050-0145-53	1/16W 220k ohm x4 J	R125	116-4791-15	1/4W 4.7 ohm
C104	046-1032-78	0.01uF B				R126	116-4791-15	1/4W 4.7 ohm
C105	168-1045-56	0.1uF Z	CCT506	050-0140-63	1/32W 47k ohm x4J	R127	116-4791-15	1/4W 4.7 ohm
C106	046-1032-78	0.01uF B	CCT507	050-0140-55	1/32W 2.2k ohmx4J	R128	116-5611-15	1/4W 560 ohm
C107	168-1045-56	0.1uF Z	CCT508	050-0140-55	1/32W 2.2k ohmx4J	R201	033-3921-15	1/10W 3.9k ohm
C108	042-1673-00	10V 220uF	D101	001-2015-00	RL253	R202	033-3921-15	1/10W 3.9k ohm
C109	178-3342-78	0.33uF	D102	001-4100-50	PTZ TE25 9.1B	R203	119-9121-15	1/10W 9.1k ohm
C110	178-1052-78	1uF	D301	001-4302-38	UDZTE-17 33B	R204	119-9121-15	1/10W 9.1k ohm
C111	163-1073-15	6.3V 100uF	D302	001-0516-90	MA111	R205	033-2731-15	1/10W 27k ohm
C112	168-1045-56	0.1uF Z	D303	001-4302-38	UDZTE-17 33B	R206	033-8221-15	1/10W 8.2k ohm
C113	178-4742-78	0.47uF	D304	001-0516-90	MA111	R207	033-2731-15	1/10W 27k ohm
C114	163-4763-15	6.3V 47uF	D305	001-0516-90	MA111	R208	033-8221-15	1/10W 8.2k ohm
C115	178-4742-78	0.47uF	D401	001-4301-21	HZU3.9B2	R209	033-1031-15	1/10W 10k ohm
C116	178-4742-78	0.47uF	D402	001-0516-90	MA111	R210	033-1031-15	1/10W 10k ohm
C117	163-4763-15	6.3V 47uF	D601	001-4301-34	HZU6.2B1	R211	033-1031-15	1/10W 10k ohm
C118	168-1045-56	0.1uF Z	D602	001-0627-90	U1BC44	R212	033-1031-15	1/10W 10k ohm
C119	168-1045-56	0.1uF Z	IC101	051-3306-90	TDA3663AT	R213	033-1031-15	1/10W 10k ohm
C120	168-1045-56	0.1uF Z	IC102	051-3288-90	AN80M50RSPTX	R214	033-1031-15	1/10W 10k ohm
C121	168-1045-56	0.1uF Z	IC103	051-3312-90	BA05SFP	R215	033-1031-15	1/10W 10k ohm
C122	168-1045-56	0.1uF Z	IC104	051-3293-90	BA033SFP-E2	R216	033-8221-15	1/10W 8.2k ohm
C123	168-1045-56	0.1uF Z	IC201	051-1407-90	NJM4556AM	R217	033-2201-15	1/10W 22 ohm
C124	045-3301-50	33pF CH	IC202	051-1407-90	NJM4556AM	R218	033-2201-15	1/10W 22 ohm
C125	045-3301-50	33pF CH	IC505	052-5072-00	M30621MCM-AS1GP	R219	033-1031-15	1/10W 10k ohm
C126	045-3301-50	33pF CH				R220	033-1031-15	1/10W 10k ohm
C201	046-3322-58	3300pF B	IC601	051-5418-08	S-80827ANMP-EDQ	R221	033-1021-15	1/10W 1k ohm
C202	046-3322-58	3300pF B	IC602	051-5445-08	BD5227G-TR	R222	033-1021-15	1/10W 1k ohm
C203	163-2263-15	6.3V 22uF	IC701	051-9402-78	BR93L56RFVM-W	R223	033-1031-15	1/10W 10k ohm
C204	163-2263-15	6.3V 22uF	J101	074-1189-95	45P	R224	033-1031-15	1/10W 10k ohm
C205	046-6812-58	680pF B	J102	074-1059-76	26P	R225	033-2201-15	1/10W 22 ohm
C206	046-6812-58	680pF B	J103	074-1087-12	OUTLET SOCKET	R226	033-2201-15	1/10W 22 ohm
C207	046-1022-58	1000pF B	L501	010-3406-66	22uH J	R301	033-4731-15	1/10W 47k ohm
C208	046-1022-58	1000pF B	Q101	191-1205-65	2SB1205 S,T	R302	033-1031-15	1/10W 10k ohm
C209	045-1211-50	120pF CH	Q102	190-1162-00	2SA1162	R303	033-5631-15	1/10W 56k ohm
C210	045-1211-50	120pF CH	Q103	125-2004-92	RN1402	R304	033-1031-15	1/10W 10k ohm
C211	168-1045-56	0.1uF Z	Q104	103-2353-00	2SD2353	R305	033-1031-15	1/10W 10k ohm
C212	045-2201-50	22pF CH	Q105	125-0014-92	DTA114EK	R306	033-1031-15	1/10W 10k ohm
C213	045-2201-50	22pF CH	Q106	125-2004-92	RN1402	R307	033-5631-15	1/10W 56k ohm
C214	163-1073-15	6.3V 100uF	Q107	125-2004-92	RN1402	R308	033-5631-15	1/10W 56k ohm
C215	163-2273-25	10V 220uF	Q108	125-0014-92	DTA114EK	R309	033-5621-15	1/10W 5.6k ohm
C216	163-2273-25	10V 220uF	Q201	125-2004-92	RN1402	R401	033-1021-15	1/10W 1k ohm
C217	168-1045-56	0.1uF Z	Q202	190-1162-00	2SA1162	R402	033-1031-15	1/10W 10k ohm
C218	163-2273-25	10V 220uF	Q203	125-4001-90	XN1504	R404	116-4711-15	1/4W 470 ohm
C219	046-2222-58	2200pF B	Q204	125-4001-90	XN1504	R405	033-1041-15	1/10W 100k ohm
C220	046-2222-58	2200pF B	Q301	125-2004-92	RN1402	R407	033-4721-15	1/10W 4.7k ohm
C221	163-2273-25	10V 220uF	Q302	192-2712-00	2SC2712	R408	033-4721-15	1/10W 4.7k ohm
C222	046-2222-58	2200pF B	Q303	192-2712-00	2SC2712	R409	116-1001-15	1/4W 10 ohm
C223	046-2222-58	2200pF B	Q304	125-0014-92	DTA114EK	R410	116-1001-15	1/4W 10 ohm
C301	046-1022-58	1000pF B	Q305	192-2712-00	2SC2712	R411	033-4721-15	1/10W 4.7k ohm
C302	046-1022-58	1000pF B	Q401	125-2004-92	RN1402	R412	033-2231-15	1/10W 22k ohm
C303	046-1022-58	1000pF B	Q402	131-1188-00	2SB1188	R413	033-4731-15	1/10W 47k ohm
C401	163-1063-35	16V 10uF	Q403	193-2118-00	2SD2118F5 Q,R,S	R414	033-1031-15	1/10W 10k ohm
C402	168-1045-56	0.1uF Z	Q404	125-2004-92	RN1402	R415	033-2231-15	1/10W 22k ohm
C403	163-1053-65	50V 1uF	Q405	125-2004-92	RN1402	R416	033-4731-15	1/10W 47k ohm
C404	163-4753-55	35V 4.7uF	Q406	125-2004-92	RN1402	R417	116-4721-15	1/4W 4.7k ohm
C405	172-1041-11	0.1uF	Q407	192-2712-00	2SC2712	R501	033-4731-15	1/10W 47k ohm
C501	168-1045-56	0.1uF Z	Q601	193-0601-00	2SD601A	R502	033-1041-15	1/10W 100k ohm
C601	046-2232-78	0.022uF B	R101	116-4791-15	1/4W 4.7 ohm	R503	033-4731-15	1/10W 47k ohm
C602	045-1011-50	100pF CH	R103	116-1511-15	1/4W 150 ohm	R504	033-1021-15	1/10W 1k ohm
C603	045-1011-50	100pF CH	R104	116-1511-15	1/4W 150 ohm	R505	033-1021-15	1/10W 1k ohm
C604	163-1053-65	50V 1uF	R105	033-2231-15	1/10W 22k ohm	R506	033-1041-15	1/10W 100k ohm
C605	046-1032-78	0.01uF B	R106	033-4711-15	1/10W 470 ohm	R510	033-1041-15	1/10W 100k ohm
C606	168-1045-56	0.1uF Z	R107	116-5611-15	1/4W 560 ohm	R513	033-4721-15	1/10W 4.7k ohm
C607	045-1011-50	100pF CH	R108	033-1041-15	1/10W 100k ohm	R514	033-4731-15	1/10W 47k ohm
C701	168-1045-56	0.1uF Z	R109	116-4791-15	1/4W 4.7 ohm	R531	033-4731-15	1/10W 47k ohm
CCT103	050-0140-67	1/32W 220 ohm x4J	R110	116-4791-15	1/4W 4.7 ohm	R532	033-4731-15	1/10W 47k ohm
CCT104	050-0140-67	1/32W 220 ohm x4J	R111	116-4791-15	1/4W 4.7 ohm	R533	033-1041-15	1/10W 100k ohm
CCT105	050-0140-67	1/32W 220 ohm x4J	R112	033-1021-15	1/10W 1k ohm	R534	033-4731-15	1/10W 47k ohm
CCT501	050-0140-54	1/32W 1k ohm x4J	R113	033-1021-15	1/10W 1k ohm	R601	033-4741-15	1/10W 470k ohm
CCT502	050-0140-54	1/32W 1k ohm x4J	R122	116-2721-15	1/4W 2.7k ohm	R602	033-2741-15	1/10W 270k ohm

REF No.	PART No.	DESCRIPTION
R603	033-4731-15	1/10W 47k ohm
R604	033-1041-15	1/10W 100k ohm
R605	033-1031-15	1/10W 10k ohm
R606	033-5611-15	1/10W 560 ohm
R701	033-2221-15	1/10W 2.2k ohm
R902	033-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R903	033-1041-15	1/10W 100k ohm
T101	009-0679-00	CHOKE 0.53mH
TM1	073-0768-90	TERMINAL
TM2	073-0766-90	TERMINAL
TM3	073-0766-90	TERMINAL
TM4	073-0766-90	TERMINAL

REF No.	PART No.	DESCRIPTION
X101	060-1533-90	CSTCE10M0G52-RO
PWB	039-2917-01	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C402	168-1045-56	0.1uF Z
CCT2	050-0145-52	1/16W 1k ohm x4
D401	001-7045-90	CL-165D/FG-D
D402	001-7093-92	RFA1112H (ORANGE)
D403	001-7093-92	RFA1112H (ORANGE)
D404	001-7045-90	CL-165D/FG-D
D405	001-7045-90	CL-165D/FG-D
D406	001-7045-90	CL-165D/FG-D
D407	001-7045-90	CL-165D/FG-D
D408	001-7045-90	CL-165D/FG-D
D411	001-0655-90	1SS294
D412	001-0655-90	1SS294
IC401	051-6617-08	NJU3715G-TE2
J401	074-1239-76	26P
PL401	017-0465-55	14V40mA
PL402	017-0465-55	14V40mA
PL403	017-0465-55	14V40mA
PL404	017-0465-55	14V40mA
Q401	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION
Q402	192-2712-00	2SC2712
Q403	192-2712-00	2SC2712
Q404	192-2712-00	2SC2712
Q406	192-2712-00	2SC2712
R401	119-2211-15	1/10W 220 ohm
R402	119-2211-15	1/10W 220 ohm
R404	119-1511-15	1/10W 150 ohm
R406	119-1511-15	1/10W 150 ohm
R407	119-2211-15	1/10W 220 ohm
R408	119-2211-15	1/10W 220 ohm
R409	119-2211-15	1/10W 220 ohm
R410	119-2211-15	1/10W 220 ohm
R411	119-2211-15	1/10W 220 ohm
R412	119-2211-15	1/10W 220 ohm
R413	119-2211-15	1/10W 220 ohm
R414	119-2211-15	1/10W 220 ohm
R415	119-2211-15	1/10W 220 ohm
R416	119-2211-15	1/10W 220 ohm
R419	033-1031-15	1/10W 10k ohm
R420	033-1031-15	1/10W 10k ohm
R421	033-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R422	033-1031-15	1/10W 10k ohm
R423	033-1031-15	1/10W 10k ohm
R424	033-1031-15	1/10W 10k ohm
R425	033-1031-15	1/10W 10k ohm
R426	033-1031-15	1/10W 10k ohm
R428	119-2211-15	1/10W 220 ohm
R429	119-1021-15	1/10W 1k ohm
R430	119-1021-15	1/10W 1k ohm
S401	013-6302-53	SKQMBBE010
S402	013-6302-53	SKQMBBE010
S403	013-6302-53	SKQMBBE010
S404	013-6302-53	SKQMBBE010
S405	013-6302-53	SKQMBBE010
S406	013-6302-53	SKQMBBE010
S407	013-6302-53	SKQMBBE010
S408	013-7415-50	SPVG110400
X401	060-8045-00	PKLCS1212E4001-R
PWB	039-2231-00	PWB(WITHOUT COMPONENT)

DPS PWB(B3) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	042-0671-01	10V 47uF TA
C2	168-4735-56	0.047uF Z
C3	046-4722-58	4700pF
C4	046-1032-78	0.01uF
C5	168-1045-56	0.1uF Z
C6	042-0671-01	10V 47uF TA
C7	168-1045-56	0.1uF Z
C8	168-1045-56	0.1uF Z
C9	045-1007-50	10pF
C10	168-1045-56	0.1uF Z
C11	045-1007-50	10pF
C12	168-1045-56	0.1uF Z
C13	042-0672-00	25V 47uF TA
C14	168-4735-56	0.047uF Z
C15	168-4735-56	0.047uF Z
C16	168-4735-56	0.047uF Z
C17	178-1052-78	1uF
C18	045-4701-50	47pF
C19	168-1045-56	0.1uF Z
C20	046-4712-58	470pF
C21	046-4712-58	470pF
C22	168-1045-56	0.1uF Z
C23	046-1532-78	0.015uF
C24	168-1045-56	0.1uF Z
C25	046-6822-58	6800pF
C26	046-1032-78	0.01uF
C28	046-1022-58	1000pF
C29	046-3332-78	0.033uF
C32	046-4722-58	4700pF
C33	046-1522-58	1500pF
C34	168-1045-56	0.1uF Z
C35	046-1532-78	0.015uF
C36	168-1045-56	0.1uF Z
C37	168-1045-56	0.1uF Z
C38	042-0671-01	10V 47uF TA
C39	178-1052-78	1uF
C40	045-6801-50	68pF
C41	168-1045-56	0.1uF Z

REF No.	PART No.	DESCRIPTION
C42	178-1052-78	1uF
C43	042-0671-01	10V 47uF TA
C44	046-6812-58	680pF
C45	168-1045-56	0.1uF Z
C46	168-1045-56	0.1uF Z
C47	042-0671-01	10V 47uF TA
C48	168-5632-78	16V 0.056uF
C49	168-1045-56	0.1uF Z
C50	168-1045-56	0.1uF Z
C51	168-1045-56	0.1uF Z
C53	168-1045-56	0.1uF Z
C54	042-0671-01	10V 47uF TA
C56	168-4712-55	470pF K
C57	046-1032-78	0.01uF
C58	168-4712-55	470pF K
C59	168-1045-56	0.1uF Z
C60	168-1045-56	0.1uF Z
C61	046-1032-78	0.01uF
C62	042-0671-01	10V 47uF TA
C63	046-1032-78	0.01uF
C64	168-1045-56	0.1uF Z
C65	045-1201-50	12pF
C66	046-1032-78	0.01uF
C67	046-1032-78	0.01uF
C68	168-1045-56	0.1uF Z
C69	045-1201-50	12pF
C101	046-1032-78	0.01uF
C102	046-1032-78	0.01uF
CCT1	050-0140-68	1/32W 3.3k ohm x4J
CCT4	050-0140-63	1/32W 47k ohm x4J
D1	001-0367-91	1SS226
D2	001-2610-90	RB480KTL
IC2	051-6399-00	TC94A15F
IC3	051-6060-08	BD7961FM-E2
IC4	051-7518-18	SN74LVC139APWR
IC5	052-5062-05	MBM29DL800BA-90PFTN
IC6	051-7518-18	SN74LVC139APWR

REF No.	PART No.	DESCRIPTION
IC7	051-9330-00	K4S641632F-TC60
IC8	051-7203-48	SN74LV74APW
IC9	051-6700-00	TMS320DA140
		PGE160
IC10	051-3315-90	TPS76316DBVR
IC11	051-7221-58	SN74AHC1G04
		HDCKR
IC12	051-7525-08	SN74LVC2GU04
		DCKR
IC13	051-7526-08	SN74LVC1G126
		DCKR
J1	074-1201-65	15P
J2	074-1138-56	6P
J3	074-1059-76	26P
J4	074-1189-95	45P
J5	074-1201-60	10P
L2	010-3104-54	MPZ1608S601AT
L3	010-3104-54	MPZ1608S601AT
Q1	131-1188-50	2SB1188PQR
Q2	131-1188-50	2SB1188PQR
Q3	125-2004-92	RN1402
R1	033-1021-15	1/10W 1k ohm
R2	033-1021-15	1/10W 1k ohm
R3	033-3311-15	1/10W 330 ohm
R4	033-2211-15	1/10W 220 ohm
R5	033-2211-15	1/10W 220 ohm
R6	033-1021-15	1/10W 1k ohm
R7	033-1051-15	1/10W 1M ohm
R8	033-0000-05	1/10W 0 ohm
R10	033-5621-15	1/10W 5.6k ohm
R11	033-4731-15	1/10W 47k ohm
R12	119-3341-15	1/10W 330k ohm
R13	033-2231-15	1/10W 22k ohm
R14	033-2231-15	1/10W 22k ohm
R15	117-1001-15	1/8W 10 ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-3331-15	1/10W 33k ohm
R18	033-6831-15	1/10W 68k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R19	033-6831-15	1/10W 68k ohm	R38	033-3311-15	1/10W 330 ohm	R100	033-1011-15	1/10W 100 ohm
R20	033-1011-15	1/10W 100 ohm	R39	033-2211-15	1/10W 220 ohm	R101	033-1011-15	1/10W 100 ohm
R21	116-4711-15	1/4W 470 ohm	R40	033-1011-15	1/10W 100 ohm	R102	033-1011-15	1/10W 100 ohm
R22	117-1811-15	1/8W 180 ohm	R41	033-1001-15	1/10W 10 ohm	R103	033-1011-15	1/10W 100 ohm
R23	116-4711-15	1/4W 470 ohm	R42	033-1001-15	1/10W 10 ohm	R104	033-1011-15	1/10W 100 ohm
R24	033-2231-15	1/10W 22k ohm	R45	033-1011-15	1/10W 100 ohm	R105	033-1011-15	1/10W 100 ohm
R25	033-2231-15	1/10W 22k ohm	R46	033-4731-15	1/10W 47k ohm	R106	033-1011-15	1/10W 100 ohm
R26	033-2231-15	1/10W 22k ohm	R47	033-4731-15	1/10W 47k ohm	R107	033-4731-15	1/10W 47k ohm
R27	033-1011-15	1/10W 100 ohm	R48	033-1011-15	1/10W 100 ohm	R200	033-1051-15	1/10W 1M ohm
R28	033-4731-15	1/10W 47k ohm	R49	033-0000-05	1/10W 0 ohm	R201	033-1021-15	1/10W 1k ohm
R29	033-2231-15	1/10W 22k ohm	R50	033-0000-05	1/10W 0 ohm	R202	033-1021-15	1/10W 1k ohm
R30	033-4721-15	1/10W 4.7k ohm	R51	033-8231-15	1/10W 82k ohm	R220	033-4731-15	1/10W 47k ohm
R31	033-4721-15	1/10W 4.7k ohm	R52	033-0000-05	1/10W 0 ohm	R301	119-2231-15	1/10W 22k ohm
R32	033-4731-15	1/10W 47k ohm	R53	033-4731-15	1/10W 47k ohm	R302	119-3911-15	1/10W 390 ohm
R33	033-4731-15	1/10W 47k ohm	R63	033-2231-15	1/10W 22k ohm	X1	061-3534-90	16.92MHz
R35	033-4731-15	1/10W 47k ohm	R64	033-2231-15	1/10W 22k ohm	PWB	039-2531-20	PWB(WITHOUT COMPONENT)
R36	033-3311-15	1/10W 330 ohm	R65	033-4731-15	1/10W 47k ohm			
R37	033-4731-15	1/10W 47k ohm	R66	033-4731-15	1/10W 47k ohm			

Sensor PWB(B4) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	S1	013-7414-50	SPVG22
PT4	060-0252-01	PT4850F	PWB	039-1956-00	PWB(WITHOUT COMPONENT)
PT5	060-0252-01	PT4850F			
PT6	060-0252-01	PT4850F			

PIM-FPC(B5) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95
FPC	039-2009-00	FPC(WITHOUT COMPONENT)

Driver PWB(B6) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100uF	J2	074-1100-59	9P	S1	013-7412-50	SPVG21
D1	001-0529-32	MA8056-M	R1	033-1021-15	1/10W 1k ohm	PWB	039-2242-00	PWB(WITHOUT COMPONENT)
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC(B7) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93
FPC	039-2010-00	FPC(WITHOUT COMPONENT)

LED-L-PWB(B8) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	PWB	039-1954-20	PWB(WITHOUT COMPONENT)
LED4	001-7042-00	GL4800			

LED-R-PWB(B9) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	PWB	039-1955-20	PWB(WITHOUT COMPONENT)
LED6	001-7042-00	GL4800			

L-Motor-FPC(B10) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING
FPC	039-2014-01	FPC(WITHOUT COMPONENT)

M/S-FPC(B11) section:CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-196-100	SPINDLE	FPC	039-2016-02	FPC(WITHOUT COMPONENT)
M3	SMA-191-100	SLED			
S2	013-7414-50	SPVG22			