


EXPLODED VIEW / PARTS LIST

PANEL section (NF47 66 9H0)

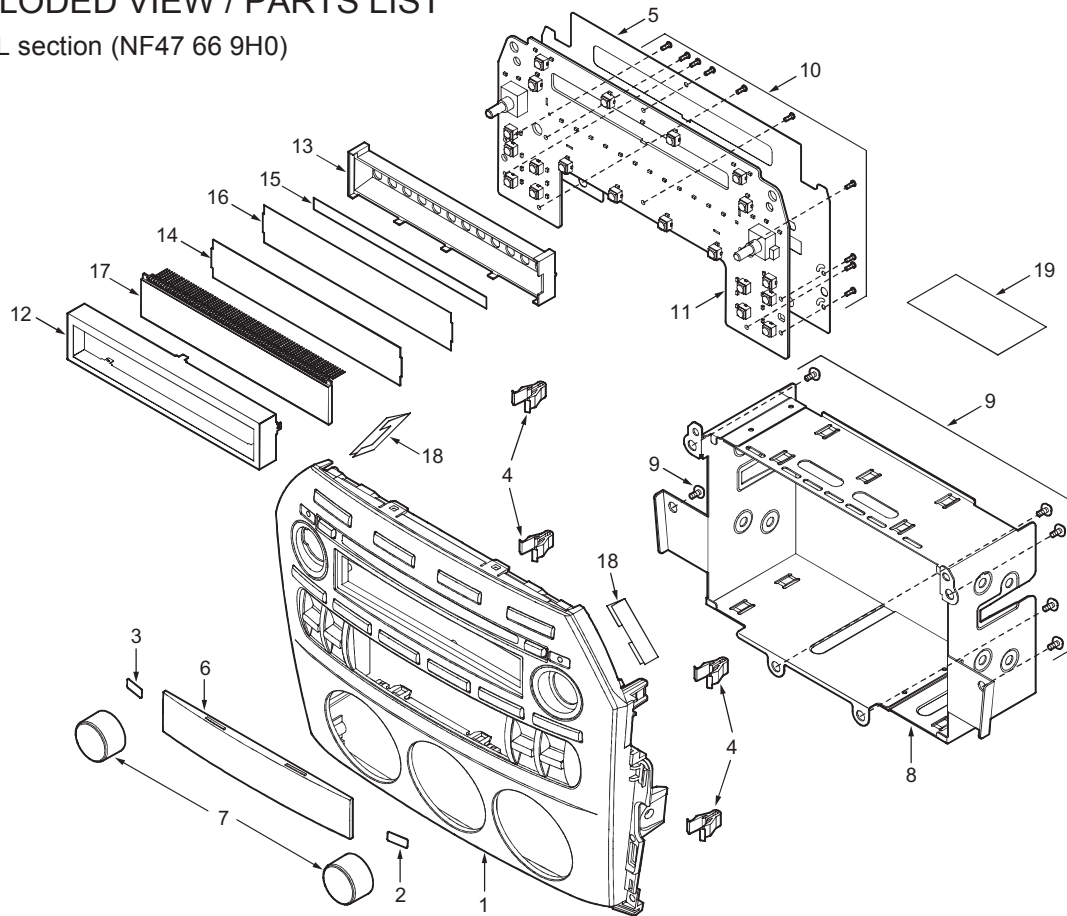

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8096-00	ESCUTCHEON-ASSY	1
2	335-7423-01	CAP(CD LOGO)	1
3	335-7423-10	CAP(R)	1
4	335-7583-01	CLIP	4
5	347-7616-00	PROTECTOR	1
6	373-1057-00	DIAL COVER	1
7	380-5622-00	KNOB	2
8	300-8049-01	MTG-BRKT	1
9	716-0778-10	WAVE SCREW(2x6)	10
10	716-3558-00	SPECIAL SCREW(M5x6)	6

NO.	PART NO.	DESCRIPTION	Q'TY
11	-----	SWITCH PWB	1
12	331-4014-00	LCD COVER	1
13	335-7429-01	LCD HOLDER	1
14	335-7430-00	COLOR FILTER	1
15	347-7749-00	DOT FILM	1
16	347-7750-00	FILTER	1
17	379-1336-50	LCD	1
18	347-7823-00	SPACER	2
19	286-6750-11 286-6750-12	SETPLATE(PT2675QA) SETPLATE(PT2675QB)	1

Note) No.19 SETPLATE depend on each model.

The model name is specified in the description.

BASE UNIT section (NF47 66 AR0)


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1
2	880-2091M	AM/FM TUNER	1
3	074-1259-00	OUTLET SOCKET(16P)	1
4	074-1260-00	OUTLET SOCKET(24P)	1
5	076-0642-50	PLUG(15P)	1
6	092-4000-51	ANT-RECEPT	1
7	313-1936-00	HEAT SINK	1
8	331-4012-00	REAR PLATE	1
9	331-4013-00	TR-HOLDER	1
10	331-4031-00	EARTH BRKT	1
11	345-5828-00	GASKET	1
12	347-6465-00	PROTECTOR	1
13	714-2606-81	MACHINE SCREW(M2.6x6)	3

NO.	PART NO.	DESCRIPTION	Q'TY
14	714-3006-81	MACHINE SCREW(M3x6)	1
15	778-3006-00	TAP-SCREW(3x6)	4
16	305-0338-02	SIDE-CVR-L	1
17	305-0339-02	SIDE-CVR-R	1
18	309-0810-01	ES PLATE	1
19	310-1811-01	UPPER CASE	1
20	311-1903-01	LOWER CASE	1
21	313-1935-01	HEAT SINK	1
22	331-4010-01	MECH-BRKT-L	1
23	331-4011-01	MECH-BRKT-R	1
24	345-8494-00	REAR RUBBER	1
25	346-0178-01	LEATHER SHEET	1
26	347-7615-00	SHADE	1

NO.	PART NO.	DESCRIPTION	Q'TY
27	347-7617-00	WIRE SUPPORT	1
28	816-4011-50	FLAT WIRE(26P)	1
29	929-0291-84	CD-MECHANISM	1
30	714-2603-80	MACHINE SCREW(M2.6x3)	9
31	714-2606-81	MACHINE SCREW(M2.6X6)	21
32	714-2612-89	MACHINE SCREW(M2.6x12)	3

NO.	PART NO.	DESCRIPTION	Q'TY
33	716-0821-03	IT SCREW(M3x5)	1
34	716-1494-00	IT SCREW(M2.6x6)	5
35	716-1888-01	REAR BOLT	1
36	331-4131-00	MECH-BRKT-C	1
37	286-6750-11 286-6750-12	SETPLATE(PT2675QA) SETPLATE(PT2675QB)	1

Note) No.30 SETPLATE depend on each model.
The model name is specified in the description.

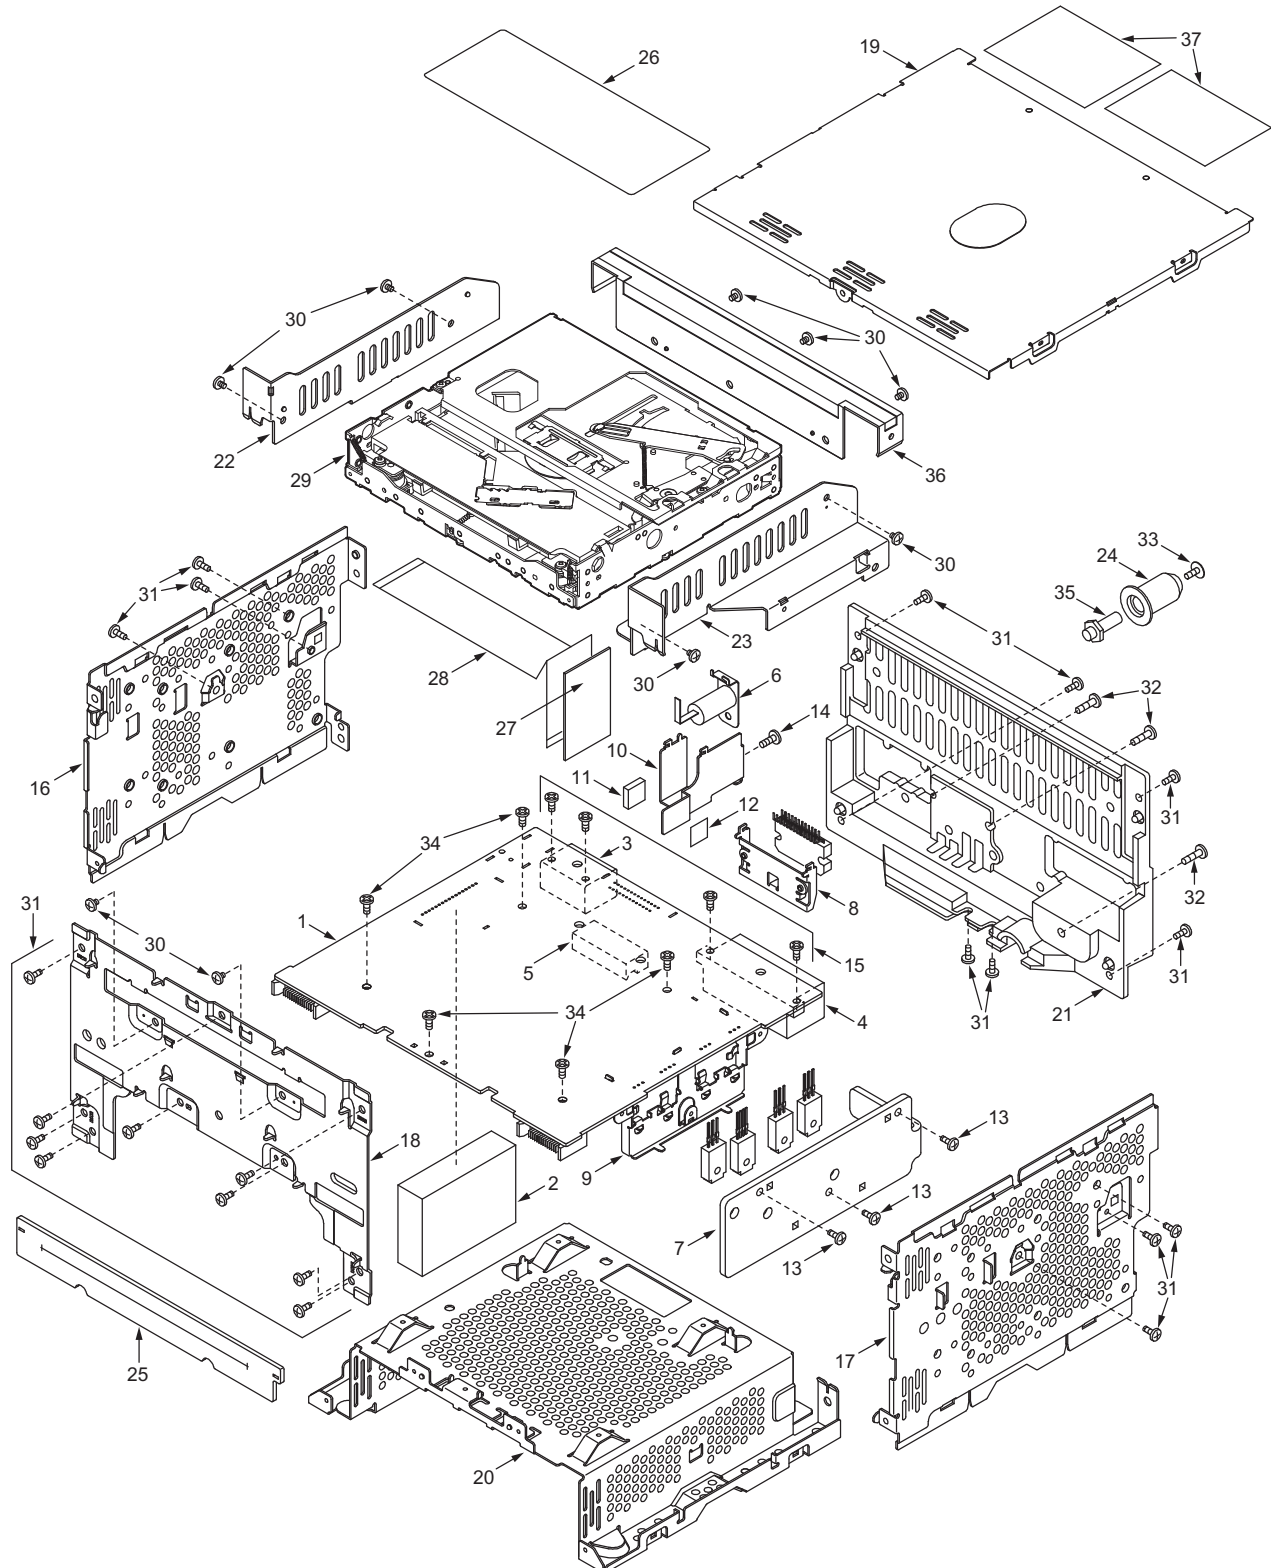

ELECTRICAL PARTS LIST

BASE UNIT : Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-4000-51	ANT-RECEPT	C418	168-1022-55	1000pF K	C528	163-2253-65	50V2.2uF
BL101	880-2091M	AM/FM TUNER	C419	168-1022-55	1000pF K	C537	163-1073-15	6.3V100uF
C101	166-1511-50	150pF CH	C420	168-1022-55	1000pF K	C538	168-1042-78	16V 0.1uF
C102	166-2201-50	22pF CH	C421	168-1022-55	1000pF K	C539	168-1042-78	16V 0.1uF
C103	163-1073-35	16V100uF	C424	166-1011-50	100pF CH	C540	168-1042-78	16V 0.1uF
C104	168-1022-55	1000pF K	C425	168-1022-55	1000pF K	C541	163-1063-35	16V10uF
C105	163-1073-35	16V100uF	C426	168-1022-55	1000pF K	C601	168-1042-78	16V 0.1uF
C106	168-1022-55	1000pF K	C427	168-1042-78	16V 0.1uF	C603	163-4763-35	16V47uF
C107	168-1022-55	1000pF K	C428	163-4753-55	35V4.7uF	C605	163-4763-35	16V47uF
C108	168-1022-55	1000pF K	C429	168-1042-78	16V 0.1uF	C608	178-1052-78	1uF
C109	168-1022-55	1000pF K	C430	163-4753-55	35V4.7uF	C609	163-2273-25	10V 220uF
C110	168-1022-55	1000pF K	C434	168-2232-55	0.022uF K	C610	178-1042-78	0.1uF
C111	168-1022-55	1000pF K	C435	163-1073-15	6.3V100uF	C611	178-1042-78	0.1uF
C112	163-4763-15	6.3V47uF	C437	168-4732-78	0.047uF K	C612	163-1063-35	16V10uF
C113	168-1042-78	16V 0.1uF	C438	042-0423-94	10V 4.7uF	C613	168-1042-78	16V 0.1uF
C114	166-1801-50	18pF CH	C439	163-2263-35	16V22uF	C614	042-0416-56	10V22uF M TAN
C201	168-2212-55	220pF K	C440	168-1022-55	1000pF K	C615	178-1052-78	1uF
C202	163-1063-35	16V10uF	C442	168-1042-78	16V 0.1uF	C616	163-2273-25	10V 220uF
C203	168-1042-78	16V 0.1uF	C444	168-2232-55	0.022uF K	C619	178-1042-78	0.1uF
C204	168-1022-55	1000pF K	C445	163-4763-15	6.3V47uF	C621	163-1063-35	16V10uF
C205	168-1022-55	1000pF K	C446	163-1063-35	16V10uF	C622	042-0406-93	16V22uF TAN
C206	166-1011-50	100pF CH	C447	178-1052-78	1uF	C623	168-1042-78	16V 0.1uF
C208	168-1042-78	16V 0.1uF	C449	168-3332-78	0.033uF K	C624	178-1042-78	0.1uF
C209	163-2273-25	10V 220uF	C450	168-1022-55	1000pF K	C625	163-1073-35	16V100uF
C211	168-1042-78	16V 0.1uF	C451	168-1022-55	1000pF K	C626	168-6822-55	6800pF K
C212	163-2273-25	10V 220uF	C452	168-1022-55	1000pF K	C627	163-1063-35	16V10uF
C213	168-1042-78	16V 0.1uF	C453	168-1022-55	1000pF K	C628	168-1042-78	16V 0.1uF
C301	168-2212-55	220pF K	C454	168-2232-55	0.022uF K	C701	166-4701-50	47pF CH
C302	168-2212-55	220pF K	C457	178-1052-78	1uF	C702	042-1624-00	16V4700uF
C303	168-2212-55	220pF K	C458	168-4712-55	470pF K	C703	172-1041-11	0.1uF
C304	168-2212-55	220pF K	C459	168-1022-55	1000pF K	C704	178-1042-78	0.1uF
C305	168-2212-55	220pF K	C460	163-2263-35	16V22uF	C705	168-2212-55	220pF K
C306	168-2212-55	220pF K	C461	168-1042-78	16V 0.1uF	C706	163-1053-65	50V1uF
C307	168-2212-55	220pF K	C462	163-3373-15	6.3V330uF	C707	168-2245-79	0.22uF Z
C308	168-2212-55	220pF K	C464	163-2273-25	10V 220uF	C708	168-2222-55	2200pF K
C309	168-1032-55	0.01uF K	C465	168-1042-78	16V 0.1uF	C709	168-2222-55	2200pF K
C310	168-2212-55	220pF K	C466	168-1042-78	16V 0.1uF	C710	168-2222-55	2200pF K
C311	168-2212-55	220pF K	C468	168-1042-78	16V 0.1uF	C711	168-2222-55	2200pF K
C312	166-1011-50	100pF CH	C469	168-1032-55	0.01uF K	C712	168-2222-55	2200pF K
C313	168-1042-78	16V 0.1uF	C470	168-5622-55	5600pF K	C713	168-2222-55	2200pF K
C314	168-1042-78	16V 0.1uF	C471	168-5622-55	5600pF K	C714	168-2222-55	2200pF K
C316	168-4732-78	0.047uF K	C472	168-3322-55	3300pF K	C715	168-2222-55	2200pF K
C318	166-1201-50	12pF CH	C473	168-3322-55	3300pF K	C716	168-2222-55	2200pF K
C319	168-2212-55	220pF K	C474	166-1011-50	100pF CH	C717	168-2222-55	2200pF K
C320	168-1042-78	16V 0.1uF	C475	166-1011-50	100pF CH	C718	168-2222-55	2200pF K
C321	163-4763-15	6.3V47uF	C501	168-1022-55	1000pF K	C719	168-2222-55	2200pF K
C322	166-1201-50	12pF CH	C502	168-1022-55	1000pF K	C720	178-1042-78	0.1uF
C323	168-1042-78	16V 0.1uF	C503	168-1022-55	1000pF K	C721	163-1053-65	50V1uF
C324	178-1042-78	0.1uF	C504	168-1022-55	1000pF K	C722	166-3301-50	33pF CH
C325	166-1011-50	100pF CH	C505	178-2255-79	2.2uF	C723	168-2212-55	220pF K
C326	166-1011-50	100pF CH	C506	178-2255-79	2.2uF	D201	001-0580-90	1SS352
C327	166-1011-50	100pF CH	C507	178-2255-79	2.2uF	D202	001-0580-90	1SS352
C328	166-1011-50	100pF CH	C508	178-2255-79	2.2uF	D301	001-0529-28	MA8051-L
C329	166-1011-50	100pF CH	C509	168-1042-78	16V 0.1uF	D502	001-0516-90	MA111
C330	168-1042-78	16V 0.1uF	C510	166-5611-50	560pF CH	D601	001-0529-32	MA8056-M
C331	163-4763-15	6.3V47uF	C511	166-5611-50	560pF CH	D602	001-0580-90	1SS352
C332	168-1032-55	0.01uF K	C512	166-2711-50	270pF	D603	001-0529-47	MA8091-M
C401	178-2255-79	2.2uF	C513	166-2711-50	270pF	D604	001-0529-28	MA8051-L
C403	178-2255-79	2.2uF	C514	166-2201-50	22pF CH	D605	001-0580-90	1SS352
C404	178-2255-79	2.2uF	C515	166-2201-50	22pF CH	D606	001-0516-90	MA111
C405	178-2255-79	2.2uF	C516	166-2201-50	22pF CH	D607	001-0516-90	MA111
C406	178-2255-79	2.2uF	C517	166-2201-50	22pF CH	D608	001-2614-90	1SR-154-400TE25
C407	178-2255-79	2.2uF	C518	166-5611-50	560pF CH	D610	001-0580-90	1SS352
C408	168-1042-78	16V 0.1uF	C519	166-5611-50	560pF CH	D611	001-2614-90	1SR-154-400TE25
C409	166-1811-50	180pF CH	C520	166-2711-50	270pF	D614	001-2614-90	1SR-154-400TE25
C411	163-4753-55	35V4.7uF	C521	166-2711-50	270pF	D615	001-0584-24	MA8082
C412	166-1007-50	10pF CH	C522	178-4742-78	0.47uF	D617	001-2614-90	1SR-154-400TE25
C413	166-1007-50	10pF CH	C523	178-4742-78	0.47uF	D618	001-2614-90	1SR-154-400TE25
C414	166-1011-50	100pF CH	C524	178-4742-78	0.47uF	D619	001-2614-90	1SR-154-400TE25
C415	166-1011-50	100pF CH	C525	178-4742-78	0.47uF	D620	001-2614-90	1SR-154-400TE25
C417	168-1022-55	1000pF K	C527	163-2263-35	16V22uF	D622	001-2614-90	1SR-154-400TE25

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D623	001-2614-90	1SR-154-400TE25	L705	010-3105-62	1k ohm/100MHz	R202	119-1031-15	1/10W 10k ohm
D624	001-0598-24	MA5180	L706	010-3105-62	1k ohm/100MHz	R204	119-1011-15	1/10W 100 ohm
D625	001-2614-90	1SR-154-400TE25	L707	010-3105-62	1k ohm/100MHz	R205	119-0000-05	1/10W 0 ohm JW
D626	001-0529-32	MA8056-M	L708	010-3105-62	1k ohm/100MHz	R301	119-1031-15	1/10W 10k ohm
D701	001-0516-90	MA111	L709	010-3105-62	1k ohm/100MHz	R302	119-3931-15	1/10W 39k ohm
D702	001-0516-90	MA111	L710	010-3105-62	1k ohm/100MHz	R303	119-4731-15	1/10W 47k ohm
D703	001-0580-90	1SS352	L711	010-3105-62	1k ohm/100MHz	R304	116-5611-15	1/4W 560 ohm
D704	001-0580-90	1SS352	L717	010-3105-62	1k ohm/100MHz	R305	119-1021-15	1/10W 1k ohm
D705	001-0580-90	1SS352	P201	076-3009-64	14P	R306	119-1021-15	1/10W 1k ohm
D706	001-0580-90	1SS352	P202	076-3009-64	14P	R307	119-1021-15	1/10W 1k ohm
D707	001-0529-31	MA8056-L	P701	076-0642-50	15P	R308	119-1021-15	1/10W 1k ohm
D709	001-0580-90	1SS352	Q301	125-2026-91	UN5211	R309	119-1021-15	1/10W 1k ohm
D710	001-0580-90	1SS352	Q401	125-7005-90	PHK04P02T	R310	119-1011-15	1/10W 100 ohm
D711	001-0529-34	MA8062-L	Q402	125-2026-91	UN5211	R311	119-1021-15	1/10W 1k ohm
D712	001-0529-31	MA8056-L	Q404	125-2026-91	UN5211	R312	119-1021-15	1/10W 1k ohm
D713	001-2015-00	RL253	Q406	125-2026-91	UN5211	R313	119-1021-15	1/10W 1k ohm
D715	001-0580-90	1SS352	Q407	125-2026-91	UN5211	R314	119-4721-15	1/10W 4.7k ohm
D716	001-0598-24	MA5180	Q408	125-2026-91	UN5211	R315	119-1011-15	1/10W 100 ohm
D717	001-0580-90	1SS352	Q409	125-2026-91	UN5211	R316	119-4721-15	1/10W 4.7k ohm
D718	001-0608-90	D1FS4	Q601	193-1758-00	2SD1758TK-P,Q,R	R317	119-1011-15	1/10W 100 ohm
D719	001-0580-90	1SS352	Q602	125-0020-91	UN5111	R318	119-1011-15	1/10W 100 ohm
D720	001-0580-90	1SS352	Q603	125-2026-91	UN5211	R319	119-1021-15	1/10W 1k ohm
D721	001-0580-90	1SS352	Q604	190-1736-00	2SA1736	R320	119-4731-15	1/10W 47k ohm
D723	001-0580-90	1SS352	Q605	125-2026-91	UN5211	R321	119-1021-15	1/10W 1k ohm
D724	001-0529-34	MA8062-L	Q606	133-1766-00	2SD1766	R322	119-4731-15	1/10W 47k ohm
D725	001-0516-90	MA111	Q607	125-2026-91	UN5211	R325	119-4731-15	1/10W 47k ohm
IC101	051-6212-08	LC72191JM-TLM	Q608	192-2712-50	2SC2712Y.G.L	R326	119-4731-15	1/10W 47k ohm
IC301	051-5440-08	S-80931ANMP-DDV	Q609	125-0020-91	UN5111	R329	119-4731-15	1/10W 47k ohm
IC302	051-9419-08	BR24L02FVM-WE2	Q610	192-2712-50	2SC2712Y.G.L	R330	119-1021-15	1/10W 1k ohm
IC303	052-3195-00	M30843MW-061GP	Q611	101-1274-00	2SB1274	R331	119-1021-15	1/10W 1k ohm
IC401	051-6706-20	SAF7730HV/N217	Q612	191-1197-50	2SB1197K Q,R	R332	119-1021-15	1/10W 1k ohm
IC501	051-3019-90	NJM2060V	Q613	125-2026-91	UN5211	R334	119-1021-15	1/10W 1k ohm
IC502	051-2055-00	TDA8593J/N3	Q614	191-1205-65	2SB1205S,T	R335	119-1021-15	1/10W 1k ohm
IC602	051-3340-00	LD1085P	Q615	192-2712-50	2SC2712Y.G.L	R336	119-1021-15	1/10W 1k ohm
IC603	051-3343-00	NJM2396F33	Q616	192-2712-50	2SC2712Y.G.L	R337	119-1031-15	1/10W 10k ohm
IC604	051-3340-00	LD1085P	Q617	191-1197-50	2SB1197K Q,R	R338	119-1031-15	1/10W 10k ohm
IC606	051-3341-90	BD3931FP	Q618	125-2026-91	UN5211	R339	119-2231-15	1/10W 22k ohm
IC607	051-5441-08	BD4828G-TR	Q619	191-1205-65	2SB1205S,T	R340	119-1021-15	1/10W 1k ohm
J201	074-2003-76	26P	Q620	192-2712-50	2SC2712Y.G.L	R341	119-4731-15	1/10W 47k ohm
J701	074-1260-00	24P	Q621	190-1162-00	2SA1162	R342	119-4731-15	1/10W 47k ohm
J702	074-1259-00	16P	Q622	125-2026-91	UN5211	R343	119-4731-15	1/10W 47k ohm
L101	010-2003-04	30uH	Q623	190-1736-00	2SA1736	R344	119-4731-15	1/10W 47k ohm
L102	010-4044-00	27uH	Q624	125-2026-91	UN5211	R345	119-4731-15	1/10W 47k ohm
L103	010-3105-62	1k ohm/100MHz	Q625	190-1736-00	2SA1736	R346	119-1021-15	1/10W 1k ohm
L201	010-2198-59	4.7uH	Q626	125-2026-91	UN5211	R347	119-4731-15	1/10W 47k ohm
L202	010-3406-66	22uH	Q627	190-1736-00	2SA1736	R348	119-1021-15	1/10W 1k ohm
L301	010-3406-66	22uH	Q628	125-2026-91	UN5211	R349	119-1021-15	1/10W 1k ohm
L302	010-3406-66	22uH	Q629	125-0020-93	UN5113	R350	119-1021-15	1/10W 1k ohm
L401	010-3105-62	1k ohm/100MHz	Q631	193-1758-00	2SD1758TK-P,Q,R	R352	119-1021-15	1/10W 1k ohm
L402	010-3105-62	1k ohm/100MHz	Q632	191-0709-50	2SB709A	R354	119-1021-15	1/10W 1k ohm
L403	010-3105-62	1k ohm/100MHz	Q633	191-0709-50	2SB709A	R355	119-1011-15	1/10W 100 ohm
L404	010-3105-62	1k ohm/100MHz	Q635	191-0709-50	2SB709A	R356	119-1011-15	1/10W 100 ohm
L405	010-3105-62	1k ohm/100MHz	Q701	192-2712-50	2SC2712Y.G.L	R357	119-1011-15	1/10W 100 ohm
L406	010-3105-62	1k ohm/100MHz	Q702	125-2026-91	UN5211	R358	119-1011-15	1/10W 100 ohm
L407	010-3104-54	600 ohm/100MHz	Q703	192-2712-50	2SC2712Y.G.L	R359	119-1021-15	1/10W 1k ohm
L409	010-3105-62	1k ohm/100MHz	Q704	192-2712-50	2SC2712Y.G.L	R360	119-1021-15	1/10W 1k ohm
L410	010-3105-62	1k ohm/100MHz	Q705	192-2712-50	2SC2712Y.G.L	R361	119-1031-15	1/10W 10k ohm
L411	010-3105-62	1k ohm/100MHz	Q706	192-2712-50	2SC2712Y.G.L	R362	119-1031-15	1/10W 10k ohm
L412	010-3105-62	1k ohm/100MHz	Q707	192-2712-50	2SC2712Y.G.L	R363	119-4731-15	1/10W 47k ohm
L413	010-3105-62	1k ohm/100MHz	Q708	192-2712-50	2SC2712Y.G.L	R364	119-4731-15	1/10W 47k ohm
L414	010-3105-62	1k ohm/100MHz	Q709	192-2712-50	2SC2712Y.G.L	R365	119-4731-15	1/10W 47k ohm
L415	010-3105-62	1k ohm/100MHz	Q710	191-1197-50	2SB1197K Q,R	R366	119-4731-15	1/10W 47k ohm
L416	010-3105-62	1k ohm/100MHz	R102	119-2741-15	1/10W 270k ohm	R367	119-2231-15	1/10W 22k ohm
L417	010-3105-62	1k ohm/100MHz	R103	119-1041-15	1/10W 100k ohm	R368	119-4731-15	1/10W 47k ohm
L418	010-3105-62	1k ohm/100MHz	R104	119-1011-15	1/10W 100 ohm	R369	119-4731-15	1/10W 47k ohm
L420	010-3105-62	1k ohm/100MHz	R105	119-6821-15	1/10W 6.8k ohm	R370	119-4731-15	1/10W 47k ohm
L421	010-3104-54	600 ohm/100MHz	R106	119-6821-15	1/10W 6.8k ohm	R371	119-4721-15	1/10W 4.7k ohm
L422	010-3105-62	1k ohm/100MHz	R107	119-1011-15	1/10W 100 ohm	R372	119-4721-15	1/10W 4.7k ohm
L423	010-2198-51	0.22uH	R108	119-1011-15	1/10W 100 ohm	R373	119-4721-15	1/10W 4.7k ohm
L424	010-3105-62	1k ohm/100MHz	R109	119-1011-15	1/10W 100 ohm	R374	119-1031-15	1/10W 10k ohm
L505	010-3406-66	22uH	R110	119-1011-15	1/10W 100 ohm	R375	119-4721-15	1/10W 4.7k ohm
L702	010-3105-62	1k ohm/100MHz	R111	116-5691-15	1/4W 5.6 ohm	R376	119-4721-15	1/10W 4.7k ohm
L703	010-8026-00	210uH(TOROIDAL)	R112	119-4731-15	1/10W 47k ohm	R377	119-4731-15	1/10W 47k ohm
L704	010-3105-62	1k ohm/100MHz	R201	119-1031-15	1/10W 10k ohm	R401	032-0140-63	1/10W 2.7k ohm F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R402	032-0140-63	1/10W 2.7k ohm F	R536	119-1011-15	1/10W 100 ohm	R659	119-1021-15	1/10W 1k ohm
R403	119-2731-15	1/10W 27k ohm	R537	117-0000-05	1/8W 0 ohm JW	R661	116-4791-15	1/4W4.7 ohm
R404	119-2731-15	1/10W 27k ohm	R538	117-0000-05	1/8W 0 ohm JW	R662	116-4791-15	1/4W4.7 ohm
R405	119-8221-15	1/10W 8.2k ohm	R539	117-0000-05	1/8W 0 ohm JW	R663	116-5691-15	1/4W 5.6 ohm
R406	032-0140-50	1/10W 10k ohm F	R540	117-0000-05	1/8W 0 ohm JW	R664	116-5691-15	1/4W 5.6 ohm
R407	032-0140-50	1/10W 10k ohm F	R541	117-0000-05	1/8W 0 ohm JW	R665	116-5691-15	1/4W 5.6 ohm
R408	032-0140-50	1/10W 10k ohm F	R542	117-0000-05	1/8W 0 ohm JW	R666	116-5691-15	1/4W 5.6 ohm
R409	032-0140-50	1/10W 10k ohm F	R543	117-0000-05	1/8W 0 ohm JW	R667	116-5691-15	1/4W 5.6 ohm
R410	119-2201-15	1/10W 22 ohm	R544	117-0000-05	1/8W 0 ohm JW	R701	119-2231-15	1/10W 22k ohm
R412	119-0000-05	1/10W 0 ohm JW	R553	119-0000-05	1/10W 0 ohm JW	R702	119-2231-15	1/10W 22k ohm
R413	119-1031-15	1/10W 10k ohm	R554	119-0000-05	1/10W 0 ohm JW	R703	119-2231-15	1/10W 22k ohm
R414	119-1021-15	1/10W 1k ohm	R555	119-0000-05	1/10W 0 ohm JW	R704	119-2231-15	1/10W 22k ohm
R416	119-1031-15	1/10W 10k ohm	R556	119-0000-05	1/10W 0 ohm JW	R705	119-2231-15	1/10W 22k ohm
R417	119-0000-05	1/10W 0 ohm JW	R601	119-3311-15	1/10W 330 ohm	R706	119-2231-15	1/10W 22k ohm
R418	119-1031-15	1/10W 10k ohm	R602	119-1031-15	1/10W 10k ohm	R707	119-4731-15	1/10W 47k ohm
R419	119-0000-05	1/10W 0 ohm JW	R605	119-1031-15	1/10W 10k ohm	R708	116-1021-15	1/4W 1k ohm
R420	119-1031-15	1/10W 10k ohm	R606	116-4711-15	1/4W 470 ohm	R709	119-2231-15	1/10W 22k ohm
R421	119-1031-15	1/10W 10k ohm	R607	119-1031-15	1/10W 10k ohm	R710	116-1021-15	1/4W 1k ohm
R423	119-1001-15	1/10W 10 ohm	R608	119-3311-15	1/10W 330 ohm	R711	119-2231-15	1/10W 22k ohm
R425	119-0000-05	1/10W 0 ohm JW	R609	032-0140-81	1/10W 3.9k ohm	R712	116-2211-15	1/4W 220 ohm
R426	032-0140-50	1/10W 10k ohm F	R610	032-0140-68	1/10W 680 ohm F	R713	119-2231-15	1/10W 22k ohm
R427	032-0140-50	1/10W 10k ohm F	R612	116-1011-15	1/4W 100 ohm	R714	116-2211-15	1/4W 220 ohm
R429	032-0140-50	1/10W 10k ohm F	R613	117-1021-15	1/8W 1k ohm	R715	116-1021-15	1/4W 1k ohm
R430	032-0140-50	1/10W 10k ohm F	R614	119-1031-15	1/10W 10k ohm	R716	116-1021-15	1/4W 1k ohm
R431	119-0000-05	1/10W 0 ohm JW	R615	116-1821-15	1/4W 1.8k ohm	R717	119-1041-15	1/10W 100k ohm
R435	119-0000-05	1/10W 0 ohm JW	R616	119-1531-15	1/10W 15k ohm	R718	116-2211-15	1/4W 220 ohm
R436	119-0000-05	1/10W 0 ohm JW	R617	116-1821-15	1/4W 1.8k ohm	R719	116-2211-15	1/4W 220 ohm
R440	119-1031-15	1/10W 10k ohm	R618	116-2291-15	1/4W 2.2 ohm	R720	116-1021-15	1/4W 1k ohm
R441	119-1031-15	1/10W 10k ohm	R619	119-1021-15	1/10W 1k ohm	R721	119-2231-15	1/10W 22k ohm
R442	119-1011-15	1/10W 100 ohm	R620	116-1821-15	1/4W 1.8k ohm	R722	119-1021-15	1/10W 1k ohm
R443	119-1011-15	1/10W 100 ohm	R621	119-1031-15	1/10W 10k ohm	R723	119-4721-15	1/10W 4.7k ohm
R446	119-1031-15	1/10W 10k ohm	R622	119-1031-15	1/10W 10k ohm	R725	119-1031-15	1/10W 10k ohm
R449	119-1031-15	1/10W 10k ohm	R623	116-1821-15	1/4W 1.8k ohm	R726	119-6821-15	1/10W 6.8k ohm
R452	119-1011-15	1/10W 100 ohm	R624	119-4721-15	1/10W 4.7k ohm	R727	119-5611-15	1/10W 560 ohm
R453	119-1001-15	1/10W 10 ohm	R625	119-1031-15	1/10W 10k ohm	R728	116-1011-15	1/4W 100 ohm
R457	119-0000-05	1/10W 0 ohm JW	R626	119-2221-15	1/10W 2.2k ohm	R729	116-1531-15	1/4W 15k ohm
R460	119-0000-05	1/10W 0 ohm JW	R627	119-1031-15	1/10W 10k ohm	R730	116-1021-15	1/4W 1k ohm
R501	119-1021-15	1/10W 1k ohm	R628	119-1031-15	1/10W 10k ohm	R731	116-1021-15	1/4W 1k ohm
R502	119-1021-15	1/10W 1k ohm	R629	119-4731-15	1/10W 47k ohm	R732	116-1011-15	1/4W 100 ohm
R503	119-1021-15	1/10W 1k ohm	R630	032-0140-93	1/10W 2k ohm F	R733	116-1021-15	1/4W 1k ohm
R504	119-1021-15	1/10W 1k ohm	R631	032-0140-98	1/10W 330 ohm F	R734	116-1021-15	1/4W 1k ohm
R505	119-1031-15	1/10W 10k ohm	R632	119-1031-15	1/10W 10k ohm	R735	119-5611-15	1/10W 560 ohm
R506	119-1031-15	1/10W 10k ohm	R633	116-2221-15	1/4W 2.2k ohm	R736	116-2291-15	1/4W 2.2 ohm
R507	119-1031-15	1/10W 10k ohm	R634	116-2221-15	1/4W 2.2k ohm	R737	119-1031-15	1/10W 10k ohm
R508	119-1031-15	1/10W 10k ohm	R635	116-2221-15	1/4W 2.2k ohm	R738	119-5621-15	1/10W 5.6k ohm
R509	119-1031-15	1/10W 10k ohm	R636	119-4731-15	1/10W 47k ohm	R739	116-1021-15	1/4W 1k ohm
R510	119-1031-15	1/10W 10k ohm	R637	119-1031-15	1/10W 10k ohm	R740	119-0000-05	1/10W 0 ohm JW
R511	119-0000-05	1/10W 0 ohm JW	R638	116-2221-15	1/4W 2.2k ohm	R741	117-4721-15	1/8W 4.7k ohm
R512	119-0000-05	1/10W 0 ohm JW	R639	119-4721-15	1/10W 4.7k ohm	R743	119-0000-05	1/10W 0 ohm JW
R513	119-1031-15	1/10W 10k ohm	R640	119-1031-15	1/10W 10k ohm	R744	119-0000-05	1/10W 0 ohm JW
R514	119-1031-15	1/10W 10k ohm	R641	119-4721-15	1/10W 4.7k ohm	R745	119-0000-05	1/10W 0 ohm JW
R515	119-1051-15	1/10W 1M ohm	R642	116-1221-15	1/4W 1.2k ohm	R746	119-0000-05	1/10W 0 ohm JW
R516	119-1051-15	1/10W 1M ohm	R643	116-4721-15	1/4W 4.7k ohm	R747	119-0000-05	1/10W 0 ohm JW
R517	119-1051-15	1/10W 1M ohm	R644	116-5691-15	1/4W 5.6 ohm	SUP101	060-0122-91	DSP-141N-A21F
R518	119-1051-15	1/10W 1M ohm	R645	116-4721-15	1/4W 4.7k ohm	TC101	004-1580-10	TZ03R300FR169
R519	119-1031-15	1/10W 10k ohm	R646	119-1241-15	1/10W 120k ohm	TM101	073-0762-90	TERMINAL
R520	119-1031-15	1/10W 10k ohm	R647	119-7531-15	1/10W 75k ohm	TM301	073-0762-90	TERMINAL
R521	119-0000-05	1/10W 0 ohm JW	R648	116-1221-15	1/4W 1.2k ohm	TM401	073-0762-90	TERMINAL
R522	119-0000-05	1/10W 0 ohm JW	R649	116-2291-15	1/4W 2.2 ohm	TM701	073-0762-90	TERMINAL
R523	119-1031-15	1/10W 10k ohm	R650	116-2291-15	1/4W 2.2 ohm	X101	061-3515-90	7.2MHz
R524	119-1031-15	1/10W 10k ohm	R651	116-2291-15	1/4W 2.2 ohm	X301	061-3541-90	10MHz
R525	119-1021-15	1/10W 1k ohm	R655	116-4721-15	1/4W 4.7k ohm	X401	061-3537-90	41.6MHz
R528	119-4721-15	1/10W 4.7k ohm	R656	116-1221-15	1/4W 1.2k ohm	PWB	039-2686-20	PWB(WITHOUT COMPONENT)
R529	119-4721-15	1/10W 4.7k ohm	R657	116-4711-15	1/4W 470 ohm			
R535	119-1011-15	1/10W 100 ohm	R658	116-4711-15	1/4W 470 ohm			


PANEL : Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	168-1032-55	0.01uF K	D911	001-0529-38	MA8068-M	R850	119-4721-15	1/10W 4.7k ohm
C802	163-4763-35	16V47uF	D912	001-0529-38	MA8068-M	R851	119-4721-15	1/10W 4.7k ohm
C803	168-2212-55	220pF K	D913	001-0529-38	MA8068-M	R852	119-1041-15	1/10W 100k ohm
C804	168-1042-78	16V 0.1uF	D914	001-0529-38	MA8068-M	R853	119-1041-15	1/10W 100k ohm
C805	168-1032-55	0.01uF K	D915	001-0529-38	MA8068-M	R854	119-4731-15	1/10W 47k ohm
C810	168-1042-78	16V 0.1uF	D916	001-0529-38	MA8068-M	R855	119-4721-15	1/10W 4.7k ohm
C815	168-1042-78	16V 0.1uF	IC801	052-7077-00	MB89475PFV-G-115	R856	119-4721-15	1/10W 4.7k ohm
C911	168-1042-78	16V 0.1uF	IC911	051-6081-00	LC75810T	R857	119-1041-15	1/10W 100k ohm
C912	168-1042-78	16V 0.1uF	J301	076-6000-54	4P	R858	119-1041-15	1/10W 100k ohm
C913	168-1042-78	16V 0.1uF	J302	076-6000-54	4P	R859	119-4731-15	1/10W 47k ohm
C914	168-1042-78	16V 0.1uF	J801	074-3009-64	14P	R860	119-4731-15	1/10W 47k ohm
C915	168-1042-78	16V 0.1uF	J901	074-3009-64	14P	R861	119-1021-15	1/10W 1k ohm
C916	168-4712-55	470pF K	LCD901	379-1336-50	INDICATOR(LCD)	R862	119-1021-15	1/10W 1k ohm
C920	168-4722-55	4700pF K	Q801	190-1736-00	2SA1736	R863	119-4731-15	1/10W 47k ohm
D800	001-0529-32	MA8056-M	Q802	192-2712-50	2SC2712Y.G.L	R864	119-1021-15	1/10W 1k ohm
D801	001-7089-90	FV1112H-740-TR	Q803	190-1736-00	2SA1736	R865	119-1021-15	1/10W 1k ohm
D802	001-7089-90	FV1112H-740-TR	Q804	125-2004-92	RN1402	R866	119-4731-15	1/10W 47k ohm
D804	001-7089-90	FV1112H-740-TR	Q805	190-1736-00	2SA1736	R867	119-4731-15	1/10W 47k ohm
D805	001-7089-90	FV1112H-740-TR	Q806	125-2004-92	RN1402	R868	119-1021-15	1/10W 1k ohm
D806	001-7089-90	FV1112H-740-TR	Q807	125-2004-92	RN1402	R869	119-1021-15	1/10W 1k ohm
D807	001-7089-90	FV1112H-740-TR	Q808	192-2712-50	2SC2712Y.G.L	R871	119-1031-15	1/10W 10k ohm
D809	001-7089-90	FV1112H-740-TR	Q811	192-3265-00	2SC3265OY	R872	119-1031-15	1/10W 10k ohm
D810	001-7089-90	FV1112H-740-TR	Q812	192-2712-50	2SC2712Y.G.L	R873	119-4731-15	1/10W 47k ohm
D811	001-7089-90	FV1112H-740-TR	Q813	192-3265-00	2SC3265OY	R874	119-1031-15	1/10W 10k ohm
D812	001-7089-90	FV1112H-740-TR	Q815	192-2712-50	2SC2712Y.G.L	R876	119-1031-15	1/10W 10k ohm
D813	001-7089-90	FV1112H-740-TR	Q816	125-9003-92	IMD3	R878	119-1031-15	1/10W 10k ohm
D814	001-7089-90	FV1112H-740-TR	Q818	192-2712-50	2SC2712Y.G.L	R879	116-1231-15	1/4W 12k ohm
D815	001-7089-90	FV1112H-740-TR	R801	119-2231-15	1/10W 22k ohm	R880	119-4721-15	1/10W 4.7k ohm
D816	001-7089-90	FV1112H-740-TR	R802	119-2231-15	1/10W 22k ohm	R881	119-1031-15	1/10W 10k ohm
D817	001-7089-90	FV1112H-740-TR	R803	119-3331-15	1/10W 33k ohm	R883	119-4721-15	1/10W 4.7k ohm
D818	001-7089-90	FV1112H-740-TR	R804	119-3331-15	1/10W 33k ohm	R885	119-0000-05	1/10W 0 ohm JW
D819	001-7089-90	FV1112H-740-TR	R805	117-6811-15	1/8W 680 ohm	R901	119-1021-15	1/10W 1k ohm
D820	001-7089-90	FV1112H-740-TR	R806	119-2221-15	1/10W 2.2k ohm	R902	119-1021-15	1/10W 1k ohm
D821	001-7089-90	FV1112H-740-TR	R807	119-1031-15	1/10W 10k ohm	R903	119-1021-15	1/10W 1k ohm
D822	001-7089-90	FV1112H-740-TR	R808	116-5621-15	1/4W 5.6k ohm	R904	119-1021-15	1/10W 1k ohm
D823	001-7089-90	FV1112H-740-TR	R809	119-1031-15	1/10W 10k ohm	R905	119-1011-15	1/10W 100 ohm
D824	001-7089-90	FV1112H-740-TR	R810	116-2421-15	1/4W 2.4k ohm	R906	119-1011-15	1/10W 100 ohm
D825	001-7089-90	FV1112H-740-TR	R811	119-2221-15	1/10W 2.2k ohm	R907	119-4731-15	1/10W 47k ohm
D826	001-7089-90	FV1112H-740-TR	R812	116-5621-15	1/4W 5.6k ohm	R908	119-1031-15	1/10W 10k ohm
D827	001-7089-90	FV1112H-740-TR	R813	116-3921-15	1/4W 3.9k ohm	R909	119-1021-15	1/10W 1k ohm
D828	001-7089-90	FV1112H-740-TR	R814	116-2721-15	1/4W 2.7k ohm	R910	119-1021-15	1/10W 1k ohm
D829	001-7089-90	FV1112H-740-TR	R815	116-2221-15	1/4W 2.2k ohm	R911	119-1021-15	1/10W 1k ohm
D830	001-7089-90	FV1112H-740-TR	R816	119-1031-15	1/10W 10k ohm	R912	119-4721-15	1/10W 4.7k ohm
D831	001-7089-90	FV1112H-740-TR	R817	116-2221-15	1/4W 2.2k ohm	R913	119-4721-15	1/10W 4.7k ohm
D832	001-7089-90	FV1112H-740-TR	R818	116-2221-15	1/4W 2.2k ohm	R914	119-4721-15	1/10W 4.7k ohm
D833	001-7089-90	FV1112H-740-TR	R819	116-1821-15	1/4W 1.8k ohm	R915	119-4721-15	1/10W 4.7k ohm
D834	001-7089-90	FV1112H-740-TR	R820	116-3921-15	1/4W 3.9k ohm	R916	119-1021-15	1/10W 1k ohm
D837	001-7089-90	FV1112H-740-TR	R821	116-3321-15	1/4W 3.3k ohm	S801	013-6202-51	SKPMBJE010
D845	001-7089-90	FV1112H-740-TR	R822	116-3921-15	1/4W 3.9k ohm	S802	013-6202-51	SKPMBJE010
D846	001-7089-90	FV1112H-740-TR	R823	116-3921-15	1/4W 3.9k ohm	S803	013-6202-51	SKPMBJE010
D851	001-7089-90	FV1112H-740-TR	R824	116-3921-15	1/4W 3.9k ohm	S804	013-6202-51	SKPMBJE010
D852	001-7089-90	FV1112H-740-TR	R825	116-1031-15	1/4W 10k ohm	S805	013-6202-51	SKPMBJE010
D853	001-7089-90	FV1112H-740-TR	R826	116-3921-15	1/4W 3.9k ohm	S806	013-6205-50	SKPMAME010
D854	001-7089-90	FV1112H-740-TR	R827	116-1031-15	1/4W 10k ohm	S807	013-6205-50	SKPMAME010
D855	001-7089-90	FV1112H-740-TR	R828	116-3921-15	1/4W 3.9k ohm	S808	013-6202-51	SKPMBJE010
D856	001-7089-90	FV1112H-740-TR	R829	116-1231-15	1/4W 12k ohm	S809	013-6202-51	SKPMBJE010
D857	001-7089-90	FV1112H-740-TR	R830	116-6821-15	1/4W 6.8k ohm	S810	013-6202-51	SKPMBJE010
D858	001-7089-90	FV1112H-740-TR	R831	119-1031-15	1/10W 10k ohm	S811	013-6202-51	SKPMBJE010
D859	001-7089-90	FV1112H-740-TR	R832	119-4721-15	1/10W 4.7k ohm	S812	013-6202-51	SKPMBJE010
D860	001-7089-90	FV1112H-740-TR	R833	116-8221-15	1/4W 8.2k ohm	S813	013-6202-51	SKPMBJE010
D861	001-0516-90	MA111	R834	119-4721-15	1/10W 4.7k ohm	S814	013-6205-50	SKPMAME010
D862	001-0516-90	MA111	R835	119-2221-15	1/10W 2.2k ohm	S815	013-6205-50	SKPMAME010
D863	001-0516-90	MA111	R836	116-8221-15	1/4W 8.2k ohm	S816	013-6205-50	SKPMAME010
D864	001-0516-90	MA111	R837	116-3321-15	1/4W 3.3k ohm	S817	013-6205-50	SKPMAME010
D865	001-0516-90	MA111	R838	116-6821-15	1/4W 6.8k ohm	S818	013-6205-50	SKPMAME010
D867	001-0516-90	MA111	R839	119-1031-15	1/10W 10k ohm	S819	013-6205-50	SKPMAME010
D868	001-0516-90	MA111	R840	119-1031-15	1/10W 10k ohm	S820	013-6202-51	SKPMBJE010
D869	001-0516-90	MA111	R842	116-8221-15	1/4W 8.2k ohm	VR801	016-0014-05	VR W-SHAFT
D870	001-0516-90	MA111	R844	116-8221-15	1/4W 8.2k ohm	VR802	016-0014-05	VR W-SHAFT
D871	001-0516-90	MA111	R845	116-1031-15	1/4W 10k ohm	X801	060-1537-90	CSTCE12M5G52
D872	001-0516-90	MA111	R846	116-1031-15	1/4W 10k ohm	PWB	039-2687-20	PWB(WITHOUT COMPONENT)
D873	001-0516-90	MA111	R848	119-1021-15	1/10W 1k ohm			
D874	001-0516-90	MA111	R849	119-4731-15	1/10W 47k ohm			

pin 33: TESTR	: O : The compensation terminal for RFEQO off-set.	pin 67: MONIT	: O : Internal DSP signal monitor.
pin 34: INVSEL	: IN: MDI polarity selection.	pin 68: FG IN	: IN: FG input for the spindle CAV servo.
pin 35: AGCI	: IN: The input terminal of RF AGC amplifier.	pin 69: VSS	: - : Negative supply voltage.
pin 36: RF DCI	: IN: The input terminal for RF peak detection.	pin 70: VDD	: - : Positive supply voltage.
pin 37: RF OUT	: O : RF signal output.	pin 71: TESIN	: IN: For test.
pin 38: PN SEL	: IN: The transistor type selection input for laser diode driver. L=NPN, H=PNP.	pin 72: X VSS	: - : Master clock analog ground.
pin 39: EQ SET	: O : The equalizer setting terminal.	pin 73: X IN	: IN: Crystal connection.
pin 40: RF VDD	: - : RF power supply.	pin 74: X O	: O : Crystal connection.
pin 41: LDO	: O : The laser diode drive output.	pin 75: X VDD	: - : Clock power supply.
pin 42: MDI	: IN: Monitor photo diode signal input.	pin 76: D VSS	: - : Digital ground.
pin 43: RF VSS	: - : RF ground.	pin 77: RO	: O : Right channel data output for 1-bit DAC.
pin 44: FNI 2	: IN: Main beam signal input.	pin 78: D VDD	: - : Positive supply voltage for the digital section.
pin 45: FNI 1	: IN: Main beam signal input.	pin 79: D Vref	: O : Digital reference voltage.
pin 46: FPI 2	: IN: Main beam signal input.	pin 80: LO	: O : Left channel data output for 1-bit DAC.
pin 47: FPI 1	: IN: Main beam signal input.	pin 81: D VSS	: - : Digital ground.
pin 48: TPI	: IN: Sub beam signal input.	pin 82: Z DET O	: O : 1bit DAC zero flag output.
pin 49: TNI	: IN: Sub beam signal input.	pin 83: VSS	: - : Negative supply voltage.
pin 50: FTEO	: O : For test.	pin 84: BUS 0	: I/O: CD IC Data input / output.
pin 51: RF ZI	: IN: RF ripple zero cross signal input.	pin 85: BUS 1	: I/O: CD IC Data input / output.
pin 52: A VSS	: - : Analog ground.	pin 86: BUS 2	: I/O: CD IC Data input / output.
pin 53: RF RP	: O : RF ripple signal output.	pin 87: BUS 3	: I/O: CD IC Data input / output.
pin 54: RF DC	: O : RF peak detection signal output. (hologram suitable)	pin 88: BU CK IN	: IN: CD IC Data clock input.
pin 55: FEI	: O : Focus error signal output.	pin 89: CCEI	: IN: Chip enable input.
pin 56: SBAD	: O : Sub beam add signal output.	pin 90: RSTI	: IN: Reset signal input.
pin 57: TEI	: O : Tracking error signal output.	pin 91: VDD	: - : Positive supply voltage.
pin 58: TE Z IN	: IN: Tracking error signal input for zero cross.	pin 92: EMPHI/FAO	: I/O: Emphasis input for 1-bit DAC / Flag A output.
pin 59: A VDD	: - : Positive supply voltage for the Analog section.	pin 93: BCKI/FBO	: I/O: Bit clock input for 1-bit DAC / Flag B output.
pin 60: FOO	: O : Focus equalizer output.	pin 94: AIN/FCO	: I/O: Audio input for 1-bit DAC / Flag C output.
pin 61: TRO	: O : Tracking equalizer output.	pin 95: LRCKI/FDO	: I/O: LR clock input for 1-bit DAC / Flag D output.
pin 62: Vref	: O : Reference voltage output.	pin 96: EMPHO	: O : Emphasis flag output. H=Emphasis ON.
pin 63: FMO	: O : Field equalizer output / Speed error output.	pin 97: B CK O	: O : Bit clock output.
pin 64: DMO	: O : Disk equalizer output.	pin 98: A OUT	: O : Audio signal output.
pin 65: IO2A	: I/O: General input/output.	pin 99: LR CK O	: O : LR clock output.
pin 66: IO3A	: I/O: General input/output.	pin100: D OUT	: O : Serial data output.

EXPLODED VIEW / PARTS LIST

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1729-21	DRIVE PLATE ASSY	1	21	966-1747-20	SH-RACK ASSY	1
2	969-0065-31	PICK UP UNIT	1	22	621-0598-27	UPPER GUIDE	1
3	-----	LED PWB	1	23	621-0718-21	ROLLER GUIDE	1
4	-----	CD PWB	1	24	621-0600-26	SHIFT LEVER	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	25	621-1735-20	RACK	1
6	SMA-183-100	MOTOR ASSY(SLED)	1	26	621-0602-22	LOCK ARM L	1
7	816-2592-00	LEAD WIRE(BLU)	1	27	621-0603-25	LOCK ARM R	1
8	620-1736-22	CLAMPER LINK	1	28	621-0724-21	GEAR BASE	1
9	620-1742-20	CLAMPER PLATE	1	29	621-0605-22	GEAR COVER	1
10	620-1737-21	SENSOR ARM	1	30	621-1719-20	IDLE CASE	1
11	621-0708-20	CLAMPER RING	1	31	816-2590-00	VINYL COAT WIRE(GRN)	1
12	621-0626-21	STOPPER LINK	1	32	621-0608-21	SECOND GEAR	1
13	621-0627-21	DISC STOPPER	1	33	621-0609-20	BASE GEAR	1
14	750-3471-20	SENSOR SPRING	1	34	621-0610-20	IDLE GEAR A	1
15	803-4906-60	VINYL COAT WIRE(ORG)	1	35	621-0611-20	IDLE GEAR B	1
16	816-2591-00	LEAD WIRE(YEL)	1	36	621-0612-21	ROLLER GEAR A	1
17	620-1738-21	ID-LOCK PLATE	1	37	621-0719-20	ROLLER GEAR B	1
18	620-1739-20	SPRING PLATE	1	38	621-0720-20	ROLLER GEAR C	1
19	620-1027-28	LOWER CHASSIS	1	39	621-0721-20	ROLLER GEAR D	1
20	620-1740-22	UPPER CHASSIS	1	40	621-0616-20	POWER GEAR A	1

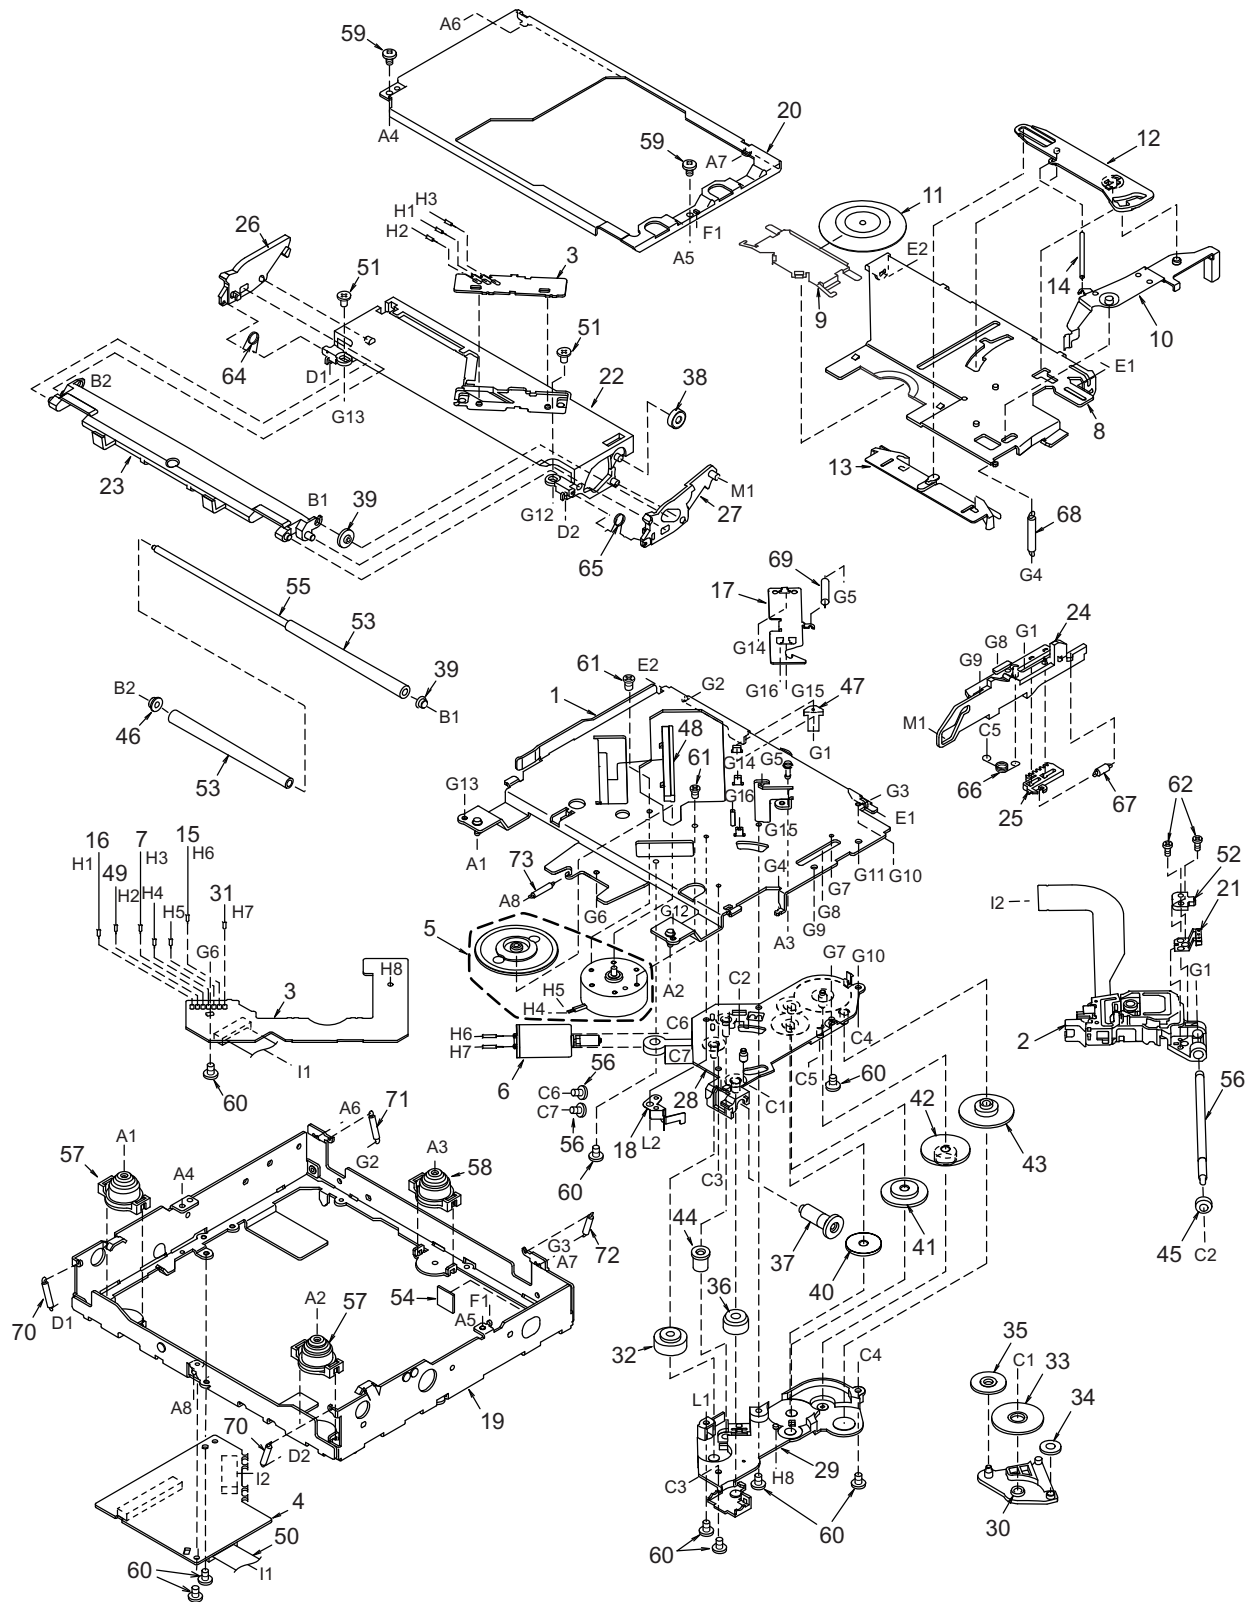

NO.	PART NO.	DESCRIPTION	Q'TY
41	621-0617-20	POWER GEAR B	1
42	621-0618-20	POWER GEAR C	1
43	621-0619-20	POWER GEAR D	1
44	621-0620-20	THREAD GEAR A	1
45	621-0621-20	THREAD GEAR B	1
46	621-1726-20	ROLLER SLEEVE	2

NO.	PART NO.	DESCRIPTION	Q'TY
47	621-0623-23	LS-HOLDER	1
48	621-0624-22	GUIDE RAIL	1
49	816-2593-00	LEAD WIRE(PUR)	1
50	816-2542-01	FLAT WIRE(10P)	1
51	716-3473-00	IT SCREW(M2 x 3)	2
52	621-1729-20	SH-BASE	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
53	621-0711-20	LOADING ROLLER	2	64	750-3465-21	ROLLER SPRING L	1
54	345-5476-20	CUSHION RUBBER	1	65	750-3466-20	ROLLER SPRING R	1
55	622-1571-21	ROLLER SHAFT	1	66	750-3467-21	SHIFT SPRING	1
56	624-0020-00	LEAD SCREW	1	67	750-3468-20	RACK SPRING	1
57	629-0086-20	DAMPER F	2	68	750-3469-20	CLAMPER SPRING	1
58	629-0087-20	DAMPER R	1	69	750-3470-20	ID-LOCK SPRING	1
59	714-2003-81	MACHINE SCREW(M2 x 3)	2	70	750-3472-21	DR-SPRING F	2
60	716-1507-00	SCREW(M2 x 3)	9	71	750-3473-20	DR-SPRING RA	1
61	716-1733-00	SCREW(M1.7 x 2.3)	2	72	750-3474-20	DR-SPRING RB	1
62	716-3469-00	SCREW(3 x 4)	2	73	750-3475-21	DR-SPRING C	1
63	716-3551-00	SCREW(M1.4 x 2.5)	2				

ELECTRICAL PARTS LIST

CD PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C35	046-6812-58	680pF	R2	117-1001-15	1/8W 10 ohm
C3	163-2273-05	4V220uF	C36	168-1042-78	16V 0.1uF	R9	033-2211-15	1/10W 220 ohm
C4	168-1042-78	16V 0.1uF	C37	168-1042-78	16V 0.1uF	R11	033-1051-15	1/10W 1M ohm
C5	163-1073-35	16V100uF	C38	046-1522-58	1500pF	R12	119-2221-15	1/10W 2.2k ohm
C6	163-1073-35	16V100uF	C39	046-4722-58	4700pF	R13	033-2211-15	1/10W 220 ohm
C7	168-1042-78	16V 0.1uF	C40	046-1032-78	0.01uF	R14	033-2211-15	1/10W 220 ohm
C9	178-1052-78	1uF	C41	046-1532-78	0.015uF	R16	033-2231-15	1/10W 22k ohm
C10	042-0560-85	6.3V100uF	C43	168-1042-78	16V 0.1uF	R17	033-1011-15	1/10W 100 ohm
C11	046-4712-58	470pF	C45	045-6097-50	6pF	R18	033-3341-15	1/10W 330k ohm
C12	178-1052-78	1uF	C47	045-4701-50	47pF	R19	033-5621-15	1/10W 5.6k ohm
C13	046-4712-58	470pF	C48	168-1042-78	16V 0.1uF	R21	033-2231-15	1/10W 22k ohm
C15	168-1042-78	16V 0.1uF	C49	168-1042-78	16V 0.1uF	R22	033-4731-15	1/10W 47k ohm
C16	168-4732-78	0.047uF	C50	042-0666-00	12.5V 22uF	R24	033-1041-15	1/10W 100k ohm
C17	168-4732-78	0.047uF	C51	046-5622-58	5600pF	R26	033-1531-15	1/10W 15k ohm
C18	168-1042-78	16V 0.1uF	C52	178-1052-78	1uF	R27	033-4731-15	1/10W 47k ohm
C19	168-1042-78	16V 0.1uF	C53	045-1007-50	10pF	R28	033-1831-15	1/10W 18k ohm
C21	046-6822-58	6800pF	C54	045-1007-50	10pF	R29	033-6821-15	1/10W 6.8k ohm
C22	046-3332-78	0.033uF	C55	178-1052-78	1uF	R30	033-8231-15	1/10W 82k ohm
C24	178-1052-78	1uF	CCT2	050-0140-63	1/32W 47k ohm x4J	R31	033-8231-15	1/10W 82k ohm
C25	168-1042-78	16V 0.1uF	D1	001-0367-91	1SS226	R32	119-1001-15	1/10W 10 ohm
C26	168-1042-78	16V 0.1uF	IC1	051-6071-08	BA5825FP-E2	R33	033-2731-15	1/10W 27k ohm
C28	168-1042-78	16V 0.1uF	IC2	051-6399-00	TC94A15F	R34	033-2731-15	1/10W 27k ohm
C29	168-1042-78	16V 0.1uF	J101	074-1228-76	26P	R35	033-2731-15	1/10W 27k ohm
C30	045-6801-50	68pF	J201	074-1138-65	15P	R36	033-2731-15	1/10W 27k ohm
C31	168-1042-78	16V 0.1uF	J301	074-1138-60	10P	R37	032-0162-50	1/10W 0.51 ohm
C32	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	X2	061-3534-90	16.92MHz
C33	046-1532-78	0.015uF	Q2	131-1188-50	2SB1188PQR	PWB	039-2435-20	PWB(WITHOUT COMPONENT)
C34	168-1042-78	16V 0.1uF	R1	117-6811-15	1/8W 680 ohm			

LED PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			