Exploded view of general assembly and parts list

Block No.M1MM

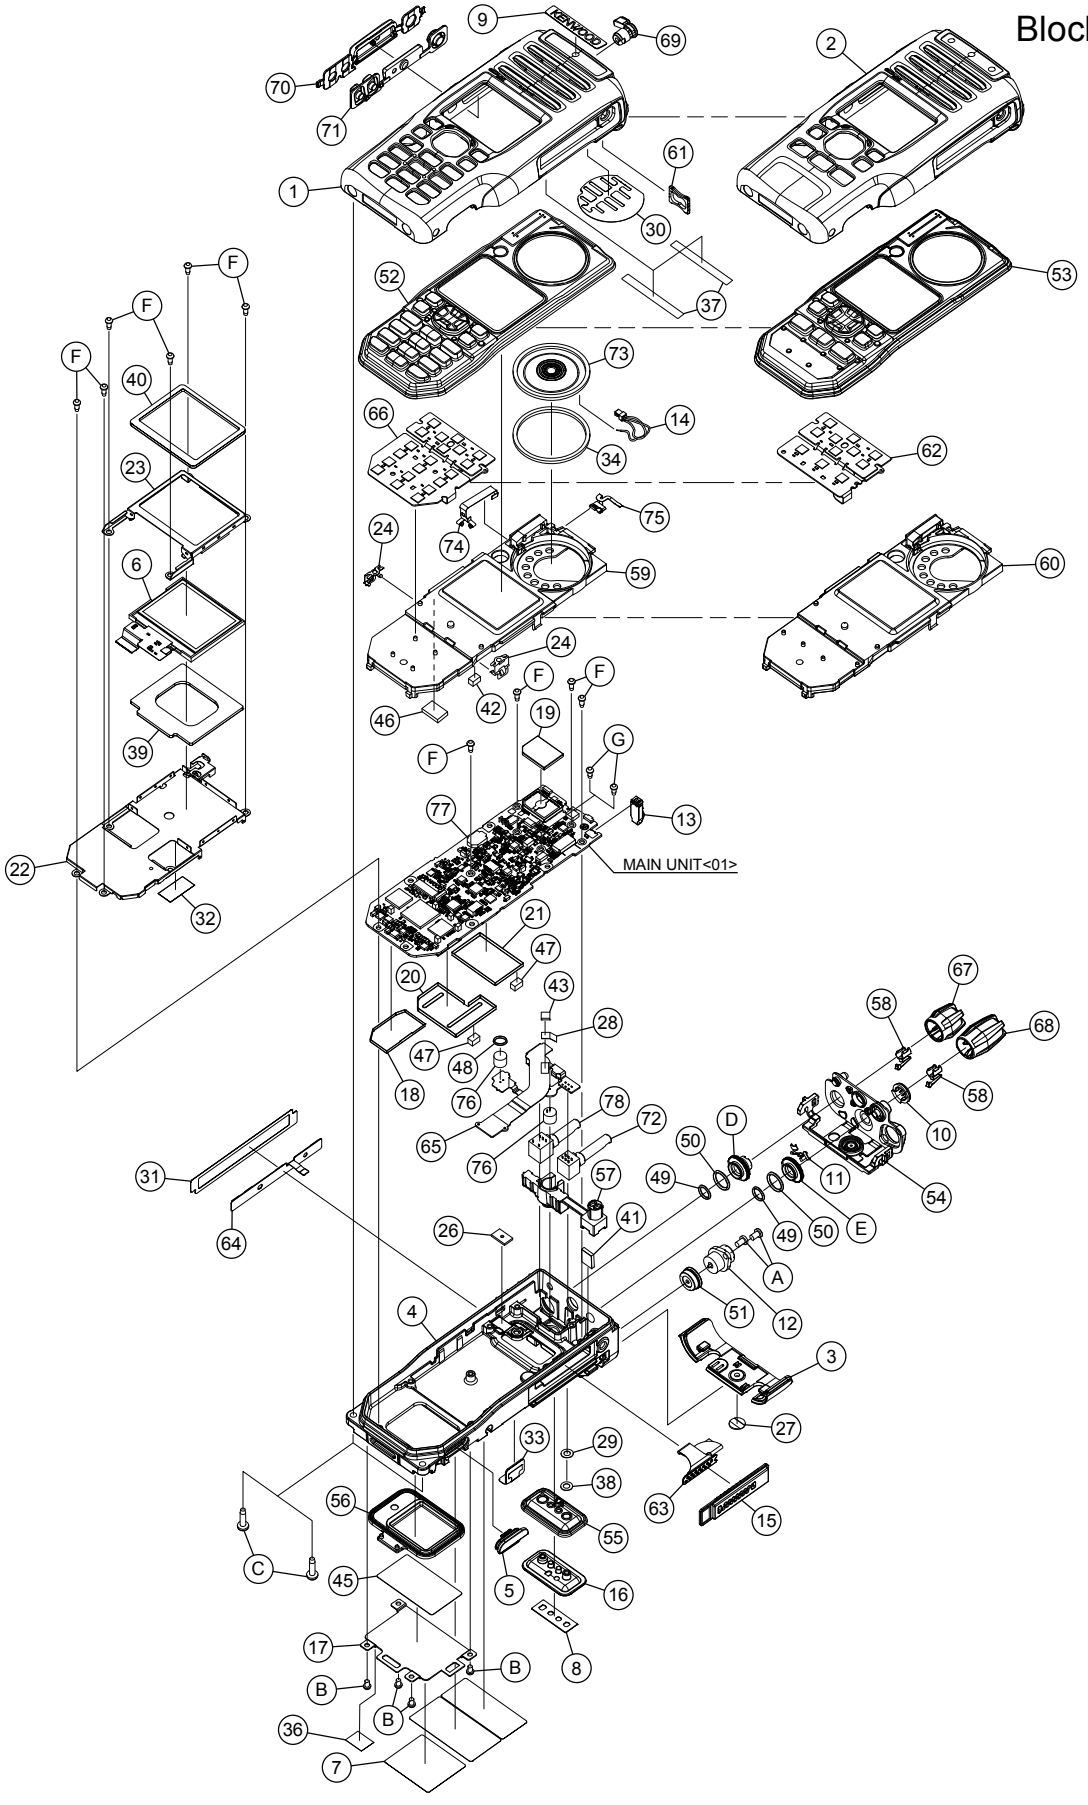

General assembly

Block No. [M][1][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	A0C-0001-00	PLASTIC CABINET	FULL KEY	F3,F6,K3,K6,E
2	A0C-0002-00	PLASTIC CABINET	STANDARD KEY	F2,F5,K2,K5,E2
2	A0C-0002-01	PLASTIC CABINET	SA*STD YELLOW	K2,K5,E2
2	A0C-0002-02	PLASTIC CABINET	SA*STD ORANGE	K2,K5,E2
3	A8A-0005-00	REAR PANEL		
4	A1A-0005-10	CHASSIS		
5	B0K-0024-00	CAP	SD CARD	
6	B38-0960-05	LCD ASSY	1.74IN	
7	B4B-0006-00	CAUTION STICKER	FCC L,CAUTION	F2,F3,F5,F6,K2,K3,K5,K6
8	B4C-0105-00	TER.STICKER	TERMINAL BLOCK	
9	B4D-0002-00	KENWOOD BADGE		
10	D32-0454-04	STOPPER	16CH	
11	D3C-0001-10	STOPPER	CIRCULAR NUT	
12	E04-0467-15	C.RECEPTACLE-SM	ANT	
13	E2D-0003-00	TERMINAL	ANT	
14	E3H-0007-00	LEAD.WIRE W.C.	SP	
15	E58-0532-05	R.RECEPTACLE	14P	
16	E7C-0001-00	TERMINAL BLOCK		
17	F0G-0005-00	COVER	OP BOARD	
18	F10-3223-05	SHIELDING COVER	BLS/IF	
19	F10-3227-05	SHIELDING COVER	BLS/GPS	
20	F10-3243-15	SHIELDING COVER	BLS/VCO TX	
21	F10-3245-15	SHIELDING COVER	BLS/VCO RX	
22	F1B-0005-00	SHIELDING CASE	OMAP	
23	F1B-0006-00	SHIELDING COVER	LCD	
24	G0B-0031-00	EARTH SPRING	FPC(x2)	
26	G11-4090-14	SHEET	COOLING	
27	G11-4440-04	SHEET	LEAK COVER	
28	G11-4459-04	SHEET	VOL CH FPC	
29	G11-4500-04	SHEET	LEAK	
30	G1A-0001-00	FIBROUS SHEET	SP GRILL	
31	G1B-0016-00	SHEET	PTT	
32	G1B-0031-00	SHEET	LI BATT INSULATING	
33	----------	SHEET	VOID/CABINET	
34	G1B-0045-10	RUBBER CUSHION	SP	
36	----------	SEAL	VOID/OP BOARD	
37	G1B-0074-00	SHEET	CASE(x2)	F2,F5,K2,K5,E2
38	G1B-0087-00	SHEET	LEAK TEST	
39	G1D-0008-00	CUSHION	LCD/BACK	
40	G1D-0009-00	CUSHION	LCD/FRONT	
41	G1D-0010-00	CUSHION	ANT TERMINAL	
42	G1D-0021-00	CUSHION	20KEY CONN	
43	G1D-0025-00	CUSHION	VOL,RO-SW FPC	
45	G1D-0062-00	CUSHION	OP BOARD	
46	G13-1952-04	CUSHION	HOLDER	
47	G13-2071-14	CONDUCT CUSHION	PCB B BLS(x2)	
48	G53-1768-04	PACKING	MAIN ECM	
49	G53-1792-04	PACKING	CIRCULAR NUT(x2)	
50	G53-2206-04	O RING	VOL,RO-SW O RING(x2)	
51	G53-2207-04	PACKING	ANT	
52	G5D-0002-20	PACKING	FULL KEY	F3,F6,K3,K6,E
53	G5D-0003-20	PACKING	STANDARD KEY	F2,F5,K2,K5,E2
54	G5D-0005-00	PACKING	TOP	
55	G5D-0006-00	PACKING	TERMINAL BLOCK	
56	G5D-0007-00	PACKING	OP BOARD	
57	G5D-0018-00	PACKING	VOL,RO-SW,2ECM	
58	G09-0443-14	KNOB SPRING	VOL,RO-SW(x2)	
59	J1K-0004-10	HOLDER	FULL KEY	F3,F6,K3,K6,E
60	J1K-0005-10	HOLDER	STANDARD KEY	F2,F5,K2,K5,E2
61	J3K-0003-00	SPACER	2CH	
62	J8C-0001-00	FLEX P.BOARD	STANDARD KEY	F2,F5,K2,K5,E2
63	J87-0056-05	FPC(LEAD FREE)	UNIV.	
64	J87-0057-05	FPC(LEAD FREE)	PTT	
65	J87-0058-05	FPC(LEAD FREE)	VOL,CH,ECM	
66	J87-0059-05	FPC(LEAD FREE)	FULL KEY	F3,F6,K3,K6,E
67	K2K-0011-00	KNOB	VOL	
68	K2K-0012-00	KNOB	16CH	
69	K2K-0013-00	KNOB	2CH	
70	K2K-0014-00	KNOB	PTT	
71	K2K-0015-00	BUTTON KNOB	PTT	
72	S6A-0004-00	ROTARY SWITCH	16CH	
73	T0H-0002-00	SPEAKER	FST 1.5W/2W	
74	T9A-0001-10	ANTENNA ELEMENT	GPS ANT	
75	T9A-0004-10	ANTENNA ELEMENT	BT ANT	
76	T9B-0004-00	MIC ELEMENT	(x2)	
77	W09-0971-05	LITHIUM CELL		
78	R31-0692-05	V RESISTOR	VOL	
A	N09-2438-05	BI.HEAD SCREW	ANT(x2)	
B	N09-2441-25	SPECIAL SCREW	OP BOARD(x4)	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C	N09-6646-05	SPECIAL SCREW	CASE(x2)	
D	N14-1011-00	CIRCULAR NUT	VOL	
E	N14-1012-00	CIRCULAR NUT	RO-SW	
F	N83-2005-48	P.HEAD T.SCREW	UNIT/FIX(x10)	
G	N84-2004-43	P.HEAD T.SCREW	TERM-BL(+,-)(x2)	
-	XC1-0341-82	SERVICE MAIN UNIT		F2,F3,K2,K3
-	XC1-0341-83	SERVICE MAIN UNIT		F5,F6,K5,K6
-	XC1-0370-12	SERVICE MAIN UNIT		K2,K3
-	XC1-0370-13	SERVICE MAIN UNIT		K5,K6,E,E2

Packing materials and accessories parts list

Block No.M2MM

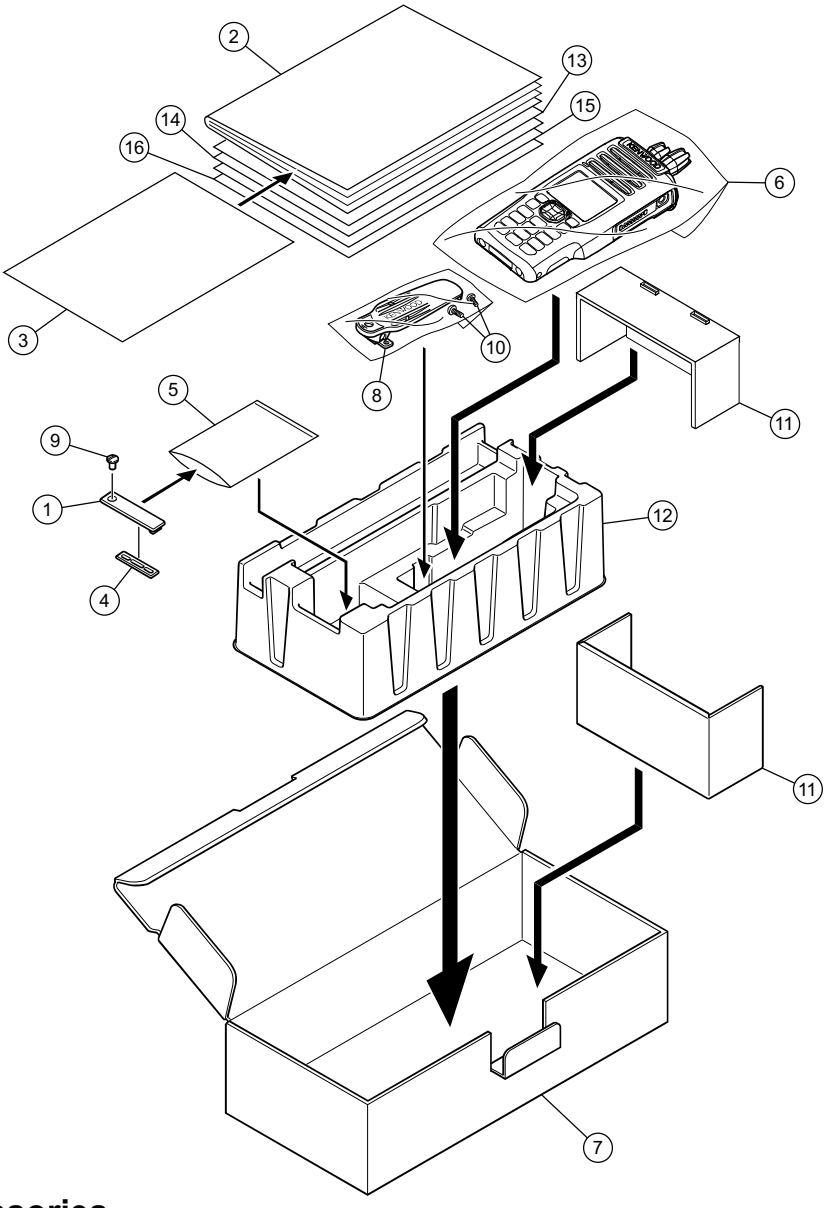

Packing and accessories

Block No. [M][2][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	B0K-0002-00	CAP	ACC	
2	B5A-0049-10	INST.MANUAL	ACC	F2,F3,F5,F6,K2,K3,K5,K6
2	B5A-0940-00	INST.MANUAL	ACC/9 LANG	E,E2
3	----------	PAMPHLET	SAR(E,F)	F2,F3,F5,F6,K2,K3,K5,K6
3	----------	PAMPHLET	ROHS2	E,E2
4	G5D-0027-00	PACKING	ACC/CAP	
5	----------	PROTECTION BAG	ACC/CAP	
6	----------	PROTECTION BAG	RADIO	
7	H5A-0012-00	ITEM CARTON	*Produced in Japan	F2,F3,F5,F6
7	H5A-0203-00	ITEM CARTON	*Produced in Malaysia	K2,K3,K5,K6,E,E2
8	J29-0730-05	HOOK	ACC/KBH-11	
9	N08-0571-04	DRESSED SCREW	ACC/CAP	
10	N09-6585-15	SPECIAL SCREW	ACC/KBH-11(x2)	
11	H1C-0036-00	PACKING FIXTURE	*Produced in Japan(x2)	F2,F3,F5,F6
11	H1C-0037-00	PACKING FIXTURE	*Produced in Malaysia(x2)	K2,K3,K5,K6,E,E2
12	H1C-0011-00	PACKING FIXTURE		
13	B5A-0327-30	INST.MANUAL	WEB/EN	
14	B5A-0328-30	INST.MANUAL	WEB/FR	
15	B5A-0329-30	INST.MANUAL	WEB/ES	
16	B5A-0330-30	INST.MANUAL	QUICK GUIDE	

Electrical parts list

MAIN UNIT

XC1-0341-80(NX-5300_F2,NX-5300_F3,NX-5300_K2,NX-5300_K3)

XC1-0341-81(NX-5300_F5,NX-5300_F6,NX-5300_K5,NX-5300_K6)

XC1-0370-10(NX-5300_K2,NX-5300_K3)

XC1-0370-11(NX-5300_K5,NX-5300_K6,NX-5300_E,NX-5300_E2)

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][1]

⚠ Symbol No.	Part No.	Part Name	Description	Local
IC20	XC61CC5602N-G	MOS IC		
IC30	XC6223H331G-G	MOS IC		
IC31	XC6209B312D-G	MOS IC		
IC32	XC6215B122N-G	MOS IC		
IC33	TPS62140RGT	MOS IC		
IC34	LXDC2HN18F163	MOS IC		
IC35	XC6223D331G-G	MOS IC		
IC36	XC6209B502D-G	MOS IC		
IC37	BU18TD2WNVX	MOS IC		
IC38	BU33TD2WNVX	MOS IC		
IC39	NJM2878F4-33	BIPOLAR IC		
IC60	TPS61041DRVR	ANALOG IC		
IC61	BU33TD2WNVX	MOS IC		
IC63	XC6209B502D-G	MOS IC		
IC64	XC6209B502D-G	MOS IC		
IC65	XC6209B502D-G	MOS IC		
IC70	BU7242NUX	MOS IC		
IC80	BU30TD2WNVX	MOS IC		
IC81	XC6223H331G-G	MOS IC		
IC82	XC6209B502D-G	MOS IC		
IC100	SKY72310362LF	MOS IC		
IC101	OPA170AIDRLR	MOS IC		
IC102	BU7242NUX	MOS IC		
IC200	SKY72310362LF	MOS IC		
IC201	OPA170AIDRLR	MOS IC		
IC300	UPC2710TB-A	BIPOLAR IC		
IC360	XC8102AA07-G	MOS IC		
IC400	BD7562FVM	MOS IC		F2,F3,K2,K3
IC401	NJM2717RB1	BIPOLAR IC		F5,F6,K5,K6,E,E2
IC550	OPA170AIDRLR	MOS IC		
IC551	OPA170AIDRLR	MOS IC		
IC600	AD9864BCPZRL	MOS IC		
IC700	CDC3S04YFF	MOS IC		
IC701	XC8102AA07-G	MOS IC		
IC702	----------	MPU IC	*Note	F2,F3,F5,F6
IC702	----------	MPU IC	*Note	K2,K3,K5,K6,E,E2
IC703	----------	SRAM IC	*Note	
IC704	S-80135ANPF-G	MOS IC		
IC705	----------	ROM IC	*Note	
IC706	TC7SZ08FE	MOS IC		
IC708	----------	MPU IC	*Note	
IC709	KXCJ9-1008	MOS IC		
IC711	BD11600NUX	MOS IC		
IC712	TC7WH14FK-F	MOS IC		
IC800	BD1754HFN	MOS IC		
IC801	NJW4184U2-05	MOS IC		
IC802	TC7W53FKF	MOS IC		
IC803	TC7SPB9306TUF	MOS IC		
IC804	BD11600NUX	MOS IC		
IC805	TC7WT126FU-F	MOS IC		
IC806	TC7SZ08FE	MOS IC		
IC807	TC7SZ08FE	MOS IC		
IC850	----------	MOS IC	*Note	
IC851	----------	MOS IC	*Note	
IC852	74AVC4TD245GU	MOS IC		
IC853	74AVC4TD245GU	MOS IC		
IC900	ADS7961SRHB	MOS IC		
IC901	DAC124S085CIS	MOS IC		
IC902	TLV32AIC3104I	MOS IC		
IC903	R2A20178NP	MCU IC		
IC904	TPA6201A1DRBR	ANALOG IC		
IC905	TPA6201A1DRBR	ANALOG IC		
IC906	BD11600NUX	MOS IC		
Q20	EMD12	TRANSISTOR		
Q21	SSM6N37FE	FET		
Q22	SSM6N37FE	FET		
Q30	SSM3K15AMFV	FET		
Q31	KTA2012EP	TRANSISTOR		
Q32	EM6M2	FET		
Q33	EM6M2	FET		
Q70	LTC014EEBFS8	DIGI TRANSISTOR		
Q71	2SB1132(Q,R)	TRANSISTOR		
Q100	EM6M2	FET		
Q101	DSC9A01/T/	TRANSISTOR		
Q102	EM6M2	FET		F5,F6,K5,K6,E,E2
Q103	SSM3J15FS	FET		F5,F6,K5,K6,E,E2
Q111	EM6M2	FET		
Q140	MCH3914-H/8/	FET		
Q160	MCH3914-H/8/	FET		F5,F6,K5,K6,E,E2
Q180	2SC5108F/Y/	TRANSISTOR		
Q200	EM6M2	FET		
Q201	DSC9A01/T/	TRANSISTOR		
Q202	EM6M2	FET		F5,F6,K5,K6,E,E2
Q203	SSM3J15FS	FET		F5,F6,K5,K6,E,E2
Q210	SSM3J15FS	FET		
Q211	EM6M2	FET		
Q240	MCH3914-H/8/	FET		
Q260	MCH3914-H/8/	FET		F5,F6,K5,K6,E,E2
Q280	2SC5108F/Y/	TRANSISTOR		
Q310	2SK3077F	FET		
Q320	RFM01U7PF	FET		F2,F3,K2,K3
Q320	RD01MUS2BT113	FET		F5,F6,K5,K6,E,E2
Q330	RD07MUS2BT214	FET		
Q390	LSCR523EBFS8	TRANSISTOR		
Q400	LTC023JEBFS8	DIGI TRANSISTOR		
Q401	SSM3K15AMFV	FET		
Q402	SSM3K15AMFV	FET		
Q403	EMD9	TRANSISTOR		
Q404	SSM3J15FS	FET		
Q500	BB506CFS-H	FET		
Q530	BB506CFS-H	FET		
Q580	2SC5108F/Y/	TRANSISTOR		
Q600	MCH3914-H/8/	FET		
Q601	LTC023JEBFS8	DIGI TRANSISTOR		
Q602	LSCR523EBFS8	TRANSISTOR		
Q660	2SC5066F/O/	TRANSISTOR		
Q670	BB506CFS-H	FET		
Q700	2SC4617/S/	TRANSISTOR		
Q701	SSM3K15AMFV	FET		
Q702	LTC014EEBFS8	DIGI TRANSISTOR		
Q703	SSM6N37FE	FET		
Q800	SSM3K15AMFV	FET		
Q801	EMD9	TRANSISTOR		
Q850	SSM3K15AMFV	FET		
D1	1SR154-400	DIODE		
D2	DA3S101F	DIODE ARRAY		
D20	DAN222	DIODE ARRAY		
D30	RB520SM-30	DIODE		
D60	DB2J40700	DIODE		
D100	EDZV8.2B	ZENER DIODE		
D101	1SS400SM	DIODE		
D140	BBY56-02V	VARI CAP DIODE		
D141	BB664-02V	VARI CAP DIODE		
D142	BB664-02V	VARI CAP DIODE		
D143	BB664-02V	VARI CAP DIODE		
D144	BB664-02V	VARI CAP DIODE		
D160	BBY56-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D161	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D162	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D163	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D164	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D200	EDZV8.2B	ZENER DIODE		
D201	1SS400SM	DIODE		
D240	BBY56-02V	VARI CAP DIODE		
D241	BB664-02V	VARI CAP DIODE		

⚠ Symbol No.	Part No.	Part Name	Description	Local
D242	BB664-02V	VARI CAP DIODE		
D243	BB664-02V	VARI CAP DIODE		
D260	BBY56-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D261	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D262	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D263	BB664-02V	VARI CAP DIODE		F5,F6,K5,K6,E,E2
D350	L5208F	DIODE		
D370	RN142S	DIODE		
D371	RN142S	DIODE		
D390	DZ2S056(M)	ZENER DIODE		
D520	BB565-02V	VARI CAP DIODE		
D521	BB565-02V	VARI CAP DIODE		
D522	BB565-02V	VARI CAP DIODE		
D532	BB565-02V	VARI CAP DIODE		
D533	BB565-02V	VARI CAP DIODE		
D534	BB565-02V	VARI CAP DIODE		
D600	SMV1705-079LF	VARI CAP DIODE		
D601	SMV1705-079LF	VARI CAP DIODE		
D603	DA3S101F	DIODE ARRAY		
D700	RB521CM-30	DIODE		
D701	RB521CM-30	DIODE		
D702	RB521CM-30	DIODE		
D703	RB521CM-30	DIODE		
D704	NSSM038A	LED		
D705	RB521CM-30	DIODE		
D800	RB521CM-30	DIODE		
D801	RB521CM-30	DIODE		
D802	RB521CM-30	DIODE		
D803	RB521CM-30	DIODE		
D804	RB521CM-30	DIODE		
D805	DZ5S068D	ZENER DIODE		
D806	DZ5S068D	ZENER DIODE		
D807	DAN222	DIODE ARRAY		
D808	DZ5S068D	ZENER DIODE		
D809	SPC10501A01	VARISTOR		
D810	SPC10501A01	VARISTOR		
D850	RN262CS	DIODE		
D851	RN262CS	DIODE		
D900	DZ2S068M	ZENER DIODE		
D901	DZ2S068M	ZENER DIODE		
D902	RB521CM-30	DIODE		
D903	DAN222	DIODE ARRAY		
D904	RB521CM-30	DIODE		
D905	RB521CM-30	DIODE		
D906	RB521CM-30	DIODE		
D907	RB521CM-30	DIODE		
C1	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C2	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C3	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C4	CC73HCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C5	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C7	C93-1967-05	C CAPACITOR	470pF 50V	
C8	C93-1967-05	C CAPACITOR	470pF 50V	
C9	C93-1967-05	C CAPACITOR	470pF 50V	
C10	C93-1967-05	C CAPACITOR	470pF 50V	
C11	C93-1967-05	C CAPACITOR	470pF 50V	
C12	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C13	C93-1967-05	C CAPACITOR	470pF 50V	
C14	C93-1967-05	C CAPACITOR	470pF 50V	
C15	C93-1967-05	C CAPACITOR	470pF 50V	
C16	C93-1967-05	C CAPACITOR	470pF 50V	
C17	C93-1967-05	C CAPACITOR	470pF 50V	
C18	C93-1967-05	C CAPACITOR	470pF 50V	
C19	C93-1967-05	C CAPACITOR	470pF 50V	
C20	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C21	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C22	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C23	C93-1959-05	C CAPACITOR	0.1uF 16V	
C24	C93-1967-05	C CAPACITOR	470pF 50V	
C25	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C30	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C31	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C32	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C33	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C34	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C35	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C36	CK73FB1C106K	C CAPACITOR	10uF 16V K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C37	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C38	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C39	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C41	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C42	CK73FB1A475K	C CAPACITOR	4.7uF 10V K	
C43	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C44	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C45	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C46	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C47	C93-1967-05	C CAPACITOR	470pF 50V	
C48	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C49	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C50	CS77PBL1A470M	TA E CAPACITOR	47uF 10V M	
C51	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C52	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C53	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C54	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C55	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C56	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C57	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C60	CK73GB1A335K	C CAPACITOR	3.3uF 10V K	
C61	CK73GB1A335K	C CAPACITOR	3.3uF 10V K	
C62	CK73FB1A475K	C CAPACITOR	4.7uF 10V K	
C63	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C64	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M	
C65	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C66	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C69	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C70	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C71	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C72	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C73	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C74	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C75	C93-1959-05	C CAPACITOR	0.1uF 16V	
C76	C93-1959-05	C CAPACITOR	0.1uF 16V	
C77	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C78	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C79	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C80	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C81	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C82	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C83	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C84	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C85	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C86	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C87	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C90	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C92	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C93	C93-1967-05	C CAPACITOR	470pF 50V	
C94	C93-1967-05	C CAPACITOR	470pF 50V	
C101	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C102	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C103	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C105	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C107	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C108	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C110	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C111	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C112	C93-1959-05	C CAPACITOR	0.1uF 16V	
C113	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C114	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C115	C93-1959-05	C CAPACITOR	0.1uF 16V	
C116	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C117	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C118	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C119	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C120	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C121	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C122	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C123	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C124	C93-1959-05	C CAPACITOR	0.1uF 16V	
C125	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C126	C93-1967-05	C CAPACITOR	470pF 50V	
C127	CS77BP1A4R7M	TA E CAPACITOR	4.7uF 10V M	
C128	C93-1967-05	C CAPACITOR	470pF 50V	
C129	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C130	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C131	C93-1967-05	C CAPACITOR	470pF 50V	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C140	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K	
C141	CS77MA1E2R2M	TA E CAPACITOR	2.2uF 25V M	
C142	CK73FB1H473K	C CAPACITOR	0.047uF 50V K	
C143	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C144	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C146	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C147	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	F2,F3,K2,K3
C147	CC73HCH1H020B	C CAPACITOR	2pF 50V B	F5,F6,K5,K6,E,E2
C148	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C149	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F2,F3,K2,K3
C149	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C150	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C151	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C152	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C153	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C154	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C156	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C160	CC73HCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C161	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C163	CC73HCH1H680J	C CAPACITOR	68pF 50V J	F5,F6,K5,K6,E,E2
C164	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F5,F6,K5,K6,E,E2
C165	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F5,F6,K5,K6,E,E2
C166	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C167	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C168	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C169	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C170	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F5,F6,K5,K6,E,E2
C171	CC73JCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C173	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C181	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C182	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C183	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C184	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C188	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C189	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C190	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C191	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C192	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C193	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C200	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C203	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C204	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C206	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C207	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C208	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C209	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C210	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C211	C93-1959-05	C CAPACITOR	0.1uF 16V	
C212	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C213	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C214	C93-1959-05	C CAPACITOR	0.1uF 16V	
C215	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C216	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C217	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C218	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C219	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C220	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C221	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C222	C93-1967-05	C CAPACITOR	470pF 50V	
C223	CS77BP1A4R7M	TA E CAPACITOR	4.7uF 10V M	
C224	C93-1967-05	C CAPACITOR	470pF 50V	
C225	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C226	C93-1967-05	C CAPACITOR	470pF 50V	
C240	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K	
C241	CS77ABE1D100M	TA E CAPACITOR	10uF 20V M	
C242	CK73FB1H473K	C CAPACITOR	0.047uF 50V K	
C243	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C244	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C246	CC73HCH1H560J	C CAPACITOR	56pF 50V J	F2,F3,K2,K3
C246	CC73HCH1H390J	C CAPACITOR	39pF 50V J	F5,F6,K5,K6,E,E2
C247	CC73HCH1H020B	C CAPACITOR	2pF 50V B	F2,F3,K2,K3
C247	CC73HCH1H010B	C CAPACITOR	1pF 50V B	F5,F6,K5,K6,E,E2
C248	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F2,F3,K2,K3
C248	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C249	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F2,F3,K2,K3
C249	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C250	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C251	CK73HBB1H471K	C CAPACITOR	470pF 50V K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C252	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C253	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C255	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C256	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C257	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C258	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C259	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C260	CC73HCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C261	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C262	CC73HCH1H680J	C CAPACITOR	68pF 50V J	F5,F6,K5,K6,E,E2
C264	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C265	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C266	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C267	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C268	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F5,F6,K5,K6,E,E2
C269	CC73JCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C271	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F5,F6,K5,K6,E,E2
C272	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F2,F3,K2,K3
C281	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C282	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C283	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F2,F3,K2,K3
C283	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F5,F6,K5,K6,E,E2
C291	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C292	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C293	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C294	CC73HCH1H080B	C CAPACITOR	8pF 50V B	F2,F3,K2,K3
C294	CC73HCH1H090B	C CAPACITOR	9pF 50V B	F5,F6,K5,K6,E,E2
C295	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C296	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C304	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C305	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C306	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	F2,F3,K2,K3
C306	CC73HCH1H100B	C CAPACITOR	10pF 50V B	F5,F6,K5,K6,E,E2
C307	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C310	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F2,F3,K2,K3
C310	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C311	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F2,F3,K2,K3
C311	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F5,F6,K5,K6,E,E2
C312	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C313	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C314	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C315	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C317	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C318	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F2,F3,K2,K3
C318	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C321	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C322	CK73HBB1H471K	C CAPACITOR	470pF 50V K	F2,F3,K2,K3
C322	CC73HCH1H150J	C CAPACITOR	15pF 50V J	F5,F6,K5,K6,E,E2
C323	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F2,F3,K2,K3
C325	CC73HCH1H220J	C CAPACITOR	22pF 50V J	F2,F3,K2,K3
C325	CC73HCH1H150J	C CAPACITOR	15pF 50V J	F5,F6,K5,K6,E,E2
C326	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C327	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C328	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C330	CC73HCH1H680J	C CAPACITOR	68pF 50V J	F2,F3,K2,K3
C330	CC73HCH1H101J	C CAPACITOR	100pF 50V J	F5,F6,K5,K6,E,E2
C331	CC73HCH1H100B	C CAPACITOR	10pF 50V B	F5,F6,K5,K6,E,E2
C332	C93-0949-05	C CAPACITOR	39pF 50V	F2,F3,K2,K3
C332	C93-0951-05	C CAPACITOR	47pF 50V	F5,F6,K5,K6,E,E2
C334	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C335	CC73HCH1H220J	C CAPACITOR	22pF 50V J	F2,F3,K2,K3
C335	CC73HCH1H270J	C CAPACITOR	27pF 50V J	F5,F6,K5,K6,E,E2
C338	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C339	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C341	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C344	C93-0943-05	C CAPACITOR	22pF 50V	F2,F3,K2,K3
C346	C93-0935-05	C CAPACITOR	10pF 50V	F2,F3,K2,K3
C347	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C348	CC73GCH1H050B	C CAPACITOR	5pF 50V B	F2,F3,K2,K3
C348	CC73GCH1H080B	C CAPACITOR	8pF 50V	F5,F6,K5,K6,E,E2
C349	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C351	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C352	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C355	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C356	CC73GCH1H1R5B	C CAPACITOR	1.5pF 50V B	F2,F3,K2,K3
C356	CC73GCH1H2R5B	C CAPACITOR	2.5pF 50V	F5,F6,K5,K6,E,E2
C357	CC73GCH1H070B	C CAPACITOR	7pF 50V B	F2,F3,K2,K3
C357	CC73GCH1H060B	C CAPACITOR	6pF 50V B	F5,F6,K5,K6,E,E2

⚠ Symbol No.	Part No.	Part Name	Description	Local
C358	CC73GCH1H1R5B	C CAPACITOR	1.5pF 50V B	F2,F3,K2,K3
C358	CC73GCH1H020B	C CAPACITOR	2pF 50V B	F5,F6,K5,K6,E,E2
C359	CC73GCH1H040B	C CAPACITOR	4pF 50V B	F2,F3,K2,K3
C359	CC73GCH1H020B	C CAPACITOR	2pF 50V B	F5,F6,K5,K6,E,E2
C360	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C361	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C362	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C364	C93-0941-05	C CAPACITOR	18pF 50V	F5,F6,K5,K6,E,E2
C365	C93-0935-05	C CAPACITOR	10pF 50V	F2,F3,K2,K3
C366	C93-0935-05	C CAPACITOR	10pF 50V	F5,F6,K5,K6,E,E2
C370	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F2,F3,K2,K3
C370	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F5,F6,K5,K6,E,E2
C371	CC73HCH1H010B	C CAPACITOR	1pF 50V B	F5,F6,K5,K6,E,E2
C372	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F5,F6,K5,K6,E,E2
C373	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F5,F6,K5,K6,E,E2
C374	CC73GCH1H070B	C CAPACITOR	7pF 50V B	F5,F6,K5,K6,E,E2
C377	CC73GCH1H010B	C CAPACITOR	1pF 50V B	F5,F6,K5,K6,E,E2
C378	CC73GCH1H2R5B	C CAPACITOR	2.5pF 50V	F2,F3,K2,K3
C379	C93-0945-05	C CAPACITOR	27pF 50V	F5,F6,K5,K6,E,E2
C390	C93-1967-05	C CAPACITOR	470pF 50V	
C391	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C392	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C400	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C402	CK73GB1C563K	C CAPACITOR	0.056uF 16V K	
C404	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C408	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C409	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C410	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C412	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C413	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C500	CK73FB1A475K	C CAPACITOR	4.7uF 10V K	
C501	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C502	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C503	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C504	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C506	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C507	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C508	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C509	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C510	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F2,F3,K2,K3
C510	CC73HCH1H090B	C CAPACITOR	9pF 50V B	F5,F6,K5,K6,E,E2
C511	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C512	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C514	C93-1967-05	C CAPACITOR	470pF 50V	
C520	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F2,F3,K2,K3
C520	CC73HCH1H050B	C CAPACITOR	5pF 50V B	F5,F6,K5,K6,E,E2
C521	CC73HCH1H180G	C CAPACITOR	18pF 50V G	F2,F3,K2,K3
C521	CC73HCH1H220G	C CAPACITOR	22pF 50V G	F5,F6,K5,K6,E,E2
C522	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C524	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F2,F3,K2,K3
C524	CC73HCH1H010B	C CAPACITOR	1pF 50V B	F5,F6,K5,K6,E,E2
C525	CC73HCH1H180G	C CAPACITOR	18pF 50V G	F2,F3,K2,K3
C525	CC73HCH1H220G	C CAPACITOR	22pF 50V G	F5,F6,K5,K6,E,E2
C526	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	F2,F3,K2,K3
C526	CC73HCH1H020B	C CAPACITOR	2pF 50V B	F5,F6,K5,K6,E,E2
C527	CC73HCH1H180G	C CAPACITOR	18pF 50V G	F2,F3,K2,K3
C527	CC73HCH1H270G	C CAPACITOR	27pF 50V G	F5,F6,K5,K6,E,E2
C528	CC73HCH1H010B	C CAPACITOR	1pF 50V B	F2,F3,K2,K3
C528	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F5,F6,K5,K6,E,E2
C530	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C531	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C532	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C533	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C535	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C536	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C538	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C539	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C540	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F2,F3,K2,K3
C540	CC73HCH1H100B	C CAPACITOR	10pF 50V B	F5,F6,K5,K6,E,E2
C541	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C542	CC73HCH1H010B	C CAPACITOR	1pF 50V B	F2,F3,K2,K3
C542	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F5,F6,K5,K6,E,E2
C543	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C544	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F2,F3,K2,K3
C544	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F5,F6,K5,K6,E,E2
C545	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C547	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F2,F3,K2,K3
C547	CC73HCH1H060B	C CAPACITOR	6pF 50V B	F5,F6,K5,K6,E,E2

⚠ Symbol No.	Part No.	Part Name	Description	Local
C549	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C550	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C551	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C552	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C553	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C554	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C556	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C558	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C559	CC73HCH1HR75B	C CAPACITOR	0.75pF 50V B	F2,F3,K2,K3
C559	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	F5,F6,K5,K6,E,E2
C560	CC73HCH1H070B	C CAPACITOR	7pF 50V B	F5,F6,K5,K6,E,E2
C580	CC73HCH1H040B	C CAPACITOR	4pF 50V B	F2,F3,K2,K3
C580	CC73HCH1H020B	C CAPACITOR	2pF 50V B	F5,F6,K5,K6,E,E2
C581	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	F2,F3,K2,K3
C581	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F5,F6,K5,K6,E,E2
C582	CC73HCH1H120G	C CAPACITOR	12pF 50V G	F2,F3,K2,K3
C582	CC73HCH1H100B	C CAPACITOR	10pF 50V B	F5,F6,K5,K6,E,E2
C583	CC73HCH1H020B	C CAPACITOR	2pF 50V B	F2,F3,K2,K3
C583	CC73HCH1H030B	C CAPACITOR	3pF 50V B	F5,F6,K5,K6,E,E2
C584	CC73HCH1H080B	C CAPACITOR	8pF 50V B	F2,F3,K2,K3
C584	CC73HCH1H100B	C CAPACITOR	10pF 50V B	F5,F6,K5,K6,E,E2
C585	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C586	C93-1959-05	C CAPACITOR	0.1uF 16V	
C587	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C588	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C589	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C590	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	F2,F3,K2,K3
C590	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	F5,F6,K5,K6,E,E2
C591	CC73HCH1H180G	C CAPACITOR	18pF 50V G	F2,F3,K2,K3
C591	CC73HCH1H220G	C CAPACITOR	22pF 50V G	F5,F6,K5,K6,E,E2
C592	CC73HCH1H180G	C CAPACITOR	18pF 50V G	F2,F3,K2,K3
C592	CC73HCH1H220G	C CAPACITOR	22pF 50V G	F5,F6,K5,K6,E,E2
C600	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C601	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C602	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C603	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C604	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C605	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C606	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C607	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C608	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C609	CK73HB1E562K	C CAPACITOR	5600pF 25V K	
C610	C93-1959-05	C CAPACITOR	0.1uF 16V	
C611	CC73HCH1H3R5B	C CAPACITOR	3.5pF 50V B	
C612	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C613	C93-1959-05	C CAPACITOR	0.1uF 16V	
C614	CK73HB1H123K	C CAPACITOR	0.012uF 50V K	
C615	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C616	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C617	CC73HCH1H270G	C CAPACITOR	27pF 50V G	
C618	C93-1959-05	C CAPACITOR	0.1uF 16V	
C619	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C620	C93-1953-05	C CAPACITOR	0.01uF 25V	
C621	C93-1953-05	C CAPACITOR	0.01uF 25V	
C622	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C623	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C624	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C625	C93-1959-05	C CAPACITOR	0.1uF 16V	
C626	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C627	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C628	C93-1953-05	C CAPACITOR	0.01uF 25V	
C629	C93-1959-05	C CAPACITOR	0.1uF 16V	
C630	C93-1959-05	C CAPACITOR	0.1uF 16V	
C631	C93-1959-05	C CAPACITOR	0.1uF 16V	
C632	C93-1953-05	C CAPACITOR	0.01uF 25V	
C633	C93-1959-05	C CAPACITOR	0.1uF 16V	
C634	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C635	CK73FB1A475K	C CAPACITOR	4.7uF 10V K	
C636	C93-1959-05	C CAPACITOR	0.1uF 16V	
C637	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C638	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C639	C93-1969-05	C CAPACITOR	1000pF 50V	
C640	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C641	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C642	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C643	C93-1953-05	C CAPACITOR	0.01uF 25V	
C644	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C645	CC73HCH1H100B	C CAPACITOR	10pF 50V B	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C646	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C647	C93-1959-05	C CAPACITOR	0.1uF 16V	
C648	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C649	C93-1959-05	C CAPACITOR	0.1uF 16V	
C650	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C651	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C652	C93-1959-05	C CAPACITOR	0.1uF 16V	
C653	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C660	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C661	C93-1967-05	C CAPACITOR	470pF 50V	
C662	C93-1953-05	C CAPACITOR	0.01uF 25V	
C663	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C664	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C670	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C671	C93-1953-05	C CAPACITOR	0.01uF 25V	
C672	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C673	C93-1967-05	C CAPACITOR	470pF 50V	
C674	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C675	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C676	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C678	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C679	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C681	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C700	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C701	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C702	C93-1953-05	C CAPACITOR	0.01uF 25V	
C703	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C704	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C705	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C706	C93-1953-05	C CAPACITOR	0.01uF 25V	
C707	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C708	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C709	C93-1953-05	C CAPACITOR	0.01uF 25V	
C710	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C711	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C712	C93-1959-05	C CAPACITOR	0.1uF 16V	
C713	C93-1959-05	C CAPACITOR	0.1uF 16V	
C714	C93-1959-05	C CAPACITOR	0.1uF 16V	
C715	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C716	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C717	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C718	C93-1959-05	C CAPACITOR	0.1uF 16V	
C719	C93-1959-05	C CAPACITOR	0.1uF 16V	
C720	C93-1959-05	C CAPACITOR	0.1uF 16V	
C721	C93-1959-05	C CAPACITOR	0.1uF 16V	
C722	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C723	C93-1959-05	C CAPACITOR	0.1uF 16V	
C724	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C725	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C726	C93-1959-05	C CAPACITOR	0.1uF 16V	
C727	C93-1959-05	C CAPACITOR	0.1uF 16V	
C728	C93-1959-05	C CAPACITOR	0.1uF 16V	
C729	C93-1959-05	C CAPACITOR	0.1uF 16V	
C730	C93-1959-05	C CAPACITOR	0.1uF 16V	
C731	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C732	C93-1959-05	C CAPACITOR	0.1uF 16V	
C733	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C734	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C735	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C736	C93-1959-05	C CAPACITOR	0.1uF 16V	
C737	C93-1959-05	C CAPACITOR	0.1uF 16V	
C738	C93-1959-05	C CAPACITOR	0.1uF 16V	
C739	C93-1959-05	C CAPACITOR	0.1uF 16V	
C740	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C741	C93-1959-05	C CAPACITOR	0.1uF 16V	
C742	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C743	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C744	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C745	C93-1959-05	C CAPACITOR	0.1uF 16V	
C746	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C747	C93-1959-05	C CAPACITOR	0.1uF 16V	
C748	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C749	C93-1959-05	C CAPACITOR	0.1uF 16V	
C750	C93-1959-05	C CAPACITOR	0.1uF 16V	
C751	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C752	C93-1959-05	C CAPACITOR	0.1uF 16V	
C753	C93-1959-05	C CAPACITOR	0.1uF 16V	
C754	C93-1959-05	C CAPACITOR	0.1uF 16V	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C755	C93-1959-05	C CAPACITOR	0.1uF 16V	
C756	C93-1959-05	C CAPACITOR	0.1uF 16V	
C757	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C758	C93-1959-05	C CAPACITOR	0.1uF 16V	
C759	C93-1959-05	C CAPACITOR	0.1uF 16V	
C760	C93-1959-05	C CAPACITOR	0.1uF 16V	
C761	C93-1959-05	C CAPACITOR	0.1uF 16V	
C762	C93-1959-05	C CAPACITOR	0.1uF 16V	
C763	C93-1959-05	C CAPACITOR	0.1uF 16V	
C764	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C765	C93-1959-05	C CAPACITOR	0.1uF 16V	
C766	C93-1959-05	C CAPACITOR	0.1uF 16V	
C767	C93-1959-05	C CAPACITOR	0.1uF 16V	
C768	C93-1959-05	C CAPACITOR	0.1uF 16V	
C769	C93-1959-05	C CAPACITOR	0.1uF 16V	
C770	C93-1959-05	C CAPACITOR	0.1uF 16V	
C771	C93-1959-05	C CAPACITOR	0.1uF 16V	
C772	C93-1959-05	C CAPACITOR	0.1uF 16V	
C773	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C774	C93-1959-05	C CAPACITOR	0.1uF 16V	
C775	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C776	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C777	C93-1953-05	C CAPACITOR	0.01uF 25V	
C778	C93-1959-05	C CAPACITOR	0.1uF 16V	
C779	C93-1959-05	C CAPACITOR	0.1uF 16V	
C780	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C782	C93-1959-05	C CAPACITOR	0.1uF 16V	
C783	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C784	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C785	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C786	C93-1959-05	C CAPACITOR	0.1uF 16V	
C787	C93-1959-05	C CAPACITOR	0.1uF 16V	
C788	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C789	C93-1967-05	C CAPACITOR	470pF 50V	
C790	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C791	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C792	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C793	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C795	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C796	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C797	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C798	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C799	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C800	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C801	C93-1959-05	C CAPACITOR	0.1uF 16V	
C802	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C803	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C804	C93-1969-05	C CAPACITOR	1000pF 50V	
C805	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C806	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C807	C93-1959-05	C CAPACITOR	0.1uF 16V	
C808	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C809	C93-1967-05	C CAPACITOR	470pF 50V	
C810	C93-1967-05	C CAPACITOR	470pF 50V	
C811	C93-1967-05	C CAPACITOR	470pF 50V	
C812	C93-1967-05	C CAPACITOR	470pF 50V	
C813	C93-1967-05	C CAPACITOR	470pF 50V	
C814	C93-1967-05	C CAPACITOR	470pF 50V	
C815	C93-1967-05	C CAPACITOR	470pF 50V	
C816	C93-1967-05	C CAPACITOR	470pF 50V	
C817	C93-1967-05	C CAPACITOR	470pF 50V	
C818	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C819	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C822	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C823	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C824	C93-1953-05	C CAPACITOR	0.01uF 25V	
C825	C93-1953-05	C CAPACITOR	0.01uF 25V	
C826	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C827	C93-1953-05	C CAPACITOR	0.01uF 25V	
C828	C93-1953-05	C CAPACITOR	0.01uF 25V	
C829	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C830	C93-1953-05	C CAPACITOR	0.01uF 25V	
C831	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C832	C93-1953-05	C CAPACITOR	0.01uF 25V	
C833	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C834	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C835	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C836	CC73JCH1H101J	C CAPACITOR	100pF 50V J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C837	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C838	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C839	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C840	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C841	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C842	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C843	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C844	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C845	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C846	C93-1953-05	C CAPACITOR	0.01uF 25V	
C847	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C850	C93-1953-05	C CAPACITOR	0.01uF 25V	
C851	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C852	C93-1959-05	C CAPACITOR	0.1uF 16V	
C853	C93-1959-05	C CAPACITOR	0.1uF 16V	
C854	C93-1959-05	C CAPACITOR	0.1uF 16V	
C855	C93-1959-05	C CAPACITOR	0.1uF 16V	
C856	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C857	C93-1959-05	C CAPACITOR	0.1uF 16V	
C858	C93-1959-05	C CAPACITOR	0.1uF 16V	
C859	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C860	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C861	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C862	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C863	C93-1959-05	C CAPACITOR	0.1uF 16V	
C864	C93-1959-05	C CAPACITOR	0.1uF 16V	
C865	C93-1959-05	C CAPACITOR	0.1uF 16V	
C866	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C867	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C868	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C869	C93-1959-05	C CAPACITOR	0.1uF 16V	
C870	C93-1959-05	C CAPACITOR	0.1uF 16V	
C871	C93-1959-05	C CAPACITOR	0.1uF 16V	
C872	C93-1959-05	C CAPACITOR	0.1uF 16V	
C873	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C874	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C875	C93-1959-05	C CAPACITOR	0.1uF 16V	
C876	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C877	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C879	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C880	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C881	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C882	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C883	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C884	C93-1959-05	C CAPACITOR	0.1uF 16V	
C885	C93-1959-05	C CAPACITOR	0.1uF 16V	
C887	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C889	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C890	C93-1959-05	C CAPACITOR	0.1uF 16V	
C891	C93-1959-05	C CAPACITOR	0.1uF 16V	
C892	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C893	C93-1967-05	C CAPACITOR	470pF 50V	
C894	C93-1953-05	C CAPACITOR	0.01uF 25V	
C895	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C896	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C897	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C898	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C899	C93-1967-05	C CAPACITOR	470pF 50V	
C900	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C901	C93-1959-05	C CAPACITOR	0.1uF 16V	
C902	C93-1959-05	C CAPACITOR	0.1uF 16V	
C903	C93-1959-05	C CAPACITOR	0.1uF 16V	
C904	C93-1959-05	C CAPACITOR	0.1uF 16V	
C905	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C906	C93-1959-05	C CAPACITOR	0.1uF 16V	
C907	C93-1959-05	C CAPACITOR	0.1uF 16V	
C908	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C909	C93-1959-05	C CAPACITOR	0.1uF 16V	
C911	C93-1959-05	C CAPACITOR	0.1uF 16V	
C912	C93-1959-05	C CAPACITOR	0.1uF 16V	
C913	C93-1959-05	C CAPACITOR	0.1uF 16V	
C914	C93-1959-05	C CAPACITOR	0.1uF 16V	
C915	C93-1967-05	C CAPACITOR	470pF 50V	
C916	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C917	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C918	C93-1959-05	C CAPACITOR	0.1uF 16V	
C919	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C920	C93-1959-05	C CAPACITOR	0.1uF 16V	
C921	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C922	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C923	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C924	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C925	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C926	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C927	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C928	C93-1959-05	C CAPACITOR	0.1uF 16V	
C929	C93-1959-05	C CAPACITOR	0.1uF 16V	
C930	C93-1969-05	C CAPACITOR	1000pF 50V	
C931	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C932	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C933	CK73HB1E224K	C CAPACITOR	0.22uF 25V K	
C934	C93-1959-05	C CAPACITOR	0.1uF 16V	
C935	C93-1959-05	C CAPACITOR	0.1uF 16V	
C936	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C937	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C938	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C939	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C940	C93-1959-05	C CAPACITOR	0.1uF 16V	
C941	C93-1959-05	C CAPACITOR	0.1uF 16V	
C942	C93-1959-05	C CAPACITOR	0.1uF 16V	
C943	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C944	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C945	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C946	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C948	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C949	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C950	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C951	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C952	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C953	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C954	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C955	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C956	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C957	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C958	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C959	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C960	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C961	C93-1967-05	C CAPACITOR	470pF 50V	
C962	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C963	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C964	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C965	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C974	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C975	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C976	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C977	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C978	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C980	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C981	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C982	C93-1967-05	C CAPACITOR	470pF 50V	
C983	C93-1967-05	C CAPACITOR	470pF 50V	
C984	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C986	C93-1967-05	C CAPACITOR	470pF 50V	
C987	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C988	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C989	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C990	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C991	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C992	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C993	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C997	C93-1959-05	C CAPACITOR	0.1uF 16V	
R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R2	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F2,F3,K2,K3
R3	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F5,F6,K5,K6,E,E2
R6	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R15	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R16	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R17	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R18	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R19	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R20	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R21	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R22	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R23	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R24	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R25	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R26	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R27	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R28	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R29	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R30	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R31	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R32	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	
R33	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R34	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R35	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R36	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R37	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R38	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R39	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R40	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R41	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R42	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R43	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R45	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R46	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R47	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R48	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R49	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R50	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R51	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R60	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R61	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R62	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R63	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R64	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R66	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R67	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R68	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R70	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R71	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R72	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R73	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R74	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R75	RK73PB2H1R2J	MG RESISTOR	1.2Ω 1/2W J	
R76	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R77	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R78	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R79	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R80	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R81	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R92	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R94	R92-3758-05	MG RESISTOR	1.2Ω 0.25W	
R95	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R96	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R100	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R102	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R104	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R105	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R106	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R107	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R108	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R109	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R110	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R111	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R112	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R113	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R114	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R115	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R116	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R117	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R119	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R120	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R122	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R123	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R125	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	F2,F3,K2,K3
R125	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F5,F6,K5,K6,E,E2
R127	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	F5,F6,K5,K6,E,E2
R128	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	F5,F6,K5,K6,E,E2
R129	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	F5,F6,K5,K6,E,E2
R130	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	F5,F6,K5,K6,E,E2
R132	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F2,F3,K2,K3
R140	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R141	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J	
R142	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R143	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R146	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R147	RN73HH1J151D	MF RESISTOR	150Ω 0.063W	F2,F3,K2,K3
R147	RN73H0AJ121D	MF RESISTOR	120Ω D	F5,F6,K5,K6,E,E2
R148	RN73HH1J220D	MF RESISTOR	22Ω 1/16W D	
R152	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R153	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R161	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	F5,F6,K5,K6,E,E2
R162	RN73H0AJ181D	MF RESISTOR	180Ω D	F5,F6,K5,K6,E,E2
R163	RN73HH1J220D	MF RESISTOR	22Ω 1/16W D	F5,F6,K5,K6,E,E2
R181	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R183	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R184	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R185	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R190	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R200	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R201	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R202	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R203	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R204	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R205	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R206	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R207	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R208	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R209	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R210	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R211	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R212	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R213	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R214	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R215	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R216	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R217	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R218	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	F5,F6,K5,K6,E,E2
R219	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	F5,F6,K5,K6,E,E2
R220	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	F5,F6,K5,K6,E,E2
R221	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	F5,F6,K5,K6,E,E2
R230	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R231	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R232	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R233	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F2,F3,K2,K3
R240	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R241	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R242	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R243	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J	
R244	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R247	RN73H0AJ181D	MF RESISTOR	180Ω D	
R248	RN73HH1J220D	MF RESISTOR	22Ω 1/16W D	
R249	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R250	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R251	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R260	RN73HH1J151D	MF RESISTOR	150Ω 0.063W	F5,F6,K5,K6,E,E2
R261	RN73HH1J220D	MF RESISTOR	22Ω 1/16W D	F5,F6,K5,K6,E,E2
R281	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R283	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R290	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R300	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R301	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	
R302	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R303	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R304	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R310	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	F2,F3,K2,K3
R310	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	F5,F6,K5,K6,E,E2
R311	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	F2,F3,K2,K3
R311	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	F5,F6,K5,K6,E,E2
R312	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	F2,F3,K2,K3
R312	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	F5,F6,K5,K6,E,E2
R313	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R314	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	F2,F3,K2,K3
R314	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	F5,F6,K5,K6,E,E2
R316	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	F2,F3,K2,K3
R316	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	F5,F6,K5,K6,E,E2
R317	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R323	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	F2,F3,K2,K3
R323	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	F5,F6,K5,K6,E,E2
R324	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	F2,F3,K2,K3
R324	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	F5,F6,K5,K6,E,E2
R325	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	F2,F3,K2,K3
R325	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	F5,F6,K5,K6,E,E2
R326	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	F2,F3,K2,K3
R326	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	F5,F6,K5,K6,E,E2
R327	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R330	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	F2,F3,K2,K3
R330	RK73HB1J8R2J	MG RESISTOR	8.2Ω 1/16W J	F5,F6,K5,K6,E,E2
R331	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	F2,F3,K2,K3
R331	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	F5,F6,K5,K6,E,E2
R333	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	F2,F3,K2,K3
R334	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	F2,F3,K2,K3
R334	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	F5,F6,K5,K6,E,E2
R335	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	F2,F3,K2,K3
R336	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R350	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J	
R360	R92-3785-05	MG RESISTOR	120Ω 0.25W	
R362	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R371	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	F2,F3,K2,K3
R390	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R391	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R392	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R393	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R394	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R400	R92-3756-05	MG RESISTOR	0.22Ω 1/3W	
R401	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R402	R92-3756-05	MG RESISTOR	0.22Ω 1/3W	
R403	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	
R404	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
R405	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
R406	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R407	RK73HH1J333D	MG RESISTOR	33kΩ 1/16W D	
R408	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	
R409	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R410	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R412	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R414	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	F2,F3,K2,K3
R414	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	F5,F6,K5,K6,E,E2
R416	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R417	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R418	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R420	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R422	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R424	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D	
R425	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R500	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R501	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R502	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R503	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R505	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R507	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R508	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	
R520	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R521	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R522	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R532	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	F2,F3,K2,K3
R532	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	F5,F6,K5,K6,E,E2
R533	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	F2,F3,K2,K3
R533	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	F5,F6,K5,K6,E,E2
R534	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R535	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R536	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R537	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R538	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R539	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R540	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R542	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	F2,F3,K2,K3
R546	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R547	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R550	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R551	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R552	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	F2,F3,K2,K3
R552	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	F5,F6,K5,K6,E,E2
R553	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R554	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R555	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R557	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	
R558	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R581	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R582	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R583	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R584	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R585	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R586	RK73HB1J150J	MG RESISTOR	15Ω 1/16W J	
R587	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R588	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R600	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R601	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R602	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R603	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R604	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R605	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R606	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R607	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R608	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R609	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R610	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R660	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R661	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R662	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R663	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R664	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J	
R665	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R670	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R671	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R672	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R673	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R674	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	
R675	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R676	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R700	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R701	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R702	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R703	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R704	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R705	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R706	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R707	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R708	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R710	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R711	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R713	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R715	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R717	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R718	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R719	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R721	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R722	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R723	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R724	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R725	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R726	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R727	RK73JB1H223J	MG RESISTOR	22kΩ 1/20W J	
R728	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R729	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R730	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R731	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R732	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R733	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R734	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R736	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R737	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R738	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R739	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R742	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R744	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R745	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R746	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R747	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R748	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R750	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R753	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R754	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R755	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R756	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R757	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R758	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R759	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R760	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R761	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R762	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R763	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R764	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R765	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R770	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R771	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R772	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R773	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R774	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R775	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R776	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R777	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R778	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R779	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R780	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R800	RK73HH1J274D	MG RESISTOR	270kΩ 1/16W D	
R803	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R805	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R806	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R808	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R810	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R814	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R819	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R823	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R824	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R825	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R826	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R827	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R828	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R829	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R830	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R831	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R832	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R833	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R834	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R835	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R836	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R837	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R838	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R839	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R840	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R841	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R842	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R849	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R850	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R851	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R852	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R853	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R855	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R856	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R857	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R858	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R859	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R860	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R861	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R862	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R865	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R867	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R900	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R901	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R902	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R903	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R904	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R905	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R906	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R907	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R908	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R909	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R910	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R911	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R912	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R913	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R915	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	
R916	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	
R917	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R918	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
R919	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
R920	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R921	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R922	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	
R923	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	
R924	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
R925	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
R926	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R927	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R928	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R929	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R930	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R931	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R932	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R933	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R934	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R935	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R937	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R938	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R939	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R940	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R942	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R944	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R945	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R946	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
L1	LB73F0AW-002	CHIP FERRITE		
L2	LB73H0AV-003	CHIP FERRITE		
L3	LB73H0AV-003	CHIP FERRITE		
L30	LB73G0AK-001	CHIP FERRITE		
L31	LB73H0AV-002	CHIP FERRITE		
L32	LB73G0AM-004	CHIP FERRITE		
L33	L33-3034-05	CHIP INDUCTOR		
L34	LB73G0AM-004	CHIP FERRITE		
L35	LB73G0AK-001	CHIP FERRITE		
L36	LB73G0AK-001	CHIP FERRITE		
L38	LB73H0AV-002	CHIP FERRITE		
L39	LB73G0BJ-002	CHIP FERRITE		
L40	LB73H0AV-002	CHIP FERRITE		
L60	L41-1502-70	CHIP INDUCTOR		
L61	LB73H0AV-002	CHIP FERRITE		
L81	LB73G0AK-001	CHIP FERRITE		
L100	LB73H0AV-003	CHIP FERRITE		
L101	LB73H0AY-004	CHIP FERRITE		
L102	LB73H0AY-004	CHIP FERRITE		
L140	LB73H0AV-003	CHIP FERRITE		
L141	L41-2785-53	CHIP INDUCTOR		
L142	L41-2785-53	CHIP INDUCTOR		
L143	L41-2785-53	CHIP INDUCTOR		
L144	L41-2785-53	CHIP INDUCTOR		
L145	L41-1578-08	CHIP INDUCTOR		F2,F3,K2,K3
L145	L41-1878-08	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L146	L41-2785-53	CHIP INDUCTOR		
L147	L41-2785-53	CHIP INDUCTOR		
L160	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L161	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L162	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L163	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L164	L41-2778-08	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L165	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L166	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L180	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	F2,F3,K2,K3
L180	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	F5,F6,K5,K6,E,E2
L183	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	
L185	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	
L186	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	
L200	LB73H0AV-003	CHIP FERRITE		
L201	LB73H0AY-004	CHIP FERRITE		
L240	LB73H0AV-003	CHIP FERRITE		
L241	L41-2785-53	CHIP INDUCTOR		
L242	L41-2785-53	CHIP INDUCTOR		
L243	L41-2785-53	CHIP INDUCTOR		

⚠ Symbol No.	Part No.	Part Name	Description	Local
L244	L41-2785-53	CHIP INDUCTOR		
L245	L41-1878-08	CHIP INDUCTOR		F2,F3,K2,K3
L245	L41-2778-08	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L246	L41-2785-53	CHIP INDUCTOR		
L247	L41-2785-53	CHIP INDUCTOR		
L260	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L261	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L262	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L263	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L264	L41-3978-08	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L265	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L266	L41-2785-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L280	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	F2,F3,K2,K3
L280	LK73H0AM39NJ	M.CHIP INDUCTOR	39nH	F5,F6,K5,K6,E,E2
L285	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	F2,F3,K2,K3
L285	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	F5,F6,K5,K6,E,E2
L286	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	F2,F3,K2,K3
L286	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	F5,F6,K5,K6,E,E2
L290	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	F2,F3,K2,K3
L290	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F5,F6,K5,K6,E,E2
L303	L41-1085-53	CHIP INDUCTOR		
L310	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
L311	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F2,F3,K2,K3
L311	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	F5,F6,K5,K6,E,E2
L312	L41-1575-53	CHIP INDUCTOR		F2,F3,K2,K3
L312	L41-2275-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L313	LB73G0BD-005	CHIP FERRITE		
L320	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	F2,F3,K2,K3
L321	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F5,F6,K5,K6,E,E2
L322	LR79Z0CA15NJ	CHIP INDUCTOR	15nH	F2,F3,K2,K3
L322	L41-1075-43	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L323	LB73F0AW-002	CHIP FERRITE		
L330	L40-1563-92	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L331	LR79Z0DC45N5J	CHIP INDUCTOR	45.5nH	
L332	LB73F0AW-002	CHIP FERRITE		
L350	L41-1288-55	CHIP INDUCTOR		F2,F3,K2,K3
L350	L41-1888-55	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L352	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
L353	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
L354	L41-5669-16	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L360	LR79Z0CAR22J	CHIP INDUCTOR	0.22uH	
L370	LR79Z0DD21N9J	CHIP INDUCTOR	21.9nH	
L372	L41-1875-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L500	LR77Z0AER56J	CHIP INDUCTOR	0.56uH	
L501	LB73G0BD-005	CHIP FERRITE		
L502	LR77Z0AER27J	CHIP INDUCTOR	0.27uH	
L503	L41-1875-53	CHIP INDUCTOR		F2,F3,K2,K3
L503	L41-3375-53	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L520	L41-8268-14	CHIP INDUCTOR		
L522	L41-8268-14	CHIP INDUCTOR		
L523	L41-8268-14	CHIP INDUCTOR		
L530	L41-8268-14	CHIP INDUCTOR		
L531	LB73G0BD-005	CHIP FERRITE		
L532	L41-2285-14	CHIP INDUCTOR		
L535	L41-8268-14	CHIP INDUCTOR		
L538	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F5,F6,K5,K6,E,E2
L540	L41-3978-14	CHIP INDUCTOR		F2,F3,K2,K3
L540	L41-4778-14	CHIP INDUCTOR		F5,F6,K5,K6,E,E2
L580	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F2,F3,K2,K3
L580	LK73H0AM18NJ	M.CHIP INDUCTOR	18nH	F5,F6,K5,K6,E,E2
L581	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	F2,F3,K2,K3
L581	LK73H0AM18NJ	M.CHIP INDUCTOR	18nH	F5,F6,K5,K6,E,E2
L582	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	F2,F3,K2,K3
L582	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	F5,F6,K5,K6,E,E2
L600	LK73G0AQ100K	M.CHIP INDUCTOR	10uH	
L601	LB73H0AV-003	CHIP FERRITE		
L602	LB73H0AV-003	CHIP FERRITE		
L603	L41-3988-55	CHIP INDUCTOR		
L604	L41-2785-53	CHIP INDUCTOR		
L605	LB73H0AV-003	CHIP FERRITE		
L606	L41-4798-14	CHIP INDUCTOR		
L607	LB73H0AV-003	CHIP FERRITE		
L608	LB73H0AV-003	CHIP FERRITE		
L609	L41-1885-53	CHIP INDUCTOR		
L610	LK73G0AQ100K	M.CHIP INDUCTOR	10uH	
L611	LK73G0AQ100K	M.CHIP INDUCTOR	10uH	
L612	L41-2285-53	CHIP INDUCTOR		
L613	LB73H0AV-003	CHIP FERRITE		

⚠ Symbol No.	Part No.	Part Name	Description	Local
L614	LB73H0AV-003	CHIP FERRITE		
L660	LK73G0AQR33K	M.CHIP INDUCTOR	0.33uH	
L661	LB73H0AV-002	CHIP FERRITE		
L662	LK73G0AQR82K	M.CHIP INDUCTOR	0.82uH	
L670	LK73G0AQR82K	M.CHIP INDUCTOR	0.82uH	
L671	LK73G0AQR47K	M.CHIP INDUCTOR	0.47uH	
L672	LB73H0AV-002	CHIP FERRITE		
L673	LK73G0ASR47J	M.CHIP INDUCTOR	470nH	
L674	LK73G0ASR47J	M.CHIP INDUCTOR	470nH	
L700	LB73H0AV-003	CHIP FERRITE		
L701	LK73G0AQ4R7K	M.CHIP INDUCTOR	4.7uH	
L702	LB73H0AV-002	CHIP FERRITE		
L703	LB73H0AV-002	CHIP FERRITE		
L704	LB73H0AV-002	CHIP FERRITE		
L705	LB73G0AM-004	CHIP FERRITE		
L706	L92-1101-05	CHIP FERRITE		
L708	L92-1101-05	CHIP FERRITE		
L710	LB73G0AK-001	CHIP FERRITE		
L711	LB73G0AK-001	CHIP FERRITE		
L717	LB73G0AK-001	CHIP FERRITE		
L719	LB73G0AK-001	CHIP FERRITE		
L800	LB73G0AK-001	CHIP FERRITE		
L802	L79-1984-05	FILTER		
L803	L79-1984-05	FILTER		
L804	L79-1984-05	FILTER		
L805	L79-1984-05	FILTER		
L806	L79-1984-05	FILTER		
L807	LB73H0AV-002	CHIP FERRITE		
L808	LB73G0AK-001	CHIP FERRITE		
L809	LB73G0AM-004	CHIP FERRITE		
L810	LB73G0AM-004	CHIP FERRITE		
L811	LB73H0AV-002	CHIP FERRITE		
L812	LB73H0AV-002	CHIP FERRITE		
L813	LB73G0AM-004	CHIP FERRITE		
L814	LB73H0AV-002	CHIP FERRITE		
L815	LB73G0AM-004	CHIP FERRITE		
L850	L92-0487-05	CHIP FERRITE		
L851	L92-0487-05	CHIP FERRITE		
L852	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
L853	L79-1985-05	FILTER		
L854	L92-0487-05	CHIP FERRITE		
L855	L79-1987-05	FILTER		
L856	LK73H0AM6N8J	M.CHIP INDUCTOR	6.8nH	
L857	L79-1985-05	FILTER		
L858	L41-3965-55	CHIP INDUCTOR		
L859	L41-3965-55	CHIP INDUCTOR		
L861	L92-0487-05	CHIP FERRITE		
L862	L92-0487-05	CHIP FERRITE		
L863	L40-2263-71	CHIP INDUCTOR		
L902	LB73H0AV-002	CHIP FERRITE		
L903	LB73G0AM-004	CHIP FERRITE		
L904	LB73G0AM-004	CHIP FERRITE		
L905	LK73H0AM1N0S	M.CHIP INDUCTOR	1nH	
A30	W02-3785-05	DC-DC CONVERTER		
CN1	G0B-0023-00	EARTH SPRING		
CN3	G0B-0023-00	EARTH SPRING		
CN4	E40-6970-05	PIN ASSY		
CN7	J19-5386-05	HOLDER		
CN8	E40-6883-05	F.C.CONNECTOR		
CN9	E40-6962-05	F.C.CONNECTOR		
CN10	E40-6720-05	SOCKET FOR PIN		
CN11	E40-6720-05	SOCKET FOR PIN		
CN12	E41-3167-05	F.C.CONNECTOR		
CN13	E41-1486-05	PIN ASSY		
CN14	G0B-0005-00	EARTH SPRING		
CN15	G0B-0005-00	EARTH SPRING		
CN16	G0B-0005-00	EARTH SPRING		
CN17	G0B-0005-00	EARTH SPRING		
CN18	G0B-0005-00	EARTH SPRING		
CN20	G0B-0005-00	EARTH SPRING		
CN21	G0B-0005-00	EARTH SPRING		
CN301	E23-1278-05	TERMINAL		
CN602	E23-1278-05	TERMINAL		
CN603	G0B-0002-00	EARTH SPRING		
CP100	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP200	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP600	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
CP601	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP700	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP701	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP702	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP850	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP851	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP900	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP901	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP903	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP904	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP905	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP906	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP907	RK74HA1J100J	NET RESISTOR	10Ω 1/16W J	
CP908	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP909	RK74HB1J104J	NET RESISTOR	100kΩ 1/16W J	
CP910	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
E1	F10-3224-15	SHIELDING CASE		
E3	F10-3244-15	SHIELDING CASE		
E4	F10-3236-05	SHIELDING CASE		
E5	F10-3246-15	SHIELDING CASE		
E6	F10-3228-05	SHIELDING CASE		F2,F3,F5,F6
E6	F10-3228-15	SHIELDING CASE		K2,K3,K5,K6,E,E2
F1	FZA10BQ-3R15	FUSE (CC)		
F2	F53-0498-05	FUSE		
J1	E68-0426-05	JACK OTHERS		
OT1	F10-3223-05	SHIELDING COVER		
OT2	F10-3227-05	SHIELDING COVER		
OT3	F10-3243-15	SHIELDING COVER		
OT4	F10-3245-15	SHIELDING COVER		
OT5	G13-2071-14	CONDUCT CUSHION (x2)		
S1	S70-0530-05	TACTILE PUSH SW		
S2	S68-0931-05	PUSH SWITCH		
TH400	ERTJ0V104H	N THERMISTOR		
TH700	ERTJ0V104H	N THERMISTOR		
X700	L77-3123-05	TCXO		
X701	L77-1802-05	QUARTZ CRYSTAL		
X850	L77-3121-05	QUARTZ CRYSTAL		
XF670	L7B-0003-00	MCF		