


EXPLODED VIEW (UNIT)

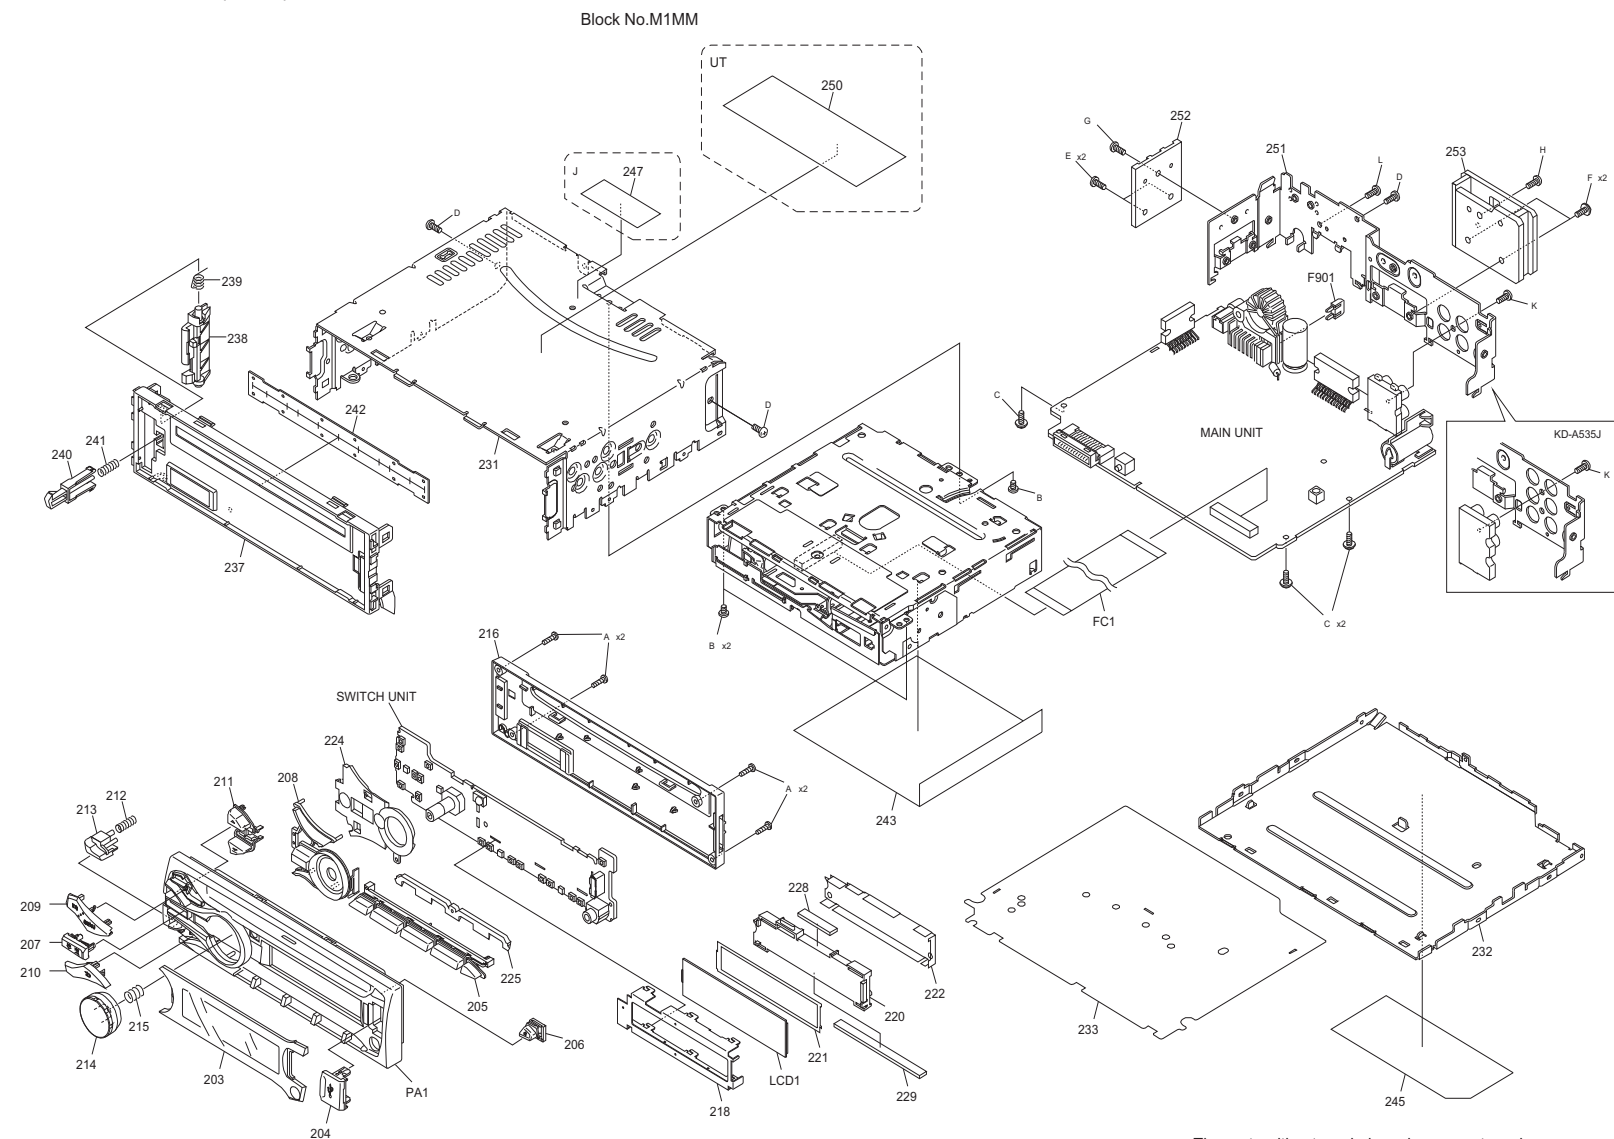

The parts without symbol number are not service.

created date:2011-10-18


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

△	F901	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0277-001A-E	E-CARD WIRE		1	
	LCD1	QLD0695-001	LCD MODULE		1	
	PA1	GE10321-010A	FRONT PANEL		1	A,I
	PA1	GE10321-009A	FRONT PANEL		1	B
	PA1	GE10321-007A	FRONT PANEL		1	C,D,E,F,G,H
	A	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	GE40377-002A	SCREW		3	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	3	
	E	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	F	GE40377-005A	SCREW		2	
	G	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	K	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	L	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	203	GE20294-002A	FINDER		1	A
	203	GE20294-014A	FINDER		1	B
	203	GE20294-019A	FINDER		1	C
	203	GE20294-003A	FINDER		1	D,E,F,G
	203	GE20294-023A	FINDER		1	H
	203	GE20294-020A	FINDER		1	I
	204	GE34515-001A	USB DOOR COVER		1	
	205	GE20297-001A	PRESET BUTTON		1	
	206	GE34526-001A	EJECT BUTTON		1	
	207	GE34530-001A	SEARCH BUTTON		1	
	208	GE34531-002A	SRC BUTTON		1	
	209	GE34527-001A	MENU BUTTON		1	
	210	GE34528-001A	BACK BUTTON		1	A,B,C,D,E,F,G,I
	210	GE34528-002A	BACK BUTTON		1	H
	211	GE34529-001A	UP DOWN BUTTON		1	
	212	GE30999-009A	COMP.SPRING		1	
	213	GE34537-002A	DETACH BUTTON		1	A,C,D,E,F,G,H,I
	213	GE34537-001A	DETACH BUTTON		1	B
	214	GE34538-004A	VOL KNOB		1	A
	214	GE34538-002A	VOL KNOB		1	B,C,D,E,F,G,H,I
	215	GE40127-006A	KNOB SPRING		1	
	216	GE10322-001A	REAR COVER		1	
	218	GE34535-001A	LCD CASE		1	
	220	GE34536-001A	LCD LENS		1	
	221	GE40566-001A	LIGHTING SHEET		1	
	222	GE40565-002A	REFLECTION SHT		1	
	224	GE34532-001A	LIGHT GUIDE		1	
	225	GE34533-001A	PRESET LENS		1	
	228	QNZ1002-001	RUBBER CONNE		1	
	229	QNZ1003-001	RUBBER CONNE		1	
	231	GE10294-001A	TOP CHASSIS		1	
	232	GE20298-001A	BOTTOM COVER		1	
	233	GE34534-001A	INSULATOR		1	
	237	GE10323-001A	FRONT CHASSIS		1	
	238	GE34072-001A	LOCK LEVER		1	
	239	GE40514-002A	TORSION SPRING		1	
	240	GE34073-001A	RELEASE LEVER		1	
	241	GE30999-008A	COMP.SPRING		1	
	242	GE40500-001A	BLIND		1	
	243	GE34327-001A	SHIELD COVER		1	
	245	GE34725-002A	NAME PLATE		1	A
	245	GE34710-002A	NAME PLATE		1	B
	245	GE34731-002A	NAME PLATE		1	C
	245	GE34737-002A	NAME PLATE		1	D,E,G
	245	GE34926-001A	NAME PLATE		1	F
	245	GE34743-002A	NAME PLATE		1	H
	245	GE34728-002A	NAME PLATE		1	I
	247	GE40442-001A	FCC RULE LABEL		1	A,B,C,I
	250	GE33884-022A	UT LABEL		1	G
	251	GE20299-007A	REAR BRACKET		1	A
	251	GE20299-002A	REAR BRACKET		1	B
	251	GE20299-004A	REAR BRACKET		1	C,D,E,F,G,H,I
	252	GE40499-002A	REG HEAT SINK		1	
	253	GE34070-003A	HEAT SINK		1	

EXPLODED VIEW (CD MECHANISM : FLM-HC4-1D)

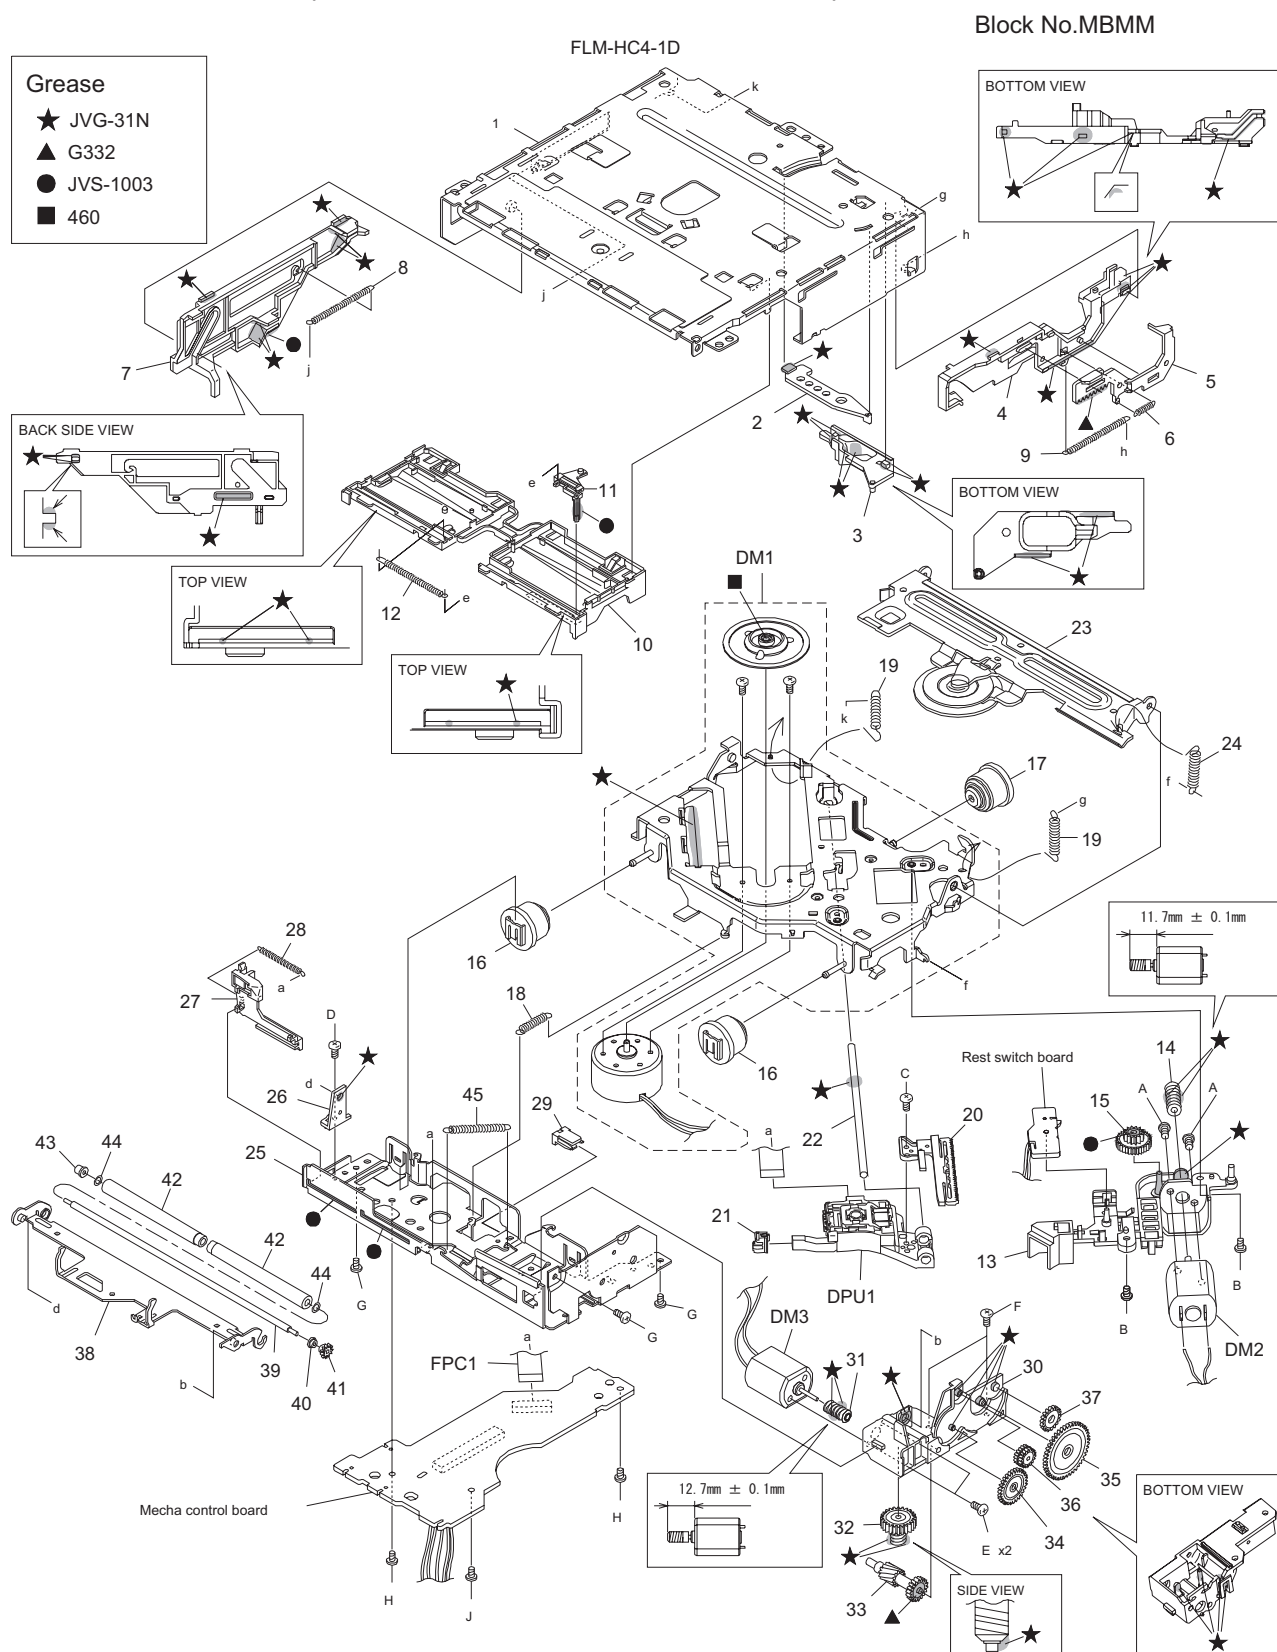

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM:FLM-HC4-1D) <MBMM>

	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
△	DPU1	QAL0993-002	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSP2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSP2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-001A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-002A	BOTTOM FRAME		1	
	26	LV38954-002A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45449-001A	WASHER		2	
	45	LV45418-001A	R.ARM SPRING		1	
ERECTORIC UNIT <01>						
△	IC1	TEF6614TV1S4-X	IC		1	
	IC80	MFI341S2313-X	IC		1	A,C,D,E,F,G,H,I
	IC161	TDA7718B-X	IC		1	A,B,C,H,I
	IC161	TDA7720-X	IC		1	D,E,F,G
△	IC301	TB2931HQ	IC		1	
△	IC501	LV8281VR-X	IC		1	
	IC530	XC6213B332NG-X	IC		1	
	IC531	XC6213B152NG-X	IC		1	
	IC532	XC6213B152NG-X	IC		1	
△	IC540	JCV8022	IC		1	
	IC580	NJM4565E-X	IC		1	
△	IC701	JES220B	IC		1	
	IC702	XC6120N282NG-X	IC		1	
	IC771	BR24T02FJ-W-X	IC		1	
	IC771	R1EX24002ASAA-X	IC		1	
△	IC901	LV5680P	IC		1	
	IC931	XC6213B332NG-X	IC		1	
	IC981	BD9673EFJ-X	IC		1	
	Q251	IMX9-W	PAIR TRANSISTOR		1	A
	Q321	IMX9-W	PAIR TRANSISTOR		1	
	Q341	IMX9-W	PAIR TRANSISTOR		1	A,C,D,E,F,G,H,I
	Q540	2SA2188/F/-X	TRANSISTOR		1	
	Q780	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q780	DRA5124E-X	DIGI TRANSISTOR		1	
	Q781	DRC5124E-X	DIGI TRANSISTOR		1	
	Q781	LTC024EUB-X	DIGI TRANSISTOR		1	B
	Q782	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q782	DRA5124E-X	DIGI TRANSISTOR		1	
	Q881	DRC5114E-X	DIGI TRANSISTOR		1	

MODEL		MARK	MODEL		MARK	MODEL		MARK
KD-A535J		A	KD-R438J		B	KD-R530J		C
KD-R536UN		E	KD-R536UP		F	KD-R536UT		G
KD-R538J		I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local		
	Q881	LTC014EUB-X	DIGI TRANSISTOR		1	B		
	Q951	2SA812A/5-6/-X	TRANSISTOR		1			
	Q951	or ISA1530AC1/QR/X	TRANSISTOR		1			
	Q952	DRC5144E-X	DIGI TRANSISTOR		1			
	Q952	LTC044EUB-X	DIGI TRANSISTOR		1	B		
	Q970	DSC5001/RS/-X	TRANSISTOR		1			
	Q970	LSCR523UB-X	TRANSISTOR		1	B		
	Q971	DSC5001/RS/-X	TRANSISTOR		1			
	Q971	LSCR523UB-X	TRANSISTOR		1	B		
	D1	NAF0029-001X	DIODE	V	1			
	D100	RKZ6.2B2KG-X	Z DIODE		1			
	D100	or DZ2J062/M/-X	Z DIODE		1			
	D101	RKZ6.2B2KG-X	Z DIODE		1			
	D101	or DZ2J062/M/-X	Z DIODE		1			
	D110	RKZ6.2B2KG-X	Z DIODE		1			
	D110	or DZ2J062/M/-X	Z DIODE		1			
	D111	RKZ6.2B2KG-X	Z DIODE		1			
	D111	or DZ2J062/M/-X	Z DIODE		1			
	D120	RKZ6.2B2KG-X	Z DIODE		1			
	D120	or DZ2J062/M/-X	Z DIODE		1			
	D121	RKZ6.2B2KG-X	Z DIODE		1			
	D121	or DZ2J062/M/-X	Z DIODE		1			
	D130	RKZ6.2B2KG-X	Z DIODE		1			
	D130	or DZ2J062/M/-X	Z DIODE		1			
	D131	RKZ6.2B2KG-X	Z DIODE		1			
	D131	or DZ2J062/M/-X	Z DIODE		1			
	D251	BAW56-TP-X	SI DIODE		1	A		
	D251	or MC2836-X	DIODE		1	A		
	D321	BAW56-TP-X	SI DIODE		1			
	D321	or MC2836-X	DIODE		1			
	D341	BAW56-TP-X	SI DIODE		1	A,C,D,E,F,G,H,I		
	D341	or MC2836-X	DIODE		1	A,C,D,E,F,G,H,I		
	D502	GS1J-LTP-X	DIODE		1			
	D502	or 1SR154-400-X	SI DIODE		1			
	D540	RKS801KF-X	SI DIODE		1			
	D540	or DA2J101-X	SI DIODE		1			
	D704	RKZ6.2B2KG-X	Z DIODE		1	A,D,E,F,G,I		
	D704	or DZ2J062/M/-X	Z DIODE		1	A,D,E,F,G,I		
	D780	BAW56-TP-X	SI DIODE		1			
	D780	or MC2836-X	DIODE		1			
	D781	BAW56-TP-X	SI DIODE		1			
	D781	or MC2836-X	DIODE		1			
	D782	RKS801KF-X	SI DIODE		1			
	D782	or DA2J101-X	SI DIODE		1			
	D783	BAW56-TP-X	SI DIODE		1			
	D783	or MC2836-X	DIODE		1			
	D851	MBRX130-TP-X	SB DIODE		1	D,E,F,G		
	D852	MBRX130-TP-X	SB DIODE		1	D,E,F,G		
	D891	BAW56-TP-X	SI DIODE		1			
	D891	or MC2836-X	DIODE		1			
△	D901	1N5401-BPC04	SI DIODE		1			
	D902	MBRX130-TP-X	SB DIODE		1			
	D941	MBRX130-TP-X	SB DIODE		1			
	D942	MBRX130-TP-X	SB DIODE		1			
	D970	RKZ6.8B2KG-X	Z DIODE		1			
	D970	or DZ2J068/M/-X	Z DIODE		1			
	D971	RKZ6.8B2KG-X	Z DIODE		1			
	D971	or DZ2J068/M/-X	Z DIODE		1			
	D981	DB22306-X	SB DIODE		1			
	C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1			
	C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1			
	C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1			
	C4	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1			
	C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1			
	C6	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1			
	C7	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1			
	C10	NCB21CK-105X	C CAPACITOR	1uF 16V K	1			
	C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1			
	C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1			
	C13	NCB21CK-105X	C CAPACITOR	1uF 16V K	1			
	C14	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1			
	C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1			
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1			
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C20	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1			
	C21	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C22	NCB31CK-105X	C CAPACITOR	1uF 16V K	1			
	C23	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C24	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1			
	C26	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1			
	C27	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1			
	C28	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	A,B,C,I		
	C80	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	A,C,D,E,F,G,H,I		
	C101	NCB31CK-105X	C CAPACITOR	1uF 16V K	1			
	C102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1			
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1			
	C112	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1			
	C121	NCB31CK-105X	C CAPACITOR	1uF 16V K	1			

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C122	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C131	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C132	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C160	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1		
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1		
	C166	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,C,D,E,F,G,H,I	
	C168	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C169	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C170	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C172	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1		
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C174	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1		
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C251	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A	
	C252	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A	
	C253	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A	
	C254	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A	
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C303	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C304	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C305	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1		
	C306	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1		
	C307	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1		
	C308	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1		
	C309	QEKJ1CM-226Z-S	E CAPACITOR	22uF 16V M	1		
	C310	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1		
	C311	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1		
	C312	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1		
	C313	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1		
	C314	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C320	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1		
	C321	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1		
	C330	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1		
	C331	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1		
	C340	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A,C,D,E,F,G,H,I	
	C341	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,C,D,E,F,G,H,I	
	C350	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A,C,D,E,F,G,H,I	
	C351	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,C,D,E,F,G,H,I	
	C368	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C501	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C504	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C505	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1		
	C506	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1		
	C507	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C513	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C514	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1		
	C530	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C531	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C532	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C533	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C534	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C535	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C540	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C541	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1		
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C543	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C544	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1		
	C545	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C546	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C547	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1		
	C548	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1		
	C549	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C550	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1		
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C552	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1		
	C553	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1		
	C554	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1		
	C555	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1		
	C556	NCB31CK-683X	C CAPACITOR	0.068uF 16V K	1		
	C557	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1		
	C558	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C559	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C561	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1		
	C562	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1		
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C565	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C566	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C567	NCB31AK-105X	C CAPACITOR	1uF 10V K	1		
	C568	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C569	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C571	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1		
	C572	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1		
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C576	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1		
	C584	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1		
	C585	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1		
	C586	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1		
	C587	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1		
	C588	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1		
	C591	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1		
	C594	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1		
	C595	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1		
	C701	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1		
	C702	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1		
	C703	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C704	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1		
	C705	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C706	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C708	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C712	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C713	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C714	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C716	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C717	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C718	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1		
	C720	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1		
	C721	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,C,D,E,F,G,H,I	
	C722	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1		
	C723	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1		
	C724	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1		
	C725	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1		
	C726	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C729	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1		
	C731	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C733	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1		
	C734	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C736	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C737	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C738	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C794	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1		
	C881	QERF1CM-226Z	E CAPACITOR	22uF 16V M	1		
	C891	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C901	QEZ0937-278	E CAPACITOR	2700uF	1		
	C902	NCB31EK-474X	C CAPACITOR	0.47uF 25V K	1		
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1		
	C904	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1		
	C905	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1		
	C907	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1		
	C908	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	D,E,F,G	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1		
	C912	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C913	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1		
	C931	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C932	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1		
	C933	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C941	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C954	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C963	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1		
	C981	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1		
	C983	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1		
	C984	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C985	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C987	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1		
	C989	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C990	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1		
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1		
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1		
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1		
	R8	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1		
	R9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	D,E,F,G,H	
	R12	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R82	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,C,D,E,F,G,H,I	
	R100	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R102	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R110	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R112	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1		
	R120	NQR0007-002X	FERRITE BEADS		1		
	R121	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R122	NQR0007-002X	FERRITE BEADS		1		
	R130	NQR0007-002X	FERRITE BEADS		1		
	R131	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R132	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1		
	R150	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R151	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	D,E,F,G	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
△	R152	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B	
△	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R162	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R163	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R165	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R167	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1		
	R168	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,H,I	
	R169	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	D,E,F,G	
	R251	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A	
	R252	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A	
	R253	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A	
	R254	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A	
	R255	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A	
	R256	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A	
	R257	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A	
	R258	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A	
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R304	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R310	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	A,B,C,H,I	
	R310	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	D,E,F,G	
	R320	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1		
	R321	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1		
	R322	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1		
	R323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F,G,H,I	
	R324	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A	
	R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1		
	R331	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1		
	R332	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1		
	R333	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F,G,H,I	
	R334	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A	
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B	
	R340	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,C,D,E,F,G,H,I	
	R341	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,C,D,E,F,G,H,I	
	R342	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,C,D,E,F,G,H,I	
	R347	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,C,D,E,F,G,H,I	
	R349	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,C,D,E,F,G,H,I	
	R350	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,C,D,E,F,G,H,I	
	R351	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,C,D,E,F,G,H,I	
	R352	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,C,D,E,F,G,H,I	
	R357	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R358	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R361	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D,E,F,G	
	R362	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R362	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D,E,F,G	
	R363	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R363	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D,E,F,G	
	R364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,H,I	
	R364	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	D,E,F,G	
	R365	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D,E,F,G	
	R366	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D,E,F,G	
	R367	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D,E,F,G	
	R368	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	D,E,F,G	
	R400	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R401	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R403	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R404	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R405	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R406	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R408	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R409	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R410	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R411	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R412	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R413	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R414	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R415	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R417	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R418	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R419	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R420	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R421	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R423	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R426	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A	
	R428	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R429	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R430	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R431	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R432	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R434	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R435	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R437	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R438	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R439	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R440	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,C,D,E,F,G,H,I	
	R441	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R442	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R443	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R444	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R445	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R447	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R449	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R450	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R451	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R452	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R453	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R454	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R455	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R456	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R457	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,C,D,E,F,G,H,I	
	R458	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R459	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R460	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R461	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R462	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R463	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R464	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R465	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R466	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R467	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R469	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R470	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R471	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R472	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R474	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R475	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R476	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R477	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R479	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R481	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R482	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R485	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R488	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R490	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R495	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R501	NRSA63J-114X	MG RESISTOR	110kΩ 1/16W J	1		
	R502	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R503	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R504	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1		
	R505	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R506	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	1		
	R507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	1		
	R508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R510	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R511	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	1		
	R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R516	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1		
	R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1		
	R530	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R534	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1		
	R540	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1		
	R545	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	1		
	R547	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1		
	R548	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R549	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R550	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R553	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R554	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1		
	R555	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1		
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R557	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1		
	R558	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1		
	R559	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R561	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R562	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R563	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R564	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R565	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R566	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R567	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R568	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R569	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R570	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R571	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R572	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R573	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	1		
	R574	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1		
	R575	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1		
	R576	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R577	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R579	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R581	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R582	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	
	R583	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R584	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R587	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R588	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	
	R589	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R590	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R592	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R593	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R594	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R597	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R598	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R599	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R701	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,H,I
	R701	NRSA63J-364X	MG RESISTOR	360kΩ 1/16W J	1	D,E,F,G
	R702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R706	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R708	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R712	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R713	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R718	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R721	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R722	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R723	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R724	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R725	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R726	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R727	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R730	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R731	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R732	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R735	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R736	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R737	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R738	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,I
	R738	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	H
	R739	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R741	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R744	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R746	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R747	NRS181J-243X	MG RESISTOR	24kΩ 1/8W J	1	
	R749	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R750	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R751	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,C,D,E,F,G,H,I
	R753	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R754	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R757	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R758	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R759	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R761	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R762	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R764	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A
	R764	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	C
	R764	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	D,E,F,G
	R764	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	H
	R765	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,C,D,E,F,G,H,I
	R765	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	B
	R766	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A
	R766	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	B,I
	R766	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	C
	R766	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	D,E,F,G
	R766	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	H
	R767	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,C,D,E,F,G,H,I
	R767	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	B
	R768	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R770	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R771	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R772	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R773	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R775	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R776	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,D,E,F,G,I
	R778	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R779	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R780	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R781	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1		
	R782	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R783	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R785	NRS181J-273X	MG RESISTOR	27kΩ 1/8W J	1	A,D,E,F,G,I	
	R785	NRS181J-223X	MG RESISTOR	22kΩ 1/8W J	1	B,C	
	R785	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	H	
	R786	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R789	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1		
	R790	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1		
	R794	NRSA63J-200X	MG RESISTOR	20Ω 1/16W J	1		
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	D,E,F,G	
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1		
	R882	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1		
	R891	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R892	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1		
	R893	NRS181J-123X	MG RESISTOR	12kΩ 1/8W J	1		
	R894	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1		
	R902	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	1		
	R906	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1		
	R907	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1		
	R908	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R909	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1		
	R941	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1		
	R951	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1		
	R965	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1		
	R970	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1		
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1		
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1		
	R981	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1		
	R982	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1		
	R983	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R984	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1		
	R986	NRSA63D-114X	MG RESISTOR	110kΩ 1/16W D	1		
	L1	NQL093K-R47X	P COIL	0.47uH K	1		
	L2	NQL093K-1R8X	P COIL	1.8uH K	1		
	L3	NQL093K-R27X	P COIL	0.27uH K	1		
	L4	QQR1872-001	RF COIL		1		
	L5	QQL244J-561Z	COIL	560uH J	1		
	L6	QQL244J-561Z	COIL	560uH J	1		
	L7	NQL79GM-4R7X	COIL	4.7uH M	1		
	L8	NQL093K-4R7X	P COIL	4.7uH K	1		
	L9	NQL093K-R47X	P COIL	0.47uH K	1		
	L10	NQL103J-10NX	COIL	10nH J	1	A,B,C,I	
	L11	NQR0251-002X	FERRITE BEADS		1		
	L12	NQR0251-002X	FERRITE BEADS		1		
	L161	NQL553J-27NX	COIL	27nH J	1	A,C,D,E,F,G,H,I	
	L531	NQR0502-001X	FERRITE BEADS		1		
	L561	NQR0502-001X	FERRITE BEADS		1		
	L562	NQR0502-001X	FERRITE BEADS		1		
	L563	NQR0502-001X	FERRITE BEADS		1		
	L564	NQR0502-001X	FERRITE BEADS		1		
	L565	NQR0502-001X	FERRITE BEADS		1		
	L701	NQL79GM-4R7X	COIL	4.7uH M	1		
	L702	NQL79GM-4R7X	COIL	4.7uH M	1		
	L703	NQR0502-001X	FERRITE BEADS		1		
	L901	QQR1884-001	CHOKE COIL		1		
	L981	QQL92AK-220Z	COIL	22uH K	1		
	L982	NQLH25M-4R7X	COIL	4.7uH M	1		
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1		
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1		
	CN901	QNZ0607-001	CAR CONNECTOR		1		
	J1	QNB0358-001	ANT TERMINAL		1		
	J1 or	QNB0356-001	ANT TERMINAL		1		
	J120	QNS0307-001	3.5 JACK		1		
	J321	QNN0866-001	PIN JACK		1	A	
	J321	QNN0874-001	PIN JACK		1	B	
	J321	QNN0868-001	PIN JACK		1	C,D,E,F,G,H,I	
	S701	QSW0648-001Z	TACT SWITCH		1		
	X1	QAX0952-001Z	CRYSTAL		1		
	X540	QAX0929-001Z	C RESONATOR		1		
	X701	QAX0966-001Z	CRYSTAL		1		
	X702	QAX0401-001	CRYSTAL	32.768KHz	1		
SWITCH UNIT <Q2>							
	IC601	PCA9624PW-X	IC		1		
	IC661	PTC6526LQ-L	IC		1		
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	A,B,C,D,E,F,G,I	
	Q627 or	DSC5001/RS/-X	TRANSISTOR		1		
	Q627	LSCR523UB-X	TRANSISTOR		1	B	
	D621	NSSM065T-X	LED		1		
	D622	NSSM065T-X	LED		1		
	D623	NSSM065T-X	LED		1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	D624	NSSM065T-X	LED		1		
	D625	NSSM065T-X	LED		1		
	D627	RKZ5.6B2KG-X	Z DIODE		1		
	D627	or DZ2J056/M/-X	Z DIODE		1		
	D630	SML-D12V8W-X	LED		1		
	D661	RKS801KF-X	SI DIODE		1		
	D661	or DA2J101-X	SI DIODE		1		
	D662	RKZ5.1B2KG-X	SB DIODE		1		
	D662	or DZ2J051/M/-X	Z DIODE		1		
	D663	RKZ5.1B2KG-X	SB DIODE		1		
	D663	or DZ2J051/M/-X	Z DIODE		1		
	D664	RKZ5.1B2KG-X	SB DIODE		1		
	D664	or DZ2J051/M/-X	Z DIODE		1		
	D682	RKZ3.3B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,I	
	D682	or DZ2J033/M/-X	Z DIODE		1	A,B,C,D,E,F,G,I	
	D691	RKZ5.1B2KG-X	SB DIODE		1		
	D691	or DZ2J051/M/-X	Z DIODE		1		
	D692	RKZ5.1B2KG-X	SB DIODE		1		
	D692	or DZ2J051/M/-X	Z DIODE		1		
	C620	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1		
	C628	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C629	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C662	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1		
	C663	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C665	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C666	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C682	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,I	
	C684	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1		
	C685	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1		
	C687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1		
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1		
	C691	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1		
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1		
	R612	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1		
	R613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R614	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R615	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R616	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R617	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R618	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1		
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R623	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1		
	R624	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R628	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1		
	R647	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R648	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R649	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1		
	R650	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R651	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R652	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1		
	R653	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1		
	R656	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R657	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1		
	R658	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1		
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1		
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R664	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1		
	R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R678	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1		
	R681	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,I	
	R693	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1		
	L621	NQR0022-005X	FERRITE BEADS		1		
	L674	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	L675	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	L676	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1		
	CN603	QNZ1076-001	USB CONNECTOR		1		
	CN603	or QNZ1057-001	USB CONNECTOR		1		
	J601	QNS0299-001	3.5 JACK		1		
	JS686	QSW1231-002	ROTARY ENCODER		1		
	LF691	NQR0682-001X	CHOKE COIL		1		
	S601	NSW0246-001X	TACK SW		1		
	S602	NSW0246-001X	TACK SW		1		


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	S603	NSW0246-001X	TACK SW		1	
	S604	NSW0246-001X	TACK SW		1	
	S605	NSW0246-001X	TACK SW		1	
	S606	NSW0246-001X	TACK SW		1	
	S607	NSW0246-001X	TACK SW		1	
	S608	NSW0246-001X	TACK SW		1	
	S609	NSW0246-001X	TACK SW		1	
	S610	NSW0246-001X	TACK SW		1	
	S611	NSW0246-001X	TACK SW		1	
	S612	NSW0246-001X	TACK SW		1	
	S613	NSW0246-001X	TACK SW		1	
	S614	NSW0246-001X	TACK SW		1	
	S615	NSW0246-001X	TACK SW		1	
	S616	NSW0246-001X	TACK SW		1	
	S617	NSW0246-001X	TACK SW		1	
CD PLAYER UNIT (FLM-HC4-1D) IN CD MECHA <03>						
	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	

PACKING AND ACCESSORIES

Block No.M3MM

No additional / supplemental order of WARRANTY CARDS are available.

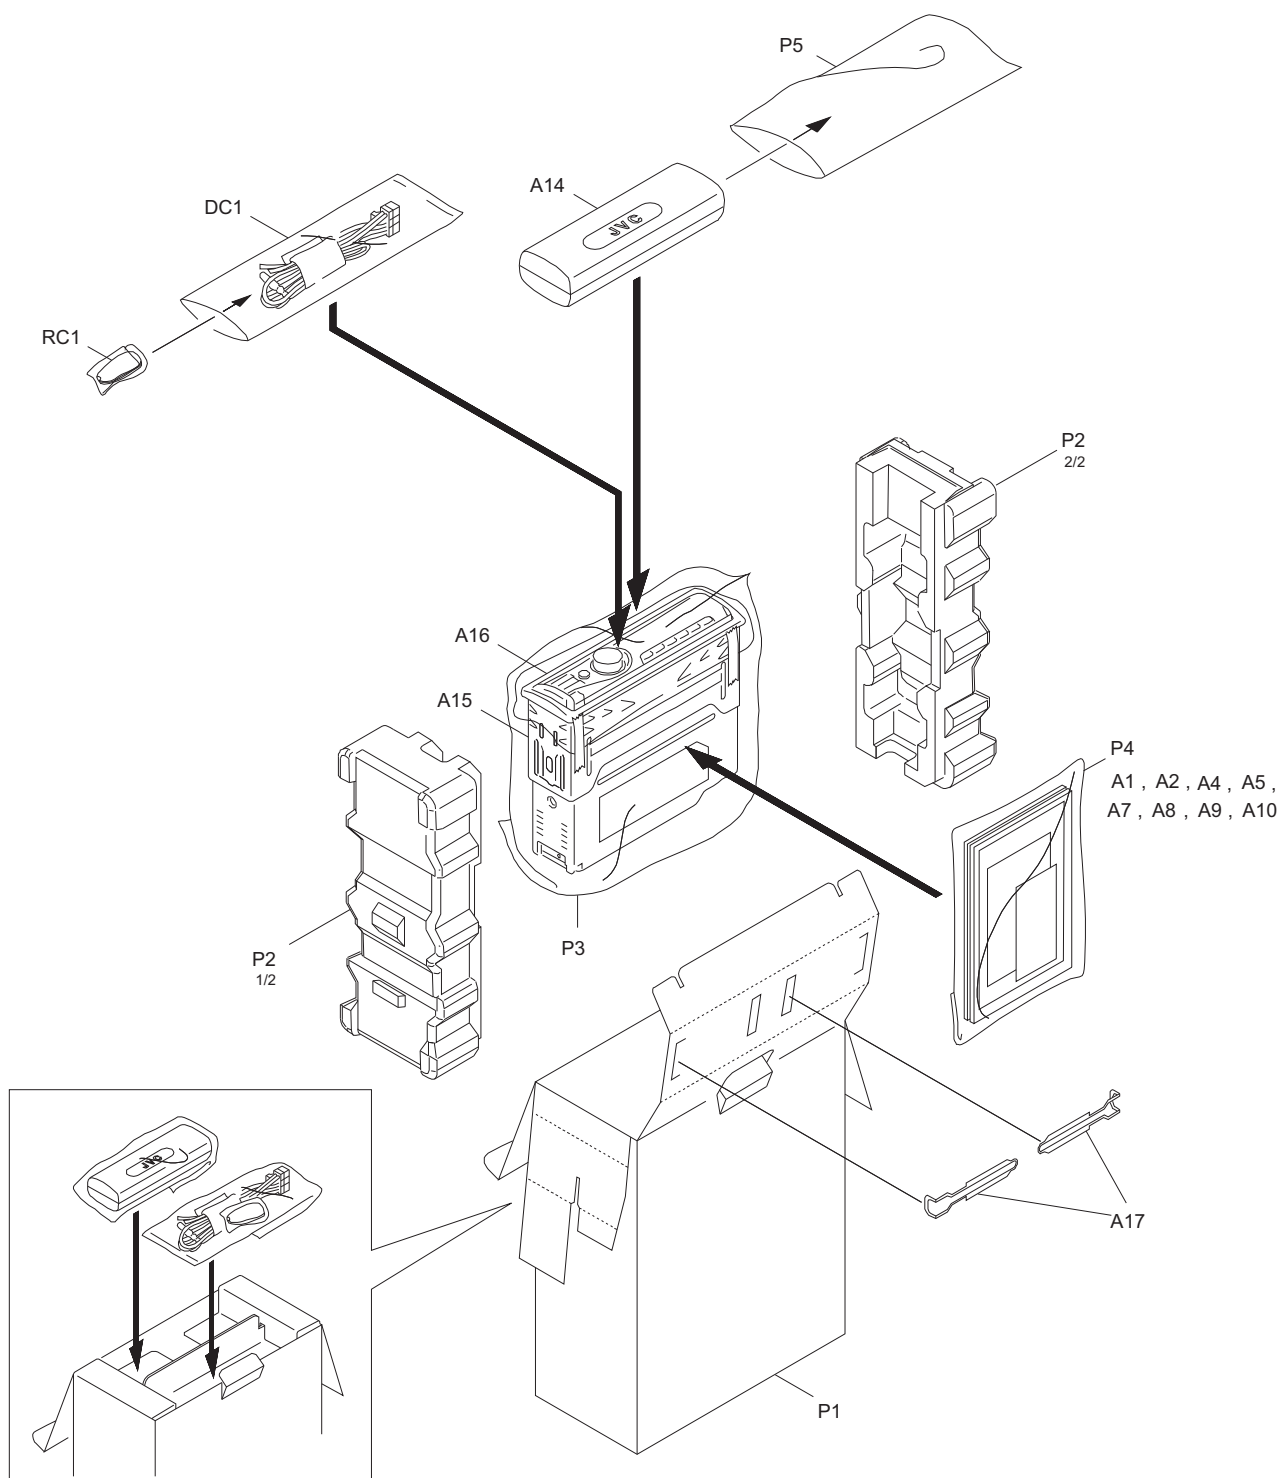

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A535J	A	KD-R438J	B	KD-R530J	C	KD-R536U	D
KD-R536UN	E	KD-R536UP	F	KD-R536UT	G	KD-R537EE	H
KD-R538J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

PACKING AND ACCESSORIES <M3MM>

DC1	QAM1329-001	CAR CABLE		1	A,I
DC1	QAM1326-001	CAR CABLE		1	B,C
DC1	QAM1330-001	CAR CABLE		1	D,E,F,G
DC1	QAM1344-001	CAR CABLE		1	H
RC1	RM-RK52M	REMOCON UNIT		1	A,B,C,D,E,F,G,I
A1	GET0769-001A	INST BOOK	ENG SPA FRE	1	A,B,C,I
A1	GET0770-001A	INST BOOK	ENG RUS THA ARA PER	1	D
A1	GET0770-004A	INST BOOK	ENG INA	1	E
A1	GET0770-003A	INST BOOK	KOR	1	F
A2	GET0770-002A	INST BOOK	CHI(TAIWAN)	1	D,G
A2	GET0768-001A	INST BOOK	RUS UKR	1	H
A4	GET0769-002A	INSTALL MANUAL	ENG SPA FRE	1	A,B,C,I
A4	GET0770-005A	INSTALL MANUAL	ENG RUS THA ARA PER	1	D
A4	GET0770-008A	INSTALL MANUAL	ENG INA	1	E
A4	GET0770-007A	INSTALL MANUAL	KOR	1	F
A4	GET0770-006A	INSTALL MANUAL	CHI(TAIWAN)	1	G
A4	GET0768-002A	INSTALL MANUAL	RUS UKR	1	H
A5	GET0770-006A	INSTALL MANUAL	CHI(TAIWAN)	1	D
A7	-----	WARRANTY CARD	BT-52008-1	1	A,B,C,I
A7	-----	WARRANTY CARD	BT-54045-1	1	H
A8	-----	WARRANTY CARD	BT-51029-3	1	A
A8	-----	WARRANTY CARD	BT-51018-6	1	B,C,I
A9	-----	REGISTRATION CARD	BT-51044-1	1	A,B,C,I
A10	GET0796-001A	RUSSIAN SHEET		1	H
A14	GE32320-001A	HARD CASE ASSY		1	D,E,F,G,H
A15	GE20279-001A	MOUNTING SLEEVE		1	
A16	GE20295-003A	TRIM PLATE		1	A,C,D,E,F,G,H,I
A16	GE20295-001A	TRIM PLATE		1	B
A17	GE40508-001A	HOOK		2	
P1	GE34726-001A	CARTON		1	A
P1	GE34711-002A	CARTON		1	B
P1	GE34732-002A	CARTON		1	C
P1	GE34738-002A	CARTON		1	D,E,F,G
P1	GE34744-002A	CARTON		1	H
P1	GE34729-002A	CARTON		1	I
P2	GE10324-001A	CUSHION		1	
P3	QPC03004315PL	POLY BAG	30cm x 43cm	1	
P4	FSPG4002-001	POLY BAG		1	
P5	QPA01003003	POLY BAG	10cm x 30cm	1	D,E,F,G,H