


EXPLODED VIEW • PARTS LIST:

Main Section

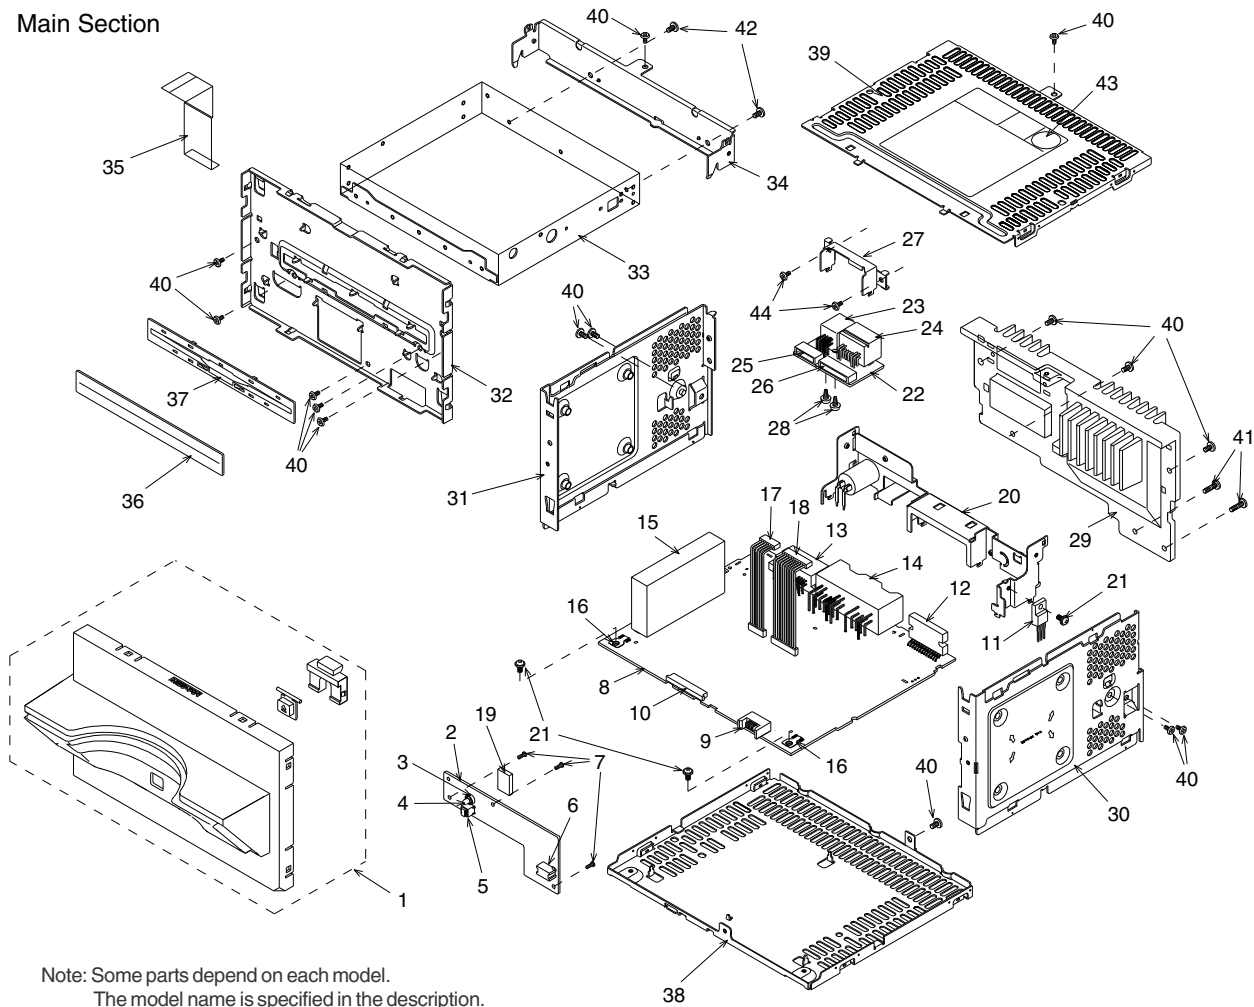

Note: Some parts depend on each model.
The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8020-01	ESCUTCHEON-ASSY (PN-2540Q-A EJECT BLACK)	1	22	039-2313-00	SUB PWB (WITHOUT COMPONENT)	1
	940-8020-11	ESCUTCHEON-ASSY (PN-2540Q-B EJECT BEIGE)	1	23	074-1302-08	OUTLET SOCKET(TH08)	1
2	039-2314-00	SWITCH PWB (WITHOUT COMPONENT)	1	24	074-1013-00	OUTLET SOCKET(A-12)	1
3	340-4401-00	LED HOLDER	1	25	076-0313-06	PLUG	1
4	001-0569-06	DIODE	1	26	076-0313-10	PLUG	1
5	013-3934-02	SWITCH	1	27	331-3529-00	OUTLET HOLDER	1
6	074-1151-06	OUTLET SOCKET	1	28	716-0804-01	SCREW	2
7	716-0778-00	SCREW	3	29	313-1863-00	HEAT SINK	1
8	039-2312-00	MAIN PWB (WITHOUT COMPONENT)	1	30	305-0314-00	SIDE PLATE(RH)	1
9	076-0540-06	PLUG	1	31	305-0313-00	SIDE PLATE(LH)	1
10	074-1191-26	OUTLET SOCKET	1	32	331-3256-00	ES-PLATE	1
11	103-2012-00	TRANSISTOR	1	33	929-0220-84	CD MECHANISM	1
12	051-2037-00	IC	1	34	331-3254-10	MECHA-BRKT	1
13	074-1319-20	OUTLET SOCKET(A-20)	1	35	816-2549-02	FLAT WIRE	1
14	074-1068-11	OUTLET SOCKET(NS10+6)	1	36	346-0140-00	LEATHER SHEET	1
15	880-1917F	TUNER	1	37	335-6647-00	DISC GUIDE	1
16	073-0774-00	TERMINAL	2	38	311-1867-00	LOWER CASE	1
17	854-4561-50	EXTENSION LEAD	1	39	310-1739-10	UPPER CASE	1
18	854-4560-50	EXTENSION LEAD	1	40	714-2606-81	MACHINE SCREW(M2.6x6)	15
19	345-5336-00	CUSHION RUBBER	1	41	714-2612-81	MACHINE SCREW(M2.6x12)	2
20	307-0691-00	REAR PLATE	1	42	714-2603-81	MACHINE SCREW(M2.6x3)	6
21	716-0878-00	IT SCREW	3	43	286-6242-03	SETPLATE(PN-2540Q-A)	1
					286-6242-04	SETPLATE(PN-2540Q-B)	1
				44	714-2604-81	MACHINE SCREW(M2.6x4)	2

PN-2540Q-A/B

CD mechanism sectionn 929-0220-84



PN-2540Q-A/B

PARTS LIST:

CD mechanism sectionn 929-0220-84

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	966-0595-25	DRIVE PLATE ASSY	1	37	621-0620-20	THREAD GEAR A	1
2	969-0060-30	PICK UP UNIT	1	38	621-0621-20	THREAD GEAR B	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1	39	621-0622-21	ROLLER SLEEVE	2
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1	40	621-0623-23	LS-HOLDER	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	41	621-0624-22	GUIDE RAIL	1
6	SMA-183-100	MOTOR ASSY(SLED)	1	42	816-2593-00	LEAD WIRE(PUR)	1
7	620-1022-25	CLAMPER LINK	1	43	816-2542-01	FLAT WIRE(10P)	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1	44	716-3473-00	SCREW	2
9	816-2591-00	LEAD WIRE(YEL)	1	45	621-0709-20	SH-BASE	1
10	620-1025-22	ID-LOCK PLATE	1	46	621-0629-20	LOADING ROLLER	2
11	620-1026-21	SPRING PLATE	1	47	345-8704-20	CUSHION RUBBER	1
12	620-1027-26	LOWER CHASSIS	1	48	622-1664-20	ROLLER SHAFT	1
13	620-1028-23	UPPER CHASSIS	1	49	624-0018-01	LEAD SCREW	1
14	966-0638-20	SH-RACK ASSY	1	50	629-0081-20	DAMPER F	2
15	621-0598-27	UPPER GUIDE	1	51	629-0082-20	DAMPER R	1
16	621-0718-21	ROLLER GUIDE	1	52	714-2003-81	MACHINE SCREW	2
17	621-0600-26	SHIFT LEVER	1	53	716-1507-00	SCREW	9
18	621-0601-21	RACK	1	54	716-1733-00	SCREW	2
19	621-0602-22	LOCK ARM(L)	1	55	716-3469-00	SCREW	2
20	621-0603-25	LOCK ARM(R)	1	56	716-3446-00	SCREW	2
21	621-0724-20	GEAR BASE	1	57	750-3465-21	ROLLER SPRING(L)	1
22	621-0605-22	GEAR COVER	1	58	750-3466-20	ROLLER SPRING(R)	1
23	621-0606-21	IDLE CASE	1	59	750-3467-21	SHIFT SPRING	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1	60	750-3468-20	RACK SPRING	1
25	621-0608-21	SECOND GEAR	1	61	750-3469-20	CLAMPER SPRING	1
26	621-0609-20	BASE GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
27	621-0610-20	IDLE GEAR A	1	63	816-2592-00	LEAD WIRE(BLU)	1
28	621-0611-20	IDLE GEAR B	1	64	750-3472-21	DR-SPRING F	2
29	621-0612-21	ROLLER GEAR A	1	65	750-3473-20	DR-SPRING RA	1
30	621-0613-21	ROLLER GEAR B	1	66	750-3474-20	DR-SPRING RB	1
31	621-0614-20	ROLLER GEAR C	1	67	750-3475-21	DR-SPRING C	1
32	621-0615-21	ROLLER GEAR D	1	68	620-1023-23	CLAMPER PLATE	1
33	621-0616-20	POWER GEAR A	1	69	620-1024-23	SENSOR ARM	1
34	621-0617-20	POWER GEAR B	1	70	621-0708-20	CLAMPER RING	1
35	621-0618-20	POWER GEAR C	1	71	621-0626-21	STOPPER LINK	1
36	621-0619-20	POWER GEAR D	1	72	621-0627-21	DISC STOPPER	1
				73	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST:

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL 101	880-1917F	AM/FM TUNER	C 221	168-1042-78	16V 0.1uF	C 355	182-1063-39	16V 10uF
C 102	166-1201-50	12pF CH	C 222	168-1042-78	16V 0.1uF	C 356	182-1063-39	16V 10uF
C 103	166-1007-50	10pF CH	C 223	166-1801-50	18pF CH	C 357	182-1063-39	16V 10uF
C 104	168-1042-78	16V 0.1uF	C 224	182-2263-39	16V 22uF	C 358	182-1063-39	16V 10uF
C 105	183-1073-29	10V 100uF	C 225	166-1801-50	18pF CH	C 360	166-5096-50	5pF CH
C 106	168-2232-55	0.022uF	C 226	168-2212-55	220pF	C 361	166-5096-50	5pF CH
C 108	183-1073-29	10V 100uF	C 227	178-2242-78	0.22uF	C 362	166-5096-50	5pF CH
C 111	168-1042-78	16V 0.1uF	C 228	168-1832-55	0.018uF	C 363	166-5096-50	5pF CH
C 112	183-1073-29	10V 100uF	C 229	182-2263-39	16V 22uF	C 400	168-1022-55	1000pF
C 114	178-1052-78	1uF	C 230	182-1063-39	16V 10uF	C 401	168-1022-55	1000pF
C 115	168-1532-55	0.015uF	C 231	168-1032-55	0.01uF	C 450	182-1063-39	16V 10uF
C 120	168-2222-55	2200pF	C 232	168-1032-55	0.01uF	C 451	182-1063-39	16V 10uF
C 121	178-1042-78	0.1uF	C 233	182-1063-39	16V 10uF	C 470	168-1042-78	16V 0.1uF
C 122	178-1042-78	0.1uF	C 234	182-2263-39	16V 22uF	C 500	168-1022-55	1000pF
C 126	168-1022-55	1000pF	C 235	168-1032-55	0.01uF	C 501	168-2232-55	0.022uF
C 127	042-0458-90	50V 1uF	C 236	182-1063-39	16V 10uF	C 502	168-1022-55	1000pF
C 128	182-4763-39	16V 47uF	C 237	178-3342-78	0.33uF	C 503	168-1022-55	1000pF
C 129	168-2232-55	0.022uF	C 238	168-1032-55	0.01uF	C 509	042-0423-94	10V 4.7uF
C 131	168-1022-55	1000pF	C 239	182-1063-39	16V 10uF	C 511	182-1063-39	16V 10uF
C 133	182-4763-39	16V 47uF	C 240	178-1052-78	1uF	C 512	168-1042-78	16V 0.1uF
C 134	168-2232-55	0.022uF	C 241	168-1042-78	16V 0.1uF	C 550	042-0562-67	16V 10uF
C 135	166-1011-50	100pF CH	C 242	178-1052-78	1uF	C 551	042-0562-67	16V 10uF
C 136	166-1011-50	100pF CH	C 243	178-3342-78	0.33uF	C 552	042-0562-67	16V 10uF
C 137	166-1011-50	100pF CH	C 244	166-3901-50	39pF CH	C 553	042-0562-67	16V 10uF
C 138	166-1011-50	100pF CH	C 245	178-3342-78	0.33uF	C 554	166-5096-50	5pF CH
C 139	166-1801-50	18pF CH	C 246	178-3342-78	0.33uF	C 555	166-5096-50	5pF CH
C 140	166-1801-50	18pF CH	C 247	178-3342-78	0.33uF	C 558	166-5096-50	5pF CH
C 141	168-1022-55	1000pF	C 249	166-1011-50	100pF CH	C 559	166-5096-50	5pF CH
C 150	166-1511-50	150pF CH	C 250	166-2201-50	22pF CH	C 600	178-1052-78	1uF
C 151	166-4701-50	47pF CH	C 251	166-2201-50	22pF CH	C 603	182-2263-69	50V 22uF
C 152	166-4701-50	47pF CH	C 253	178-4742-78	0.47uF	C 604	168-1042-78	16V 0.1uF
C 153	168-1032-55	0.01uF	C 254	178-4742-78	0.47uF	C 605	168-1022-55	1000pF
C 154	168-6812-55	680pF	C 255	168-1222-55	1200pF	C 606	168-1042-78	16V 0.1uF
C 155	168-4732-78	0.047uF	C 256	178-1052-78	1uF	C 607	178-2242-78	0.22uF
C 156	168-3332-78	0.033uF	C 257	178-1052-78	1uF	C 608	166-1801-50	18pF CH
C 157	182-1053-69	50V 1uF	C 258	168-1042-78	16V 0.1uF	C 650	168-1042-78	16V 0.1uF
C 158	168-3922-55	3900pF	C 259	182-1063-39	16V 10uF	C 700	182-1063-39	16V 10uF
C 159	168-1032-55	0.01uF	C 262	184-2273-39	10V 220uF	C 701	168-1042-78	16V 0.1uF
C 160	166-2201-50	22pF CH	C 263	166-1011-50	100pF CH	C 702	183-1073-29	10V 100uF
C 161	168-1032-55	0.01uF	C 264	166-1011-50	100pF CH	C 703	182-1063-39	16V 10uF
C 162	168-1022-55	1000pF	C 265	166-1011-50	100pF CH	C 706	182-1063-39	16V 10uF
C 163	166-2201-50	22pF CH	C 266	166-1011-50	100pF CH	C 707	168-1042-78	16V 0.1uF
C 164	166-2201-50	22pF CH	C 267	166-2201-50	22pF CH	C 710	168-1042-78	16V 0.1uF
C 165	166-2201-50	22pF CH	C 300	166-5601-50	56pF CH	C 711	182-4763-39	16V 47uF
C 166	166-2201-50	22pF CH	C 303	166-5601-50	56pF CH	C 802	182-1053-69	50V 1uF
C 203	182-2253-69	50V 2.2uF	C 304	166-5601-50	56pF CH	C 803	178-2242-78	0.22uF
C 205	182-2253-69	50V 2.2uF	C 307	166-5601-50	56pF CH	C 804	182-2253-69	50V 2.2uF
C 206	184-1073-29	6.3V 100uF	C 308	182-1063-39	16V 10uF	C 805	178-1052-78	1uF
C 207	184-1073-29	6.3V 100uF	C 309	182-1063-39	16V 10uF	C 806	178-1052-78	0.22uF
C 208	168-2212-55	220pF	C 310	182-4763-39	16V 47uF	C 900	172-1041-15	0.1uF
C 209	168-2212-55	220pF	C 311	168-1042-78	16V 0.1uF	C 901	042-0447-00	16V 2200uF
C 210	184-2273-39	10V 220uF	C 312	182-1063-39	16V 10uF	C 902	042-0447-00	16V 2200uF
C 211	166-2701-50	27pF CH	C 313	184-2273-29	10V 220uF	C 903	182-1053-69	50V 1uF
C 212	168-4732-78	0.047uF	C 314	166-2201-50	22pF CH	C 904	168-1042-78	16V 0.1uF
C 213	168-2212-55	220pF	C 315	178-1042-78	0.1uF	C 905	182-1063-39	16V 10uF
C 214	178-1052-78	1uF	C 320	168-2212-55	220pF	C 906	168-2222-55	2200pF
C 215	168-4732-78	0.047uF	C 350	182-1063-39	16V 10uF	C 907	168-2222-55	2200pF
C 216	182-2263-39	16V 22uF	C 351	182-1063-39	16V 10uF	C 908	168-2222-55	2200pF
C 218	168-4732-78	0.047uF	C 352	182-1063-39	16V 10uF	C 909	168-2222-55	2200pF
C 219	182-4763-39	16V 47uF	C 353	182-1063-39	16V 10uF	C 910	168-2222-55	2200pF
C 220	168-1042-78	16V 0.1uF	C 354	168-2222-55	2200pF	C 911	168-2222-55	2200pF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 912	168-2222-55	2200pF	P 550	076-0103-10	10P	R 153	119-1021-15	1/16W 1k ohm
C 913	168-2222-55	2200pF	P 551	076-0103-06	6P	R 154	119-1021-15	1/16W 1k ohm
C 914	168-2222-55	2200pF	P 901	076-0540-06	6P	R 155	119-8201-15	1/16W 82 ohm
CCT601	050-0140-53	1/16W 1kohm x4J	Q 101	125-2005-91	UN2211	R 156	119-4741-15	1/16W 470k ohm
CCT602	050-0140-53	1/16W 1kohm x4J	Q 102	190-1298-00	2SA1298	R 158	119-1031-15	1/16W 10k ohm
CCT603	050-0140-53	1/16W 1kohm x4J	Q 103	190-1298-00	2SA1298	R 159	119-1031-15	1/16W 10k ohm
CCT604	050-0140-53	1/16W 1kohm x4J	Q 104	192-2712-50	2SC2712	R 160	119-2231-15	1/16W 22k ohm
CCT605	050-0140-54	1/32W 1kohm x4J	Q 105	192-2712-51	2SC2712GR	R 161	119-1031-15	1/16W 10k ohm
CCT606	050-0140-53	1/16W 1kohm x4J	Q 106	192-2712-51	2SC2712GR	R 162	119-0000-05	0
D 150	001-3205-90	1SV251	Q 150	193-0601-00	2SD601A	R 163	119-0000-05	0
D 151	001-3205-90	1SV251	Q 151	193-0601-00	2SD601A	R 200	111-3911-94	1/4W 390 ohm
D 200	001-0529-32	MA8056M	Q 152	125-2005-91	UN2211	R 201	119-1021-15	1/16W 1k ohm
D 400	001-0422-38	MTZJ36	Q 153	125-2005-91	UN2211	R 202	119-1021-15	1/16W 1k ohm
D 401	001-0516-90	MA111	Q 200	102-3420-00	2SC3420	R 203	119-7521-15	1/16W 7.5k ohm
D 470	001-0516-90	MA111	Q 350	125-9003-92	IMD3	R 204	119-2231-15	1/16W 22k ohm
D 500	001-0422-38	MTZJ36	Q 351	125-2005-91	UN2211	R 205	119-7521-15	1/16W 7.5k ohm
D 501	001-0529-44	MA8082-M	Q 352	125-9003-92	IMD3	R 206	119-1021-15	1/16W 1k ohm
D 502	001-0589-91	1SS145	Q 400	125-0001-91	UN2111	R 207	119-1021-15	1/16W 1k ohm
D 503	001-0589-91	1SS145	Q 401	193-0601-00	2SD601A	R 209	119-1001-15	1/16W 10 ohm
D 700	001-0504-31	HZS6A2L	Q 402	125-2005-91	UN2211	R 210	119-1001-15	1/16W 10 ohm
D 701	001-0504-45	HZS9B1L	Q 403	193-0601-00	2SD601	R 211	119-1031-15	1/16W 10k ohm
D 702	001-0504-48	HZS9C2	Q 470	125-0006-90	UN2110	R 212	119-1011-15	1/16W 100 ohm
D 703	001-0466-90	S5688B	Q 500	125-0001-91	UN2111	R 213	119-2211-15	1/16W 220 ohm
D 704	001-0466-90	S5688B	Q 501	193-0601-00	2SD601A	R 214	119-2211-15	1/16W 220 ohm
D 705	001-0330-90	1SS119	Q 502	125-2005-91	UN2211	R 215	119-1011-15	1/16W 100 ohm
D 900	001-2015-00	RL253	Q 503	125-9006-90	IMX1	R 216	119-1031-15	1/16W 10k ohm
D 901	001-0529-34	MA8062L	Q 700	193-1664-00	2SD1664	R 217	119-1031-15	1/16W 10k ohm
D 902	001-0466-90	S5688B	Q 701	125-9003-92	IMD3	R 218	119-1031-15	1/16W 10k ohm
D 903	001-0466-90	S5688B	Q 702	103-2012-00	2SD2012	R 219	119-1011-15	1/16W 100 ohm
D 904	001-0516-90	MA111	Q 703	193-2118-00	2SD2118	R 220	119-1031-15	1/16W 10k ohm
IC 101	051-6212-08	LC72191JM	Q 704	190-1428-00	2SA1428	R 221	119-1031-15	1/16W 10k ohm
IC 150	051-4603-90	TA2083	Q 705	125-2005-91	UN2211	R 222	119-1011-15	1/16W 100 ohm
IC 200	051-3273-90	L88M33T	Q 706	125-2005-91	UN2211	R 223	119-4721-15	1/16W 4.7k ohm
IC 201	051-6360-20	SAA7706H N210	Q 707	190-1048-00	2SA1048	R 224	119-1031-15	1/16W 10k ohm
IC 202	051-6394-08	UDA1334TS	Q 708	191-1205-60	2SB1205FA	R 225	119-1011-15	1/16W 100 ohm
IC 300	051-3019-90	NJM2060V	Q 900	193-0601-00	2SD601A	R 226	119-1011-15	1/16W 100 ohm
IC 302	051-3020-90	NJM4565V	Q 901	125-2005-91	UN2211	R 227	119-1011-15	1/16W 100 ohm
IC 350	051-3020-90	NJM4565V	Q 902	191-0709-00	2SB709A	R 229	119-1031-15	1/16W 10k ohm
IC 501	051-3298-90	TDA3664	Q 903	100-1359-00	2SA1359	R 230	119-7521-15	1/16W 7.5k ohm
IC 506	051-2037-00	TDA7560	R 101	119-2221-15	1/16W 2.2k ohm	R 231	119-7521-15	1/16W 7.5k ohm
IC 550	051-3020-90	NJM4565V	R 103	119-4721-15	1/16W 4.7k ohm	R 232	119-2731-15	1/16W 27k ohm
IC 600	052-3179-00	UPD703033BYGC-J05-8EU	R 104	119-1021-15	1/16W 1k ohm	R 233	119-2731-15	1/16W 27k ohm
IC 601	051-5436-08	S-80933ANMP	R 105	111-1501-94	1/4W 15 ohm	R 234	119-4701-15	1/16W 47 ohm
J 201	074-1191-26	OUTLET SOCKET	R 106	111-1001-94	1/4W 10 ohm	R 235	119-1031-15	1/16W 10k ohm
J 350	074-1319-20	OUTLET SOCKET	R 107	119-2221-15	1/16W 2.2k ohm	R 236	119-1031-15	1/16W 10k ohm
J 550	074-1013-00	OUTLET SOCKET	R 108	119-1031-15	1/16W 10k ohm	R 237	119-1031-15	1/16W 10k ohm
J 551	074-1302-08	OUTLET SOCKET	R 109	119-1031-15	1/16W 10k ohm	R 238	119-1031-15	1/16W 10k ohm
J 900	074-1068-11	NS10+6	R 110	119-1021-15	1/16W 1k ohm	R 240	119-2231-15	1/16W 22k ohm
L 102	010-6009-76	22uH	R 111	119-1021-15	1/16W 1k ohm	R 241	119-2231-15	1/16W 22k ohm
L 103	010-2312-52	0.27uH	R 112	119-2221-15	1/16W 2.2k ohm	R 242	119-2231-15	1/16W 22k ohm
L 150	010-2046-41	560uH	R 113	111-2701-94	1/4W 27 ohm	R 243	119-2231-15	1/16W 22k ohm
L 151	010-2198-53	5.6uH	R 116	119-1031-15	1/16W 10k ohm	R 244	119-3931-15	1/16W 39k ohm
L 152	010-2198-65	0.1uH	R 117	119-1031-15	1/16W 10k ohm	R 245	119-3931-15	1/16W 39k ohm
L 200	010-2285-62	COIL	R 118	119-2221-15	1/16W 2.2k ohm	R 247	119-0000-05	0
L 201	010-2285-62	COIL	R 119	119-4721-15	1/16W 4.7k ohm	R 300	119-2031-15	1/16W 20k ohm
L 202	010-3407-70	47uH	R 120	119-3321-15	1/16W 3.3k ohm	R 301	119-1001-15	1/16W 10 ohm
L 600	010-6009-64	2.2uH	R 121	119-2221-15	1/16W 2.2k ohm	R 302	119-2231-15	1/16W 22k ohm
L 900	009-0680-60	CHOKE	R 122	119-4721-15	1/16W 4.7k ohm	R 303	119-1031-15	1/16W 10k ohm
L101	010-2003-04	COIL	R 124	119-1021-15	1/16W 1k ohm	R 304	119-1041-15	1/16W 100k ohm
P 101	854-4560-50	EXTENSION LEAD (10CH)	R 126	119-4731-15	1/16W 47k ohm	R 305	119-2231-15	1/16W 22k ohm
P 102	854-4561-50	EXTENSION LEAD (6CH)	R 150	119-4741-15	1/16W 470k ohm	R 306	119-1001-15	1/16W 10 ohm
			R 151	119-1031-15	1/16W 10k ohm	R 307	119-2031-15	1/16W 20k ohm
			R 152	119-4741-15	1/16W 470k ohm	R 308	119-1001-15	1/16W 10 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 309	119-2231-15	1/16W 22k ohm	R 500	119-1031-15	1/16W 10k ohm	R 656	119-4731-15	1/16W 47k ohm
R 310	119-1031-15	1/16W 10k ohm	R 501	119-5631-15	1/16W 56k ohm	R 657	119-0000-05	0
R 311	119-1041-15	1/16W 100k ohm	R 502	119-1021-15	1/16W 1k ohm	R 658	119-4731-15	1/16W 47k ohm
R 312	119-3331-15	1/16W 33k ohm	R 503	119-4731-15	1/16W 47k ohm	R 700	111-2211-94	1/4W 220 ohm
R 313	119-3331-15	1/16W 33k ohm	R 504	119-2231-15	1/16W 22k ohm	R 701	119-1041-15	1/16W 100k ohm
R 314	119-2231-15	1/16W 22k ohm	R 505	119-1031-15	1/16W 10k ohm	R 702	111-3911-94	1/4W 390 ohm
R 315	119-1001-15	1/16W 10 ohm	R 506	119-1031-15	1/16W 10k ohm	R 703	111-3911-94	1/4W 390 ohm
R 316	119-1031-15	1/16W 10k ohm	R 507	119-5631-15	1/16W 56k ohm	R 704	119-1041-15	1/16W 100k ohm
R 317	119-1031-15	1/16W 10k ohm	R 508	119-5631-15	1/16W 56k ohm	R 705	111-3911-94	1/4W 390 ohm
R 320	119-4731-15	1/16W 47k ohm	R 509	119-5621-15	1/16W 5.6k ohm	R 707	111-1021-94	1/4W 1k ohm
R 321	119-4731-15	1/16W 47k ohm	R 510	119-5621-15	1/16W 5.6k ohm	R 708	119-4721-15	1/16W 4.7k ohm
R 323	119-2231-15	1/16W 22k ohm	R 550	119-3011-15	1/16W 300 ohm	R 709	119-1021-15	1/16W 1k ohm
R 324	119-1031-15	1/16W 10k ohm	R 551	119-3011-15	1/16W 300 ohm	R 710	119-1031-15	1/16W 10k ohm
R 358	119-8201-15	1/16W 82 ohm	R 552	032-0106-65	1/10W 100k ohm	R 713	111-7501-98	1/4W 75 ohm
R 359	111-1211-94	1/4W 120 ohm	R 553	032-0106-65	1/10W 100k ohm	R 715	116-2201-15	1/4W 22 ohm
R 361	119-1831-15	1/16W 18k ohm	R 554	032-0106-65	1/10W 100k ohm	R 716	116-2201-15	1/4W 22 ohm
R 362	119-1031-15	1/16W 10k ohm	R 555	032-0106-65	1/10W 100k ohm	R 804	119-1031-15	1/16W 10k ohm
R 363	119-1031-15	1/16W 10k ohm	R 556	032-0106-69	1/10W 39k ohm	R 805	119-4731-15	1/16W 47k ohm
R 364	119-3011-15	1/16W 300 ohm	R 557	032-0106-69	1/10W 39k ohm	R 900	119-1031-15	1/16W 10k ohm
R 365	111-1211-94	1/4W 120 ohm	R 558	032-0106-69	1/10W 39k ohm	R 901	119-5611-15	1/16W 560 ohm
R 366	032-0106-65	1/10W 100k ohm	R 559	032-0106-69	1/10W 39k ohm	R 902	111-1531-94	1/4W 15k ohm
R 367	032-0106-65	1/10W 100k ohm	R 602	119-1021-15	1/16W 1k ohm	R 903	111-1021-94	1/4W 1k ohm
R 368	032-0106-65	1/10W 100k ohm	R 603	119-1021-15	1/16W 1k ohm	R 904	116-1221-15	1/4W 1.2k ohm
R 369	032-0106-65	1/10W 100k ohm	R 604	119-1041-15	1/16W 100k ohm	R 905	119-4721-15	1/16W 4.7k ohm
R 370	032-0106-69	1/10W 39k ohm	R 605	119-4731-15	1/16W 47k ohm	R 907	111-5691-94	1/4W 5.6 ohm
R 371	032-0106-69	1/10W 39k ohm	R 606	119-4731-15	1/16W 47k ohm	R 908	111-5691-94	1/4W 5.6 ohm
R 372	032-0106-69	1/10W 39k ohm	R 608	119-4731-15	1/16W 47k ohm	R 909	111-2211-94	1/4W 220 ohm
R 373	032-0106-69	1/10W 39k ohm	R 609	119-4731-15	1/16W 47k ohm	SUP150	060-0122-10	DSP-141N-S00B
R 400	119-1031-15	1/16W 10k ohm	R 610	119-1041-15	1/16W 100k ohm	SUP151	060-0122-10	DSP-141N-S00B
R 401	119-5631-15	1/16W 56k ohm	R 611	119-1041-15	1/16W 100k ohm	TM 101	073-0762-90	TERMINAL
R 402	119-1031-15	1/16W 10k ohm	R 642	119-0000-05	0	TM 102	073-0762-90	TERMINAL
R 403	119-4721-15	1/16W 4.7k ohm	R 643	119-0000-05	0	VR 104	012-5203-56	10k ohm
R 404	119-1531-15	1/16W 15k ohm	R 650	119-4731-15	1/16W 47k ohm	VR 150	012-5203-63	470k ohm
R 405	119-3321-15	1/16W 3.3k ohm	R 651	119-4731-15	1/16W 47k ohm	X 101	061-1066-00	7.2MHz
R 450	119-3011-15	1/16W 300 ohm	R 652	119-1021-15	1/16W 1k ohm	X 200	061-3049-00	11.2896M
R 470	119-1031-15	1/16W 10k ohm	R 653	119-4731-15	1/16W 47k ohm	X 601	060-1519-90	12.5MHz
R 471	119-6821-15	1/16W 6.8k ohm	R 655	119-1231-15	1/16W 12k ohm	Z 107	073-0774-00	TERMINAL
R 472	119-4731-15	1/16W 47k ohm						

Switch PWB sectionn (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D 601	001-0569-06	DIODE	J 601	074-1151-06	OUTLET SOCKET	S 601	013-3934-02	SWITCH

CD mechanism (B3) section 929-0220-84

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 101	168-1042-78	0.1uF	C 117	043-0533-50	0.047uF	C 206	168-1042-78	0.1uF
C 102	045-4701-50	47pF	C 118	043-0533-50	0.047uF	C 207	043-0533-50	0.047uF
C 103	046-4722-58	4700pF	C 119	045-2701-50	27pF	C 208	046-6822-58	6800pF
C 104	168-1042-78	0.1uF	C 120	045-1801-50	18pF	C 209	168-1042-78	0.1uF
C 105	046-1532-78	0.015uF	C 121	163-1063-35	16V 10uF	C 210	043-0533-50	0.047uF
C 106	046-1032-78	0.01uF	C 122	178-1052-78	1uF	C 211	168-1042-78	0.1uF
C 107	046-1032-78	0.01uF	C 123	046-1032-78	0.01uF	C 212	168-1042-78	0.1uF
C 108	046-4722-58	4700pF	C 124	163-1073-05	4V 100uF	C 213	045-5096-50	5pF
C 109	046-1522-58	1500pF	C 125	168-1042-78	0.1uF	C 214	045-5601-50	56pF
C 110	046-3332-78	0.033uF	C 126	168-1042-78	0.1uF	C 215	043-0533-50	0.047uF
C 111	168-1042-78	0.1uF	C 129	178-1052-78	1uF	C 216	178-1052-78	1uF
C 112	046-3332-78	0.033uF	C 201	163-3363-05	4V 33uF	C 217	045-1011-50	100pF
C 113	168-1042-78	0.1uF	C 202	168-1042-78	0.1uF	C 301	163-1073-35	16V 100uF
C 114	168-1042-78	0.1uF	C 203	178-1052-78	1uF	C 302	168-1042-78	0.1uF
C 115	046-4712-58	470pF	C 204	163-1073-05	4V 100uF	C 303	043-0533-50	0.047uF
C 116	046-4712-58	470pF	C 205	163-3363-05	4V 33uF	D 201	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 101	051-6376-00	TC94A14FA	R 108	033-1531-15	1/16W 15Kohm	R 208	033-8231-15	1/16W 82Kohm
IC 102	051-3279-90	BA033LBSG	R 109	033-1031-15	1/16W 10Kohm	R 209	033-6811-15	1/16W 680ohm
IC 201	051-5710-90	TA2157F	R 110	033-1051-15	1/16W 1Mohm	R 210	033-6831-15	1/16W 68Kohm
IC 301	051-6049-08	BA5983FP-E2	R 111	033-3321-15	1/16W 3.3Kohm	R 211	033-1831-15	1/16W 18Kohm
J 101	074-1228-76	26P	R 114	033-2211-15	1/16W 220ohm	R 212	033-2721-15	1/16W 2.7Kohm
J 201	074-1138-65	15P	R 115	033-2211-15	1/16W 220ohm	R 213	033-1011-15	1/16W 100ohm
J 301	074-1138-60	10P	R 116	033-1031-15	1/16W 10Kohm	R 214	033-1021-15	1/16W 1Kohm
L 101	010-2285-57	BLM21B102SPT	R 117	033-1021-15	1/16W 1Kohm	R 215	033-1031-15	1/16W 10Kohm
L 102	010-2285-57	BLM21B102SPT	R 131	033-4711-15	1/16W 470ohm	R 217	033-1041-15	1/16W 100Kohm
L 103	010-2285-57	BLM21B102SPT	R 132	033-2211-15	1/16W 220ohm	R 218	033-2211-15	1/16W 220ohm
L 104	010-2285-57	BLM21B102SPT	R 201	117-2201-15	1/10W 22ohm	R 301	117-6811-15	1/10W 680ohm
L 105	010-2285-57	BLM21B102SPT	R 202	117-2201-15	1/10W 22ohm	R 304	033-3921-15	1/16W 3.9Kohm
L 401	010-2155-93	10uH	R 203	033-1041-15	1/16W 100Kohm	R 305	033-3921-15	1/16W 3.9Kohm
Q 201	131-1188-50	2SB1188	R 204	033-1041-15	1/16W 100Kohm	R 306	033-1041-15	1/16W 100Kohm
R 102	033-5621-15	1/16W 5.6Kohm	R 205	033-1041-15	1/16W 100Kohm	R 307	033-2211-15	1/16W 220ohm
R 104	033-4731-15	1/16W 47Kohm	R 206	033-1041-15	1/16W 100Kohm	X 102	060-1528-90	16.934M
R 105	033-1041-15	1/16W 100Kohm	R 207	033-1041-15	1/16W 100Kohm			

LED PWB (B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q 1	060-4015-90	PS1192H	S 1	013-7414-50	CHUCKING
D 2	001-7058-90	AN1105W-RR	Q 2	060-4015-90	PS1192H	S 2	013-7413-50	LIMIT
J 1	074-1138-60	10P						