



CD mechanism section

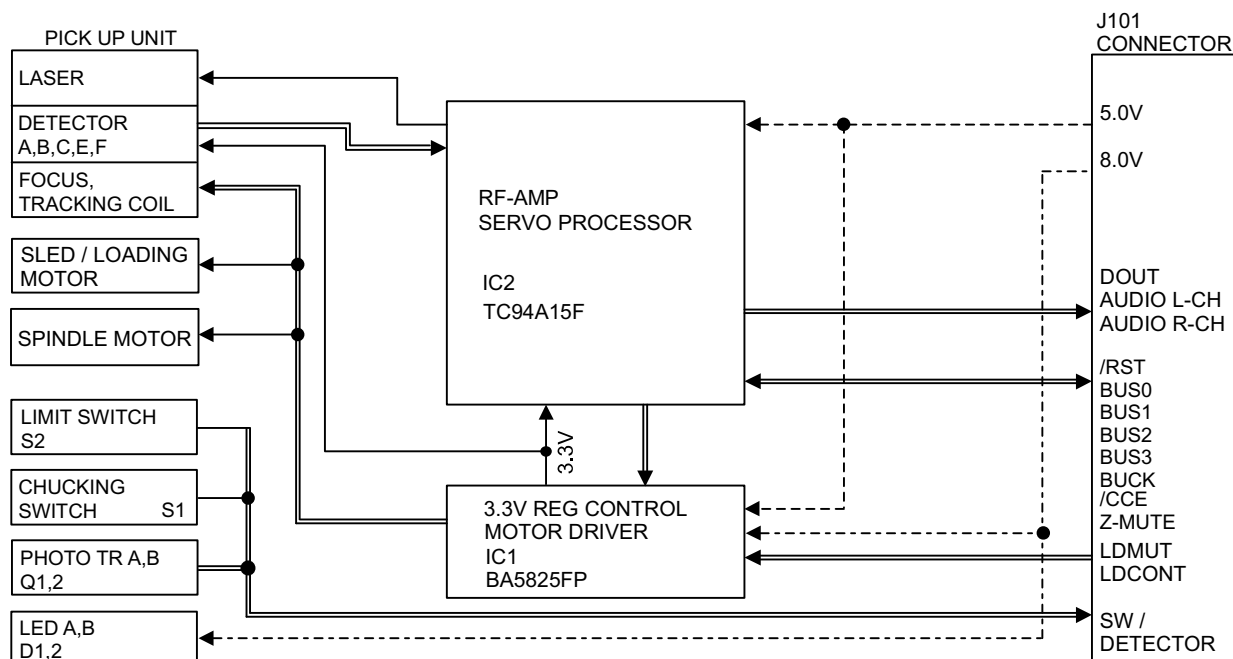


EXPLODED VIEW / PARS LIST

DCP section

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-510-600	DCP ASSY	1	26	716-0872-11	SCREW(M1.7x6)	4
2	347-7143-00	DOUBLE FACE	1	27	347-7135-00	DOUBLE FACE	1
3	778-6019-00	SCREW(M1.7x6)	2	28	347-7134-00	DOUBLE FACE	2
4	371-5761-00	FACE-PANEL(L)	1	29	347-7144-00	DOUBLE FACE	1
5	371-5760-06	FACE-PANEL(R)	1	30	373-1016-14	DIAL-CVR	1
6	380-5578-00	KNOB-COVER	1	31	347-7238-00	FILM	3
7	345-5371-00	RUBBER-RING	1	32	347-7524-00	FILM	1
8	380-5577-00	KNOB(INNER)	1	33	347-7327-00	FILM	3
9	347-7133-00	DOUBLE FACE	2	34	347-7325-00	FILM	2
10	382-6817-00	BUTTON(RELEASE)	1	35	331-3697-00	LCD-COVER	1
11	750-6748-00	SPRING	1	36	379-1297-40	LCD(INDICATOR)	1
12	370-6076-07	ESCUTCHEON	1	37	347-7131-00	BLACK FILM	1
13	382-6811-02	BUTTON(AM/FF/FB)	1	38	347-7591-00	LCD FILM	1
14	382-6810-00	BUTTON(FNC/BND)	1	39	335-7056-00	ILLUMI-PLATE	1
15	382-6812-03	BUTTON(ENT/1/3)	1	40	001-7046-00	DIODE	1
16	382-6814-03	BUTTON(4/6/PA)	1	41	335-7055-01	LCD-HOLDER	1
17	382-6816-03	BUTTON(T/ISR)	1	42	345-5231-00	LAMP CAP	4
18	382-6815-02	BUTTON(EJ/Z/DISP)	1	43	331-3337-00	VR-HOLDER	1
19	382-6813-03	BUTTON(2/5)	1	44	017-0444-00	PILOT LAMP	4
20	347-7137-00	SURGE FILM(R)	1	45	347-7326-00	FILM	3
21	347-7136-00	SURGE FILM(L)	1	46	016-9900-84	VR W/SHAFT	1
22	335-7072-01	ILLUMI-PLATE(R)	1	47	076-0615-50	PLUG	1
23	335-7073-00	ILLUMI-PLATE(L)	1	48	347-7328-00	FILM	1
24	716-1764-00	PAD SCREW(M1.7x5)	4	49	-----	SW PWB	1
25	335-6897-02	REAR-COVER	1				

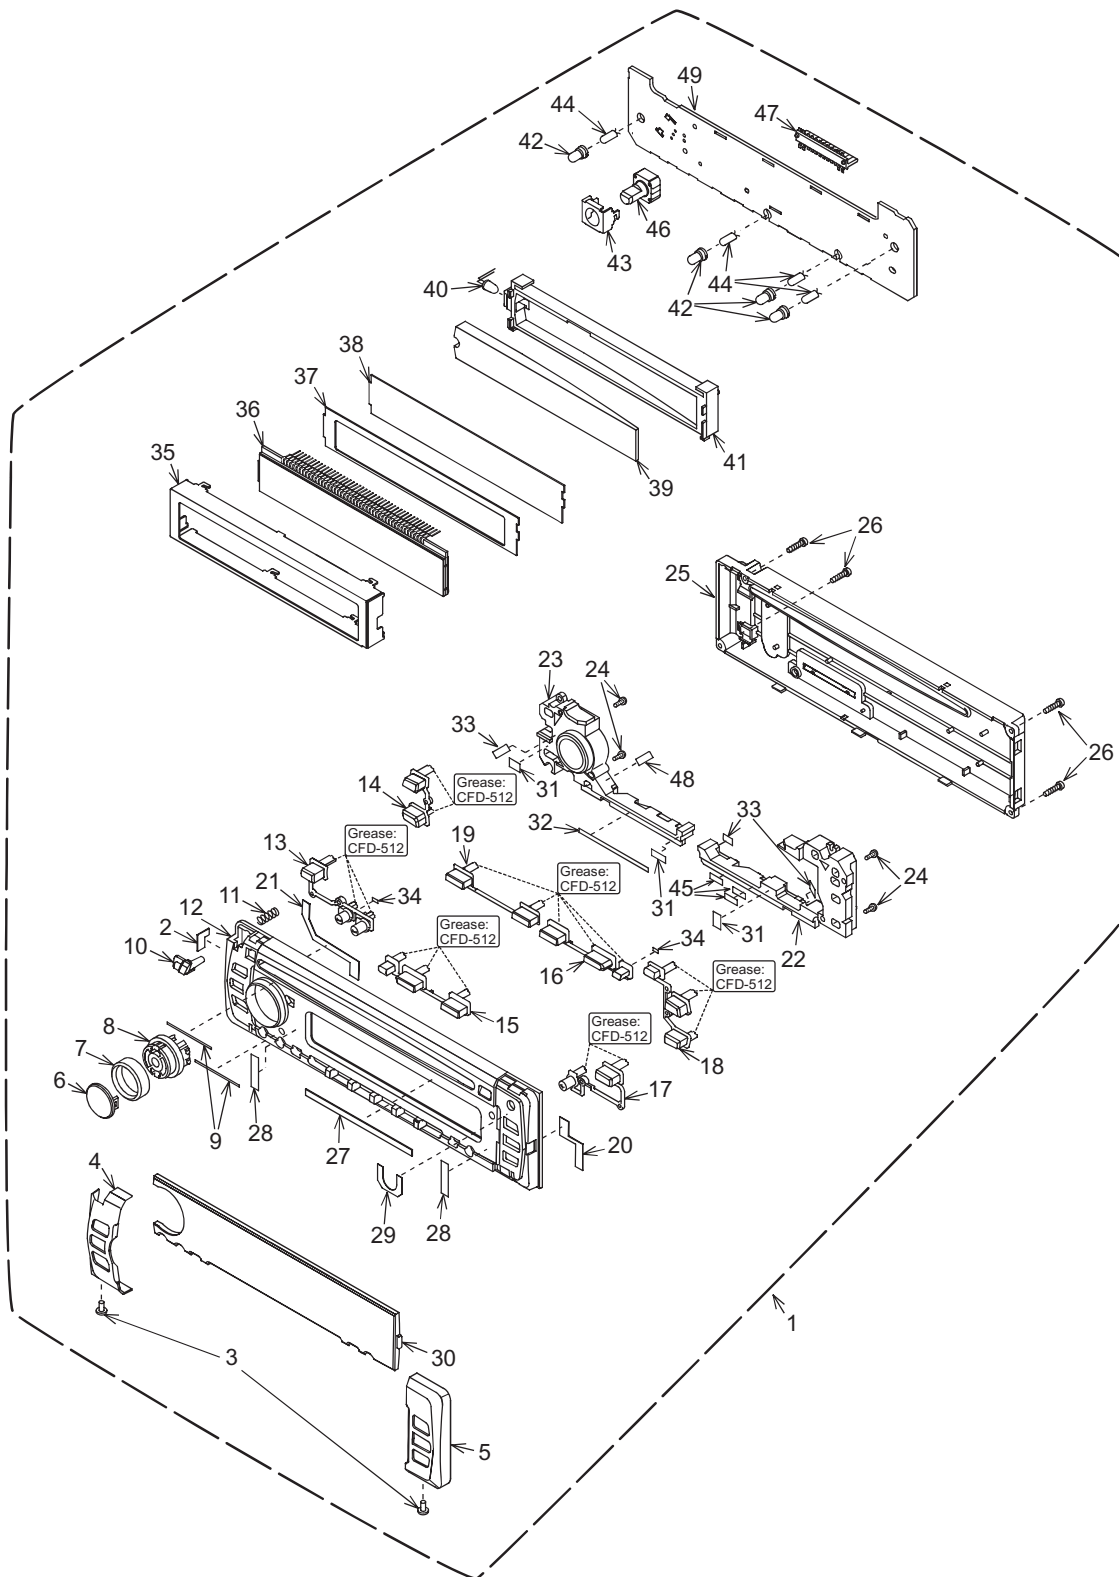


Main section

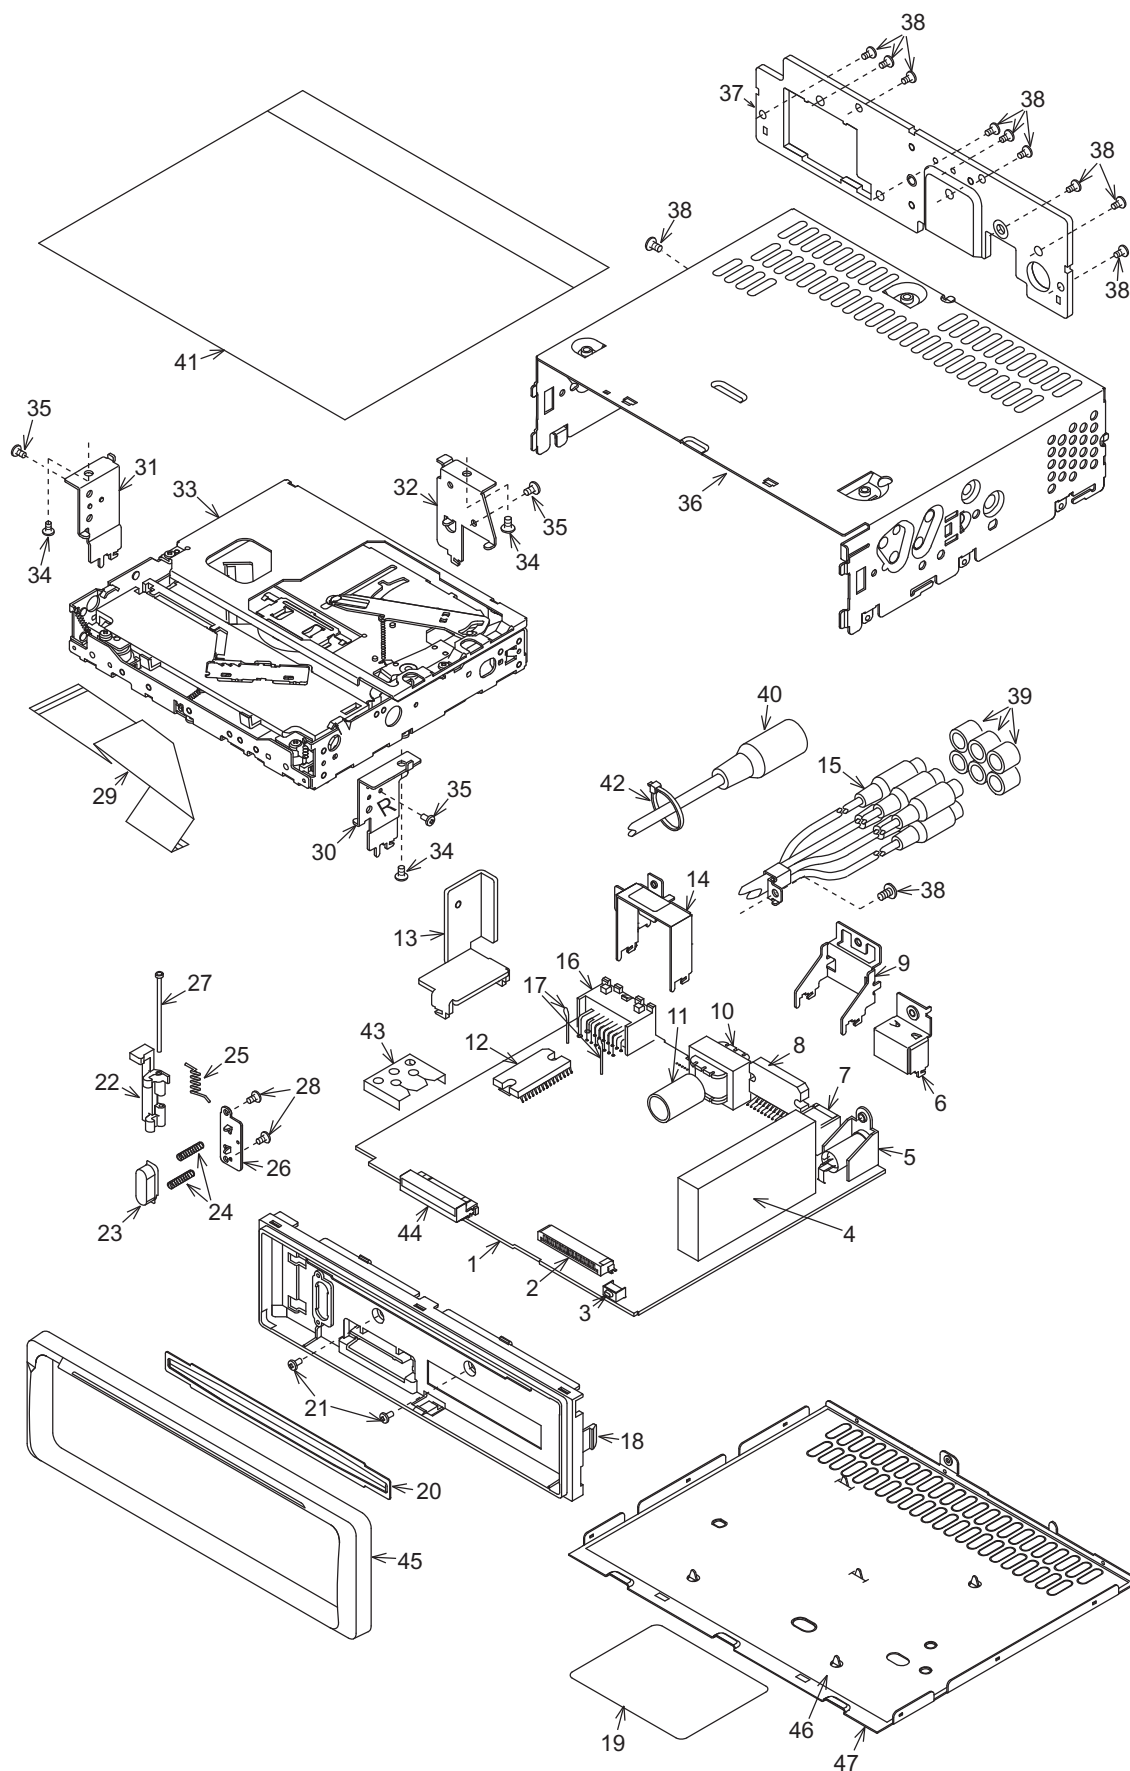

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1
2	074-1237-76	OUTLET SOCKET	1
3	013-6103-00	TACT SWITCH	1
4	880-2090B	TUNER PACK	1
5	092-4000-51	ANT-RECEPT	1
6	331-3567-00	CONNECTOR HOLD	1
7	074-1194-00	OUTLET SOCKET(CeNET)	1
8	051-2057-00	IC	1
9	331-3985-00	IC-HOLDER	1
10	009-9006-70	CHOKE	1
11	042-1447-00	ALUMI-ELE-C	1
12	051-3297-10	IC	1
13	313-1867-00	HEAT SINK	1
14	331-3561-02	CONNECTOR-HOLD	1
15	855-5478-50	RCA-PIN-CORD	1
16	074-1214-00	OUTLET SOCKET	1
17	321-0969-00	CLAMP	2
18	370-6027-02	ESCUTCHEON(IN)	1
19	286-6541-00	SETPLATE	1
20	346-0097-00	LEATHER SHEET	1
21	780-2607-02	SCREW(M2.6x7)	2
22	335-5915-01	HOOK	1
23	382-4078-00	BUTTON (P-OUT)	1
24	750-3173-00	SPRING	2

NO.	PART NO.	DESCRIPTION	Q'TY
25	750-3219-00	SPRING(F-HOOK)	1
26	331-2594-00	HOOK PLATE	1
27	341-1627-00	SHAFT	1
28	716-0778-00	WAVE SCREW(M2x6)	2
29	816-2627-50	FALT WIRE	1
30	331-3569-00	MECH-SUB-BRKT(R)	1
31	331-3570-00	MECH-SUB-BRKT(L)	1
32	331-3427-00	MECH BRKT(REAR)	1
33	929-0290-80	CD MECH MODULE	1
34	714-3004-81	MACHINE SCREW(M3x4)	3
35	714-2603-80	MACHINE SCREW(M2.6x3)	3
36	310-1778-03	UPPER CASE	1
37	313-1932-00	HEAT SINK	1
38	714-3006-81	MACHINE SCREW(M3x6)	11
39	345-3799-20	RUBBER PART	6
40	855-1471-50	DIN CORD(6P)	1
41	347-7525-00	UPPER SHEET	1
42	335-0833-07	CABLE TIE	1
43	347-7700-00	FILM	1
44	074-1217-00	OUTLET SOCKET	1
45	370-6084-08	ESCUTCHEON(OUT)	1
46	347-6880-00	INSULATOR	1
47	311-1859-02	LOWER CASE	1

CD mechanism section

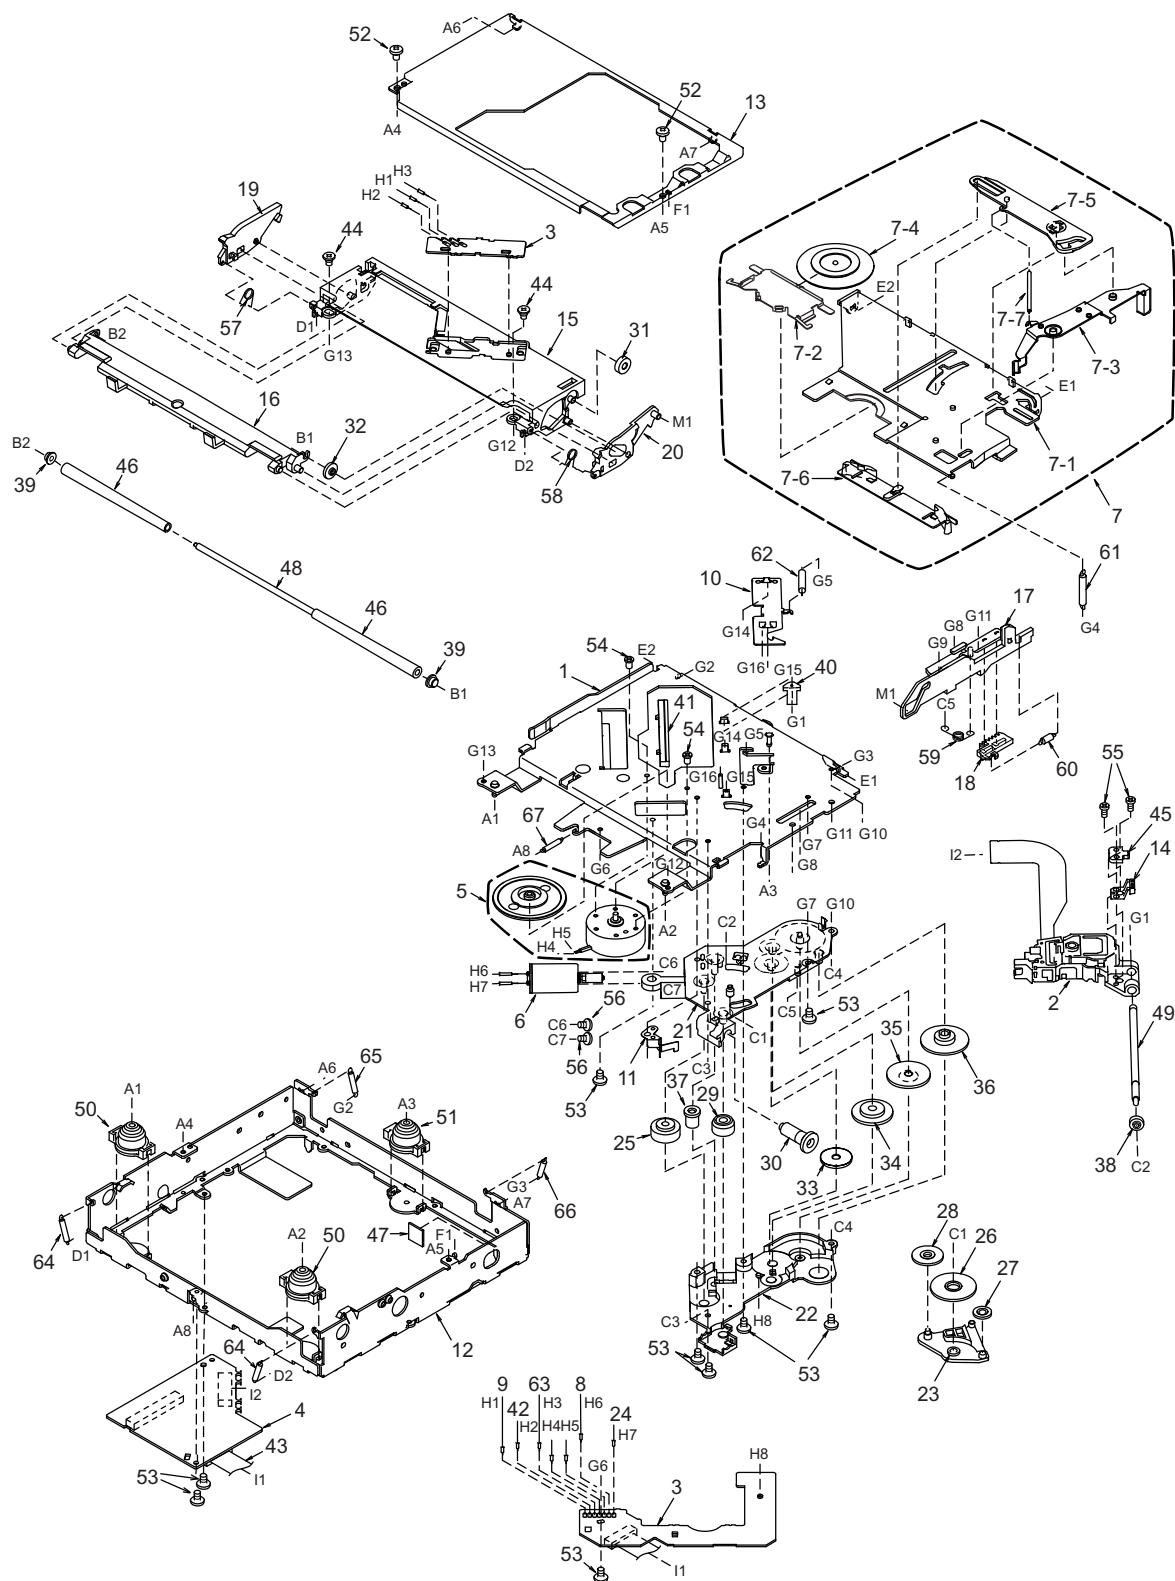

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-26	DRIVE PLATE ASSY	1	31	621-0720-20	ROLLER GEAR C	1
2	969-0065-31	PICK UP UNIT	1	32	621-0721-20	ROLLER GEAR D	1
3	-----	LED PWB	1	33	621-0616-20	POWER GEAR A	1
4	-----	CD PWB	1	34	621-0617-20	POWER GEAR B	1
5	SMA-182-100	MOTOR ASSY (SPINDLE)	1	35	621-0618-20	POWER GEAR C	1
6	SMA-183-100	MOTOR ASSY (SLED)	1	36	621-0619-20	POWER GEAR D	1
7	HBS-524-100	CLAMPER SUB ASSY	1	37	621-0620-20	THREAD GEAR A	1
7-1	620-1022-26	CLAMPER LINK	1	38	621-0621-20	THREAD GEAR B	1
7-2	620-1023-23	CLAMPER PLATE	1	39	621-1726-20	ROLLER SLEEVE	2
7-3	620-1024-23	SENSOR ARM	1	40	621-0623-23	LS-HOLDER	1
7-4	621-0708-20	CLAMPER RING	1	41	621-0624-22	GUIDE RAIL	1
7-5	621-0626-21	STOPPER LINK	1	42	816-2593-00	LEAD WIRE (PUR)	1
7-6	621-0627-21	DISC STOPPER	1	43	816-2542-01	FLAT WIRE (10P)	1
7-7	750-3471-20	SENSOR SPRING	1	44	716-3473-00	IT SCREW (M2x3)	2
8	803-4906-60	VINYL COAT WIRE (ORG)	1	45	621-0709-20	SH-BASE	1
9	816-2591-00	LEAD WIRE (YEL)	1	46	621-0629-20	LOADING ROLLER	2
10	620-1025-22	ID-LOCK PLATE	1	47	345-8704-20	CUSHION RUBBER	1
11	620-1026-21	SPRING PLATE	1	48	622-1571-21	ROLLER SHAFT	1
12	620-1027-27	LOWER CHASSIS	1	49	624-0018-01	LEAD SCREW	1
13	620-1028-24	UPPER CHASSIS	1	50	629-0081-21	DAMPER F	2
14	966-1722-20	SH-RACK ASSY	1	51	629-0082-21	DAMPER R	1
15	621-0598-27	UPPER GUIDE	1	52	714-2003-81	MACHINE SCREW (M2x3)	2
16	621-0599-26	ROLLER GUIDE	1	53	716-1507-00	SCREW (M2x3)	9
17	621-0600-26	SHIFT LEVER	1	54	716-1733-00	SCREW (M1.7x2.3)	2
18	621-1716-20	RACK	1	55	716-3469-00	SCREW (3x4)	2
19	621-0602-22	LOCK ARM L	1	56	716-3446-00	SCREW (M1.4x2.5)	2
20	621-0603-25	LOCK ARM R	1	57	750-3465-21	ROLLER SPRING L	1
21	621-0724-21	GEAR BASE	1	58	750-3466-20	ROLLER SPRING R	1
22	621-0605-22	GEAR COVER	1	59	750-3467-21	SHIFT SPRING	1
23	621-1719-20	IDLE CASE	1	60	750-3468-20	RACK SPRING	1
24	816-2590-00	VINYL COAT WIRE (GRN)	1	61	750-3469-20	CLAMPER SPRING	1
25	621-0608-21	SECOND GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
26	621-0609-20	BASE GEAR	1	63	816-2592-00	LEAD WIRE (BLU)	1
27	621-0610-20	IDLE GEAR A	1	64	750-3472-21	DR-SPRING F	2
28	621-0611-20	IDLE GEAR B	1	65	750-3473-20	DR-SPRING RA	1
29	621-0612-21	ROLLER GEAR A	1	66	750-3474-20	DR-SPRING RB	1
30	621-0719-20	ROLLER GEAR B	1	67	750-3475-21	DR-SPRING C	1

ELECTRICAL PARTS LIST

Main PWB section(B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT	C500	187-1053-67	50V1uF	L504	010-3105-62	1k ohm/100MHz
BL1	880-2090B	TUNER PACK	C501	187-1053-67	50V1uF	L601	010-3100-66	2.2uH
C1	166-2096-50	2pF CK	C502	187-1053-67	50V1uF	L602	010-3100-66	2.2uH
C2	166-2201-50	22pF CH	C503	187-1053-67	50V1uF	L603	010-3100-66	2.2uH
C3	166-2201-50	22pF CH	C504	187-1063-37	16V10uF	L605	010-3100-66	2.2uH
C4	168-1022-55	1000pF K	C505	187-1063-37	16V10uF	L606	010-3100-66	2.2uH
C5	168-2232-55	0.022uF K	C506	187-1063-37	16V10uF	L607	010-3100-66	2.2uH
C6	168-2232-55	0.022uF K	C507	187-1063-37	16V10uF	Q3	125-2199-93	KRC103S
C9	168-1032-55	0.01uF K	C512	187-4763-17	6.3V47uF	Q4	125-3004-90	KTA1504S
C10	168-2232-55	0.022uF K	C514	187-1063-37	16V10uF	Q5	125-3004-90	KTA1504S
C11	187-1053-67	50V1uF	C515	187-4763-37	16V47uF	Q50	192-2712-51	2SC2712 G,L
C12	168-1532-55	0.015uF K	C516	168-1042-78	16V 0.1uF	Q51	192-2712-51	2SC2712 G,L
C13	168-2732-55	16V 0.027uF K	C517	168-4722-55	4700pF K	Q210	125-0200-96	KRA226S
C14	168-2732-55	16V 0.027uF K	C518	168-4722-55	4700pF K	Q211	125-2199-96	KRC106S
C17	187-4763-35	16V47uF	C519	187-1053-67	50V1uF	Q227	193-1802-61	2SD1802FA R,S,T
C18	168-2232-55	0.022uF K	C520	187-1053-67	50V1uF	Q228	125-4011-90	KTD863
C19	168-1022-55	1000pF K	C521	187-1053-67	50V1uF	Q452	193-1306-00	2SD1306
C20	168-6822-55	6800pF K	C522	187-1053-67	50V1uF	Q453	193-1306-00	2SD1306
C21	187-1073-35	16V 100uF	C534	168-1042-78	16V 0.1uF	Q454	193-1306-00	2SD1306
C22	187-4763-35	16V47uF	C535	168-1042-78	16V 0.1uF	Q455	193-1306-00	2SD1306
C27	187-4763-17	6.3V47uF	C536	168-1042-78	16V 0.1uF	Q456	193-1306-00	2SD1306
C50	168-1032-55	0.01uF K	C537	168-1042-78	16V 0.1uF	Q457	193-1306-00	2SD1306
C51	187-3353-65	50V3.3uF	C538	187-1073-27	10V100uF	Q501	125-2199-96	KRC106S
C52	166-1801-50	18pF CH	C539	168-1022-55	1000pF K	Q502	125-0199-96	KRA106S
C53	166-1501-50	15pF CH	C541	189-2273-22	10V220uF	Q503	125-4010-90	KTC3875S
C54	166-1011-50	100pF CH	C542	168-1042-78	16V 0.1uF	Q505	191-1237-00	2SB1237
C55	166-1011-50	100pF CH	C543	166-1011-50	100pF CH	Q506	125-2199-96	KRC106S
C56	166-1011-50	100pF CH	C544	166-1011-50	100pF CH	Q507	125-2199-93	KRC103S
C57	166-3311-50	330pF CH	C545	166-1011-50	100pF CH	Q508	125-0199-96	KRA106S
C58	168-1022-55	1000pF K	C546	166-1011-50	100pF CH	Q602	125-2199-93	KRC103S
C59	166-2201-50	22pF CH	C601	042-0650-00	5.5V 0.1F	Q604	125-3004-90	KTA1504S
C102	178-2242-78	0.22uF	C612	168-4732-78	0.047uF K	Q606	125-2199-93	KRC103S
C103	178-2242-78	0.22uF	C614	168-1032-55	0.01uF K	Q607	125-3007-90	KTA1298
C104	178-2242-78	0.22uF	C615	042-1577-00	6.3V 100uF	Q609	125-3007-90	KTA1298
C105	178-2242-78	0.22uF	C616	187-1063-35	16V 10uF	Q610	125-2199-93	KRC103S
C106	187-1063-37	16V10uF	D110	001-0347-41	MA4075M	Q620	125-2199-93	KRC103S
C107	187-1053-67	50V1uF	D201	001-0466-90	S5688B	R3	119-1021-15	1/10W 1k ohm
C108	172-1041-15	0.1uF	D202	001-1310-00	KDS160-RTK	R4	119-1021-15	1/10W 1k ohm
C109	187-1053-67	50V1uF	D203	001-0592-61	1N5404	R7	119-1231-15	1/10W 12k ohm
C118	166-2211-50	220pF CH	D205	001-1310-00	KDS160-RTK	R9	119-1031-15	1/10W 10k ohm
C119	166-2211-50	220pF CH	D221	001-1310-00	KDS160-RTK	R14	119-1031-15	1/10W 10k ohm
C128	166-2211-50	220pF CH	D225	001-0466-91	S5688G	R15	119-1031-15	1/10W 10k ohm
C129	166-2211-50	220pF CH	D501	001-1310-00	KDS160-RTK	R17	119-5631-15	1/10W 56k ohm
C210	187-2263-37	16V 22uF	D502	001-1310-00	KDS160-RTK	R18	119-1521-15	1/10W 1.5k ohm
C214	042-1447-00	16V 2200uF	D503	001-0347-23	MA4043M	R19	119-1521-15	1/10W 1.5k ohm
C222	187-4763-35	16V47uF	D601	001-1310-00	KDS160-RTK	R22	119-1041-15	1/10W 100k ohm
C223	172-2231-15	0.022uF	IC2	051-6212-08	LC72191JM-TLM	R23	119-1031-15	1/10W 10k ohm
C224	187-2263-37	16V 22uF	IC101	051-2057-00	TB2906HQ	R24	119-2221-15	1/10W 2.2k ohm
C225	187-1073-37	16V100uF	IC102	051-3297-10	BA4916-V2	R25	119-2221-15	1/10W 2.2k ohm
C227	187-1063-37	16V10uF	IC301	051-3049-90	HA17558AFEL	R26	119-2221-15	1/10W 2.2k ohm
C228	187-4763-37	16V47uF	IC501	051-5028-90	TDA7409DTR	R29	119-1031-15	1/10W 10k ohm
C229	187-1063-37	16V10uF	IC502	051-3049-90	HA17558AFEL	R31	119-4741-15	1/10W 470k ohm
C230	173-1021-18	1000pF J	IC505	051-5437-08	S-80821ANMP-EDJ-E2	R32	119-8201-15	1/10W 82 ohm
C243	187-1073-27	10V100uF				R51	119-2221-15	1/10W 2.2k ohm
C244	187-2273-17	6.3V220uF	IC507	051-5834-90	uPC5701GR-028-8JG	R52	119-1021-15	1/10W 1k ohm
C245	187-1073-17	6.3V100uF				R60	119-1021-15	1/10W 1k ohm
C246	168-1032-55	0.01uF K	IC601	052-3397-00	M30622MEP-196GP	R101	119-1231-15	1/10W 12k ohm
C247	166-1011-50	100pF CH	IC602	051-6600-58	HA12187FP	R102	119-4731-15	1/10W 47k ohm
C301	187-1063-37	16V10uF	IC603	051-7400-08	HD74LS07FP	R105	119-1021-15	1/10W 1k ohm
C302	187-1063-37	16V10uF	J601	074-1194-00	13P CE-NET	R106	119-3311-15	1/10W 330 ohm
C303	187-1063-37	16V10uF	J602	074-1237-76	26P	R107	119-3311-15	1/10W 330 ohm
C304	187-1063-37	16V10uF	J603	074-1217-00	12P	R108	119-3311-15	1/10W 330 ohm
C305	168-4732-78	0.047uF K	J903	074-1214-00	16P	R109	119-3311-15	1/10W 330 ohm
C320	168-4732-78	0.047uF K	L1	010-2003-04	30uH	R204	119-3321-15	1/10W 3.3k ohm
C458	187-2263-37	16V 22uF	L2	010-6026-50	220uH	R205	119-1831-15	1/10W 18k ohm
C459	187-2263-37	16V 22uF	L3	010-2285-56	2.25k ohm/100MHz	R207	119-1231-15	1/10W 12k ohm
C460	187-2263-37	16V 22uF	L4	010-2285-56	2.25k ohm/100MHz	R208	119-1011-15	1/10W 100 ohm
C461	187-2263-37	16V 22uF	L500	010-6009-76	22uH J	R209	119-3311-15	1/10W 330 ohm
C462	187-2263-37	16V 22uF	L501	010-3105-62	1k ohm/100MHz	R210	119-1031-15	1/10W 10k ohm
C463	187-2263-37	16V 22uF	L502	010-3105-62	1k ohm/100MHz	R211	119-2741-15	1/10W 270k ohm
C464	168-1022-55	1000pF K	L503	010-3105-62	1k ohm/100MHz	R252	116-1521-15	1/4W 1.5k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R301	119-1041-15	1/10W 100k ohm	R509	119-3311-15	1/10W 330 ohm	R643	119-5621-15	1/10W 5.6k ohm
R302	119-1041-15	1/10W 100k ohm	R530	119-3931-15	1/10W 39k ohm	R651	119-0000-05	1/10W 0 ohm JW
R303	032-0140-64	1/10W 43k ohm F	R531	119-4721-15	1/10W 4.7k ohm	R652	119-1811-15	1/10W 180 ohm
R304	032-0140-64	1/10W 43k ohm F	R532	119-4721-15	1/10W 4.7k ohm	R653	119-1811-15	1/10W 180 ohm
R305	032-0140-64	1/10W 43k ohm F	R535	119-0000-05	1/10W 0 ohm JW	R654	119-1811-15	1/10W 180 ohm
R306	032-0140-64	1/10W 43k ohm F	R536	119-0000-05	1/10W 0 ohm JW	R656	119-0000-05	1/10W 0 ohm JW
R307	119-1021-15	1/10W 1k ohm	R537	119-8221-15	1/10W 8.2k ohm	R657	119-1811-15	1/10W 180 ohm
R308	032-0140-52	1/10W 33k ohm F	R538	119-3321-15	1/10W 3.3k ohm	R658	119-1041-15	1/10W 100k ohm
R309	032-0140-52	1/10W 33k ohm F	R540	119-2231-15	1/10W 22k ohm	R670	119-4731-15	1/10W 47k ohm
R310	032-0140-52	1/10W 33k ohm F	R541	119-1021-15	1/10W 1k ohm	R673	119-1041-15	1/10W 100k ohm
R311	032-0140-52	1/10W 33k ohm F	R551	119-4721-15	1/10W 4.7k ohm	R674	119-1031-15	1/10W 10k ohm
R320	119-1021-15	1/10W 1k ohm	R552	119-0000-05	1/10W 0 ohm JW	R675	119-1021-15	1/10W 1k ohm
R470	119-4721-15	1/10W 4.7k ohm	R553	119-4721-15	1/10W 4.7k ohm	R676	119-1021-15	1/10W 1k ohm
R471	119-4721-15	1/10W 4.7k ohm	R554	119-1011-15	1/10W 100 ohm	R677	119-1021-15	1/10W 1k ohm
R472	119-4721-15	1/10W 4.7k ohm	R555	119-1011-15	1/10W 100 ohm	R685	119-0000-05	1/10W 0 ohm JW
R473	119-4721-15	1/10W 4.7k ohm	R556	119-1011-15	1/10W 100 ohm	R687	119-0000-05	1/10W 0 ohm JW
R474	119-4721-15	1/10W 4.7k ohm	R557	119-1011-15	1/10W 100 ohm	R688	119-4721-15	1/10W 4.7k ohm
R475	119-4721-15	1/10W 4.7k ohm	R599	119-0000-05	1/10W 0 ohm JW	R689	119-4721-15	1/10W 4.7k ohm
R476	119-3311-15	1/10W 330 ohm	R603	116-6801-15	1/4W 68 ohm	R690	119-0000-05	1/10W 0 ohm JW
R477	119-3311-15	1/10W 330 ohm	R604	119-3321-15	1/10W 3.3k ohm	R691	119-0000-05	1/10W 0 ohm JW
R478	119-3311-15	1/10W 330 ohm	R607	119-2231-15	1/10W 22k ohm	R692	119-0000-05	1/10W 0 ohm JW
R479	119-3311-15	1/10W 330 ohm	R611	119-1041-15	1/10W 100k ohm	R693	119-0000-05	1/10W 0 ohm JW
R480	119-1021-15	1/10W 1k ohm	R612	119-1041-15	1/10W 100k ohm	R694	119-0000-05	1/10W 0 ohm JW
R481	119-1021-15	1/10W 1k ohm	R613	119-4731-15	1/10W 47k ohm	R695	119-0000-05	1/10W 0 ohm JW
R482	119-1021-15	1/10W 1k ohm	R614	119-4731-15	1/10W 47k ohm	R698	119-0000-05	1/10W 0 ohm JW
R490	119-3311-15	1/10W 330 ohm	R615	119-1031-15	1/10W 10k ohm	R699	119-0000-05	1/10W 0 ohm JW
R491	119-3311-15	1/10W 330 ohm	R616	119-2711-15	1/10W 270 ohm	S601	013-6103-00	SWITCH
R501	032-0140-58	1/10W 51k ohm F	R617	119-2711-15	1/10W 270 ohm	SUP1	060-0122-91	DSP-141N-S00B
R502	032-0140-58	1/10W 51k ohm F	R620	119-1031-15	1/10W 10k ohm	T101	099-9006-70	CHOKE
R503	032-0140-58	1/10W 51k ohm F	R621	116-1221-15	1/4W 1.2k ohm	X2	061-9013-00	7.2MHz
R504	032-0140-58	1/10W 51k ohm F	R627	119-1031-15	1/10W 10k ohm	X601	060-1533-90	CSTCE10M0G52-RO
R505	032-0140-51	1/10W 15k ohm F	R628	116-1521-15	1/4W 1.5k ohm	PWB	039-2671-00	PWB(WITHOUT COMPONENT)
R506	032-0140-51	1/10W 15k ohm F	R634	119-1031-15	1/10W 10k ohm			
R507	032-0140-51	1/10W 15k ohm F	R635	119-3321-15	1/10W 3.3k ohm			
R508	032-0140-51	1/10W 15k ohm F	R642	119-1031-15	1/10W 10k ohm			

CD PWB section(B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C34	168-1042-78	16V 0.1uF	R9	033-2211-15	1/10W 220 ohm
C3	163-2273-05	4V 220uF	C35	046-6812-58	680pF	R11	033-1051-15	1/10W 1M ohm
C4	168-1042-78	16V 0.1uF	C36	168-1042-78	16V 0.1uF	R12	119-6811-15	1/10W 680 ohm
C5	163-1073-35	16V 100uF	C37	168-1042-78	16V 0.1uF	R13	033-2211-15	1/10W 220 ohm
C6	163-1073-35	16V 100uF	C38	046-1522-58	1500pF	R14	033-2211-15	1/10W 220 ohm
C7	168-1042-78	16V 0.1uF	C39	046-4722-58	4700pF	R16	033-2231-15	1/10W 22k ohm
C9	178-1052-78	1uF	C40	046-1032-78	0.01uF	R18	033-3341-15	1/10W 330k ohm
C10	042-0560-85	6.3V 100uF	C41	046-1532-78	0.015uF	R19	033-5621-15	1/10W 5.6k ohm
C11	046-4712-58	470pF	C43	168-1042-78	16V 0.1uF	R21	033-2231-15	1/10W 22k ohm
C12	178-1052-78	1uF	C47	045-4701-50	47pF	R22	033-4731-15	1/10W 47k ohm
C13	046-4712-58	470pF	C48	168-1042-78	16V 0.1uF	R24	033-1041-15	1/10W 100k ohm
C15	168-1042-78	16V 0.1uF	C49	168-1042-78	16V 0.1uF	R25	033-1031-15	1/10W 10k ohm
C16	168-4732-78	0.047uF	C50	042-0666-00	12.5V 22uF	R26	033-1531-15	1/10W 15k ohm
C17	168-4732-78	0.047uF	C51	046-5622-58	5600pF	R27	033-4731-15	1/10W 47k ohm
C18	168-1042-78	16V 0.1uF	C52	178-1052-78	1uF	R28	033-1831-15	1/10W 18k ohm
C19	168-1042-78	16V 0.1uF	C55	178-1052-78	1uF	R29	033-6821-15	1/10W 6.8k ohm
C21	046-6822-58	6800pF	CCT2	050-0140-63	1/32W 47k ohmx4J	R30	033-8231-15	1/10W 82k ohm
C22	046-3332-78	0.033uF	D1	001-0367-91	1SS226	R31	033-8231-15	1/10W 82k ohm
C24	178-1052-78	1uF	IC1	051-6071-08	BA5825FP-E2	R32	119-1001-15	1/10W 10 ohm
C25	168-1042-78	16V 0.1uF	IC2	051-6399-00	TC94A15F	R33	033-2731-15	1/10W 27k ohm
C26	168-1042-78	16V 0.1uF	J101	074-1228-76	26P	R34	033-2731-15	1/10W 27k ohm
C28	168-1042-78	16V 0.1uF	J201	074-1138-65	15P	R35	033-2731-15	1/10W 27k ohm
C29	168-1042-78	16V 0.1uF	J301	074-1138-60	10P	R36	033-2731-15	1/10W 27k ohm
C30	045-6801-50	68pF	Q1	131-1188-50	2SB1188PQR	R37	032-0162-50	1/10W 0.51 ohm
C31	168-1042-78	16V 0.1uF	Q2	131-1188-50	2SB1188PQR	X1	060-1535-90	16.934MHz
C32	168-1042-78	16V 0.1uF	R1	117-6811-15	1/8W 680 ohm	PWB	039-2435-20	PWB(WITHOUT COMPONENT)
C33	046-1532-78	0.015uF	R2	117-1001-15	1/8W 10 ohm			

LED PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

SW PWB section(B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C702	168-4732-78	0.047uF K	PL3	017-0444-00	14V50mA	S708	013-6312-50	SKRP-ABE-010
C703	168-4732-78	0.047uF K	PL4	017-0444-00	14V50mA	S709	013-6312-50	SKRP-ABE-010
C704	042-0423-97	16V 10uF	R701	119-1031-15	1/10W 10k ohm	S711	013-6312-50	SKRP-ABE-010
C706	168-4732-78	0.047uF K	R704	119-3311-15	1/10W 330 ohm	S712	013-6312-50	SKRP-ABE-010
D711	001-7046-00	NSPW310BS	R705	119-1041-15	1/10W 100k ohm	S713	013-6312-50	SKRP-ABE-010
D712	001-0584-27	MA8110	R706	119-3921-15	1/10W 3.9k ohm	S715	013-6312-50	SKRP-ABE-010
D713	001-0529-29	MA8051-M	R707	119-1221-15	1/10W 1.2k ohm	S716	013-6312-50	SKRP-ABE-010
D714	001-0529-41	MA8075-M	R708	119-1221-15	1/10W 1.2k ohm	S718	013-6312-50	SKRP-ABE-010
D715	001-0529-41	MA8075-M	R709	119-1221-15	1/10W 1.2k ohm	S719	013-6312-50	SKRP-ABE-010
D716	001-0529-41	MA8075-M	S701	013-6312-50	SKRP-ABE-010	S720	013-6312-50	SKRP-ABE-010
D717	001-0529-41	MA8075-M	S702	013-6312-50	SKRP-ABE-010	S721	013-6312-50	SKRP-ABE-010
IC701	051-6066-00	NJU6535FG1	S703	013-6312-50	SKRP-ABE-010	VR720	016-9900-84	VR W/SHAFT
LCD701	379-1297-40	LCD(INDICATOR)	S704	013-6312-50	SKRP-ABE-010	PWB	039-2457-00	PWB(WITHOUT COMPONENT)
P703	076-0615-50	12P	S705	013-6312-50	SKRP-ABE-010			
PL1	017-0444-00	14V50mA	S706	013-6312-50	SKRP-ABE-010			
PL2	017-0444-00	14V50mA	S707	013-6312-50	SKRP-ABE-010			