


pin 39: MCCWbk : O : Mechanism control.
pin 40: MCWbk : O : Mechanism control.
pin 41: LIMITbk : IN : Mechanism control.
pin 42: NFLOCKbk : O : Monitor terminal.
pin 43: NTLOCKbk : O : Monitor terminal.
pin 44: RESYbk : O : Monitor terminal.
pin 45: NU : - : Not in use.
pin 46: NU : - : Not in use.
pin 47: NU : - : Not in use.
pin 48: NU : - : Not in use.
pin 49: NU : - : Not in use.
pin 50: NU : - : Not in use.
pin 51: NU : - : Not in use.

pin 52: NU : - : Not in use.
pin 53: NU : - : Not in use.
pin 54: NU : - : Not in use.
pin 55: NRSTbk : O : Communication line with CD IC.
pin 56: DMUTEbk : O : Communication line with CD IC.
pin 57: MLDBk : O : Communication line with CD IC.
pin 58: MDATAbk : O : Communication line with CD IC.
pin 59: MCLKbk : O : Communication line with CD IC.
pin 60: STATbk : IN : Communication line with CD IC.
pin 61: GND : - : Ground.
pin 62: KEY0bk : IN : For the test.
pin 63: KEY1bk : IN : For the test.
pin 64: KEY2bk : IN : For the test.

EXPLODED VIEW • PARTS LIST


Main section

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7921-01	ESCUTCHEON ASSY	1	36	039-1799-01	MAIN PWB (WITHOUT COMPONENT)	1
2	380-5513-00	KNOB	2	37	331-2991-00	MECH-BRKT	1
3	380-5495-00	KNOB	5	38	331-2992-00	MECH-BRKT	1
4	345-8518-00	RUBBER SWITCH	1	39	331-2990-00	IC-HOLDER	1
5	039-1801-00	SWITCH PWB (WITHOUT COMPONENT)	1	40	051-2036-00	IC(TDA7454)	1
6	331-2998-00	LCD COVER	1	41	076-0641-10	PLUG(10P)	1
7	379-0459-00	INDICATOR	1	42	039-1800-00	CONNECTOR PWB (WITHOUT COMPONENT)	1
8	335-6746-00	DIFFUSER	1	43	331-2995-00	OUTLET HOLDER	1
9	335-6383-00	ILLUMI-PLATE	1	44	074-1262-00	OUTLET SOCKET	1
10	001-7035-02	LED	3	45	331-3220-00	ANT-HOLDER	1
11	335-6381-00	LCD-HOLDER	1	46	076-0641-16	PLUG(16P)	1
12	016-0022-00	ROTARY ENCODER	1	47	060-8021-06	AUTO FUSE(10A)	1
13	016-0021-00	ROTARY ENCODER	1	48	313-1797-02	HEAT SINK	1
14	074-1059-76	OUTLET SOCKET(26P)	2	49	290-7914-00	LABEL	1
15	076-0567-03	PLUG(3P)	1	50	290-7913-00	LABEL	1
16	074-1151-20	OUTLET SOCKET(20P)	1	51	286-9433-00	SETPLATE	1
17	013-7104-00	SWITCH	1	52	290-7885-00	BAR CODE LABEL	1
18	076-0567-07	PLUG(7P)	1	53	714-2606-81	MACHINE SCREW(M2.6×6)	28
19	716-0778-00	WAVE SCREW	12	54	714-3006-40	MACHINE SCREW(M3×6)	4
20	722-0603-00	NUT	5	55	714-2303-81	MACHINE SCREW(M2.3×3)	4
21	016-4155-00	VARIABLE RESISTOR	5	56	716-1573-00	SCREW	4
22	076-0540-08	PLUG(8P)	1	57	290-8022-00	GUIDE LABEL	1
23	331-2997-00	VR-HOLDER	1	58	076-0640-18	PLUG(18P)	1
24	076-0570-07	PLUG(7P)	1	59	074-1151-08	OUTLET SOCKET(8P)	1
25	309-0761-01	FRONT PLATE	1	60	001-7048-91	LED	20
26	305-0299-00	SIDE PLATE	1	61	092-4300-10	ANT-RECEPTACLE	1
27	305-0300-02	SIDE PLATE(R)	1	62	092-4301-10	ANT-RECEPTACLE	1
28	750-3414-01	SIDE SPRING	2	63	076-0433-20	PLUG(20P)	1
29	304-0469-00	LOWER COVER	1	64	076-0540-20	PLUG(20P)	1
30	303-0476-00	UPPER COVER	1	65	076-0641-24	PLUG(24P)	1
31	930-0800-50	TAPE MECHANISM	1	66	076-0324-05	PLUG(5P)	1
32	929-0095-50	CD MECHANISM	1	67	345-7496-00	REAR HOLDER	1
33	331-2993-00	MECH-BRKT	1	68	001-7031-81	LED	15
34	331-2994-00	MECH-BRKT	1	69	880-2088B	FM/AM TUNER	1
35	076-0570-03	PLUG(3P)	1				

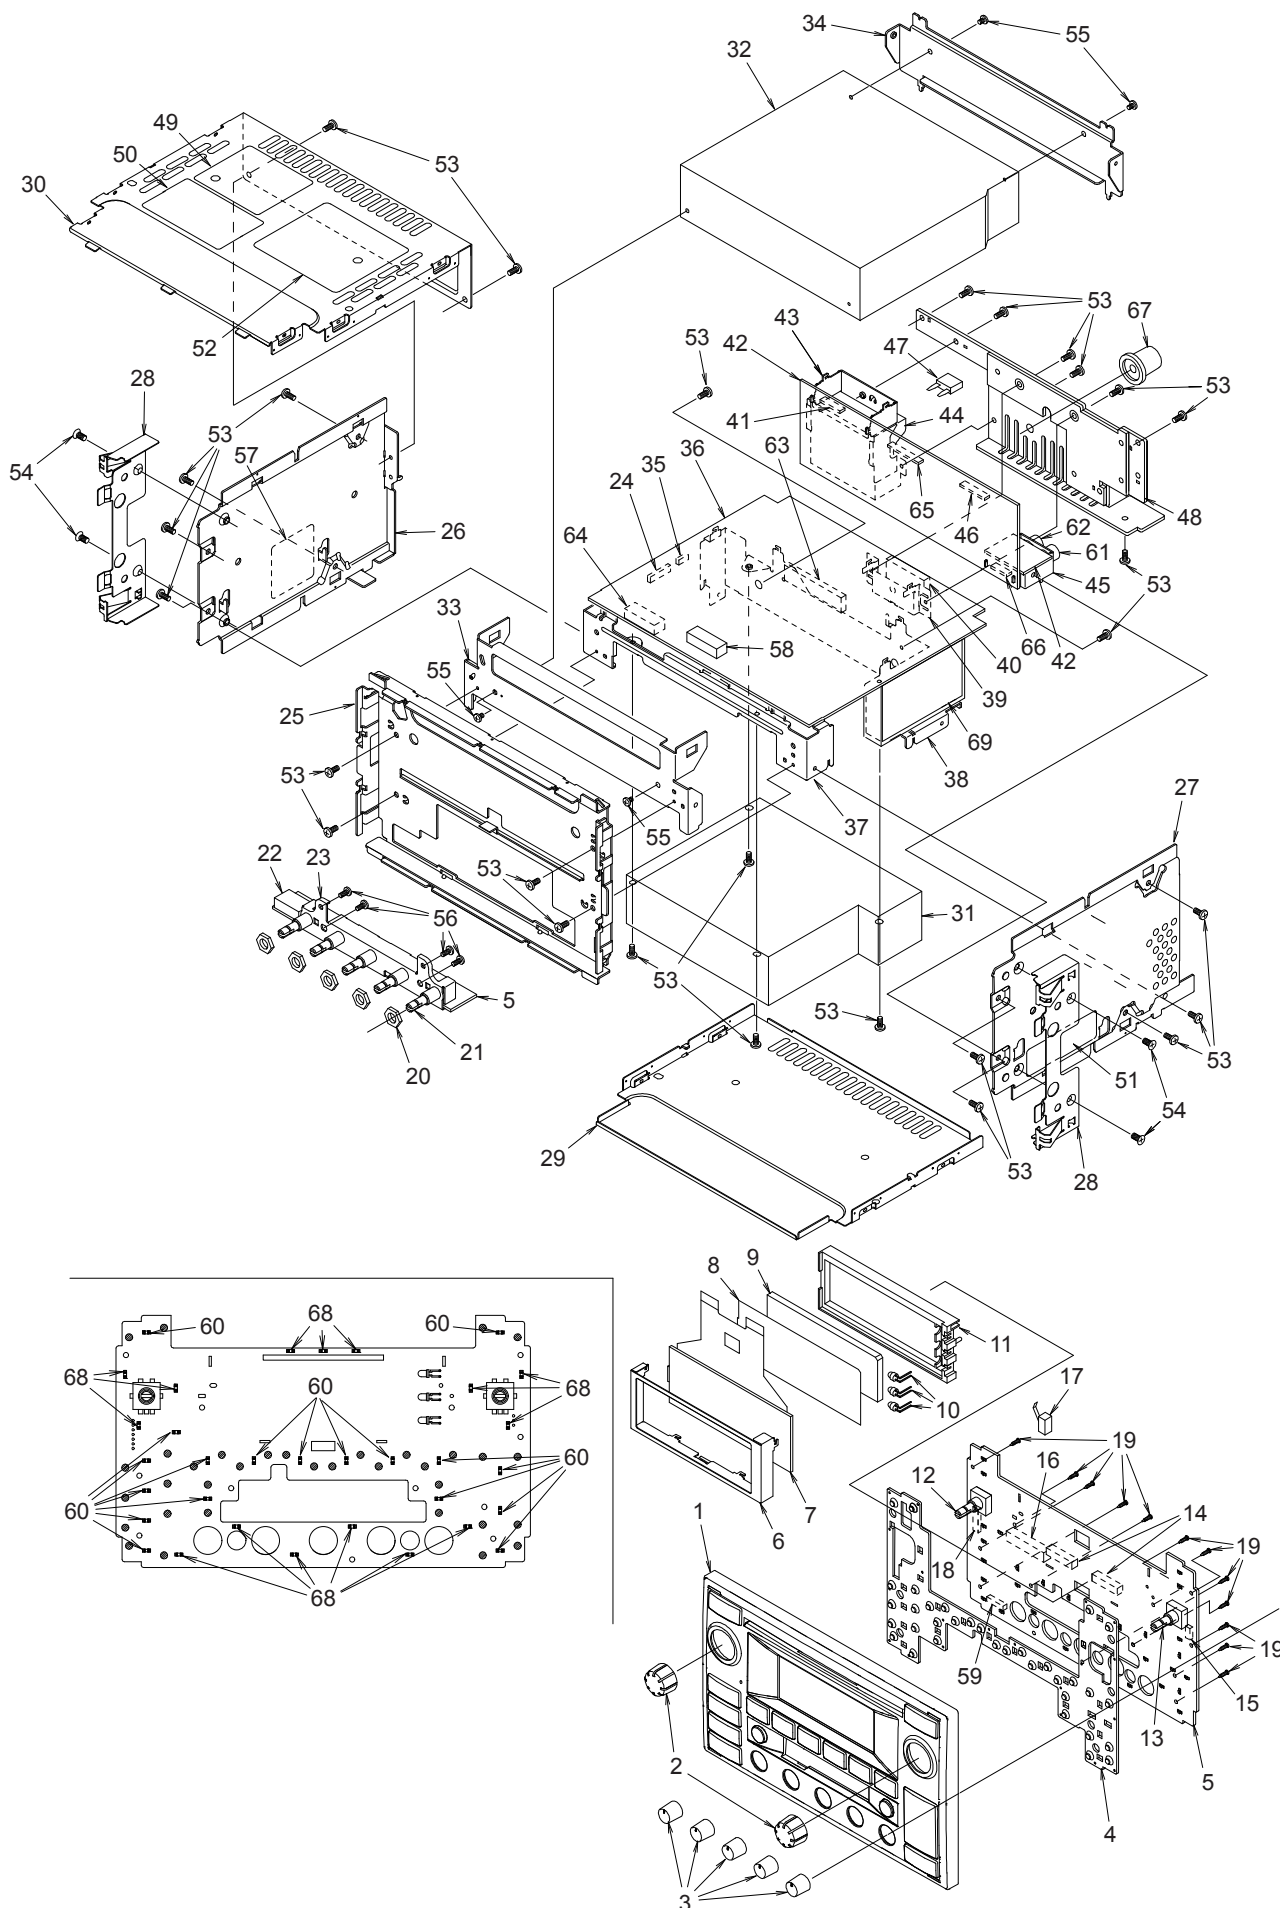

CD mechanism:Mechanism chassis section


929-0095-50

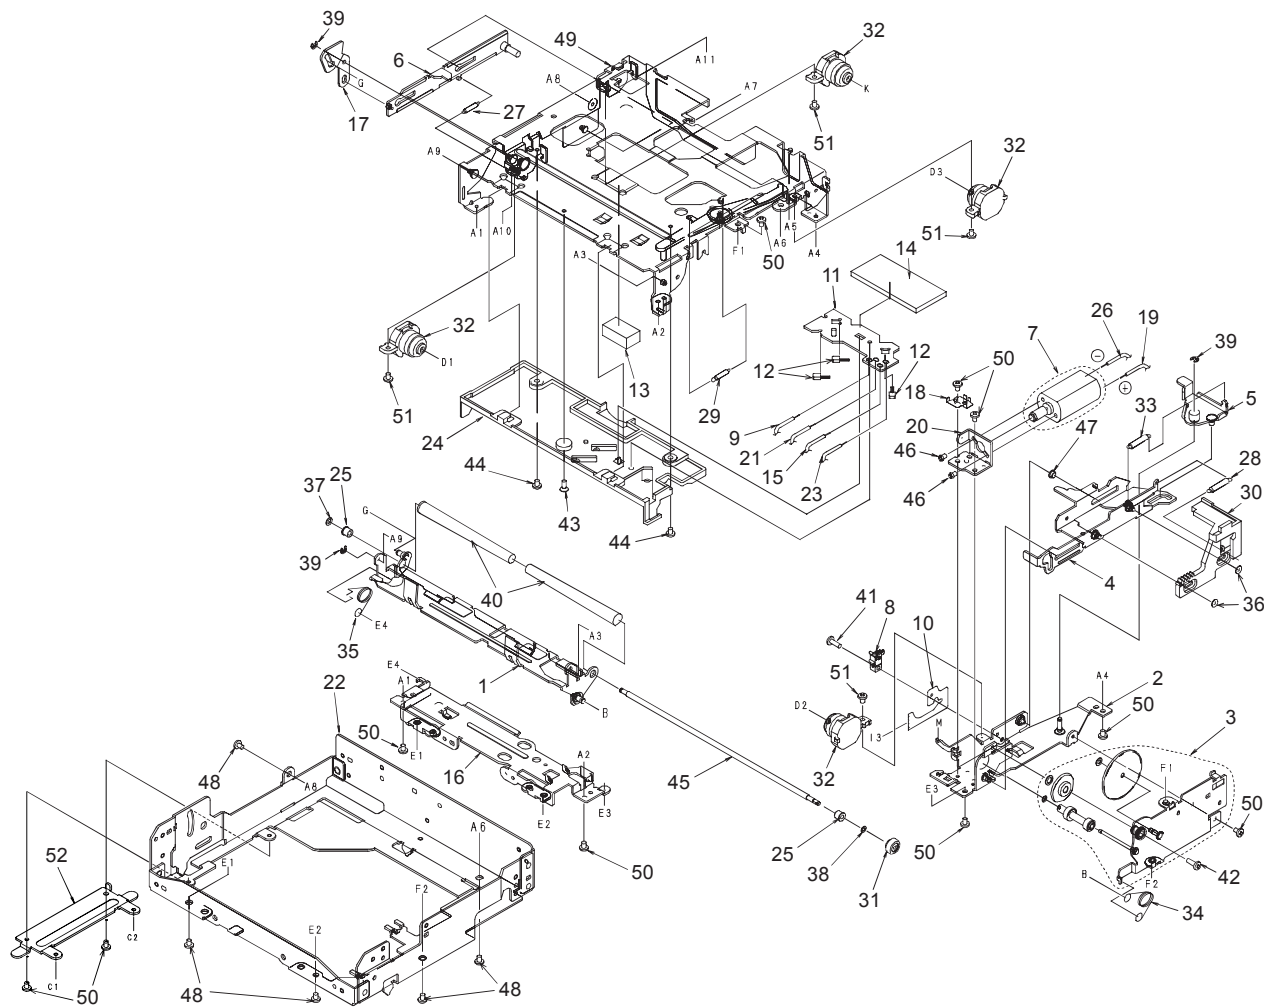

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0309-23	L-DISC-G-ASSY	1	22	620-0773-40	CD MECHA. BRKT	1
2	966-0310-41	SHIFT-P-CH-ASSY	1	23	800-4910-60	LEAD WIRE(BLK)	1
3	HBS-430-100	GEAR PALTE ASSY	1	24	621-0402-50	U-DISC GUIDE-F	1
4	966-0312-41	SHIFT PLATE ASSY	1	25	621-0243-50	ROLLER SLEEVE	2
5	966-0358-41	DRIVE-L ASSY	1	26	800-4904-60	LEAD WIRE(BLK)	1
6	966-0359-41	SIDE-L PLATE ASSY	1	27	750-3189-00	SIDE-L SPRING	1
7	SMA-147-100	MOTOR ASSY(LOADING)	1	28	750-3098-00	L-LINK SPRING	1
8	013-3879-01	CHUCKING SWITCH	1	29	750-3094-00	S ARM SPRING	1
9	804-4910-60	LEAD WIRE(YEL)	1	30	621-0248-51	RACK GEAR	1
10	039-0586-50	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1	31	621-0249-50	ROLLER GEAR	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1	32	629-0079-00	DAMPER	4
12	060-0252-01	PHOTO TR	3	33	750-3092-03	SHIFT SPRING	1
13	345-7513-01	CLAMPER SHEET	1	34	750-3091-03	LOADING SPRING-R	1
14	345-7514-00	SENSOR PWB SHEET	1	35	750-3090-02	LOADING SPRING-L	1
15	802-4910-60	LEAD WIRE(RED)	1	36	746-0877-02	WASHER	2
16	620-0485-20	FRONT PLATE	1	37	746-0762-00	WASHER	1
17	620-0488-40	S-L LINK PLATE	1	38	746-0712-03	WASHER	1
18	620-0489-40	MOTOR PLATE	1	39	743-1500-10	E-RING	3
19	802-4904-60	LEAD WIRE(RED)	1	40	621-0258-97	LOADING ROLLER	2
20	620-0492-20	MOTOR BRACKET	1	41	716-1742-00	SCREW(M2×5)	1
21	801-4910-60	LEAD WIRE(BRN)	1	42	716-1704-00	SCREW(M2×7)	1
				43	716-1677-00	SCREW(M2×5)	1

NO.	PART NO.	DESCRIPTION	Q'TY
44	716-1507-00	SCREW(M2×3)	2
45	622-1072-05	ROLLER SHAFT	1
46	716-1468-00	SCREW(M2×2.5)	2
47	622-1219-01	SHIFT ROLLER	1
48	714-2603-81	SCREW(M2.6×3)	5


Drive unit section

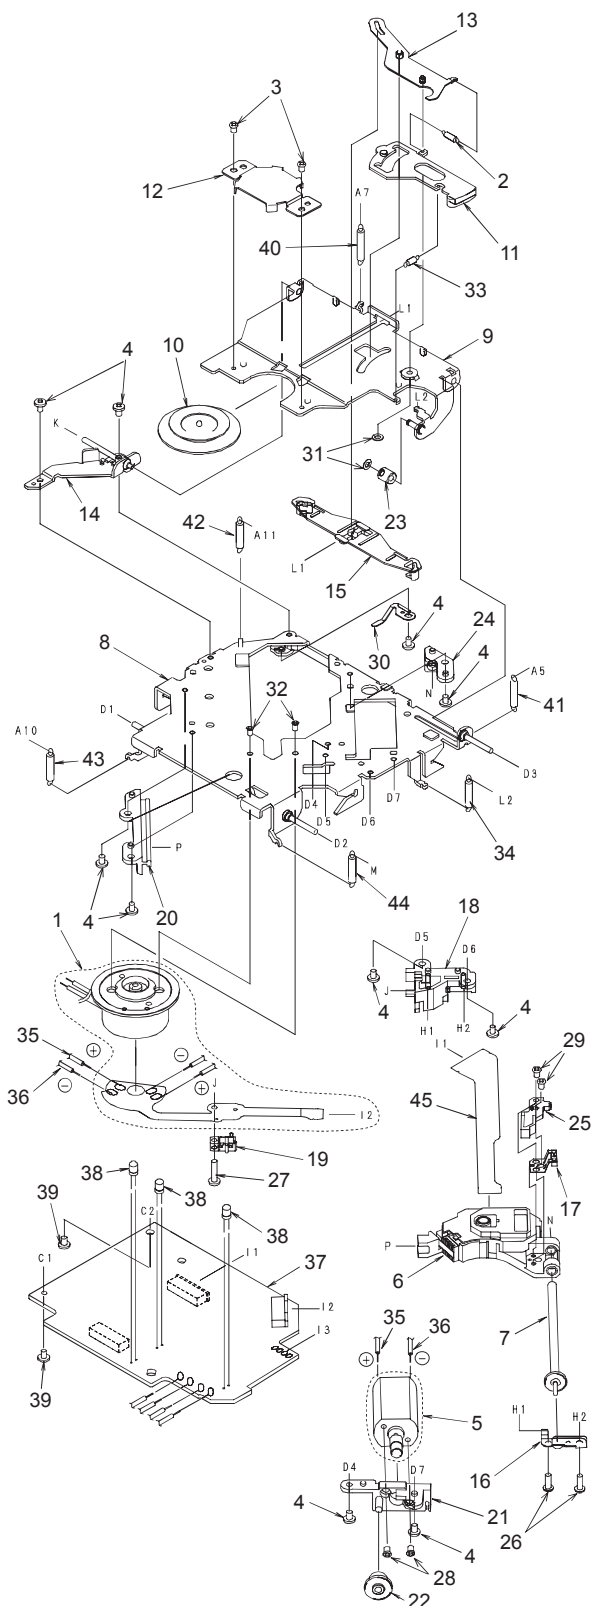

NO.	PART NO.	DESCRIPTION	Q'TY
49	966-0308-43	CHASSIS ASSY	1
50	714-2003-81	SCREW(M2×3)	10
51	716-1670-00	SCREW(M2×4)	4
52	620-0980-00	PWB PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY(SPINDLE)	1
2	750-3098-00	L-LINK SPRING	1
3	716-1468-00	SCREW(M2×2.5)	2
4	714-2003-81	SCREW(M2×3)	10
5	SMA-146-100	MOTOR ASSY(SLED)	1
6	969-0008-12	PICK UP UNIT	1
7	HBS-432-100	LS-GEAR ASSY	1
8	966-0447-42	DR-PLATE ASSY	1
9	966-0449-42	CLAMP LINK ASSY	1
10	621-0205-02	CLAMP RING	1
11	621-0251-50	LOCK LINK	1
12	620-0198-40	CLAMPER PLATE	1
13	966-0314-41	STOP LINK ASSY	1
14	966-0448-41	SIDE PLATE ASSY	1
15	621-0252-50	DISC STOPPER	1
16	620-0491-40	SPRING PLATE	1
17	966-0454-40	SCREW H-RACK ASSY	1
18	621-0358-50	LS HOLDER-F	1
19	013-7100-00	SWITCH(LIMIT)	1
20	621-0357-03	PICK UP GUIDE	1
21	621-0253-50	MOTOR HOLDER	1
22	621-0255-02	SECOND GEAR	1
23	622-1073-02	CLAMPER ROLLER	1
24	621-0359-50	LS OLDER-R	1
25	621-0375-50	SH-BASE	1
26	716-0675-00	SCREW(M2×5.5)	2
27	716-1555-00	WAVE SCREW(Φ2×8)	1
28	732-2004-11	SEMS SCREW(M2×4)	2
29	739-1735-17	SCREW(M1.7×3.5)	2
30	620-0690-01	RATTLE PLATE	1
31	746-0761-00	WASHER	2
32	716-1733-00	SCREW(M1.7×2.3)	2
33	750-3099-00	ES SPRING	1
34	750-3422-00	CLAMPER SPRING	1
35	816-2373-00	LEAD WIRE(WHT)	1
36	816-2372-00	LEAD WIRE(BLU)	1
37	039-1901-00	CD PWB (WITHOUT COMPONENT)	1
38	001-0563-00	LED	3
39	716-1670-00	SCREW(M2×4)	2
40	750-3202-00	CENTER SPRING-B	1
41	750-3096-01	DR SPRING-R	1
42	750-3164-00	DR SPRING-LR	1
43	750-3188-00	DR SPRING-F-B	1
44	750-3201-00	DR SPRING-F-R	1
45	039-1768-00	FLEX PWB (WITHOUT COMPONENT)	1

Tape mechanism section 930-0800-50

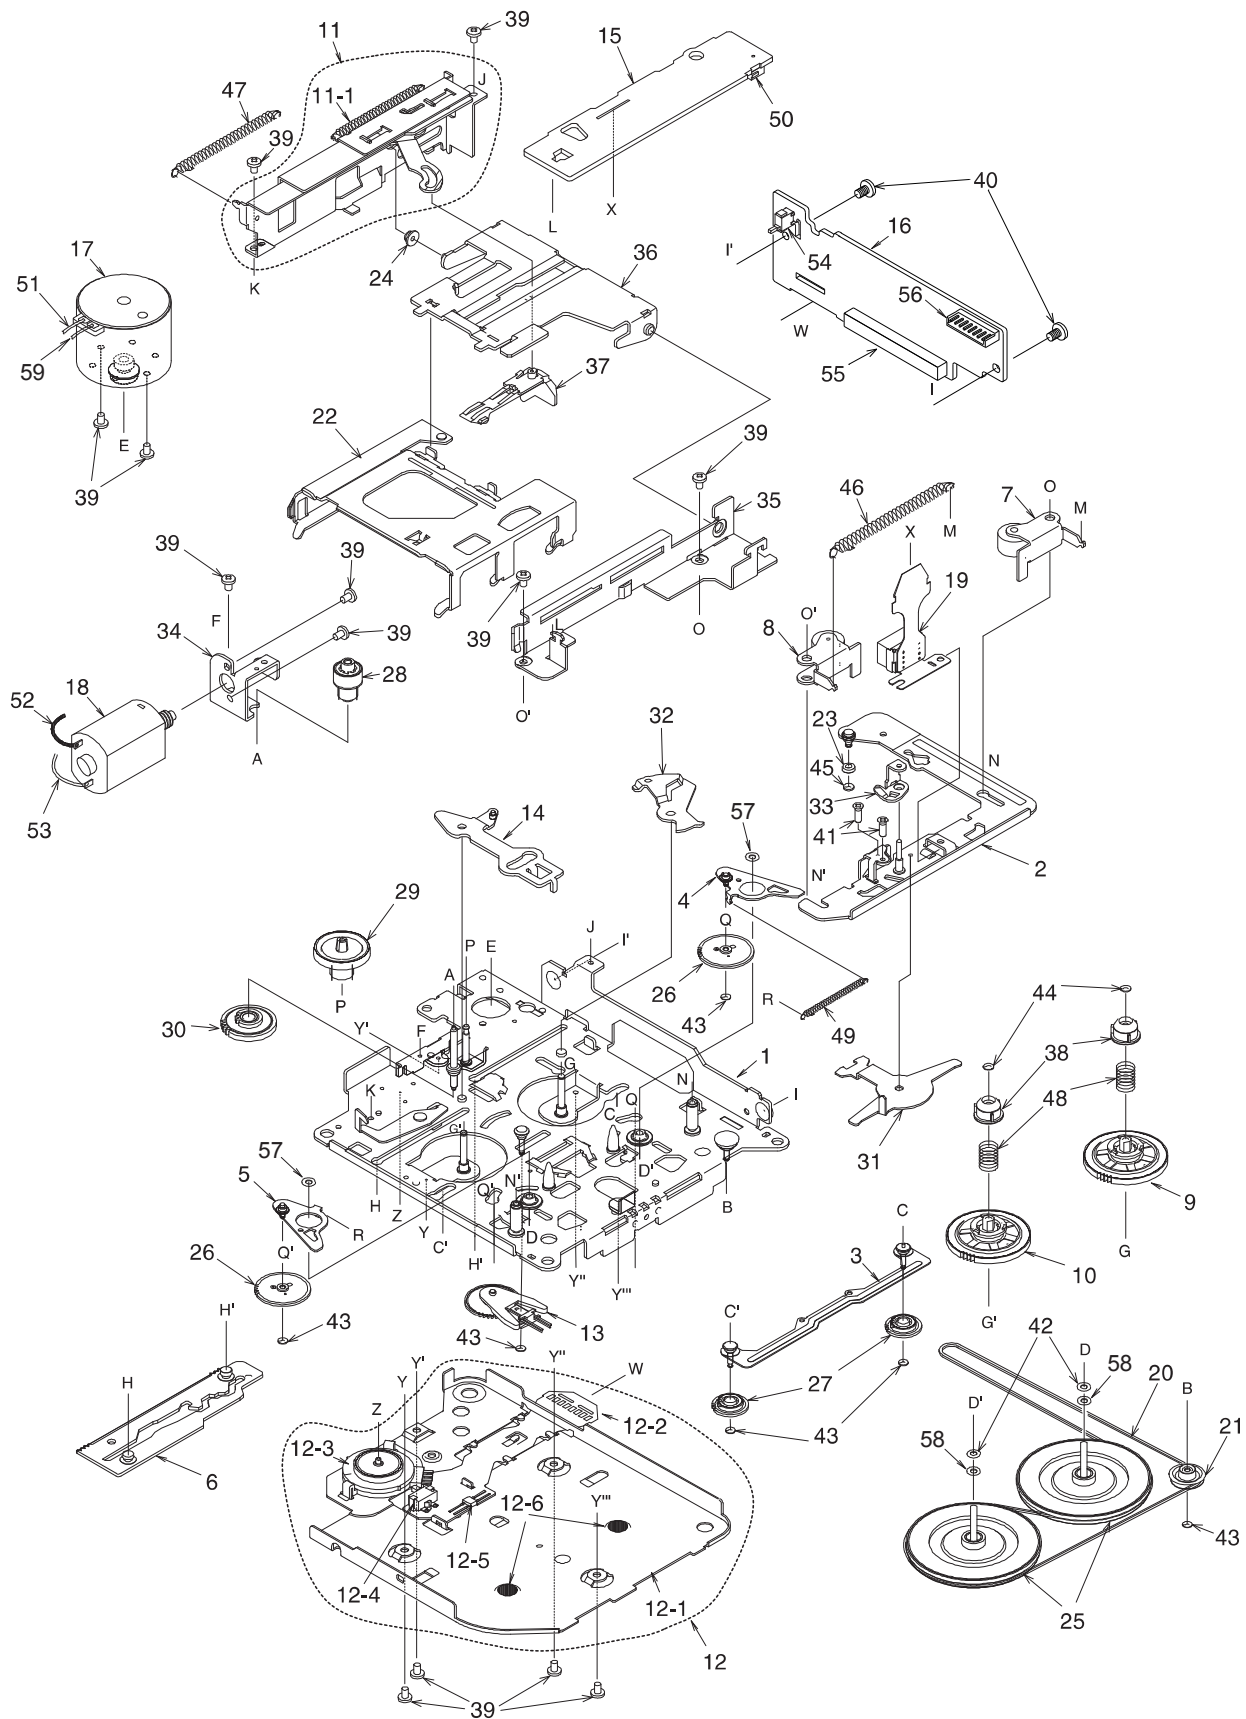

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-16	DECK PLATE ASSY	1
2	960-4261-06	HEAD PLATE ASSY	1
3	960-4262-03	FF/REW-P ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-06	MODE PLATE ASSY	1
7	960-4428-00	ROLLER ASSY F	1
8	960-4429-00	ROLLER ASSY R	1
9	960-4474-00	REEL ASSY F	1
10	960-4475-00	REEL ASSY R	1
11	960-4480-50	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4450-50	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM P-ASSY	1
12-2	099-9926-01	BOTTOM PWB (WITHOUT COMPONENT)	1
12-3	013-7300-00	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4478-00	DETECT SUB ASSY	1
14	960-4301-03	PLAY LINK ASSY	1
15	039-1747-00	SIDE PWB (WITHOUT COMPONENT)	1
16	039-0368-00	REAR PWB (WITHOUT COMPONENT)	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-00	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0106-00	PACK GUIDE	1
23	610-0342-01	HEAD P-ROLLER	1
24	610-0343-00	GUIDE A-ROLLER	1
25	611-0091-02	FLYWHEEL	2
26	613-0662-00	IDLER GEAR	2

NO.	PART NO.	DESCRIPTION	Q'TY
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-00	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-56	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2×2.5)	13
40	716-0761-01	PWB SCREW(M2.6×6)	2
41	716-0833-10	SCREW(M2×5.6)	2
42	746-0617-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-3433-00	EJECT P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER P-SPRING	1
50	074-0881-08	OUTLET SOCKET(8P)	1
51	802-4911-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLUE)	1
53	809-4914-60	WIRE(WHITE)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-0978-20	OUTLET SOCKET(20P)	1
56	076-0353-08	PLUG(8P)	1
57	746-0919-00	WASHER	2
58	746-0904-00	WASHER	2
59	800-4911-60	WIRE(BLK)	1

ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts.

Main PWB(B1) section

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL130	880-2088B	FM/AM	C278	168-1032-55	0.01 μ F	C720	168-1032-55	0.01 μ F
C101	168-1022-55	1000pF	C279	176-2221-50	2200pF CH	C799	184-1073-39	16V100 μ F
C102	168-1022-55	1000pF	C280	168-1032-55	0.01 μ F	D100	001-0516-90	MA111
C103	168-1022-55	1000pF	C282	183-2263-38	16V22 μ F	D101	001-0466-90	S5688B
C104	184-1073-39	16V100 μ F	C283	168-1032-55	0.01 μ F	D102	001-0466-90	S5688B
C130	183-1073-28	10V100 μ F	C284	176-2221-50	2200pF CH	D140	001-0541-90	MA157
C131	168-1032-55	0.01 μ F	C285	183-2263-38	16V22 μ F	D142	001-0541-90	MA157
C132	168-4732-78	0.047 μ F	C286	168-1032-55	0.01 μ F	D170	001-4305-25	UDZSTE-17 9.1B
C133	183-1073-28	10V100 μ F	C287	176-2221-50	2200pF CH	D170	001-4302-25	UDZTE-17 9.1B
C134	168-1032-55	0.01 μ F	C288	178-3342-78	0.33 μ F	D190	001-4301-43	HZU8.2B1
C135	168-1042-78	16V 0.1 μ F	C289	168-1032-55	0.01 μ F	D191	001-4305-26	UDZSTE-17 10B
C140	168-1022-55	1000pF	C290	168-1032-55	0.01 μ F	D191	001-4302-26	UDZTE-17 10B
C141	168-1532-55	0.015 μ F	C291	178-2242-78	0.22 μ F	D192	001-4301-48	HZU 9.1B3
C143	168-8232-78	0.082 μ F	C292	178-3342-78	0.33 μ F	D193	001-0516-90	MA111
C144	183-4753-58	35V4.7 μ F	C293	178-3342-78	0.33 μ F	D230	001-4305-20	UDZSTE-17 5.6B
C145	168-1022-55	1000pF	C294	168-1032-55	0.01 μ F	D230	001-4302-20	UDZTE-17 5.6B
C146	178-3342-78	0.33 μ F	C295	178-3342-78	0.33 μ F	D231	001-4301-46	HZU 9.1B1
C147	178-2242-78	0.22 μ F	C310	183-1073-28	10V100 μ F	D232	001-0516-90	MA111
C148	168-2232-55	0.022 μ F	C311	168-1042-78	16V 0.1 μ F	D250	001-0516-90	MA111
C149	183-1073-28	10V100 μ F	C312	183-1053-68	50V1 μ F	D251	001-0516-90	MA111
C150	168-1042-78	16V 0.1 μ F	C313	042-0427-94	16V47 μ F TAN	D311	001-4305-20	UDZSTE-17 5.6B
C151	168-1042-78	16V 0.1 μ F	C330	183-1063-38	16V10 μ F	D311	001-4302-20	UDZTE-17 5.6B
C152	183-2263-38	16V22 μ F	C331	183-1063-38	16V10 μ F	D330	001-4305-20	UDZSTE-17 5.6B
C153	168-1022-55	1000pF	C332	183-1063-38	16V10 μ F	D330	001-4302-20	UDZTE-17 5.6B
C158	166-1511-50	150pF CH	C333	183-1063-38	16V10 μ F	D370	001-0655-90	1SS294
C172	183-1073-28	10V100 μ F	C334	183-1073-28	10V100 μ F	D430	001-0466-90	S5688B
C173	183-1073-28	10V100 μ F	C337	168-3312-55	330pF	D431	001-4301-68	HZU18B1
C190	168-1042-78	16V 0.1 μ F	C338	168-3312-55	330pF	D432	001-0502-90	1FWJ43
C191	168-1042-78	16V 0.1 μ F	C350	178-1042-78	0.1 μ F	D434	001-0466-90	S5688B
C192	168-1042-78	16V 0.1 μ F	C351	172-1041-15	0.1 μ F	D461	001-4305-19	UDZSTE-17 5.1B
C193	168-1042-78	16V 0.1 μ F	C352	184-2273-39	16V220 μ F	D461	001-4302-19	UDZTE-17 5.1B
C194	182-1073-33	16V100 μ F	C353	042-0623-00	16V3300 μ F	D480	001-4301-68	HZU18B1
C195	172-1041-15	0.1 μ F	C354	183-1053-68	50V1 μ F	D490	001-0516-90	MA111
C196	183-1063-38	16V10 μ F	C355	172-3341-15	0.33 μ F	D584	001-4306-10	UZU5BLL-TRF
C198	183-1073-28	10V100 μ F	C356	172-3341-15	0.33 μ F	IC140	051-0350-93	NJM4558M
C199	168-1032-55	0.01 μ F	C357	172-3341-15	0.33 μ F	IC190	051-1014-08	TA7291F
C230	183-1073-28	10V100 μ F	C358	172-3341-15	0.33 μ F	IC250	051-6357-08	SAA7704H
C231	168-1032-55	0.01 μ F	C370	168-2232-55	0.022 μ F	IC310	051-3273-90	L88M33TL
C232	183-1073-28	10V100 μ F	C371	183-2253-68	50V2.2 μ F	IC330	051-0267-08	TC4066BF
C233	183-1073-28	10V100 μ F	C380	183-1063-38	16V10 μ F	IC331	051-0350-93	NJM4558M
C234	168-1032-55	0.01 μ F	C381	183-1063-38	16V10 μ F	IC350	051-2036-00	TDA7454
C235	183-1073-28	10V100 μ F	C400	166-1601-50	16pF	IC380	051-2802-90	TDA7476
C236	042-0505-84	10V33 μ F	C401	166-1601-50	16pF	IC400	052-3156-90	MB90F594APF-G
C240	168-1022-55	1000pF	C402	168-1032-55	0.01 μ F	IC430	051-5405-08	S-80723AN-DL
C250	183-1053-68	50V1 μ F	C403	168-1042-78	16V 0.1 μ F	IC431	051-3272-90	TDA3606AT
C251	183-1053-68	50V1 μ F	C404	184-3383-12	6.3V3300 μ F	IC432	051-5405-08	S-80723AN-DL
C252	178-2242-78	0.22 μ F	C405	168-4732-78	0.047 μ F	IC450	051-9415-58	BR93LG66F-WE2
C253	178-2242-78	0.22 μ F	C406	168-1042-78	16V 0.1 μ F	IC480	051-5405-08	S-80723AN-DL
C254	168-4732-78	0.047 μ F	C407	166-1011-50	100pF CH	L100	010-6009-81	56 μ H
C255	168-1032-55	0.01 μ F	C409	168-3312-55	330pF	L101	010-6009-68	4.7 μ H
C256	183-2263-38	16V22 μ F	C410	168-3312-55	330pF	L102	010-2334-00	8.2mH
C257	166-3311-50	330pF CH	C411	168-1042-78	16V 0.1 μ F	L103	010-2003-03	76 μ H
C258	166-1011-50	100pF CH	C412	168-3322-55	3300pF	L140	010-2047-94	1mH
C259	166-1011-50	100pF CH	C413	168-3322-55	3300pF	L250	010-6009-68	4.7 μ H
C260	166-1011-50	100pF CH	C414	168-3322-55	3300pF	L251	010-6009-84	100 μ H
C261	166-1511-50	150pF CH	C415	168-3322-55	3300pF	L252	010-2199-59	0.56 μ H J
C262	166-3311-50	330pF CH	C417	168-1222-55	1200pF	L401	010-2199-74	10 μ H J
C263	183-1053-68	50V1 μ F	C419	168-1222-55	1200pF	P190	076-0433-20	20P
C264	168-1032-55	0.01 μ F	C430	168-1032-55	0.01 μ F	P230	076-0640-18	18P
C265	168-1042-78	16V 0.1 μ F	C431	183-1053-68	50V1 μ F	P400	076-0540-20	20P
C266	183-4753-58	35V4.7 μ F	C432	042-0427-94	16V47 μ F TAN	P401	076-0570-07	7P
C267	178-3342-78	0.33 μ F	C433	172-1031-15	0.01 μ F	P402	076-0570-03	3P
C268	166-3311-50	330pF CH	C434	172-1031-15	0.01 μ F	Q100	190-1162-00	2SA1162
C269	183-2263-38	16V22 μ F	C435	184-2273-49	25V220 μ F	Q101	190-1162-00	2SA1162
C270	183-1073-28	10V100 μ F	C436	182-1063-59	35V10 μ F	Q102	192-3113-00	2SC3113
C271	166-1201-50	12pF CH	C450	168-1032-55	0.01 μ F	Q103	125-2020-96	DTC143ZK
C272	168-1042-78	16V 0.1 μ F	C460	168-2232-55	0.022 μ F	Q103	125-2004-96	RN1406
C273	166-1201-50	12pF CH	C480	168-1032-55	0.01 μ F	Q104	192-2412-00	2SC2412
C274	168-2232-55	0.022 μ F	C481	168-1032-55	0.01 μ F	Q104	192-2712-00	2SC2712-OYGL
C276	168-1032-55	0.01 μ F	C490	184-2273-39	16V220 μ F	Q105	125-2020-96	DTC143ZK
C277	176-2221-50	2200pF CH	C586	166-2201-50	22pF CH	Q105	125-2004-96	RN1406

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q106	190-1428-00	2SA1428	R147	119-8231-15	1/16W 82kΩ	R346	119-1231-15	1/16W 12kΩ
Q140	192-2412-00	2SC2412	R148	119-2231-15	1/16W 22kΩ	R350	119-1031-15	1/16W 10kΩ
Q170	125-2020-96	DTC143ZK	R149	119-2231-15	1/16W 22kΩ	R351	119-1031-15	1/16W 10kΩ
Q170	125-2004-96	RN1406	R150	119-1041-15	1/16W 100kΩ	R352	119-1051-15	1/16W 1MΩ
Q171	125-0014-92	DTA114EK	R151	119-1041-15	1/16W 100kΩ	R353	119-1021-15	1/16W 1kΩ
Q171	125-0001-91	UN2111	R152	119-1031-15	1/16W 10kΩ	R370	119-1831-15	1/16W 18kΩ
Q171	125-0002-92	RN2402	R174	111-3311-94	1/4W 330Ω	R371	119-2231-15	1/16W 22kΩ
Q172	125-2020-96	DTC143ZK	R190	119-2231-15	1/16W 22kΩ	R372	119-2731-15	1/16W 27kΩ
Q172	125-2004-96	RN1406	R191	119-5621-15	1/16W 5.6kΩ	R380	119-2721-15	1/16W 2.7kΩ
Q173	125-0014-92	DTA114EK	R192	114-2291-18	1W 2.2Ω	R381	119-1831-15	1/16W 18kΩ
Q173	125-0001-91	UN2111	R193	111-5611-94	1/4WS 560Ω	R382	119-2211-15	1/16W 220Ω
Q173	125-0002-92	RN2402	R194	119-2231-15	1/16W 22kΩ	R383	119-2211-15	1/16W 220Ω
Q174	193-2118-00	2SD2118	R195	119-2231-15	1/16W 22kΩ	R384	111-2701-94	1/4WS 27Ω
Q191	125-2020-96	DTC143ZK	R196	111-6811-88	1/2W 680Ω	R385	119-2221-15	1/16W 2.2kΩ
Q191	125-2004-96	RN1406	R197	111-3311-94	1/4W 330Ω	R386	119-2231-15	1/16W 22kΩ
Q192	190-1431-00	2SA1431	R198	119-1031-15	1/16W 10kΩ	R400	119-1031-15	1/16W 10kΩ
Q193	125-2020-96	DTC143ZK	R199	111-6811-88	1/2W 680Ω	R401	119-1021-15	1/16W 1kΩ
Q193	125-2004-96	RN1406	R200	119-1031-15	1/16W 10kΩ	R402	119-1041-15	1/16W 100kΩ
Q194	190-1431-00	2SA1431	R201	111-5611-94	1/4WS 560Ω	R403	119-1031-15	1/16W 10kΩ
Q195	193-1858-00	2SD1858	R202	119-1031-15	1/16W 10kΩ	R405	119-1031-15	1/16W 10kΩ
Q230	193-2118-00	2SD2118	R203	119-1031-15	1/16W 10kΩ	R406	119-1031-15	1/16W 10kΩ
Q231	192-2412-00	2SC2412	R204	119-1031-15	1/16W 10kΩ	R407	119-1031-15	1/16W 10kΩ
Q231	192-2712-00	2SC2712-OYGL	R205	119-1031-15	1/16W 10kΩ	R408	119-1031-15	1/16W 10kΩ
Q232	125-0014-92	DTA114EK	R206	119-4731-15	1/16W 47kΩ	R409	119-3311-15	1/16W 330Ω
Q232	125-0001-91	UN2111	R207	119-4731-15	1/16W 47kΩ	R410	119-1041-15	1/16W 100kΩ
Q232	125-0002-92	RN2402	R208	119-1041-15	1/16W 100kΩ	R411	119-1041-15	1/16W 100kΩ
Q233	103-2012-00	2SD2012	R230	119-1031-15	1/16W 10kΩ	R412	119-3311-15	1/16W 330Ω
Q234	192-2412-00	2SC2412	R231	119-1811-15	1/16W 180Ω	R413	119-8221-15	1/16W 8.2kΩ
Q234	192-2712-00	2SC2712-OYGL	R232	119-4721-15	1/16W 4.7kΩ	R414	119-8221-15	1/16W 8.2kΩ
Q235	190-1162-00	2SA1162	R233	119-3321-15	1/16W 3.3kΩ	R415	119-2211-15	1/16W 220Ω
Q250	192-2412-00	2SC2412	R234	111-2211-88	1/2W 220Ω	R416	119-2211-15	1/16W 220Ω
Q250	192-2712-00	2SC2712-OYGL	R235	119-1031-15	1/16W 10kΩ	R417	119-8221-15	1/16W 8.2kΩ
Q311	103-2012-00	2SD2012	R237	119-1031-15	1/16W 10kΩ	R418	119-8221-15	1/16W 8.2kΩ
Q330	192-2412-00	2SC2412	R250	119-1031-15	1/16W 10kΩ	R419	119-2211-15	1/16W 220Ω
Q330	192-2712-00	2SC2712-OYGL	R251	119-1031-15	1/16W 10kΩ	R420	119-2211-15	1/16W 220Ω
Q331	125-2020-96	DTC143ZK	R252	119-1021-15	1/16W 1kΩ	R421	119-1031-15	1/16W 10kΩ
Q331	125-2004-96	RN1406	R253	119-1021-15	1/16W 1kΩ	R423	119-0000-05	1/16W 0Ω JW
Q350	125-2020-96	DTC143ZK	R254	119-8221-15	1/16W 8.2kΩ	R430	119-4731-15	1/16W 47kΩ
Q350	125-2004-96	RN1406	R255	119-6831-15	1/16W 68kΩ	R431	111-1041-94	1/4WS 100kΩ
Q351	192-2712-51	2SC2712G,L	R256	119-3321-15	1/16W 3.3kΩ	R432	119-2231-15	1/16W 22kΩ
Q352	125-2020-96	DTC143ZK	R257	119-8221-15	1/16W 8.2kΩ	R433	119-2741-15	1/16W 270kΩ
Q352	125-2004-96	RN1406	R258	119-1541-15	1/16W 150kΩ	R434	119-1021-15	1/16W 1kΩ
Q380	125-2020-96	DTC143ZK	R259	119-1541-15	1/16W 150kΩ	R435	119-4731-15	1/16W 47kΩ
Q380	125-2004-96	RN1406	R260	119-1011-15	1/16W 100Ω	R436	111-4791-94	1/4W 4.7Ω
Q430	192-2412-00	2SC2412	R261	119-1051-15	1/16W 1MΩ	R437	111-1501-94	1/4WS 15Ω
Q430	192-2712-00	2SC2712-OYGL	R262	119-8231-15	1/16W 82kΩ	R438	119-1041-15	1/16W 100kΩ
Q431	190-1297-00	2SA1297	R263	119-8231-15	1/16W 82kΩ	R439	119-3341-15	1/16W 330kΩ
Q432	100-1359-00	2SA1359	R264	119-2731-15	1/16W 27kΩ	R440	119-2041-15	1/16W 200kΩ
Q433	190-1162-00	2SA1162	R265	119-2731-15	1/16W 27kΩ	R441	119-2741-15	1/16W 270kΩ
Q490	192-2412-00	2SC2412	R266	119-1011-15	1/16W 100Ω	R451	119-1041-15	1/16W 100kΩ
Q490	192-2712-00	2SC2712-OYGL	R267	119-2211-15	1/16W 220Ω	R452	119-1041-15	1/16W 100kΩ
Q491	190-1431-00	2SA1431	R268	119-2211-15	1/16W 220Ω	R453	119-1041-15	1/16W 100kΩ
R100	111-1691-94	1/4WS 1.6Ω	R269	119-1011-15	1/16W 100Ω	R454	119-1041-15	1/16W 100kΩ
R101	119-2231-15	1/16W 22kΩ	R270	119-1221-15	1/16W 1.2kΩ	R463	119-1821-15	1/16W 1.8kΩ
R102	119-1831-15	1/16W 18kΩ	R271	119-4721-15	1/16W 4.7kΩ	R464	119-1031-15	1/16W 10kΩ
R103	111-6291-94	1/4WS 6.2Ω	R272	119-1011-15	1/16W 100Ω	R472	119-3331-15	1/16W 33kΩ
R104	111-6291-94	1/4WS 6.2Ω	R273	119-1011-15	1/16W 100Ω	R480	119-1041-15	1/16W 100kΩ
R105	119-1031-15	1/16W 10kΩ	R275	119-1011-15	1/16W 100Ω	R481	119-1241-15	1/16W 120kΩ
R106	119-2231-15	1/16W 22kΩ	R311	111-8211-94	1/4WS 820Ω	R482	119-1231-15	1/16W 12kΩ
R107	111-2721-94	1/4WS 2.7kΩ	R330	119-1521-15	1/16W 1.5kΩ	R490	119-1031-15	1/16W 10kΩ
R108	119-3301-15	1/16W 33Ω	R331	119-1231-15	1/16W 12kΩ	R491	119-4721-15	1/16W 4.7kΩ
R109	119-1041-15	1/16W 100kΩ	R332	119-1231-15	1/16W 12kΩ	R492	111-1821-94	1/4WS 1.8kΩ
R110	119-3301-15	1/16W 33Ω	R333	119-1521-15	1/16W 1.5kΩ	R773	119-1031-15	1/16W 10kΩ
R132	119-1031-15	1/16W 10kΩ	R334	119-1031-15	1/16W 10kΩ	R1005	119-2221-15	1/16W 2.2kΩ
R133	119-1041-15	1/16W 100kΩ	R335	119-1041-15	1/16W 100kΩ	R1006	119-2221-15	1/16W 2.2kΩ
R134	119-1031-15	1/16W 10kΩ	R336	119-1031-15	1/16W 10kΩ	R1007	119-2221-15	1/16W 2.2kΩ
R135	119-1041-15	1/16W 100kΩ	R337	119-1031-15	1/16W 10kΩ	R1008	119-2221-15	1/16W 2.2kΩ
R140	119-2241-15	1/16W 220kΩ	R338	119-1031-15	1/16W 10kΩ	R1009	119-2221-15	1/16W 2.2kΩ
R141	119-1031-15	1/16W 10kΩ	R339	119-2721-15	1/16W 2.7kΩ	R1010	119-2221-15	1/16W 2.2kΩ
R142	119-1031-15	1/16W 10kΩ	R340	119-4731-15	1/16W 47kΩ	R1021	119-0000-05	1/16W 0Ω JW
R143	119-4711-15	1/16W 470Ω	R341	119-4731-15	1/16W 47kΩ	R1025	119-0000-05	1/16W 0Ω JW
R144	119-1031-15	1/16W 10kΩ	R343	119-1041-15	1/16W 100kΩ	X250	061-3049-00	11.2896MHz
R145	119-1031-15	1/16W 10kΩ	R344	119-1041-15	1/16W 100kΩ	X400	061-3031-00	4.00MHz
R146	119-2241-15	1/16W 220kΩ	R345	119-1231-15	1/16W 12kΩ			

Connector PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C335	182-1063-39	16V10 μ F	IC560	051-0860-08	TC74HC14AF	R564	119-1021-15	1/16W 1k Ω
C336	182-1063-39	16V10 μ F	IC580	051-6623-08	TJA1054T	R565	119-1031-15	1/16W 10k Ω
C520	168-1032-55	0.01 μ F	J650	074-1262-00	CONNECTOR	R566	119-1031-15	1/16W 10k Ω
C541	166-1011-50	100pF CH	P100	076-0324-05	5P	R580	119-3331-15	1/16W 33k Ω
C560	168-1042-78	16V 0.1 μ F	P651	076-0641-16	16P	R581	119-4731-15	1/16W 47k Ω
C580	168-1032-55	0.01 μ F	P652	076-0641-24	24P	R582	119-2241-15	1/16W 220k Ω
C582	182-1063-59	35V10 μ F	P653	076-0641-10	10P	R583	111-5611-94	1/4WS 560 Ω
C583	166-6801-50	68pF CH	Q500	190-1431-00	2SA1431	R584	111-5611-94	1/4WS 560 Ω
C584	166-6801-50	68pF CH	Q501	192-2412-00	2SC2412	R585	119-1031-15	1/16W 10k Ω
C587	166-1011-50	100pF CH	Q501	192-2712-00	2SC2712-OYGL	R586	119-1041-15	1/16W 100k Ω
C600	172-1041-15	0.1 μ F	Q540	192-2412-00	2SC2412	R600	119-2231-15	1/16W 22k Ω
C650	172-1041-15	0.1 μ F	Q540	192-2712-00	2SC2712-OYGL	R601	119-1021-15	1/16W 1k Ω
C651	173-3321-19	3300pF J	Q541	103-2012-00	2SD2012	R650	119-1021-15	1/16W 1k Ω
C659	168-1022-55	1000pF	Q580	192-2412-00	2SC2412	R651	119-2221-15	1/16W 2.2k Ω
C660	168-1022-55	1000pF	Q580	192-2712-00	2SC2712-OYGL	R652	111-1021-94	1/4W 1k Ω
C661	168-1022-55	1000pF	Q581	125-0014-96	DTA143ZK	R653	116-3911-15	1/8W 390 Ω
C662	168-1022-55	1000pF	Q581	125-0002-96	RN2406	R654	116-3911-15	1/8W 390 Ω
C663	168-1022-55	1000pF	Q582	192-2412-00	2SC2412	R655	116-3911-15	1/8W 390 Ω
C664	168-1022-55	1000pF	Q582	192-2712-00	2SC2712-OYGL	R656	116-3911-15	1/8W 390 Ω
C665	168-1022-55	1000pF	Q600	193-1858-00	2SD1858	R799	114-1001-18	1W 10 Ω
C666	168-1022-55	1000pF	R342	111-1011-94	1/4W 100 Ω	R1011	119-1021-15	1/16W 1k Ω
D500	001-0516-90	MA111	R500	119-2231-15	1/16W 22k Ω	R1023	119-0000-05	1/16W 0 Ω JW
D500	001-0517-90	1SS355	R501	111-2221-94	1/4W 2.2k Ω	R1024	119-0000-05	1/16W 0 Ω JW
D520	001-4305-19	UDZSTE-17 5.1B	R502	119-2231-15	1/16W 22k Ω	SUP100	060-0122-91	DSP-141N-S00B
D520	001-4302-19	UDZTE-17 5.1B	R520	119-4721-15	1/16W 4.7k Ω	SUP101	060-0122-91	DSP-141N-S00B
D521	001-0466-90	S5688B	R521	119-4731-15	1/16W 47k Ω	T650	009-0666-62	0.4mH
D522	001-0516-90	MA111	R540	111-6891-94	1/4W 6.8 Ω	T651	009-0666-62	0.4mH
D522	001-0517-90	1SS355	R541	111-1021-94	1/4W 1k Ω	TH520	002-0311-90	4.7 Ω
D540	001-0502-90	1FWJ43	R560	119-1041-15	1/16W 100k Ω	TH600	002-0311-90	4.7 Ω
D580	001-4902-92	HZM27FA-TL	R561	119-1041-15	1/16W 100k Ω	TH650	002-0310-90	0.5 Ω
D650	001-0334-30	RL202	R562	119-4721-15	1/16W 4.7k Ω		060-8021-06	FUSE 10A
D651	001-0466-90	S5688B	R563	119-4721-15	1/16W 4.7k Ω			

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C700	168-1042-78	16V 0.1 μ F	D702	001-0516-90	MA111	D754	001-7031-81	VR1112H-22
C701	168-1032-55	0.01 μ F	D702	001-0517-90	1SS355	D755	001-7031-81	VR1112H-22
C702	168-1032-55	0.01 μ F	D703	001-0516-90	MA111	D756	001-7035-02	LB3336-N.P
C703	168-1032-55	0.01 μ F	D703	001-0517-90	1SS355	D757	001-7035-02	LB3336-N.P
C704	168-1032-55	0.01 μ F	D720	001-7031-81	VR1112H-22	D758	001-7035-02	LB3336-N.P
C705	168-1032-55	0.01 μ F	D721	001-7031-81	VR1112H-22	D759	001-7031-81	VR1112H-22
C706	168-2232-55	0.022 μ F	D722	001-7031-81	VR1112H-22	D760	001-7031-81	VR1112H-22
C707	168-2232-55	0.022 μ F	D723	001-7048-91	RFR1112H-22-TR	D762	001-7031-81	VR1112H-22
C708	166-1201-50	12pF CH	D724	001-7048-91	RFR1112H-22-TR	D790	001-7048-91	RFR1112H-22-TR
C709	166-1201-50	12pF CH	D725	001-7048-91	RFR1112H-22-TR	IC700	052-3157-90	MB90F583BPF-G
C710	166-1601-50	16pF	D726	001-7048-91	RFR1112H-22-TR	J700	074-1151-20	20P
C711	166-1601-50	16pF	D727	001-7048-91	RFR1112H-22-TR	J800	074-1151-08	8P
C714	168-1042-78	16V 0.1 μ F	D728	001-7031-81	VR1112H-22	L701	010-2199-74	10 μ H J
C717	168-1042-78	16V 0.1 μ F	D729	001-7031-81	VR1112H-22	P800	076-0540-08	8P
C719	042-0427-94	16V47 μ F TAN	D730	001-7031-81	VR1112H-22	P801	076-0567-07	7P
C720	168-1032-55	0.01 μ F	D731	001-7048-91	RFR1112H-22-TR	P802	076-0567-03	3P
C721	042-0595-56	6.3V47 μ F	D732	001-7031-81	VR1112H-22	P803	074-1059-76	26P
C722	168-1042-78	16V 0.1 μ F	D733	001-7048-91	RFR1112H-22-TR	P804	074-1059-76	26P
C723	168-1222-55	1200pF	D734	001-7048-91	RFR1112H-22-TR	Q720	133-1766-00	2SD1766
C724	168-3322-55	3300pF	D735	001-7048-91	RFR1112H-22-TR	Q721	192-2412-00	2SC2412
C800	168-1032-55	0.01 μ F	D736	001-7048-91	RFR1112H-22-TR	Q721	192-2712-00	2SC2712-OYGL
C801	168-1032-55	0.01 μ F	D737	001-7048-91	RFR1112H-22-TR	Q722	190-1162-00	2SA1162
C802	168-1032-55	0.01 μ F	D738	001-7048-91	RFR1112H-22-TR	Q723	192-2412-00	2SC2412
C803	168-1032-55	0.01 μ F	D739	001-7048-91	RFR1112H-22-TR	Q723	192-2712-00	2SC2712-OYGL
C804	168-1032-55	0.01 μ F	D740	001-7048-91	RFR1112H-22-TR	Q724	191-1123-00	2SB1123
C820	168-1042-78	16V 0.1 μ F	D741	001-7048-91	RFR1112H-22-TR	Q790	192-2412-00	2SC2412
C821	168-1042-78	16V 0.1 μ F	D742	001-7048-91	RFR1112H-22-TR	Q790	192-2712-00	2SC2712-OYGL
C822	168-1042-78	16V 0.1 μ F	D743	001-7048-91	RFR1112H-22-TR	R700	119-1531-15	1/16W 15k Ω
C823	168-1042-78	16V 0.1 μ F	D744	001-7031-81	VR1112H-22	R702	119-0000-05	1/16W 0 Ω JW
C824	168-1042-78	16V 0.1 μ F	D745	001-7031-81	VR1112H-22	R703	119-1031-15	1/16W 10k Ω
C825	042-0595-70	35V4.7 μ F	D746	001-7031-81	VR1112H-22	R704	119-1031-15	1/16W 10k Ω
C826	042-0595-70	35V4.7 μ F	D749	001-4305-21	UDZSTE-17 6.2B	R705	119-1031-15	1/16W 10k Ω
C827	042-0595-70	35V4.7 μ F	D749	001-4302-21	UDZTE-17 6.2B	R706	119-1031-15	1/16W 10k Ω
D700	001-0516-90	MA111	D751	001-0516-90	MA111	R707	119-1031-15	1/16W 10k Ω
D700	001-0517-90	1SS355	D751	001-0517-90	1SS355	R708	119-1031-15	1/16W 10k Ω
D701	001-0516-90	MA111	D752	001-7048-91	RFR1112H-22-TR	R709	119-1031-15	1/16W 10k Ω
D701	001-0517-90	1SS355	D753	001-7048-91	RFR1112H-22-TR	R710	119-1031-15	1/16W 10k Ω

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R712	119-1031-15	1/16W 10kΩ	R764	119-2221-15	1/16W 2.2kΩ	R828	119-1221-15	1/16W 1.2kΩ
R713	119-1031-15	1/16W 10kΩ	R766	119-1031-15	1/16W 10kΩ	R829	119-1221-15	1/16W 1.2kΩ
R714	119-1031-15	1/16W 10kΩ	R767	119-1031-15	1/16W 10kΩ	R830	119-3921-15	1/16W 3.9kΩ
R716	119-1041-15	1/16W 100kΩ	R768	119-1031-15	1/16W 10kΩ	R831	119-5621-15	1/16W 5.6kΩ
R717	119-1041-15	1/16W 100kΩ	R769	119-5621-15	1/16W 5.6kΩ	R832	119-4721-15	1/16W 4.7kΩ
R718	119-1041-15	1/16W 100kΩ	R770	119-5621-15	1/16W 5.6kΩ	R833	119-1221-15	1/16W 1.2kΩ
R719	119-6831-15	1/16W 68kΩ	R771	119-1031-15	1/16W 10kΩ	R834	119-3321-15	1/16W 3.3kΩ
R720	119-1821-15	1/16W 1.8kΩ	R774	119-5621-15	1/16W 5.6kΩ	R835	119-5621-15	1/16W 5.6kΩ
R721	119-1821-15	1/16W 1.8kΩ	R775	119-0000-05	1/16W 0Ω JW	R836	119-2221-15	1/16W 2.2kΩ
R723	119-5621-15	1/16W 5.6kΩ	R778	119-0000-05	1/16W 0Ω JW	R837	119-2221-15	1/16W 2.2kΩ
R726	119-3321-15	1/16W 3.3kΩ	R780	119-1811-15	1/16W 180Ω	R838	119-2221-15	1/16W 2.2kΩ
R727	119-3921-15	1/16W 3.9kΩ	R781	119-1811-15	1/16W 180Ω	R839	119-2221-15	1/16W 2.2kΩ
R729	119-1221-15	1/16W 1.2kΩ	R783	119-1811-15	1/16W 180Ω	R840	119-3321-15	1/16W 3.3kΩ
R730	119-1221-15	1/16W 1.2kΩ	R784	119-1811-15	1/16W 180Ω	R841	119-3921-15	1/16W 3.9kΩ
R732	119-5621-15	1/16W 5.6kΩ	R786	119-1811-15	1/16W 180Ω	R842	119-1221-15	1/16W 1.2kΩ
R735	119-3321-15	1/16W 3.3kΩ	R787	119-1811-15	1/16W 180Ω	R843	119-4721-15	1/16W 4.7kΩ
R736	119-3321-15	1/16W 3.3kΩ	R790	119-2231-15	1/16W 22kΩ	R844	119-5621-15	1/16W 5.6kΩ
R738	119-3321-15	1/16W 3.3kΩ	R791	119-1821-15	1/16W 1.8kΩ	R845	119-1221-15	1/16W 1.2kΩ
R739	119-3321-15	1/16W 3.3kΩ	R792	119-1041-15	1/16W 100kΩ	S600	013-7104-00	SPPB6A
R741	119-2221-15	1/16W 2.2kΩ	R793	119-1041-15	1/16W 100kΩ	TH700	002-0306-90	SC20-3J153
R744	119-3321-15	1/16W 3.3kΩ	R794	119-1041-15	1/16W 100kΩ	VR800	016-0022-00	EC11B15243
R747	119-1221-15	1/16W 1.2kΩ	R795	119-1041-15	1/16W 100kΩ	VR801	016-0021-00	EC11B20243
R748	119-1221-15	1/16W 1.2kΩ	R796	119-1041-15	1/16W 100kΩ	VR802	016-4155-00	VARIABLE-R
R750	119-5621-15	1/16W 5.6kΩ	R800	119-4721-15	1/16W 4.7kΩ	VR803	016-4155-00	VARIABLE-R
R753	119-1821-15	1/16W 1.8kΩ	R801	119-4721-15	1/16W 4.7kΩ	VR804	016-4155-00	VARIABLE-R
R754	119-1821-15	1/16W 1.8kΩ	R820	119-1031-15	1/16W 10kΩ	VR805	016-4155-00	VARIABLE-R
R756	119-1821-15	1/16W 1.8kΩ	R821	119-1031-15	1/16W 10kΩ	VR806	016-4155-00	VARIABLE-R
R757	119-2721-15	1/16W 2.7kΩ	R822	119-1031-15	1/16W 10kΩ	VR807	012-4863-14	1MΩ
R759	119-1031-15	1/16W 10kΩ	R824	119-1051-15	1/16W 1MΩ	X700	061-1056-00	32.768kHz
R760	119-1031-15	1/16W 10kΩ	R825	119-1051-15	1/16W 1MΩ	X701	061-3031-00	4.00MHz
R761	119-1011-15	1/16W 100Ω	R826	119-4741-15	1/16W 470kΩ			
R763	119-1041-15	1/16W 100kΩ	R827	119-1031-15	1/16W 10kΩ			

CD PWB(B4) section:CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1μF	C40	168-5622-55	5600pF	J3	074-1283-18	18P
C2	163-1073-05	4V100μF	C41	168-2732-55	16V 0.027μF	L1	010-3050-93	10μH
C3	178-1052-78	1μF	C42	178-2742-78	0.27μF	Q1	131-1188-00	2SB1188
C4	178-1052-78	1μF	C43	166-8201-50	82pF CH	R6	117-5611-15	1/10W 560Ω
C5	163-1073-05	4V100μF	C44	168-2212-55	220pF	R7	117-5611-15	1/10W 560Ω
C6	168-1042-78	16V 0.1μF	C45	163-1073-05	4V100μF	R14	119-1041-15	1/16W 100kΩ
C7	168-1022-55	1000pF	C47	042-0416-51	6.3V10μF TAN	R15	119-5611-15	1/16W 560Ω
C8	178-4742-78	0.47μF	C48	166-2096-50	2pF CK	R16	119-5611-15	1/16W 560Ω
C9	178-1052-78	1μF	C49	168-1042-78	16V 0.1μF	R17	119-5611-15	1/16W 560Ω
C10	168-1042-78	16V 0.1μF	C50	178-4742-78	0.47μF	R18	119-2221-15	1/16W 2.2kΩ
C11	178-1052-78	1μF	C51	166-4701-50	47pF CH	R19	119-5631-15	1/16W 56kΩ
C13	168-1042-78	16V 0.1μF	C52	168-5632-78	16V 0.056μF	R21	119-6831-15	1/16W 68kΩ
C14	168-1022-55	1000pF	C53	168-1042-78	16V 0.1μF	R26	119-5621-15	1/16W 5.6kΩ
C15	168-1042-78	16V 0.1μF	C54	166-6097-50	6pF CH	R27	119-1021-15	1/16W 1kΩ
C16	168-1032-55	0.01μF	C55	166-6097-50	6pF CH	R28	119-5621-15	1/16W 5.6kΩ
C17	178-4742-78	0.47μF	CCT2	050-0145-51	1/16W 100kΩ×4	R29	119-5621-15	1/16W 5.6kΩ
C18	178-2242-78	0.22μF	CCT3	050-0145-51	1/16W 100kΩ×4	R32	119-1031-15	1/16W 10kΩ
C19	178-2242-78	0.22μF	CCT4	050-0146-50	6.8kΩX4	R33	119-2201-15	1/16W 22Ω
C20	168-1042-78	16V 0.1μF	CCT5	050-0146-51	1/16W 10kΩ×2	R34	119-6831-15	1/16W 68kΩ
C21	168-1042-78	16V 0.1μF	CCT6	050-0145-51	1/16W 100kΩ×4	R36	119-1011-15	1/16W 100Ω
C22	168-2232-55	0.022μF	CCT7	050-0145-55	10kΩX4	R37	119-3311-15	1/16W 330Ω
C23	168-5612-55	560pF	CCT8	050-0145-56	15kΩX4	R38	119-1001-15	1/16W 10Ω
C24	168-3932-78	0.039μF	CCT9	050-0146-53	1/16W 100kΩ×2	R40	119-6821-15	1/16W 6.8kΩ
C25	168-3932-78	0.039μF	D1	001-0563-00	GL380	R41	119-1031-15	1/16W 10kΩ
C26	168-1022-55	1000pF	D2	001-0563-00	GL380	R50	119-1041-15	1/16W 100kΩ
C27	168-6812-55	680pF	D3	001-0563-00	GL380	R51	119-8231-15	1/16W 82kΩ
C28	178-1052-78	1μF	D4	001-0516-90	MA111	R52	119-3931-15	1/16W 39kΩ
C29	168-1032-55	0.01μF	IC1	051-5709-90	AN8399SA-E1	R60	119-8211-15	1/16W 820Ω
C30	168-1042-78	16V 0.1μF	IC2	051-6365-00	MN662785TBUC	R61	119-8211-15	1/16W 820Ω
C31	168-1032-55	0.01μF	IC3	051-6045-08	BA5984FP	R62	119-1821-15	1/16W 1.8kΩ
C32	163-1073-35	16V100μF	IC4	052-5043-01	MN101C309CA	R65	119-1041-15	1/16W 100kΩ
C33	163-4763-05	4V47μF	IC5	051-9323-00	MSM51V17405D-60TS-K	R67	119-3931-15	1/16W 39kΩ
C34	163-4763-05	4V47μF	IC6	051-3279-90	BA033LBSG-TR	R68	117-1001-15	1/10W 10Ω
C35	166-4701-50	47pF CH	IC7	051-7239-38	SN74AHCT08PWR	R69	119-1011-15	1/16W 100Ω
C36	168-2732-55	16V 0.027μF	IC8	051-7512-08	SN74LV04APER	R70	119-6821-15	1/16W 6.8kΩ
C37	168-8222-55	8200pF	J1	074-1138-66	16P	TM1	073-0768-90	TERMIMAL
C38	168-1042-78	16V 0.1μF	J2	074-1138-56	6P	X1	060-1502-90	CSTCC8.00MG
C39	168-3322-55	3300pF				X2	060-1527-90	33.8688MHz

Sensor PWB(B5) section:CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F	Q102	060-0252-01	PT4850F	Q103	060-0252-01	PT4850F

Chuckling switch PWB(B6) section:CD mechanism

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit Switch PWB(B7) section:CD mechanism

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11

Side PWB(B8) section:Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-3312-55	330pF	C114	183-4743-67	50V0.47 μ F	R109	119-3341-15	1/16W 330k Ω
C102	168-3312-55	330pF	C115	183-4753-57	35V4.7 μ F	R110	119-1531-15	1/16W 15k Ω
C103	168-3312-55	330pF	C116	183-4753-57	35V4.7 μ F	R111	119-1131-15	1/16W 11k Ω
C104	168-3312-55	330pF	IC101	051-1546-10	BA3430S	R112	119-3341-15	1/16W 330k Ω
C105	183-4763-17	6.3V47 μ F	J101	074-0881-08	8P	R113	119-1811-15	1/16W 180 Ω
C106	042-0552-92	10V68 μ F	R101	119-1241-15	1/16W 120k Ω	R114	119-1011-15	1/16W 100 Ω
C107	042-0552-92	10V68 μ F	R102	119-1241-15	1/16W 120k Ω	R115	119-2231-15	1/16W 22k Ω
C108	168-1232-55	0.012 μ F	R103	119-1241-15	1/16W 120k Ω	R116	119-1031-15	1/16W 10k Ω
C109	168-1232-55	0.012 μ F	R104	119-1241-15	1/16W 120k Ω	R117	119-1031-15	1/16W 10k Ω
C110	168-2222-55	2200pF	R105	119-7501-15	1/16W 75 Ω	R118	119-1031-15	1/16W 10k Ω
C111	178-2242-78	0.22 μ F	R106	119-7501-15	1/16W 75 Ω	R9001	119-0000-05	1/16W 0 Ω JW
C112	183-1063-37	16V10 μ F	R107	119-1531-15	1/16W 15k Ω	R9002	119-0000-05	1/16W 0 Ω JW
C113	183-2263-37	16V22 μ F	R108	119-1131-15	1/16W 11k Ω			

Rear PWB(B9) section:Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J3	076-0353-08	8P	R19	111-5611-91	1/4WS 560 Ω
J2	074-0978-20	20P	SW3	013-3906-00	SPPB51

Bottom PWB(B10) section:Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW1	013-3953-01	SPPB32	SW2	013-7300-00	MODE SWITCH