



EXPLODED VIEW/PARTS LIST

Main section

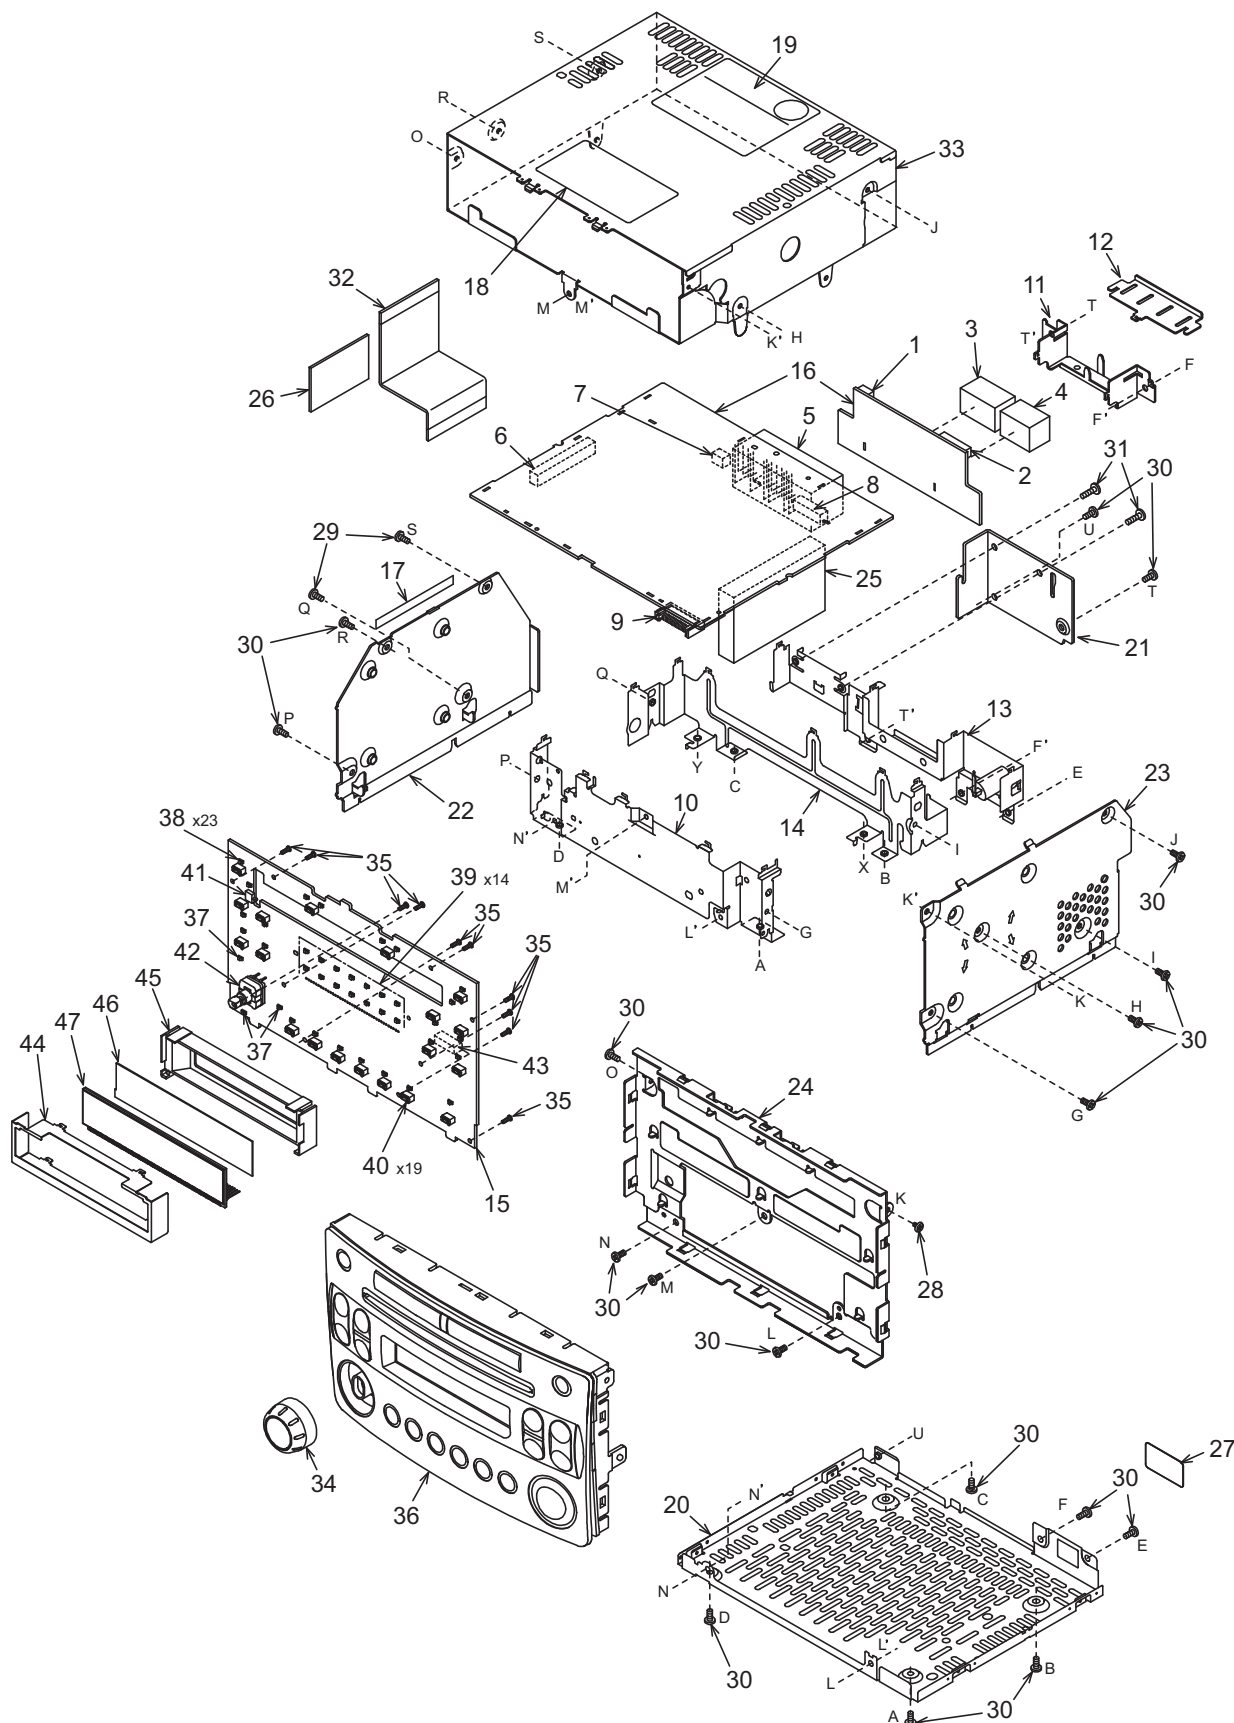


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0898-06	OUTLET SOCKET(6P)	1	25	880-1921O	AM/FM TUNER	1
2	074-0898-20	OUTLET SOCKET(20P)	1	26	335-6788-00	MOLDED PART	1
3	074-1013-30	OUTLET SOCKET(A-12)	1	27	347-6623-00	SPACER	1
4	074-1087-12	OUTLET SOCKET(A-16)	1	28	714-2004-87	MACHINE SCREW(M2 x 4)	1
5	074-1141-00	OUTLET SOCKET(NS10/06)	1	29	714-2603-80	MACHINE SCREW(M2.6 x 3)	2
6	074-1192-20	OUTLET SOCKET(20P)	1	30	714-2605-81	MACHINE SCREW(M2.6 x 5)	18
7	076-0368-06	PLUG(6P)	1	31	714-2610-89	MACHINE SCREW(M2.6 x 10)	2
8	076-0368-20	PLUG(20P)	1	32	816-4007-00	FLAT WIRE	1
9	076-0648-18	PLUG	1	33	929-0195-87	CD CHANGER MODULE	1
10	309-0806-81	FRONT PLATE	1	34	380-5567-82	KNOB	1
11	331-3478-80	OUTLET HOLDER	1	35	716-0778-00	WAVE SCREW(2 x 6)	10
12	331-3479-01	OUTLET HOLDER	1	36	940-8106-81	ESCUTCHEON-ASSY	1
13	331-3885-83	REAR PLATE with ANT.recept	1	37	001-7093-90	LED(RAY1112H-75M)(YEL)	3
14	331-3886-80	MECH-BRKT	1	38	001-7063-96	LED(RAY1102W)(YEL)	23
15	-----	SWITCH PWB	1	39	001-7080-91	LED(SML-512WWT864)(YEL)	14
16	-----	MAIN PWB	1	40	013-6311-50	SWITCH(CD6)	19
17	285-1967-00	GUIDE LABEL	1	41	013-7415-50	DETECTOR SWITCH (CD-SHUTTER)	1
18	285-1968-00	GUIDE LABEL	1	42	016-0013-04	VR W/SHAFT(MAIN-VOL)	1
19	286-6666-04	SETPLATE	1	43	074-1279-68	OUTLET SOCKET(18P)	1
20	311-1897-80	LOWER CASE	1	44	331-4088-00	PRESSED PART	1
21	313-1913-00	HEAT SINK	1	45	335-6804-81	LCD-HOLDER	1
22	331-3258-02	SIDE CASE(L)	1	46	335-7730-01	LCD LEFLECTOR	1
23	331-3259-02	SIDE CASE(R)	1	47	379-1341-31	LCD	1
24	331-4095-01	ES-PLATE	1				

CD changer module section

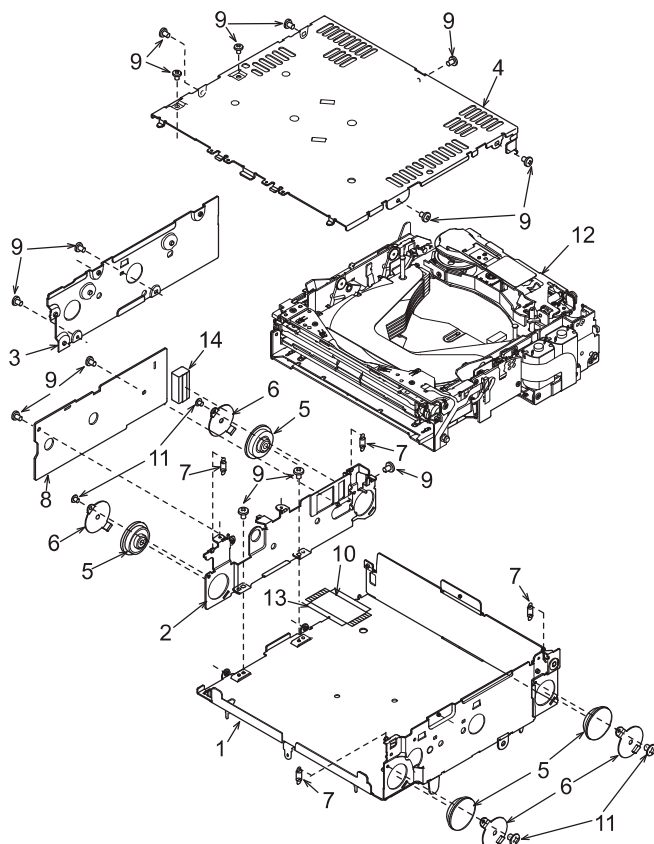


NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-25	LOWER CASE	1
2	331-3896-22	PWB-HOLDER	1
3	305-0334-21	SIDE CASE	1
4	310-1741-27	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	4
8	-----	CD PWB	1
9	716-1716-02	SCREW(M2 x 3)	14
10	HBS-561-100	FPC	1
11	716-3450-00	SCREW(M1.7 x 2)	4
12	-----	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8748-00	GASKET	1

CD changer mechanism section : CD changer module

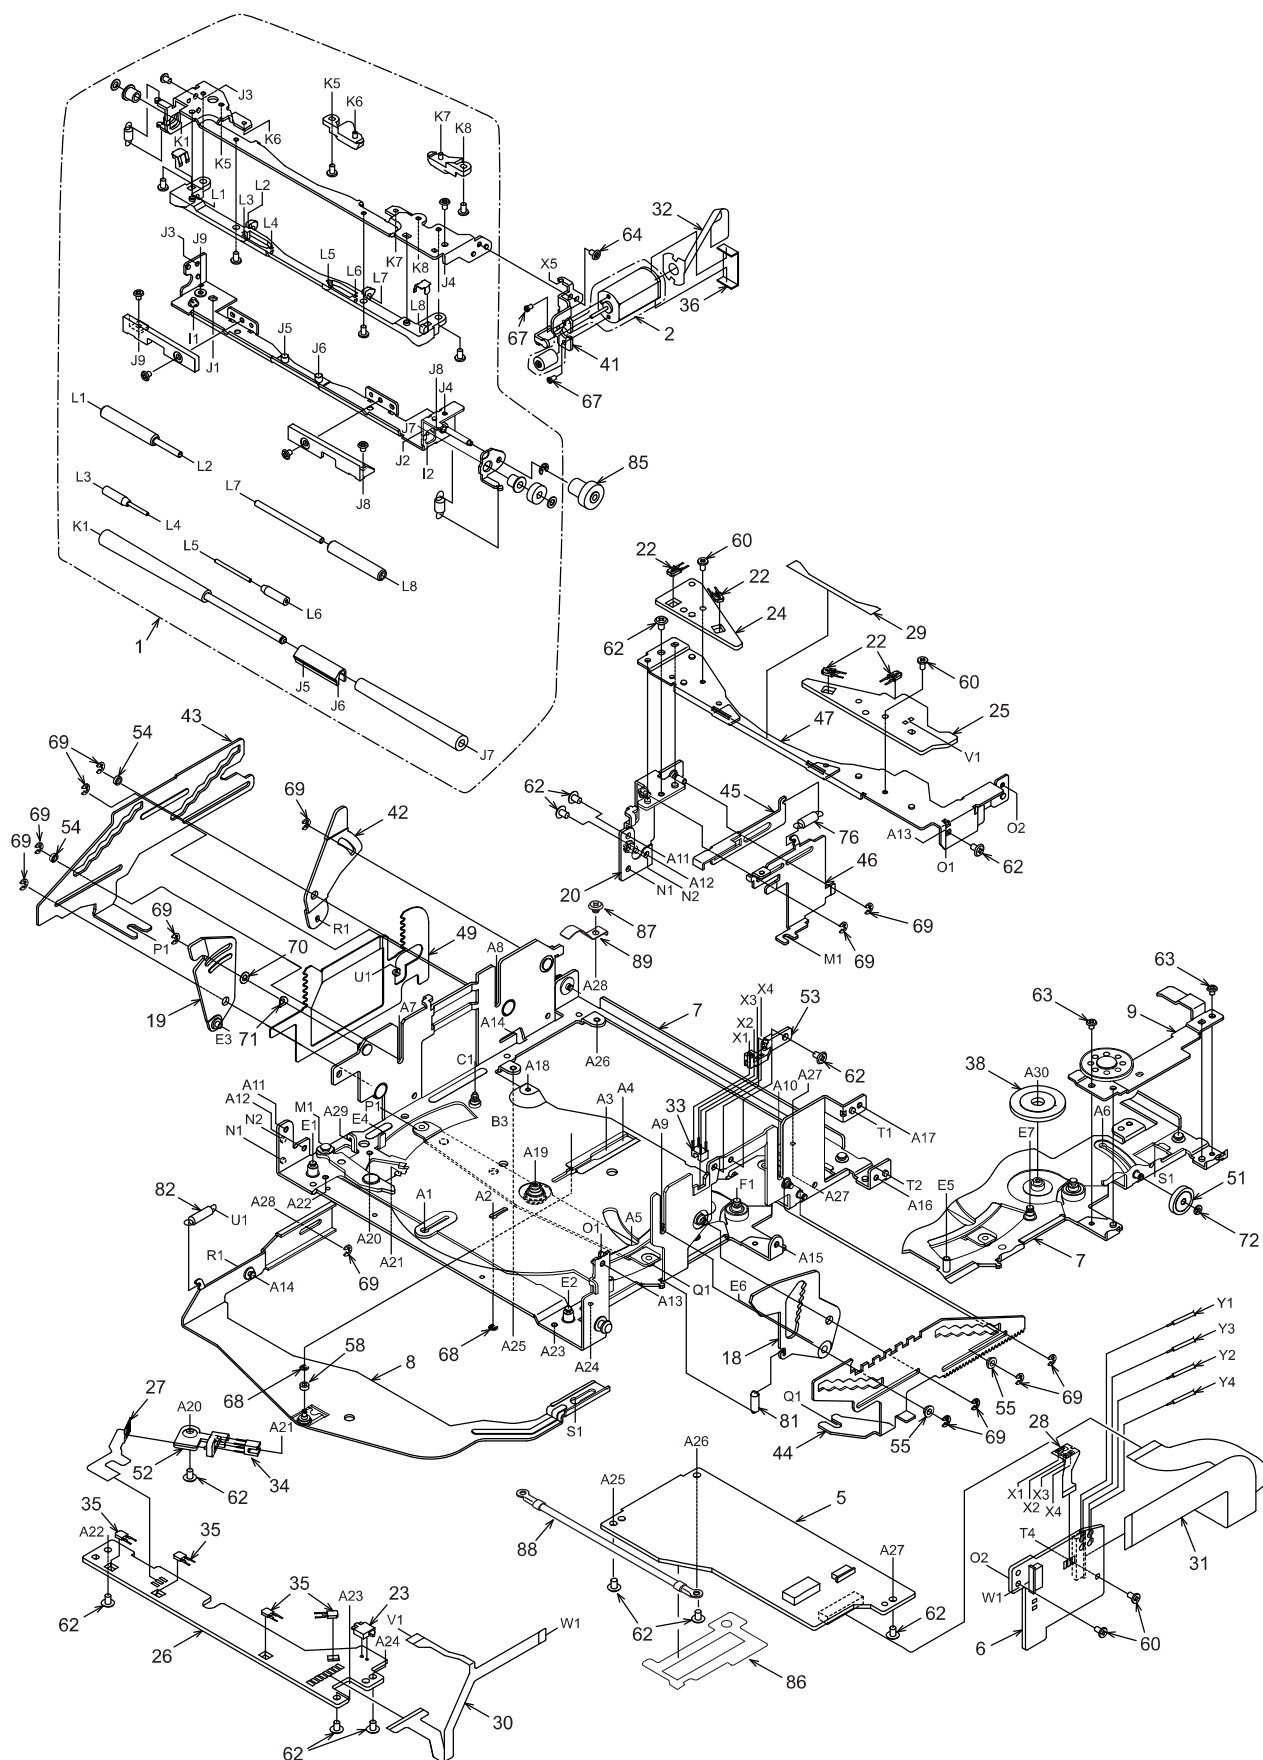

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-562-100	LOADING UNIT	1	45	620-1071-21	EJECT ARM	1
2	SMA-186-100	LOADING MOTOR ASSY	1	46	620-1072-20	EJECT PLATE	1
3	HBS-530-100	MOTOR PLATE SUB ASSY	1	47	620-1577-20	FRONT PLATE	1
4	HBS-531-104	DRIVE UNIT	1	48	620-1083-20	FPC-PLATE	1
5	-----	DSP PWB	1	49	620-1090-20	GAP PLATE	1
6	-----	DRIVER PWB	1	50	620-1568-21	RATTLE PLATE-F	2
7	966-1751-22	CHASSIS ASSY	1	51	621-0640-20	V-GEAR-G	1
8	966-0600-23	LOCK-P-RE-ASSY	1	52	621-0641-21	PI-HOLDER-M	1
9	966-0601-21	M-GEAR-P-ASSY	1	53	621-0656-21	PI-HOLDER-V	1
10	966-0602-26	DR-LINK-ASSY	1	54	622-1622-20	SL-G-ROLLER	2
11	966-0603-21	MODE-P-ASSY	1	55	622-1623-00	SL-G-ROLLER-R	2
12	966-0604-26	LOCK-PF-ASSY	1	56	622-1648-23	DU-STP-SLEEVE	1
13	966-0605-20	SHIFT-P-ASSY	1	57	622-1650-23	COV-PLATE PIN-B	2
14	966-0606-23	HLC-PLATE-ASSY	1	58	622-1651-00	LOCK-RE-ROLLER	1
15	966-1788-22	COV-PLATE-ASSY	1	59	622-1652-00	LOCK-PF-ROLLER	1
16	HBS-535-100	TOP-PLATE-ASSY	1	60	716-1866-50	SCREW(M1.7 x 3)	4
17	966-0652-24	DR-BASE-P-ASSY	1	61	716-1873-00	SCREW(M2 x 1.6)	1
18	966-0615-21	LOCK-L-RF-ASSY	1	62	716-3449-50	SCREW(M2 x 3)	15
19	966-0616-20	LOCK-L-LF-ASSY	1	63	716-3450-00	SCREW(M1.7 x 2)	4
20	966-0618-21	EJECT-B-ASSY	1	64	716-3451-01	SCREW(M1.7 x 2.5)	4
21	966-1742-20	DISC-HOL-ASSY	1	65	716-3459-01	SCREW(M1.7 x 5)	1
22	001-7042-00	DIODE (GL4800)	4	66	716-3466-53	SCREW(M2 x 6)	1
23	013-7414-50	DETECTOR SWITCH	1	67	738-1422-1B	PRECISION SCREW	2
24	-----	LED-L-PWB	1	68	743-1200-10	E-RING	2
25	-----	LED-R-PWB	1	69	743-1500-10	E-RING	13
26	-----	SENSOR PWB	1	70	746-0624-00	WASHER	1
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1	71	746-0712-23	WASHER	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1	72	746-0761-00	WASHER	1
29	039-2011-01	LED-FPC	1	73	750-3478-01	TOP-P-SP-L	2
30	039-2012-00	SENSOR-FPC	1	74	750-3479-01	TOP-P-SP-R	1
31	039-2013-04	MOS-FPC	1	75	750-3480-01	DR-LOCK-SP	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1	76	750-3483-00	EJECT-A-SPRING	1
33	051-5806-01	IC (GPIS93)	1	77	750-3484-01	DR-BASE-SPRING	1
34	051-5806-02	IC (GPIS95)	1	78	750-3485-01	TENSION-SP-L	1
35	060-0252-01	PHOTO-TR	4	79	750-3486-01	LO-TENSION-SP	1
36	347-6657-01	LO-COVER SHEET	1	80	750-3489-01	DRIVE-P-SPRING	1
37	620-1041-26	GEAR PLATE	1	81	750-3496-00	GAP-P-SPRING R	1
38	620-1042-20	M-GEAR-H	1	82	750-3497-00	GAP-P-SPRING L	1
39	620-1056-22	HLR-PLATE-L	1	83	750-6711-01	DU-STP-SPRING	1
40	620-1580-20	HLR-PLATE-R	1	84	750-6712-01	DR-LOCK-SP-B	1
41	620-1576-20	LO-MOTOR-PLT	1	85	621-0651-22	LOAD GEAR-A	1
42	620-1066-20	LOCK LINK-LR	1	86	347-6974-22	FPC COVER	1
43	620-1067-21	SLIDE PLATE-L	1	87	716-1850-01	SCREW	1
44	620-1068-22	SLIDE PLATE-R	1	88	854-4348-01	EXTENSION LEAD	1
				89	620-1604-20	DR-PLATE-SCREW	1

Drive unit section : CD changer mechanism section

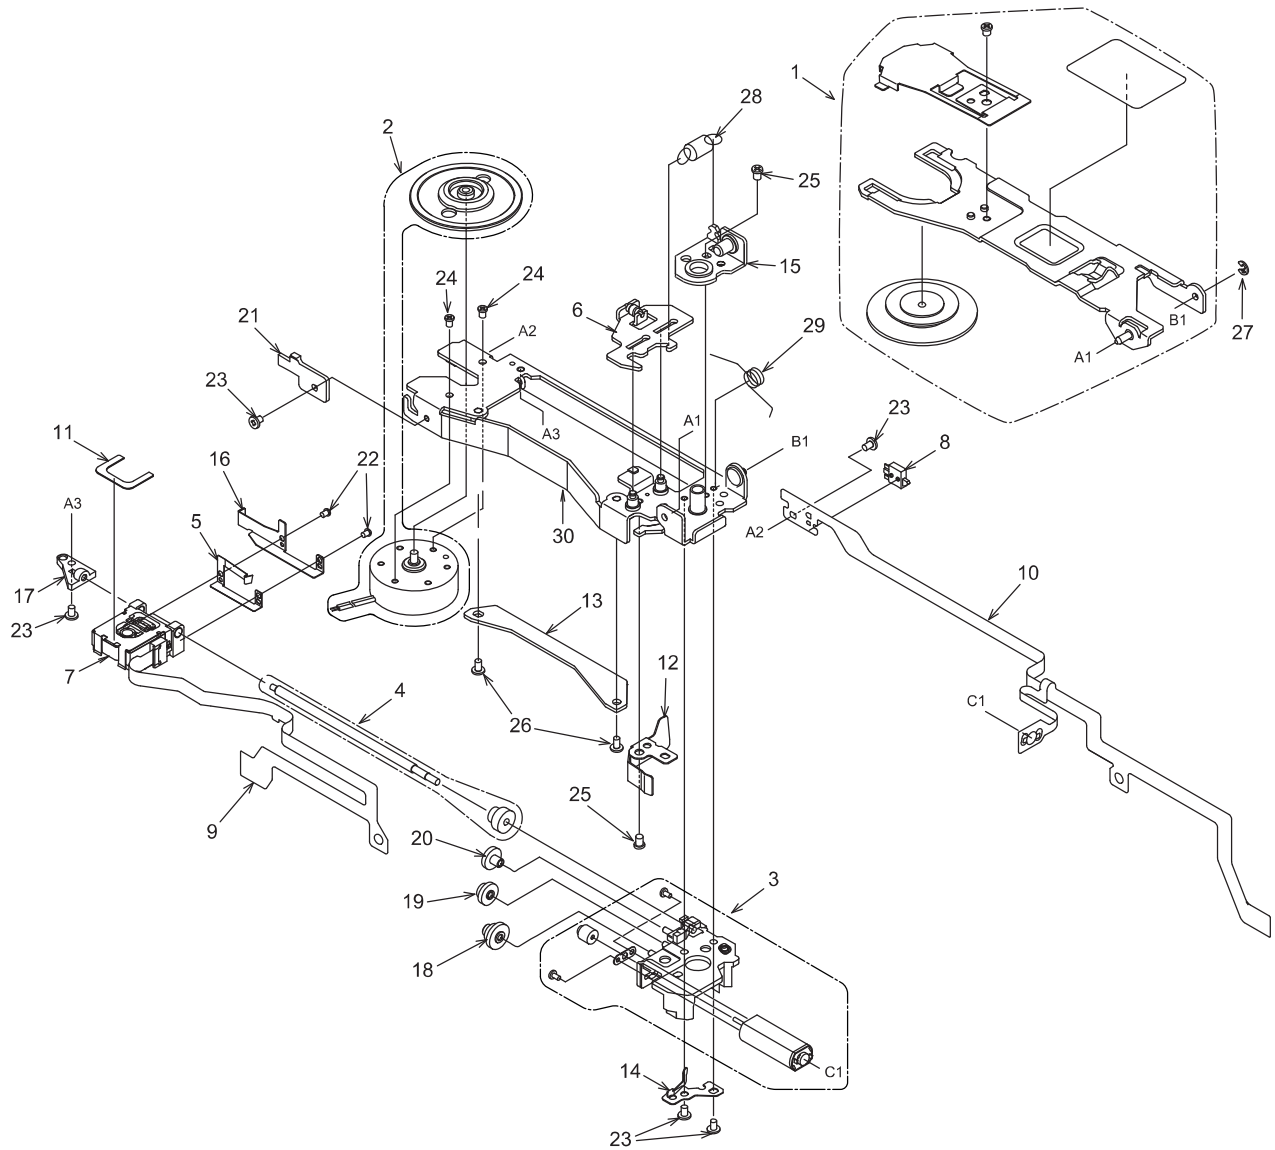

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1
2	SMA-193-101	SPINDLE MOTOR ASSY	1
3	SMA-191-100	SLED MOTOR ASSY	1
4	HBS-515-103	LS-ASSY	1
5	620-1587-83	SH-SP-PLT	1
6	HBS-542-101	D-SHIFT-P-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-21	PUSH PLATE	1
13	620-1080-22	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	966-0650-20	SPRING PLT ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	620-1730-81	SCREW-HOL-PLT	1
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3511-01	SCREW(M1.4 x 3)	2
23	716-3470-01	SCREW(M1.7 x 3)	5
24	738-1720-1H	PRECISION SCREW	2
25	738-2025-1H	PRECISION SCREW	2
26	716-3474-01	SCREW(M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0649-02	DRIVE PLT-ASSY	1

ELECTRICAL PARTS LIST

Switch PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1101	166-8211-50	820pF	D1127	001-7063-96	RAY1102W	R1119	119-2221-15	1/10W 2.2k ohm
C1102	168-4732-78	0.047uF K	D1128	001-7063-96	RAY1102W	R1120	119-2221-15	1/10W 2.2k ohm
C1103	168-4732-78	0.047uF K	D1129	001-7063-96	RAY1102W	R1121	119-2221-15	1/10W 2.2k ohm
C1104	168-1042-78	16V 0.1uF	D1130	001-7063-96	RAY1102W	R1127	119-0000-05	1/10W 0 ohm JW
C1105	042-0416-59	10V 33uF M TAN	D1131	001-7063-96	RAY1102W	R1128	119-0000-05	1/10W 0 ohm JW
CCT1101	050-0145-52	1/16W 1k ohm x4	D1132	001-7063-96	RAY1102W	R1129	119-1021-15	1/10W 1k ohm
CCT1102	050-0145-52	1/16W 1k ohm x4	D1133	001-7063-96	RAY1102W	R1145	117-0000-05	1/8W 0 ohm JW
D1100	001-7080-91	SML-512WWT864	D1134	001-7063-96	RAY1102W	R1146	117-0000-05	1/8W 0 ohm JW
D1101	001-7080-91	SML-512WWT864	D1135	001-7063-96	RAY1102W	R1147	117-0000-05	1/8W 0 ohm JW
D1102	001-7080-91	SML-512WWT864	D1136	001-7063-96	RAY1102W	R1148	117-0000-05	1/8W 0 ohm JW
D1103	001-7080-91	SML-512WWT864	D1137	001-7063-96	RAY1102W	R1149	117-0000-05	1/8W 0 ohm JW
D1104	001-7080-91	SML-512WWT864	D1138	001-7063-96	RAY1102W	S1101	013-6311-50	SWITCH 100gf
D1105	001-7080-91	SML-512WWT864	D1139	001-7063-96	RAY1102W	S1103	013-6311-50	SWITCH 100gf
D1106	001-7080-91	SML-512WWT864	IC1101	051-6064-00	LC75883W	S1104	013-6311-50	SWITCH 100gf
D1107	001-7080-91	SML-512WWT864	J1101	074-1279-68	18P	S1105	013-6311-50	SWITCH 100gf
D1108	001-7080-91	SML-512WWT864	LCD1101	379-1341-31	LCD	S1106	013-6311-50	SWITCH 100gf
D1109	001-7080-91	SML-512WWT864	R1101	119-6831-15	1/10W 68k ohm	S1107	013-6311-50	SWITCH 100gf
D1110	001-7080-91	SML-512WWT864	R1102	116-2711-15	1/4W 270 ohm	S1108	013-6311-50	SWITCH 100gf
D1111	001-7080-91	SML-512WWT864	R1103	116-2711-15	1/4W 270 ohm	S1109	013-6311-50	SWITCH 100gf
D1112	001-7080-91	SML-512WWT864	R1104	116-2711-15	1/4W 270 ohm	S1110	013-6311-50	SWITCH 100gf
D1113	001-7080-91	SML-512WWT864	R1105	116-2711-15	1/4W 270 ohm	S1111	013-6311-50	SWITCH 100gf
D1114	001-7093-90	RAY1112H-75M	R1106	116-2711-15	1/4W 270 ohm	S1112	013-6311-50	SWITCH 100gf
D1115	001-7093-90	RAY1112H-75M	R1107	116-2711-15	1/4W 270 ohm	S1113	013-6311-50	SWITCH 100gf
D1116	001-7093-90	RAY1112H-75M	R1108	116-2711-15	1/4W 270 ohm	S1114	013-6311-50	SWITCH 100gf
D1117	001-7063-96	RAY1102W	R1109	116-4711-15	1/4W 470 ohm	S1115	013-6311-50	SWITCH 100gf
D1118	001-7063-96	RAY1102W	R1110	116-3911-15	1/4W 390 ohm	S1116	013-6311-50	SWITCH 100gf
D1119	001-7063-96	RAY1102W	R1111	116-5611-15	1/4W 560 ohm	S1117	013-6311-50	SWITCH 100gf
D1120	001-7063-96	RAY1102W	R1112	116-3911-15	1/4W 390 ohm	S1118	013-6311-50	SWITCH 100gf
D1121	001-7063-96	RAY1102W	R1113	116-4711-15	1/4W 470 ohm	S1119	013-6311-50	SWITCH 100gf
D1122	001-7063-96	RAY1102W	R1114	116-4711-15	1/4W 470 ohm	S1121	013-6311-50	SWITCH 100gf
D1123	001-7063-96	RAY1102W	R1115	116-3911-15	1/4W 390 ohm	S1122	013-7415-50	SPVG110400
D1124	001-7063-96	RAY1102W	R1116	116-3911-15	1/4W 390 ohm	VR1101	016-0013-04	VR W/SHAFT
D1125	001-7063-96	RAY1102W	R1117	116-5611-15	1/4W 560 ohm	PWB	039-2754-01	PWB(WITHOUT COMPONENT)
D1126	001-7063-96	RAY1102W	R1118	116-8211-15	1/4W 820 ohm			

Main PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT102	331-3885-83	REAR PLATE with ANT.recept	C162	188-4763-18	6.3V 47uF	C516	166-1011-50	100pF CH
BL101	880-19210	AM/FM TUNER	C163	168-5612-55	560pF Z	C517	119-0000-05	1/10W 0 ohm JW
C101	166-1511-50	150pF CH	C164	166-4701-50	47pF CH	C519	166-1011-50	100pF CH
C119	166-1201-50	12pF CH	C165	188-2253-68	50V 2.2uF	C603	119-0000-05	1/10W 0 ohm JW
C120	168-4712-55	470pF K	C166	166-5601-50	56pF CH	C604	119-0000-05	1/10W 0 ohm JW
C121	166-1007-50	10pF CH	C167	168-3312-55	330pF K	C605	119-0000-05	1/10W 0 ohm JW
C122	166-1011-50	100pF CH	C168	168-1032-55	0.01uF K	C606	119-0000-05	1/10W 0 ohm JW
C123	188-1073-28	10V 100uF	C169	168-1022-55	1000pF K	C620	178-4742-78	0.47uF
C124	043-0277-51	0.022uF	C190	168-4712-55	470pF K	C621	178-4742-78	0.47uF
C125	168-1042-78	16V 0.1uF	C191	166-1801-50	18pF CH	C622	178-4742-78	0.47uF
C126	188-1073-28	10V 100uF	C192	166-1501-50	15pF CH	C623	178-4742-78	0.47uF
C127	168-1042-78	16V 0.1uF	C201	168-2232-55	0.022uF K	C626	042-0592-61	16V 47uF
C128	168-1042-78	16V 0.1uF	C210	163-4763-15	6.3V 47uF	C627	168-1042-78	16V 0.1uF
C129	188-1073-28	10V 100uF	C211	168-1042-78	16V 0.1uF	C628	168-1042-78	16V 0.1uF
C130	178-1052-78	1uF	C213	168-1022-55	1000pF K	C629	163-1073-35	16V 100uF
C131	168-1232-55	0.012uF K	C214	168-1032-55	0.01uF K	C630	168-1032-55	0.01uF K
C133	043-0277-51	0.022uF	C215	168-1042-78	16V 0.1uF	C631	042-0592-58	16V 10uF
C134	188-4763-38	16V 47uF	C223	163-1053-65	50V 1uF	C632	163-1073-35	16V 100uF
C135	042-1458-90	50V 1uF LN	C224	163-4753-55	35V 4.7uF	C633	163-2273-25	10V 220uF
C138	168-1022-55	1000pF K	C225	166-1011-50	100pF CH	C634	168-2232-55	0.022uF K
C140	168-2232-55	0.022uF K	C226	166-1011-50	100pF CH	C635	166-2201-50	22pF CH
C141	188-4763-38	16V 47uF	C227	166-1011-50	100pF CH	C636	163-2263-35	16V 22uF
C142	168-3932-78	0.039uF K	C301	163-1063-35	16V 10uF	C637	168-2232-55	0.022uF K
C143	166-1011-50	100pF CH	C302	178-4742-78	0.47uF	C638	163-2253-65	50V 2.2uF
C144	166-1011-50	100pF CH	C303	178-4742-78	0.47uF	C639	166-4701-50	47pF CH
C145	166-1011-50	100pF CH	C314	168-1042-78	16V 0.1uF	C640	168-6822-55	6800pF K
C146	166-1011-50	100pF CH	C317	163-1063-35	16V 10uF	C641	163-1073-35	16V 100uF
C147	168-3932-78	0.039uF K	C320	042-0592-58	16V 10uF	C642	168-1042-78	16V 0.1uF
C148	166-1801-50	18pF CH	C321	042-0592-58	16V 10uF	C643	163-1073-35	16V 100uF
C149	178-3332-78	0.033uF	C322	042-0592-58	16V 10uF	C644	172-1041-15	0.1uF
C150	178-3332-78	0.033uF	C323	042-0592-58	16V 10uF	C645	042-1545-00	16V 2200uF
C152	168-4722-55	4700pF K	C328	117-0000-05	1/8W 0 ohm JW	C646	168-2222-55	2200pF K
C154	166-1011-50	100pF CH	C329	117-0000-05	1/8W 0 ohm JW	C651	042-0416-57	10V 47uF M TAN
C155	166-1011-50	100pF CH	C330	117-0000-05	1/8W 0 ohm JW	C655	168-1042-78	16V 0.1uF
C160	166-1011-50	100pF CH	C331	117-0000-05	1/8W 0 ohm JW	C657	168-2222-55	2200pF K
C161	178-2242-78	0.22uF	C513	119-0000-05	1/10W 0 ohm JW	C658	168-1042-78	16V 0.1uF
			C514	168-1042-78	16V 0.1uF	C659	163-1073-35	16V 100uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C660	188-1053-68	50V 1uF	Q110	190-1162-00	2SA1162	R228	119-4731-15	1/10W 47k ohm
C671	168-1032-55	0.01uF K	Q111	190-1162-00	2SA1162	R229	119-4731-15	1/10W 47k ohm
C672	178-2242-38	0.22uF B	Q161	192-4116-00	2SC4116	R231	119-2231-15	1/10W 22k ohm
C673	178-2242-38	0.22uF B	Q201	125-2026-92	UN5212	R236	119-2231-15	1/10W 22k ohm
C681	168-2232-55	0.022uF K	Q207	125-2026-91	UN5211	R238	119-4731-15	1/10W 47k ohm
C682	168-2232-55	0.022uF K	Q211	125-2026-91	UN5211	R239	119-4731-15	1/10W 47k ohm
C683	168-2232-55	0.022uF K	Q212	125-2026-91	UN5211	R241	119-4731-15	1/10W 47k ohm
C684	168-2232-55	0.022uF K	Q504	125-2026-91	UN5211	R242	119-4731-15	1/10W 47k ohm
C685	168-2232-55	0.022uF K	Q505	125-2026-91	UN5211	R243	119-4731-15	1/10W 47k ohm
C686	168-2232-55	0.022uF K	Q506	191-0709-00	2SB709A Q,R,S	R244	119-4731-15	1/10W 47k ohm
C687	168-2232-55	0.022uF K	Q608	193-1259-50	2SD1259DS R,Q	R246	119-1031-15	1/10W 10k ohm
C688	168-2232-55	0.022uF K	Q609	125-9017-92	UMD3N-TR	R247	119-4731-15	1/10W 47k ohm
C692	168-1042-78	16V 0.1uF	Q610	193-2118-00	2SD2118F5 Q,R,S	R249	119-1041-15	1/10W 100k ohm
C693	189-1073-29	10V 100uF	Q611	192-4116-00	2SC4116	R253	119-4731-15	1/10W 47k ohm
C694	189-1073-29	10V 100uF	Q612	125-9017-92	UMD3N-TR	R255	119-3331-15	1/10W 33k ohm
C696	188-1053-68	50V 1uF	Q615	190-1298-00	2SA1298	R260	119-4731-15	1/10W 47k ohm
C697	168-1042-38	50V 0.1uF	Q616	125-2026-91	UN5211	R261	119-1021-15	1/10W 1k ohm
C701	042-1562-17	16V 10uF	Q617	125-2026-95	UN521N	R263	119-1021-15	1/10W 1k ohm
C702	042-1562-17	16V 10uF	Q618	131-1188-00	2SB1188	R264	119-1021-15	1/10W 1k ohm
C703	042-0592-58	16V 10uF	Q619	125-9017-92	UMD3N-TR	R265	119-1021-15	1/10W 1k ohm
C704	042-0592-58	16V 10uF	Q650	190-1298-00	2SA1298	R266	119-1021-15	1/10W 1k ohm
C708	168-1022-55	1000pF K	Q651	125-2026-91	UN5211	R267	119-1021-15	1/10W 1k ohm
C709	168-1022-55	1000pF K	Q652	193-1664-00	2SD1664 P,Q,R	R268	119-1021-15	1/10W 1k ohm
C713	168-1022-55	1000pF K	Q653	125-9017-92	UMD3N-TR	R269	119-4731-15	1/10W 3.3k ohm
C714	168-2232-55	0.022uF K	Q671	193-2118-00	2SD2118F5 Q,R,S	R270	119-1031-15	1/10W 10k ohm
C717	188-1066-38	16V 10uF NP	Q672	125-9017-92	UMD3N-TR	R271	119-2741-15	1/10W 270k ohm
C718	188-1066-38	16V 10uF NP	Q705	125-2026-91	UN5211	R272	119-1531-15	1/10W 15k ohm
C901	117-0000-05	1/8W 0 ohm JW	Q706	125-0020-91	UN5111	R273	119-3321-15	1/10W 3.3k ohm
C902	117-0000-05	1/8W 0 ohm JW	Q709	192-4116-00	2SC4116	R274	119-3321-15	1/10W 3.3k ohm
C903	117-0000-05	1/8W 0 ohm JW	Q710	192-4116-00	2SC4116	R275	119-4731-15	1/10W 47k ohm
C904	117-0000-05	1/8W 0 ohm JW	Q714	192-4116-00	2SC4116	R276	119-3331-15	1/10W 33k ohm
C905	163-4753-65	50V 4.7uF	Q750	125-2026-91	UN5211	R277	119-4731-15	1/10W 47k ohm
CCT201	050-0145-52	1/16W 1k ohm x4	Q901	125-4001-90	XN1504	R278	119-4731-15	1/10W 47k ohm
CCT202	050-0145-52	1/16W 1k ohm x4	Q902	125-4001-90	XN1504	R279	119-4731-15	1/10W 47k ohm
D209	001-0516-90	MA111	Q903	125-0020-96	UN5110-Q,R,S	R280	119-4731-15	1/10W 47k ohm
D501	001-0516-90	MA111	Q904	125-9017-92	UMD3N-TR	R281	119-4731-15	1/10W 47k ohm
D606	001-0504-49	HZS9 C3L	R122	119-2221-15	1/10W 2.2k ohm	R283	119-4731-15	1/10W 47k ohm
D607	001-0504-49	HZS9 C3L	R123	119-0000-05	1/10W 0 ohm JW	R284	119-1021-15	1/10W 1k ohm
D608	001-0529-34	MA8062-L	R124	119-4721-15	1/10W 4.7k ohm	R285	119-1021-15	1/10W 1k ohm
D610	001-0466-90	S5688B	R125	119-1021-15	1/10W 1k ohm	R286	119-1021-15	1/10W 1k ohm
D611	001-0516-90	MA111	R126	119-2221-15	1/10W 2.2k ohm	R287	119-1021-15	1/10W 1k ohm
D612	001-0466-90	S5688B	R127	119-4721-15	1/10W 4.7k ohm	R289	119-1021-15	1/10W 1k ohm
D613	001-2015-00	RL253	R128	119-3321-15	1/10W 3.3k ohm	R290	119-1041-15	1/10W 100k ohm
D614	001-0466-90	S5688B	R129	119-1001-15	1/10W 10 ohm	R301	032-0106-70	1/10W 33k ohm D
D615	001-0466-90	S5688B	R130	119-1501-15	1/10W 15 ohm	R302	032-0106-70	1/10W 33k ohm D
D671	001-0529-32	MA8056-M	R131	119-2221-15	1/10W 2.2k ohm	R303	032-0106-70	1/10W 33k ohm D
D672	001-0529-48	MA8091-H	R132	119-2221-15	1/10W 2.2k ohm	R304	032-0106-70	1/10W 33k ohm D
D704	001-0516-90	MA111	R134	119-1031-15	1/10W 10k ohm	R311	119-3331-15	1/10W 33k ohm
D705	001-0516-90	MA111	R135	119-1021-15	1/10W 1k ohm	R516	119-4731-15	1/10W 47k ohm
D707	001-4305-39	UDZSTE-17 36B	R136	119-1021-15	1/10W 1k ohm	R519	119-1021-15	1/10W 1k ohm
D750	001-0466-90	S5688B	R137	119-1031-15	1/10W 10k ohm	R520	119-2231-15	1/10W 22k ohm
IC103	051-6212-08	LC72191JM-TLM	R138	119-4721-15	1/10W 4.7k ohm	R522	032-0140-50	1/10W 10k ohm F
IC161	051-4607-90	SAA6581T	R139	119-4721-15	1/10W 4.7k ohm	R524	032-0140-50	1/10W 10k ohm F
IC202	052-3193-10	M30624MGA-652GP	R140	119-2221-15	1/10W 2.2k ohm	R525	032-0140-50	1/10W 10k ohm F
IC203	051-5436-38	BD5233G-TR	R141	119-1021-15	1/10W 1k ohm	R526	032-0140-50	1/10W 10k ohm F
IC301	051-5041-90	BD3827K	R142	119-2701-15	1/10W 27 ohm	R605	119-0000-05	1/10W 0 ohm JW
IC502	051-3020-90	NJM4565V	R143	119-4731-15	1/10W 47k ohm	R606	119-0000-05	1/10W 0 ohm JW
IC603	051-2055-00	TDA8593J/N3	R144	119-0000-05	1/10W 0 ohm JW	R622	119-0000-05	1/10W 0 ohm JW
IC604	051-3020-90	NJM4565V	R145	119-4741-15	1/10W 470k ohm	R623	119-0000-05	1/10W 0 ohm JW
IC605	051-5441-08	BD4828G-TR	R161	119-1021-15	1/10W 1k ohm	R633	119-4731-15	1/10W 47k ohm
IC606	051-3341-90	BD3931FP	R162	119-1021-15	1/10W 1k ohm	R634	119-4731-15	1/10W 47k ohm
J205	074-1192-20	20P	R163	119-1031-15	1/10W 10k ohm	R635	119-2731-15	1/10W 27k ohm
J602	074-1141-00	OUTLET SOCKET	R164	119-1031-15	1/10W 10k ohm	R636	119-1041-15	1/10W 100k ohm
J702	074-1013-30	OUTLET SOCKET	R206	119-4721-15	1/10W 4.7k ohm	R637	116-2211-15	1/4W 220 ohm
J703	074-1087-12	OUTLET SOCKET	R207	119-4721-15	1/10W 4.7k ohm	R638	119-1041-15	1/10W 100k ohm
L104	010-2003-04	30uH	R209	119-4731-15	1/10W 47k ohm	R639	119-1231-15	1/10W 12k ohm
L105	010-3407-66	NLV32 22uH J	R210	119-4731-15	1/10W 47k ohm	R640	119-1031-15	1/10W 10k ohm
L161	010-3407-66	NLV32 22uH J	R211	119-4731-15	1/10W 47k ohm	R641	119-1031-15	1/10W 10k ohm
L202	010-3407-66	NLV32 22uH J	R212	119-4731-15	1/10W 47k ohm	R642	119-1031-15	1/10W 10k ohm
P101	076-0368-06	PLUG 6P	R213	119-1011-15	1/10W 100 ohm	R643	119-1031-15	1/10W 10k ohm
P102	076-0368-20	20P	R214	119-1011-15	1/10W 100 ohm	R644	032-0140-16	1/10W 180k ohm F
P202	076-0648-18	18P	R217	119-4721-15	1/10W 4.7k ohm	R645	032-0106-65	1/10W 100k ohm D
P701	074-0898-06	6P OUTLET SOCKET	R219	119-4731-15	1/10W 47k ohm	R646	116-3911-15	1/4W 390 ohm
P702	074-0898-20	20P	R220	119-4731-15	1/10W 47k ohm	R647	119-1041-15	1/10W 100k ohm
Q106	125-2026-91	UN5211	R221	119-3311-15	1/10W 330 ohm	R648	119-5611-15	1/10W 560 ohm
Q107	192-4116-51	2SC4116 G,L	R224	119-1031-15	1/10W 10k ohm	R649	119-1031-15	1/10W 10k ohm
Q109	192-4116-51	2SC4116 G,L	R226	119-1031-15	1/10W 10k ohm	R653	119-3321-15	1/10W 3.3k ohm
			R227	119-3311-15	1/10W 330 ohm	R654	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R655	119-1031-15	1/10W 10k ohm	R693	119-4721-15	1/10W 4.7k ohm	R732	119-3011-15	1/10W 300 ohm
R656	116-1221-15	1/4W 1.2k ohm	R694	119-0000-05	1/10W 0 ohm JW	R750	119-2221-15	1/10W 2.2k ohm
R657	116-1091-15	1/4W 1 ohm	R695	116-4791-15	1/4W 4.7 ohm	R901	119-1031-15	1/10W 10k ohm
R658	116-1531-15	1/4W 15k ohm	R696	119-1031-15	1/10W 10k ohm	R902	119-1031-15	1/10W 10k ohm
R659	116-4791-15	1/4W 4.7 ohm	R697	119-1031-15	1/10W 10k ohm	R903	119-1031-15	1/10W 10k ohm
R660	116-2721-15	1/4W 2.7k ohm	R698	116-6811-15	1/4W 680 ohm	R904	119-1031-15	1/10W 10k ohm
R662	119-2201-15	1/10W 22 ohm	R699	119-1041-15	1/10W 100k ohm	R905	119-8221-15	1/10W 8.2k ohm
R663	119-0000-05	1/10W 0 ohm JW	R703	119-3011-15	1/10W 300 ohm	R906	119-1231-15	1/10W 12k ohm
R664	119-0000-05	1/10W 0 ohm JW	R704	119-3011-15	1/10W 300 ohm	SUP102	060-0122-91	DSP-141N-S00B
R665	119-0000-05	1/10W 0 ohm JW	R710	119-4731-15	1/10W 47k ohm	T601	009-0675-01	CHOKE
R666	119-0000-05	1/10W 0 ohm JW	R712	119-2231-15	1/10W 22k ohm	TC101	004-1580-60	30pF
R667	116-8211-15	1/4W 820 ohm	R713	119-4731-15	1/10W 47k ohm	TH602	002-0229-90	PTH8L05B
R668	116-8211-15	1/4W 820 ohm	R715	119-1031-15	1/10W 10k ohm	VR102	012-5203-56	10k ohm
R669	116-8211-15	1/4W 820 ohm	R716	119-5631-15	1/10W 56k ohm	X101	061-1066-80	7.2MHz
R671	117-2211-15	1/8W 220 ohm	R717	119-1031-15	1/10W 10k ohm	X161	061-3013-90	4.332MHz
R672	119-1041-15	1/10W 100k ohm	R718	119-1031-15	1/10W 10k ohm	X201	060-1505-50	CSTCC10.0MG-TC
R673	119-1041-15	1/10W 100k ohm	R721	119-5631-15	1/10W 56k ohm	PWB	039-2753-00	PWB(WITHOUT COMPONENT)
R690	119-4721-15	1/10W 4.7k ohm	R722	119-5631-15	1/10W 56k ohm			
R691	119-4721-15	1/10W 4.7k ohm	R728	119-5621-15	1/10W 5.6k ohm			
R692	119-4721-15	1/10W 4.7k ohm	R730	119-5621-15	1/10W 5.6k ohm			

CD PWB(B3) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-4735-56	0.047uF Z	IC3	052-5061-01	M30621MCM-4S5GP	R26	119-4721-15	1/10W 4.7k ohm
C2	168-4735-56	0.047uF Z	IC4	051-9402-78	BR93L56RFVM-W	R27	119-1031-15	1/10W 10k ohm
C4	168-1222-55	1200pF K	IC5	051-3332-90	NJU7222U33	R28	119-1041-15	1/10W 100k ohm
C5	163-2263-35	16V22uF	IC6	051-3293-90	BA033SFP-E2	R29	119-1041-15	1/10W 100k ohm
C6	168-1222-55	1200pF K	J1	074-1189-95	45P	R31	119-4731-15	1/10W 47k ohm
C12	168-1222-55	1200pF K	J3	074-1237-70	20P	R32	119-0000-05	1/10W 0 ohm JW
C15	168-1222-55	1200pF K	P1	076-0478-55	PLUG 5P	R35	119-0000-05	1/10W 0 ohm JW
C16	163-2263-35	16V22uF	Q3	190-1162-00	2SA1162	R36	119-4731-15	1/10W 47k ohm
C18	168-1045-56	0.1uF Z	Q4	198-3018-00	2SK3018	R37	119-4731-15	1/10W 47k ohm
C19	166-1011-50	100pF CH	Q5	131-1188-50	2SB1188PQR	R38	119-2231-15	1/10W 22k ohm
C21	168-1032-55	0.01uF K	Q6	198-3018-00	2SK3018	R39	119-2231-15	1/10W 22k ohm
C22	168-1045-56	0.1uF Z	Q7	125-2004-92	RN1402	R40	119-2231-15	1/10W 22k ohm
C23	168-1045-56	0.1uF Z	Q8	125-2004-92	RN1402	R41	119-4711-15	1/10W 470 ohm
C24	168-1032-55	0.01uF K	Q9	125-0014-92	DTA114EK	R42	119-2231-15	1/10W 22k ohm
C25	163-1073-15	6.3V100uF	Q53	193-0601-00	2SD601A	R43	119-2241-15	1/10W 220k ohm
C26	178-1052-78	1uF	R2	119-2211-15	1/10W 220 ohm	R60	119-0000-05	1/10W 0 ohm JW
C27	168-1045-56	0.1uF Z	R4	119-4731-15	1/10W 47k ohm	R530	119-4731-15	1/10W 47k ohm
C28	042-0671-01	10V 47uF TA	R8	119-4731-15	1/10W 47k ohm	R550	119-4731-15	1/10W 47k ohm
C29	168-1045-56	0.1uF Z	R10	119-2211-15	1/10W 220 ohm	TM1	073-0768-90	TERMINAL
C30	178-3342-78	0.33uF	R13	119-1041-15	1/10W 100k ohm	TM2	073-0766-90	TERMINAL
C31	042-1673-00	10V 220uF	R14	119-2221-15	1/10W 2.2k ohm	TM4	073-0766-90	TERMINAL
CCT4	050-0140-55	1/32W 2.2k ohmx4J	R15	119-1041-15	1/10W 100k ohm	TM5	073-0766-90	TERMINAL
CCT5	050-0145-54	1/16W 47k ohm x4	R16	119-1021-15	1/10W 1k ohm	X1	060-1533-90	CSTCE10M0G52-R0
CCT6	050-0145-53	1/16W 220k ohmx4 J	R20	119-4731-15	1/10W 47k ohm	PWB	039-2532-20	PWB(WITHOUT COMPONENT)
D2	001-2610-90	RB480KTL	R24	119-4731-15	1/10W 47k ohm			
IC2	051-5445-08	BD5227G-TR	R25	119-1031-15	1/10W 10k ohm			

DSP PWB(B4) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	042-0671-01	10V 47uF TA	C25	046-6822-58	6800pF	C53	168-1045-56	0.1uF Z
C2	168-4735-56	0.047uF Z	C26	046-1032-78	0.01uF	C54	042-0671-01	10V 47uF TA
C3	046-4722-58	4700pF	C28	046-1022-58	1000pF	C56	168-4712-55	470pF K
C4	046-1032-78	0.01uF	C29	046-3332-78	0.033uF	C57	046-1032-78	0.01uF
C5	168-1045-56	0.1uF Z	C32	046-4722-58	4700pF	C58	168-4712-55	470pF K
C6	042-0671-01	10V 47uF TA	C33	046-1522-58	1500pF	C59	168-1045-56	0.1uF Z
C7	168-1045-56	0.1uF Z	C34	168-1045-56	0.1uF Z	C60	168-1045-56	0.1uF Z
C8	168-1045-56	0.1uF Z	C35	046-1532-78	0.015uF	C61	046-1032-78	0.01uF
C9	045-1007-50	10pF	C36	168-1045-56	0.1uF Z	C62	042-0671-01	10V 47uF TA
C10	168-1045-56	0.1uF Z	C37	168-1045-56	0.1uF Z	C63	046-1032-78	0.01uF
C11	045-1007-50	10pF	C38	042-0671-01	10V 47uF TA	C64	168-1045-56	0.1uF Z
C12	168-1045-56	0.1uF Z	C39	178-1052-78	1uF	C65	045-1201-50	12pF
C13	042-0672-00	25V 47uF TA	C40	045-6801-50	68pF	C66	046-1032-78	0.01uF
C14	168-4735-56	0.047uF Z	C41	168-1045-56	0.1uF Z	C67	046-1032-78	0.01uF
C15	168-4735-56	0.047uF Z	C42	178-1052-78	1uF	C68	168-1045-56	0.1uF Z
C16	168-4735-56	0.047uF Z	C43	042-0671-01	10V 47uF TA	C69	045-1201-50	12pF
C17	178-1052-78	1uF	C44	046-6812-58	680pF	C101	046-1032-78	0.01uF
C18	045-4701-50	47pF	C45	168-1045-56	0.1uF Z	C102	046-1032-78	0.01uF
C19	168-1045-56	0.1uF Z	C46	168-1045-56	0.1uF Z	CCT1	050-0140-68	1/32W 3.3k ohm x4J
C20	046-4712-58	470pF	C47	042-0671-01	10V 47uF TA	CCT4	050-0140-63	1/32W 47k ohm x4J
C21	046-4712-58	470pF	C48	168-5632-78	16V 0.056uF	D1	001-0367-91	1SS226
C22	168-1045-56	0.1uF Z	C49	168-1045-56	0.1uF Z	D2	001-2610-90	RB480KTL
C23	046-1532-78	0.015uF	C50	168-1045-56	0.1uF Z	IC2	051-6399-00	TC94A15F
C24	168-1045-56	0.1uF Z	C51	168-1045-56	0.1uF Z	IC3	051-6060-08	BD7961FM-E2

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC4	051-7518-18	SN74LVC139APWR	R8	033-0000-05	1/10W 0 ohm	R42	033-1001-15	1/10W 10 ohm
IC5	052-5062-03	MBM29DL800BA-90PFTN	R10	033-5621-15	1/10W 5.6k ohm	R45	033-1011-15	1/10W 100 ohm
IC6	051-7518-18	SN74LVC139APWR	R11	033-4731-15	1/10W 47k ohm	R46	033-4731-15	1/10W 47k ohm
IC7	051-9330-00	K4S641632F-TC60	R12	119-3341-15	1/10W 330k ohm	R47	033-4731-15	1/10W 47k ohm
IC8	051-7203-48	SN74LV74APW	R13	033-2231-15	1/10W 22k ohm	R48	033-1011-15	1/10W 100 ohm
IC9	051-6700-00	TMS320DA140	R14	033-2231-15	1/10W 22k ohm	R49	033-0000-05	1/10W 0 ohm
		PGE160	R15	117-1001-15	1/8W 10 ohm	R50	033-0000-05	1/10W 0 ohm
IC10	051-3315-90	TPS76316DBVR	R16	033-5631-15	1/10W 56k ohm	R51	033-8231-15	1/10W 82k ohm
IC11	051-7221-58	SN74AHC1G04	R17	033-3331-15	1/10W 33k ohm	R52	033-0000-05	1/10W 0 ohm
		HDCKR	R18	033-6831-15	1/10W 68k ohm	R53	033-4731-15	1/10W 47k ohm
IC12	051-7525-08	SN74LVC2GU04	R19	033-6831-15	1/10W 68k ohm	R63	033-2231-15	1/10W 22k ohm
IC13	051-7526-08	SN74LVC1G126	R20	033-1011-15	1/10W 100 ohm	R64	033-2231-15	1/10W 22k ohm
		DCKR	R21	116-4711-15	1/4W 470 ohm	R65	033-4731-15	1/10W 47k ohm
		DCKR	R22	117-1811-15	1/8W 180 ohm	R66	033-4731-15	1/10W 47k ohm
J1	074-1201-65	15P	R23	116-4711-15	1/4W 470 ohm	R100	033-1011-15	1/10W 100 ohm
J2	074-1138-56	6P	R24	033-2231-15	1/10W 22k ohm	R101	033-1011-15	1/10W 100 ohm
J3	074-1059-76	26P	R25	033-2231-15	1/10W 22k ohm	R102	033-1011-15	1/10W 100 ohm
J4	074-1189-95	45P	R26	033-2231-15	1/10W 22k ohm	R103	033-1011-15	1/10W 100 ohm
J5	074-1201-60	10P	R27	033-1011-15	1/10W 100 ohm	R104	033-1011-15	1/10W 100 ohm
L2	010-3104-54	MPZ1608S601AT	R28	033-4731-15	1/10W 47k ohm	R105	033-1011-15	1/10W 100 ohm
L3	010-3104-54	MPZ1608S601AT	R29	033-2231-15	1/10W 22k ohm	R106	033-1011-15	1/10W 100 ohm
Q1	131-1188-50	2SB1188PQR	R30	033-4721-15	1/10W 4.7k ohm	R107	033-4731-15	1/10W 47k ohm
Q2	131-1188-50	2SB1188PQR	R31	033-4721-15	1/10W 4.7k ohm	R200	033-1051-15	1/10W 1M ohm
Q3	125-2004-92	RN1402	R32	033-4731-15	1/10W 47k ohm	R201	033-1021-15	1/10W 1k ohm
R1	033-1021-15	1/10W 1k ohm	R33	033-4731-15	1/10W 47k ohm	R202	033-1021-15	1/10W 1k ohm
R2	033-1021-15	1/10W 1k ohm	R35	033-4731-15	1/10W 47k ohm	R220	033-4731-15	1/10W 47k ohm
R3	033-3311-15	1/10W 330 ohm	R36	033-3311-15	1/10W 330 ohm	R301	119-2231-15	1/10W 22k ohm
R4	033-2211-15	1/10W 220 ohm	R37	033-4731-15	1/10W 47k ohm	R302	119-3911-15	1/10W 390 ohm
R5	033-2211-15	1/10W 220 ohm	R38	033-3311-15	1/10W 330 ohm	X1	061-3534-90	16.92MHz
R6	033-1021-15	1/10W 1k ohm	R39	033-2211-15	1/10W 220 ohm	PWB	039-2531-20	PWB(WITHOUT COMPONENT)
R7	033-1051-15	1/10W 1M ohm	R40	033-1011-15	1/10W 100 ohm			
			R41	033-1001-15	1/10W 10 ohm			

Sensor PWB(B5) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	PT6	060-0252-01	PT4850F	PWB	039-1956-00	PWB(WITHOUT COMPONENT)
PT4	060-0252-01	PT4850F	S1	013-7414-50	SPVG22			
PT5	060-0252-01	PT4850F						

PIM-FPC(B6) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100uF	J2	074-1100-59	9P	S2	013-7412-50	SPVG21
D1	001-0529-29	MA8051-M	R1	033-1021-15	1/10W 1k ohm	PWB	039-2242-00	PWB(WITHOUT COMPONENT)
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC(B8) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	LED4	001-7042-00	GL4800	PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B10) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	LED6	001-7042-00	GL4800	PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B11) section : CD changer module

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B12) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-193-101	SPINDLE	M3	SMA-191-100	SLED	S3	013-7414-50	SPVG22