Exploded view of general assembly and parts list

Block No.M1MM

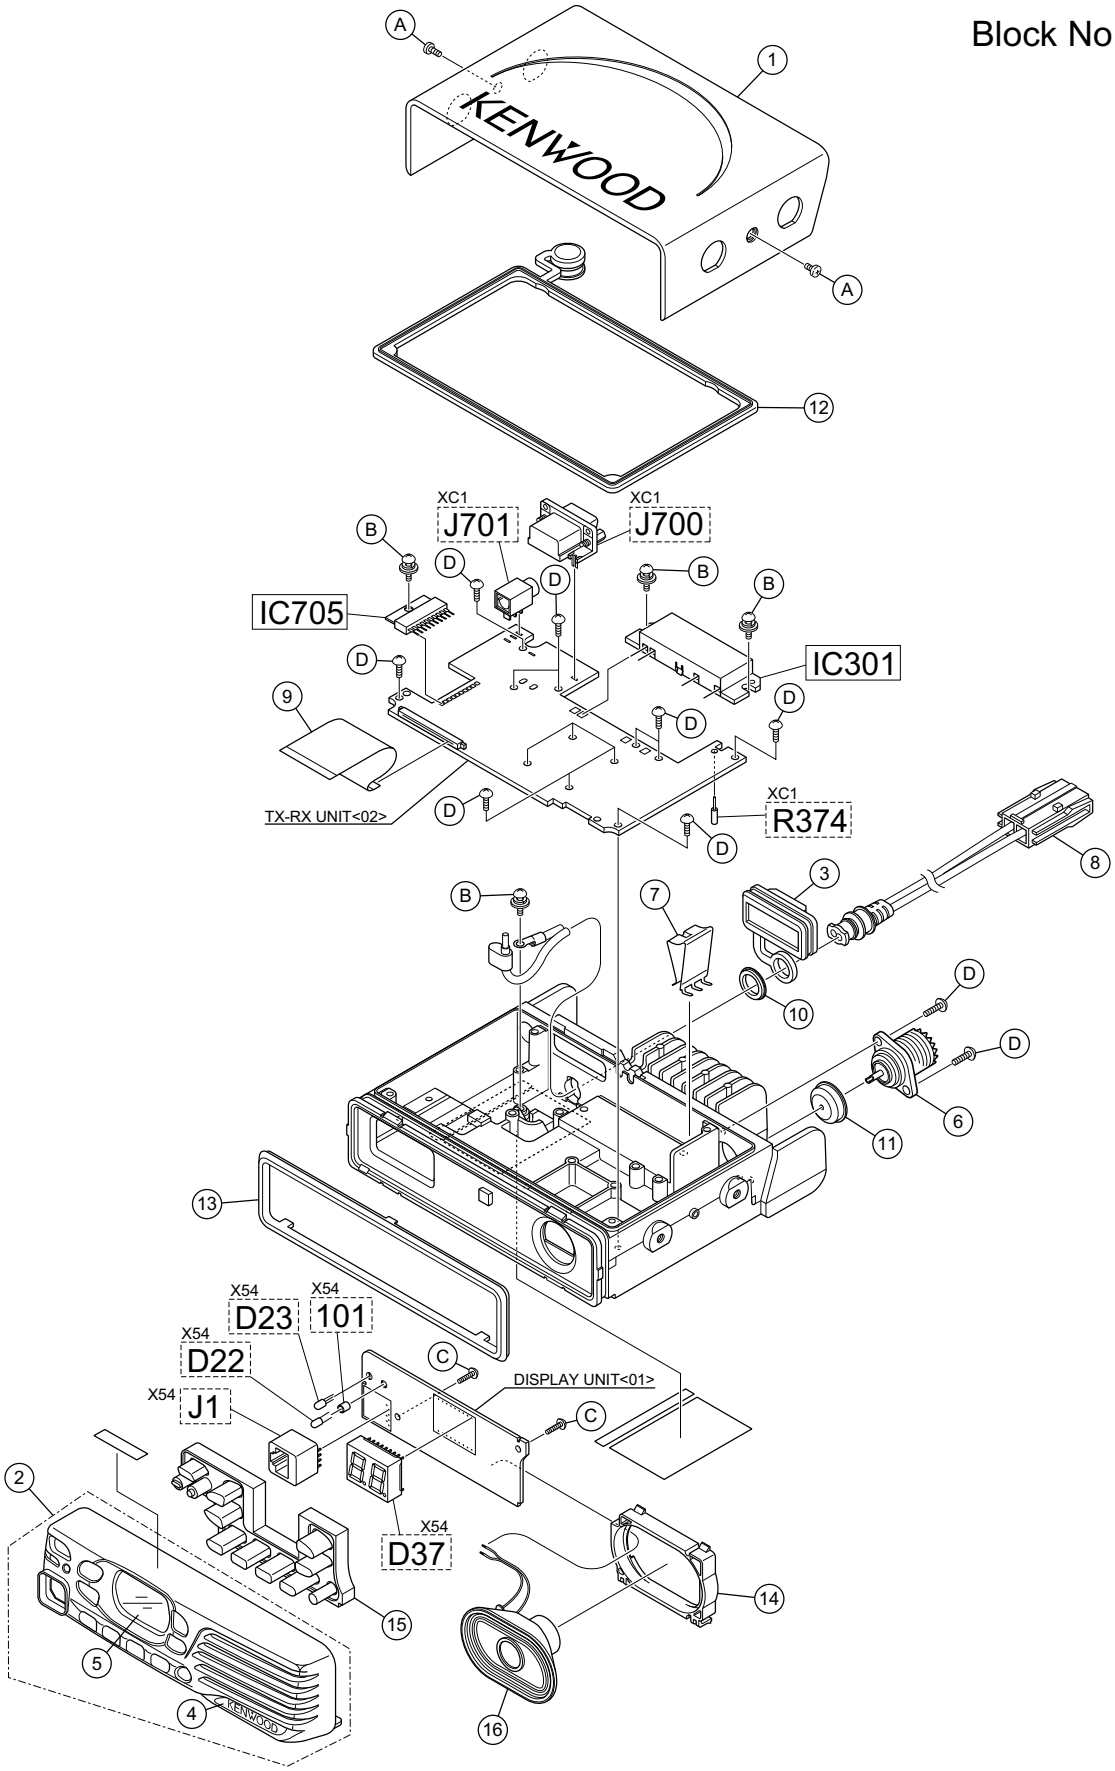

General assembly

Block No. [M][1][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	A02-4073-21	PLASTIC CABINET		
2	A6A-0004-00	PANEL ASSY		
3	B09-0732-03	CAP(D-SUB)		
4	B4D-0003-00	BADGE		
5	B10-2794-03	FRONT GLASS		
6	E04-0167-15	RF COAXIAL RECEPTACLE(M)		
7	E23-1346-04	GROUND TERMINAL		
8	E30-7684-25	DC CORD		
9	E37-1461-05	FLAT CABLE(30P PANEL)		
10	G53-1643-04	PACKING(DC CORD)		
11	G53-1662-04	PACKING(RECEPTACLE)		
12	G53-1819-21	PACKING(CHASSIS)		
13	G53-1820-03	PACKING(PANEL)		
14	J19-5528-03	HOLDER(SPEAKER)		
15	K29-9448-01	KEY TOP		
16	T07-0785-15	SPEAKER		
A	N35-2604-43	BINDING HEAD MACHINE SCREW	(x2)	
B	N67-3008-48	PAN HEAD SEMS SCREW	(x4)	
C	N80-2008-48	PAN HEAD TAPTITE SCREW	(x2)	
D	N87-2608-48	BRAZIER HEAD TAPTITE SCREW	(x14)	
-	XC2-0010-10	SERVICE TX-RX UNIT		HK
-	XC2-0010-11	SERVICE TX-RX UNIT		HVK
-	XC2-0010-21	SERVICE TX-RX UNIT		M

Packing materials and accessories parts list

Block No.M2MM

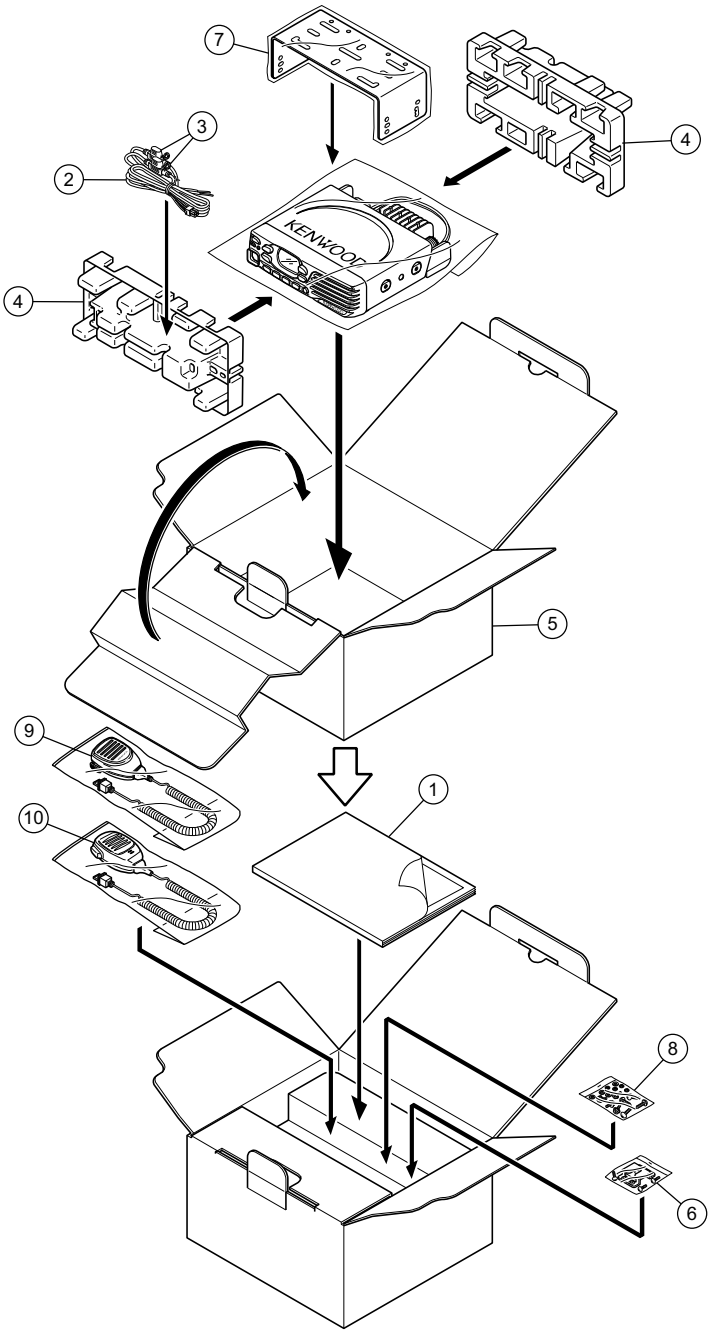

Packing and accessories

Block No. [M][2][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	B5A-0031-10	INSTRUCTION MANUAL		HK,HVK
1	B5A-0030-10	INSTRUCTION MANUAL		M
2	E30-7523-55	DC CORD ASSY ACCESSORY		
3	F52-0024-05	FUSE(BLADE TYPE)15A ACCESSORY	(x2)	HK,HVK
3	F52-0023-05	FUSE(BLADE TYPE)10A ACCESSORY	(x2)	M
4	H12-3178-05	PACKING FIXTURE	(x2)	
5	H52-2674-02	ITEM CARTON CASE		
6	J19-1584-15	HOLDER(MIC HANGER)		HK,HVK
7	J29-0726-03	BRACKET ACCESSORY		
8	N99-2039-05	SCREW SET		
9	T91-0624-65	MICROPHONE(KMC-30)ACCESSORY		HK
10	T91-0639-65	MICROPHONE(KMC-35)ACCESSORY		HVK

Electrical parts list

DISPLAY UNIT

X54-3890-20

Block No. [0][1]

⚠ Symbol No.	Part No.	Part Name	Description	Local
IC1	TC62D748CFNAG	MOS-IC		
Q1	LTC044EEBFS8	TRANSISTOR		
Q2	LTC044EEBFS8	TRANSISTOR		
Q3	KRA225S	TRANSISTOR		
Q4	KRC102S-P	TRANSISTOR		
Q5	2SC3928A	TRANSISTOR		
Q6	2SC3928A	TRANSISTOR		
Q7	LTA014EEBFS8	TRANSISTOR		
Q8	LTA014EEBFS8	TRANSISTOR		
Q9	2SC3928A	TRANSISTOR		
D1	B30-2337-05	LED	(YELLOW)	
D2	B30-2337-05	LED	(YELLOW)	
D3	B30-2337-05	LED	(YELLOW)	
D4	B30-2337-05	LED	(YELLOW)	
D5	B30-2337-05	LED	(YELLOW)	
D20	DA221	DIODE		
D22	B30-2321-05	LED	(BLUE LED)	
D23	B30-2151-05	LED	(RED/GREEN)	
D33	DZ2J062(M)	ZENER DIODE		
D37	HDSP-521A	LED		
C1	CK73HB1E103K	C CAPACITOR	0.010UF K	
C8	CC73HCH1H101J	C CAPACITOR	100PF J	
C9	CK73HB1H102K	C CAPACITOR	1000PF K	
C10	CK73HB1E103K	C CAPACITOR	0.010UF K	
C16	CK73HB1E103K	C CAPACITOR	0.010UF K	
C27	CC73HCH1H101J	C CAPACITOR	100PF J	
C29	CK73HB1H102K	C CAPACITOR	1000PF K	
C30	CK73HB1H102K	C CAPACITOR	1000PF K	
C31	CK73HB1H102K	C CAPACITOR	1000PF K	
C32	CK73HB1H102K	C CAPACITOR	1000PF K	
C33	CK73HB1H102K	C CAPACITOR	1000PF K	
C34	CK73HB1H102K	C CAPACITOR	1000PF K	
C35	CK73HB1H102K	C CAPACITOR	1000PF K	
C36	CK73HB1H102K	C CAPACITOR	1000PF K	
C38	CC73HCH1H101J	C CAPACITOR	100PF J	
C39	CC73HCH1H101J	C CAPACITOR	100PF J	
C40	CK73HB1H102K	C CAPACITOR	1000PF K	
C41	CC73HCH1H101J	C CAPACITOR	100PF J	
C42	CC73HCH1H101J	C CAPACITOR	100PF J	
C43	CK73HB1H471K	C CAPACITOR	470PF K	
C44	CK73HB1H471K	C CAPACITOR	470PF K	
C45	CK73HB1H471K	C CAPACITOR	470PF K	
C46	CK73HB1H471K	C CAPACITOR	470PF K	
C47	CK73HB1H102K	C CAPACITOR	1000PF K	
R1	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R2	RK73FB2B000J	MG RESISTOR	0.0 J 1/8W	
R3	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R4	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R5	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R6	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R7	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R8	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R10	RK73HB1J562J	MG RESISTOR	5.6K J 1/16W	
R11	RK73HB1J562J	MG RESISTOR	5.6K J 1/16W	
R12	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R21	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R22	RK73HB1J820J	MG RESISTOR	82 J 1/16W	
R23	RK73HB1J121J	MG RESISTOR	120 J 1/16W	
R26	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R27	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R28	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R29	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R34	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R35	RK73HB1J123J	MG RESISTOR	12K J 1/16W	
R36	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R37	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R38	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R39	RK73HB1J150J	MG RESISTOR	15 J 1/16W	
R40	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R41	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R42	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
L1	L92-0138-05	CHIP FERRITE		
101	J31-0565-15	COLLAR		
CN1	E40-6851-05	FLAT CABLE CONNECTOR		
CN2	E23-1262-05	TERMINAL		
CP1	RK74HB1J102J	NET RESISTOR	1.0K J 1/16W	
J1	J1	MODULAR JACK		

TX-RX UNIT

XC1-0010-10 (NX-740H(K), NX-740H(V)(K))

XC1-0010-21 (NX-740(M))

Block No. [0][2]

⚠ Symbol No.	Part No.	Part Name	Description	Local
IC2	AK1541	MOS-IC		
IC3	BD7542FVM	MOS-IC		
IC300	RA60H1317M1A	MOS-IC	(POWER MODULE)	
IC301	HA17358BFEL-E	MOS-IC		
IC500	BU7465HFV	MOS-IC		
IC501	AK2365A	FM-IC		
IC502	XC6209B332M-G	MOS-IC		
IC503	HA17358BFEL-E	MOS-IC		
IC700	TC7WBD125AFK	MOS-IC		
IC701	TC7WH126FU-F	MOS-IC		
IC702	PCA9555AHF	MOS-IC		
IC703	TC7WT126FU-F	MOS-IC		
IC704	ADM202EARNZ	MOS-IC		
IC705	TC7SET08FU-F	MOS-IC		
IC706	NJM2100V-ZB	BI-POLAR IC		
IC709	CMX7141	MOS-IC		
IC710	XC6221B332N-G	MOS-IC		
IC713	SM5023CNDH-G	MOS-IC		
IC714	2F405ZGT6KFKA	MCU		
IC715	AK2331	MOS-IC		
IC716	M95512-RDW6TP	ROM IC		
IC717	TA4809BF	ANALOGUE IC		
IC718	MM1856A33N	BI-POLAR IC		
IC719	LA4600	BI-POLAR IC		
IC720	XC6221B332N-G	MOS-IC		
IC721	TA7805F-NQ	MOS-IC		
IC722	BD4740G	MOS-IC		
IC723	XC6120N302N-G	MOS-IC		
IC724	TC7WT126FU-F	MOS-IC		
IC725	TC7WH126FU-F	MOS-IC		
IC726	XC6221B332N-G	MOS-IC		
Q2	2SC5636	TRANSISTOR		
Q3	SSM3J05FU-F	FET		
Q4	2SK1824-A	FET		
Q5	MCH3914(7)-H	FET		
Q6	SSM3J15FS	FET		
Q7	MCH3914(7)-H	FET		
Q9	KRX102U	TRANSISTOR		
Q10	KTC4075E(Y,GR)	TRANSISTOR		
Q11	2SC5108(Y)F	TRANSISTOR		
Q12	2SC5108(Y)F	TRANSISTOR		
Q300	RD00HVS1-T113	FET		
Q500	KTC4080E-P	TRANSISTOR		
Q501	KTC4075E(Y,GR)	TRANSISTOR		
Q502	2SC2412K	TRANSISTOR		
Q503	3SK318	FET		
Q504	KTC4075E(Y,GR)	TRANSISTOR		
Q505	LTC014EEBFS8	TRANSISTOR		

⚠ Symbol No.	Part No.	Part Name	Description	Local
Q506	3SK318	FET		
Q700	2SK1824-A	FET		
Q701	2SC4919-S	TRANSISTOR		
Q702	LTC014TEBFS8	TRANSISTOR		
Q703	2SJ645	FET		
Q704	KTC4075E(Y,GR)	TRANSISTOR		
Q705	SSM3J05FU-F	FET		
Q706	LTC044TUBFS8	TRANSISTOR		
Q707	LTC014EEBFS8	TRANSISTOR		
Q708	LTC014EEBFS8	TRANSISTOR		
Q709	2SB1694	TRANSISTOR		
Q710	2SB1694	TRANSISTOR		
Q711	LTC014EEBFS8	TRANSISTOR		
Q712	KTC4075E(Y,GR)	TRANSISTOR		
Q713	LTC044EEBFS8	TRANSISTOR		
Q714	SSM3K05FU	FET		
Q715	SSM3K05FU	FET		
Q716	SSM3J05FU-F	FET		
Q717	SSM3J05FU-F	FET		
Q718	KTC4075E(Y,GR)	TRANSISTOR		
Q719	2SJ645	FET		
Q720	LTC014EEBFS8	TRANSISTOR		
Q721	SSM3J05FU-F	FET		
Q722	LTC014EEBFS8	TRANSISTOR		
Q723	LTC014EEBFS8	TRANSISTOR		
D5	HVC376B	VARIABLE CAPACITANCE DIODE		
D6	HVC376B	VARIABLE CAPACITANCE DIODE		
D7	HVC376B	VARIABLE CAPACITANCE DIODE		
D8	HVC376B	VARIABLE CAPACITANCE DIODE		
D9	1SV325F	VARIABLE CAPACITANCE DIODE		
D10	1SV325F	VARIABLE CAPACITANCE DIODE		
D11	1SV325F	VARIABLE CAPACITANCE DIODE		
D12	1SV325F	VARIABLE CAPACITANCE DIODE		
D13	1SV325F	VARIABLE CAPACITANCE DIODE		
D14	1SV325F	VARIABLE CAPACITANCE DIODE		
D15	1SV278F	VARIABLE CAPACITANCE DIODE		
D16	RN142S	DIODE		
D17	RN142S	DIODE		
D300	UDZW5.1(B)	ZENER DIODE		
D301	1SS355	DIODE		
D304	HSC277	DIODE		
D305	L407CDB	DIODE	(50V/1W)	
D306	L407CDB	DIODE	(50V/1W)	
D307	RB706F-40	DIODE		
D308	RB706F-40	DIODE		
D309	RKP350KV	DIODE		
D310	RKP350KV	DIODE		
D500	RB706F-40	DIODE		
D502	1SV305F	VARIABLE CAPACITANCE DIODE		
D503	1SV305F	VARIABLE CAPACITANCE DIODE		
D504	1SV305F	VARIABLE CAPACITANCE DIODE		
D505	1SV305F	VARIABLE CAPACITANCE DIODE		
D700	DA221	DIODE		
D701	DA221	DIODE		
D702	DA221	DIODE		
D704	DA221	DIODE		
D705	DA221	DIODE		
D706	DA221	DIODE		
D707	DA221	DIODE		
D708	DA221	DIODE		
D709	DA221	DIODE		
D710	DA221	DIODE		
D711	DA221	DIODE		
D712	MC2858-T111	DIODE		
D713	1SS372F	DIODE		
D714	DB2S310	DIODE		
D715	DB2S310	DIODE		
D717	UDZW18(B)	ZENER DIODE		
D718	RB521S-30-TP	DIODE		
D719	Z5W27V	SURGE ABSORBER		
D720	DB2S310	DIODE		
D721	DB2S310	DIODE		
C7	CC73HCH1H101J	C CAPACITOR	100PF J	
C9	CK73HB1E103K	C CAPACITOR	0.010UF K	
C10	CC73HCH1H101J	C CAPACITOR	100PF J	
C12	CC73HCH1H101J	C CAPACITOR	100PF J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C13	CC73HCH1H101J	C CAPACITOR	100PF J	
C14	CK73HB1H271K	C CAPACITOR	270PF K	
C15	CK73HB1H103K	C CAPACITOR	0.010UF K	
C16	CK73HB1E103K	C CAPACITOR	0.010UF K	
C17	CC73HCH1H100B	C CAPACITOR	10PF B	
C18	CK73HB1A104K	C CAPACITOR	0.10UF K	
C19	CC73HCH1H101J	C CAPACITOR	100PF J	
C21	CK73HB1A473K	C CAPACITOR	0.047UF K	
C22	CK73HB1E103K	C CAPACITOR	0.010UF K	
C23	CC73HCH1H100B	C CAPACITOR	10PF B	
C24	CK73HB1E103K	C CAPACITOR	0.010UF K	
C25	CK73HB1E103K	C CAPACITOR	0.010UF K	
C26	CC73HCH1H101J	C CAPACITOR	100PF J	
C27	CC73HCH1H101J	C CAPACITOR	100PF J	
C28	CK73HB1A224K	C CAPACITOR	0.22UF K	
C29	CK73HB1A224K	C CAPACITOR	0.22UF K	
C31	CK73HB1H271K	C CAPACITOR	270PF K	
C32	CK73HB1E103K	C CAPACITOR	0.010UF K	
C34	CS77MA1D1R5M	TA E CAPACITOR	1.5UF 20WV	
C35	CK73HB1H102K	C CAPACITOR	1000PF K	
C36	CS77MA1V0R1M	TA E CAPACITOR	0.1UF 35WV	
C38	CK73HB1H471K	C CAPACITOR	470PF K	
C46	CK73HB1H471K	C CAPACITOR	470PF K	
C48	CK73HB1H471K	C CAPACITOR	470PF K	
C49	CC73HCH1H220J	C CAPACITOR	22PF J	
C50	CK73HB1H471K	C CAPACITOR	470PF K	
C51	CC73HCH1H200J	C CAPACITOR	20PF J	
C52	CC73HCH1H470J	C CAPACITOR	47PF J	
C53	CC73HCH1H330J	C CAPACITOR	33PF J	
C58	CK73HB1H102K	C CAPACITOR	1000PF K	
C60	CK73HB1H102K	C CAPACITOR	1000PF K	
C61	CK73HB1H102K	C CAPACITOR	1000PF K	
C63	C93-0787-05	C CAPACITOR	0.1UF J	
C64	CK73HB1A104K	C CAPACITOR	0.10UF K	
C67	CC73HCH1H470J	C CAPACITOR	47PF J	
C69	CC73HCH1H101J	C CAPACITOR	100PF J	
C70	CK73HB1H102K	C CAPACITOR	1000PF K	
C73	CK73HB1H102K	C CAPACITOR	1000PF K	
C74	CK73FB0J106K	C CAPACITOR	10UF K	
C75	CC73HCH1H101J	C CAPACITOR	100PF J	
C78	CC73HCH1H101J	C CAPACITOR	100PF J	
C79	CC73HCH1HR75B	C CAPACITOR	0.75PF B	
C80	CC73HCH1H470J	C CAPACITOR	47PF J	
C82	CK73GB1H102K	C CAPACITOR	1000PF K	
C83	CK73GB1H102K	C CAPACITOR	1000PF K	
C84	CK73HB1H102K	C CAPACITOR	1000PF K	
C85	CK73HB1H102K	C CAPACITOR	1000PF K	
C86	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C87	CK73GB1H102K	C CAPACITOR	1000PF K	
C88	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C89	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C90	CK73GB1H102K	C CAPACITOR	1000PF K	
C91	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C92	CC73HCH1H4R5B	C CAPACITOR	4.5PF B	
C93	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C94	CK73HB1H471K	C CAPACITOR	470PF K	
C95	CC73HCH1H010B	C CAPACITOR	1.0PF B	
C96	CC73HCH1H010B	C CAPACITOR	1.0PF B	
C97	CS77BB21C100M	TA E CAPACITOR	10UF 16WV	
C98	CK73HB1H471K	C CAPACITOR	470PF K	
C99	CK73HB1H102K	C CAPACITOR	1000PF K	
C100	CK73HB1H102K	C CAPACITOR	1000PF K	
C101	CC73HCH1H180J	C CAPACITOR	18PF J	
C102	CC73HCH1H050B	C CAPACITOR	5.0PF B	
C103	CC73GCH1H050B	C CAPACITOR	5.0PF B	
C104	CK73HB1H102K	C CAPACITOR	1000PF K	
C105	CK73HB1H102K	C CAPACITOR	1000PF K	
C106	CK73HB1H102K	C CAPACITOR	1000PF K	
C107	CC73HCH1H120J	C CAPACITOR	12PF J	
C108	CC73GCH1H180J	C CAPACITOR	18PF J	
C300	CK73HB1H102K	C CAPACITOR	1000PF K	
C301	CC73GCH1H151J	C CAPACITOR	150PF J	
C302	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C303	CC73HCH1H070B	C CAPACITOR	7.0PF B	
C304	CC73HCH1H120J	C CAPACITOR	12PF J	
C305	CK73HB1H102K	C CAPACITOR	1000PF K	
C306	CK73HB1H471K	C CAPACITOR	470PF K	
C309	CC73HCH1H130J	C CAPACITOR	13PF J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C310	CK73HB1H102K	C CAPACITOR	1000PF K	
C311	CC73HCH1H2R5B	C CAPACITOR	2.5PF B	
C312	CK73HB1E223K	C CAPACITOR	0.022UF K	
C313	CC73GCH1H151J	C CAPACITOR	150PF J	
C314	CS77BA1C4R7M	TA E CAPACITOR	4.7UF 16WV	
C315	CK73GB1H102K	C CAPACITOR	1000PF K	
C320	CK73HB1H471K	C CAPACITOR	470PF K	
C323	CK73GB1H221K	C CAPACITOR	220PF K	
C324	CC73HCH1H101J	C CAPACITOR	100PF J	
C325	CC73GCH1H220J	C CAPACITOR	22PF J	
C326	CK73GB1H102K	C CAPACITOR	1000PF K	
C327	CC73GCH1H101J	C CAPACITOR	100PF J	
C328	CC73GCH1H101J	C CAPACITOR	100PF J	
C329	CK73HB1A104K	C CAPACITOR	0.10UF K	
C330	CK73GB1H102K	C CAPACITOR	1000PF K	
C333	CK73GB1H471K	C CAPACITOR	470PF K	
C334	CC73GCH1H470J	C CAPACITOR	47PF J	
C335	CC73GCH1H220J	C CAPACITOR	22PF J	
C336	C93-0559-05	C CAPACITOR	9.0PF D	
C339	CK73HB1A104K	C CAPACITOR	0.10UF K	
C340	CK73GB1H102K	C CAPACITOR	1000PF K	
C343	CK73HB1H102K	C CAPACITOR	1000PF K	
C344	CK73GB1H102K	C CAPACITOR	1000PF K	
C346	CK73GB1H103K	C CAPACITOR	0.010UF K	
C347	CK73HB1H102K	C CAPACITOR	1000PF K	
C348	CK73HB1H102K	C CAPACITOR	1000PF K	
C349	CK73GB1H103K	C CAPACITOR	0.010UF K	
C350	CK73HB1H102K	C CAPACITOR	1000PF K	
C351	CC73GCH1H050B	C CAPACITOR	5.0PF B	
C352	C93-0561-05	C CAPACITOR	12PF J	
C353	C93-0603-05	C CAPACITOR	1000PF K	
C354	C93-0603-05	C CAPACITOR	1000PF K	
C355	CC73GCH1H020B	C CAPACITOR	2.0PF B	
C356	CC73GCH1H430J	C CAPACITOR	43PF J	
C357	C93-0562-05	C CAPACITOR	15PF J	
C358	CK73GB1H102K	C CAPACITOR	1000PF K	
C359	C93-0552-05	C CAPACITOR	2.0PF C	
C360	CM73F2H200J	C CAPACITOR	20PF J	
C361	C93-0552-05	C CAPACITOR	2.0PF C	
C363	C93-0554-05	C CAPACITOR	4.0PF C	
C364	C93-0562-05	C CAPACITOR	15PF J	
C365	CK73GB1H102K	C CAPACITOR	1000PF K	
C366	CK73HB1H102K	C CAPACITOR	1000PF K	
C367	CK73HB1H102K	C CAPACITOR	1000PF K	
C368	CK73HB1E103K	C CAPACITOR	0.010UF K	
C369	CK73HB1H471K	C CAPACITOR	470PF K	
C370	CC73HCH1H150J	C CAPACITOR	15PF J	
C371	CC73HCH1H070B	C CAPACITOR	7.0PF B	
C372	CC73HCH1H220J	C CAPACITOR	22PF J	
C374	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C375	CC73HCH1H120J	C CAPACITOR	12PF J	
C376	CC73HCH1H200J	C CAPACITOR	20PF J	
C500	CK73HB1H271K	C CAPACITOR	270PF K	
C502	CK73HB1A104K	C CAPACITOR	0.10UF K	
C503	CK73HB1H271K	C CAPACITOR	270PF K	
C504	CK73HB1A104K	C CAPACITOR	0.10UF K	
C505	CC73HCH1H560J	C CAPACITOR	56PF J	
C506	CK73HB1H152K	C CAPACITOR	1500PF K	
C507	CK73HB1A104K	C CAPACITOR	0.10UF K	
C508	CK73HB1H681K	C CAPACITOR	680PF K	
C509	CK73HB1H182K	C CAPACITOR	1800PF K	
C510	CC73HCH1H330J	C CAPACITOR	33PF J	
C511	CK73HB1E103K	C CAPACITOR	0.010UF K	
C512	CC73HCH1H220J	C CAPACITOR	22PF J	
C513	CC73HCH1H820J	C CAPACITOR	82PF J	
C514	CK73HB1E103K	C CAPACITOR	0.010UF K	
C515	CK73HB1A104K	C CAPACITOR	0.10UF K	
C516	CK73HB1H102K	C CAPACITOR	1000PF K	
C517	CC73HCH1H390J	C CAPACITOR	39PF J	
C518	CK73HB1A333K	C CAPACITOR	0.033UF K	
C519	CC73HCH1H820J	C CAPACITOR	82PF J	
C520	CK73GB0J106K	C CAPACITOR	10UF K	
C521	CK73HB1A104K	C CAPACITOR	0.10UF K	
C522	CK73HB1A224K	C CAPACITOR	0.22UF K	
C525	CK73HB1H271K	C CAPACITOR	270PF K	
C527	CK73HB1E103K	C CAPACITOR	0.010UF K	
C528	CC73HCH1H101J	C CAPACITOR	100PF J	
C529	CC73HCH1H101J	C CAPACITOR	100PF J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C530	CK73HB1A224K	C CAPACITOR	0.22UF K	
C531	CK73GB0J106K	C CAPACITOR	10UF K	
C532	CK73HB1A104K	C CAPACITOR	0.10UF K	
C534	CK73HB1A105K	C CAPACITOR	1.0UF K	
C535	CK73HB1A105K	C CAPACITOR	1.0UF K	
C536	CK73GB1A105K	C CAPACITOR	1.0UF K	
C539	CK73HB1E103K	C CAPACITOR	0.010UF K	
C540	CK73HB0J225K	C CAPACITOR	2.2UF K	
C541	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C542	CK73HB1A104K	C CAPACITOR	0.10UF K	
C543	CC73HCH1H100C	C CAPACITOR	10PF C	
C544	CK73HB1A224K	C CAPACITOR	0.22UF K	
C545	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C546	CK73HB1A474K	C CAPACITOR	0.47UF K	
C547	CK73HB1H102K	C CAPACITOR	1000PF K	
C548	CK73HB1E103K	C CAPACITOR	0.010UF K	
C549	CK73HB1A104K	C CAPACITOR	0.10UF K	
C550	CK73HB1E103K	C CAPACITOR	0.010UF K	
C551	CK73HB1H102K	C CAPACITOR	1000PF K	
C552	CC73HCH1H150G	C CAPACITOR	15PF G	
C553	CK73HB1E103K	C CAPACITOR	0.010UF K	
C555	CK73HB1H102K	C CAPACITOR	1000PF K	
C556	CK73HB0J224K	C CAPACITOR	0.22UF K	
C557	CK73GB1H471K	C CAPACITOR	470PF K	
C558	CK73HB1H102K	C CAPACITOR	1000PF K	
C559	CK73HB1E103K	C CAPACITOR	0.010UF K	
C560	CK73HB1H102K	C CAPACITOR	1000PF K	
C561	CK73HB1H102K	C CAPACITOR	1000PF K	
C562	CK73HB1H102K	C CAPACITOR	1000PF K	
C569	CC73HCH1H010B	C CAPACITOR	1.0PF B	
C570	CC73HCH1H560J	C CAPACITOR	56PF J	
C571	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C572	CK73HB1H102K	C CAPACITOR	1000PF K	
C573	CC73HCH1H010B	C CAPACITOR	1.0PF B	
C574	CC73HCH1H330J	C CAPACITOR	33PF J	
C575	CC73HCH1H1R5B	C CAPACITOR	1.5PF B	
C576	CK73HB1H102K	C CAPACITOR	1000PF K	
C577	CK73HB1H471K	C CAPACITOR	470PF K	
C579	CK73HB1A104K	C CAPACITOR	0.10UF K	
C580	CK73HB1H102K	C CAPACITOR	1000PF K	
C582	CK73HB1H102K	C CAPACITOR	1000PF K	
C583	CK73HB1H471K	C CAPACITOR	470PF K	
C584	CK73HB1H102K	C CAPACITOR	1000PF K	
C585	CK73HB1H471K	C CAPACITOR	470PF K	
C586	CK73HB1H471K	C CAPACITOR	470PF K	
C587	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C588	CC73GCH1H471J	C CAPACITOR	470PF J	
C589	CC73HCH1H560J	C CAPACITOR	56PF J	
C590	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C591	CK73HB1H102K	C CAPACITOR	1000PF K	
C592	CC73HCH1H030B	C CAPACITOR	3.0PF B	
C595	CC73HCH1H560J	C CAPACITOR	56PF J	
C596	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C597	CK73GB1H102K	C CAPACITOR	1000PF K	
C599	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C600	CC73HCH1H130J	C CAPACITOR	13PF J	
C700	CK73HB1H471K	C CAPACITOR	470PF K	
C701	CK73HB1H471K	C CAPACITOR	470PF K	
C702	CC73HCH1H101J	C CAPACITOR	100PF J	
C703	CK73HB1H103K	C CAPACITOR	0.010UF K	
C704	CK73HB1H471K	C CAPACITOR	470PF K	
C705	CK73HB1H102K	C CAPACITOR	1000PF K	
C706	CK73HB1H471K	C CAPACITOR	470PF K	
C707	CK73HB1H471K	C CAPACITOR	470PF K	
C708	CK73HB1H471K	C CAPACITOR	470PF K	
C709	CK73HB1H471K	C CAPACITOR	470PF K	
C710	CK73HB1H103K	C CAPACITOR	0.010UF K	
C711	CK73HB1H102K	C CAPACITOR	1000PF K	
C712	CK73HB1H471K	C CAPACITOR	470PF K	
C713	CK73HB1H102K	C CAPACITOR	1000PF K	
C714	CK73HB1A104K	C CAPACITOR	0.10UF K	
C715	CK73HB1H471K	C CAPACITOR	470PF K	
C716	CK73HB1H471K	C CAPACITOR	470PF K	
C717	CK73HB1H102K	C CAPACITOR	1000PF K	
C718	CK73HB1H471K	C CAPACITOR	470PF K	
C719	CK73HB1H102K	C CAPACITOR	1000PF K	
C720	CK73HB1H471K	C CAPACITOR	470PF K	
C721	CK73HB1H471K	C CAPACITOR	470PF K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C722	CK73HB1H471K	C CAPACITOR	470PF K	
C723	CK73HB1H471K	C CAPACITOR	470PF K	
C725	CK73HB1H471K	C CAPACITOR	470PF K	
C727	CK73HB1H471K	C CAPACITOR	470PF K	
C729	CK73HB1H471K	C CAPACITOR	470PF K	
C731	CK73HB1H221K	C CAPACITOR	220PF K	
C733	CC73HCH1H101J	C CAPACITOR	100PF J	
C735	CK73HB1H103K	C CAPACITOR	0.010UF K	
C736	CK73GB1A105K	C CAPACITOR	1.0UF K	
C737	CK73HB0J105K	C CAPACITOR	1.0UF K	
C738	CK73HB0J105K	C CAPACITOR	1.0UF K	
C740	CK73HB1H103K	C CAPACITOR	0.010UF K	
C741	CK73HB1H471K	C CAPACITOR	470PF K	
C742	CK73GB1C104K	C CAPACITOR	0.10UF K	
C743	CK73HB0J105K	C CAPACITOR	1.0UF K	
C744	CK73HB1A104K	C CAPACITOR	0.10UF K	
C745	CK73HB1H102K	C CAPACITOR	1000PF K	
C746	CK73HB1A104K	C CAPACITOR	0.10UF K	
C747	CK73HB1A105K	C CAPACITOR	1.0UF K	
C748	CK73HB1A105K	C CAPACITOR	1.0UF K	
C749	CK73HB1A105K	C CAPACITOR	1.0UF K	
C750	CK73HB1A105K	C CAPACITOR	1.0UF K	
C751	CK73FB0J106K	C CAPACITOR	10UF K	
C752	CC73HCH1H101J	C CAPACITOR	100PF J	
C753	CC73HCH1H390J	C CAPACITOR	39PF J	
C754	CK73HB0J105K	C CAPACITOR	1.0UF K	
C755	CK73HB0J105K	C CAPACITOR	1.0UF K	
C757	CK73HB1H103K	C CAPACITOR	0.010UF K	
C758	CK73HB1A104K	C CAPACITOR	0.10UF K	
C759	CK73HB1A104K	C CAPACITOR	0.10UF K	
C760	CK73HB0J105K	C CAPACITOR	1.0UF K	
C761	CK73GB0J475K	C CAPACITOR	4.7UF K	
C764	CK73HB1C333K	C CAPACITOR	0.033UF K	
C765	CC73HCH1H101J	C CAPACITOR	100PF J	
C766	CC73HCH1H101J	C CAPACITOR	100PF J	
C767	CC73HCH1H101J	C CAPACITOR	100PF J	
C768	CC73HCH1H101J	C CAPACITOR	100PF J	
C769	CC73HCH1H101J	C CAPACITOR	100PF J	
C770	CC73HCH1H101J	C CAPACITOR	100PF J	
C771	CC73HCH1H101J	C CAPACITOR	100PF J	
C772	CC73HCH1H101J	C CAPACITOR	100PF J	
C773	CC73HCH1H101J	C CAPACITOR	100PF J	
C774	CK73HB1E223K	C CAPACITOR	0.022UF K	
C775	CC73HCH1H101J	C CAPACITOR	100PF J	
C780	CK73HB0J105K	C CAPACITOR	1.0UF K	
C781	CK73HB1A104K	C CAPACITOR	0.10UF K	
C783	CK73HB1A104K	C CAPACITOR	0.10UF K	
C784	CK73GB0J106K	C CAPACITOR	10UF K	
C786	CK73HB1A104K	C CAPACITOR	0.10UF K	
C789	CK73HB0J105K	C CAPACITOR	1.0UF K	
C790	CK73HB1H471K	C CAPACITOR	470PF K	
C791	CK73HB1H471K	C CAPACITOR	470PF K	
C793	CK73HB0J105K	C CAPACITOR	1.0UF K	
C794	CK73HB1A104K	C CAPACITOR	0.10UF K	
C796	CK73GB0J106K	C CAPACITOR	10UF K	
C798	CK73HB0J105K	C CAPACITOR	1.0UF K	
C800	CK73GB1C104K	C CAPACITOR	0.10UF K	
C801	CK73GB1H471K	C CAPACITOR	470PF K	
C802	CK73FB0J106K	C CAPACITOR	10UF K	
C803	CC73HCH1H101J	C CAPACITOR	100PF J	
C806	CK73HB0J475M	C CAPACITOR	4.7UF M	
C807	CC73HCH1H101J	C CAPACITOR	100PF J	
C809	CK73HB1H271K	C CAPACITOR	270PF K	
C810	CK73FB0J106K	C CAPACITOR	10UF K	
C815	CK73HB1E103K	C CAPACITOR	0.010UF K	
C816	CK73GB1A105K	C CAPACITOR	1.0UF K	
C817	CK73GB0J106K	C CAPACITOR	10UF K	
C818	CK73HB1H102K	C CAPACITOR	1000PF K	
C820	CK73HB1H103K	C CAPACITOR	0.010UF K	
C829	CK73HB1A683K	C CAPACITOR	0.068UF K	
C831	CK73HB1H103K	C CAPACITOR	0.010UF K	
C832	CK73HB1E103K	C CAPACITOR	0.010UF K	
C833	CK73HB1A104K	C CAPACITOR	0.10UF K	
C835	CK73GB1H104K	C CAPACITOR	0.10UF K	
C837	CK73HB1E103K	C CAPACITOR	0.010UF K	
C841	CK73HB1A104K	C CAPACITOR	0.10UF K	
C842	CK73HB1A104K	C CAPACITOR	0.10UF K	
C843	CK73HB1A104K	C CAPACITOR	0.10UF K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C844	CK73HB1H102K	C CAPACITOR	1000PF K	
C845	CK73HB1A104K	C CAPACITOR	0.10UF K	
C846	CK73HB1H102K	C CAPACITOR	1000PF K	
C847	CK73HB1A104K	C CAPACITOR	0.10UF K	
C848	CK73HB1H102K	C CAPACITOR	1000PF K	
C849	CK73GB1H102K	C CAPACITOR	1000PF K	
C850	CK73HB1H102K	C CAPACITOR	1000PF K	
C851	CK73HB0J225K	C CAPACITOR	2.2UF K	
C852	CK73HB1H471K	C CAPACITOR	470PF K	
C853	CK73HB1H103K	C CAPACITOR	0.010UF K	
C855	CK73HB1H471K	C CAPACITOR	470PF K	
C856	CK73HB0J105K	C CAPACITOR	1.0UF K	
C857	CK73HB1H103K	C CAPACITOR	0.010UF K	
C858	CK73HB0J105K	C CAPACITOR	1.0UF K	
C859	CK73HB1H471K	C CAPACITOR	470PF K	
C860	CK73GB1H102K	C CAPACITOR	1000PF K	
C861	CK73HB1A104K	C CAPACITOR	0.10UF K	
C862	CK73HB1H102K	C CAPACITOR	1000PF K	
C863	CK73HB1H102K	C CAPACITOR	1000PF K	
C865	CK73HB1H102K	C CAPACITOR	1000PF K	
C867	CK73HB1A104K	C CAPACITOR	0.10UF K	
C868	CK73HB1A104K	C CAPACITOR	0.10UF K	
C869	CK73HB1H102K	C CAPACITOR	1000PF K	
C870	CK73HB1A104K	C CAPACITOR	0.10UF K	
C871	CK73HB1A104K	C CAPACITOR	0.10UF K	
C872	CK73HB0J105K	C CAPACITOR	1.0UF K	
C873	CK73HB1H102K	C CAPACITOR	1000PF K	
C874	CK73HB1A104K	C CAPACITOR	0.10UF K	
C875	CK73HB1H682K	C CAPACITOR	6800PF K	
C876	CC73HCH1H101J	C CAPACITOR	100PF J	
C878	CK73HB0J225K	C CAPACITOR	2.2UF K	
C879	CK73HB1A104K	C CAPACITOR	0.10UF K	
C880	CK73HB1H102K	C CAPACITOR	1000PF K	
C881	CK73HB1A104K	C CAPACITOR	0.10UF K	
C882	CK73HB1A104K	C CAPACITOR	0.10UF K	
C883	CK73HB1A104K	C CAPACITOR	0.10UF K	
C884	CK73HB1H102K	C CAPACITOR	1000PF K	
C885	CK73HB1H102K	C CAPACITOR	1000PF K	
C886	CK73HB1H102K	C CAPACITOR	1000PF K	
C887	CK73HB1H102K	C CAPACITOR	1000PF K	
C890	CK73HB1A104K	C CAPACITOR	0.10UF K	
C891	CS77BB21C220M	TA E CAPACITOR	22UF 16WV	
C892	CK73HB1E103K	C CAPACITOR	0.010UF K	
C894	CK73HB1H102K	C CAPACITOR	1000PF K	
C897	CK73HB1H102K	C CAPACITOR	1000PF K	
C898	CK73GB1A105K	C CAPACITOR	1.0UF K	
C899	CK73HB0J105K	C CAPACITOR	1.0UF K	
C900	CK73GB1A105K	C CAPACITOR	1.0UF K	
C902	CK73HB0J105K	C CAPACITOR	1.0UF K	
C903	CS77BB21C220M	TA E CAPACITOR	22UF 16WV	
C904	CK73HB1H102K	C CAPACITOR	1000PF K	
C905	CK73HB1A104K	C CAPACITOR	0.10UF K	
C908	CK73HB1A104K	C CAPACITOR	0.10UF K	
C909	CK73HB1A104K	C CAPACITOR	0.10UF K	
C911	CK73HB1A224K	C CAPACITOR	0.22UF K	
C912	CK73HB1A104K	C CAPACITOR	0.10UF K	
C913	CK73GB1C224K	C CAPACITOR	0.22UF K	
C914	CE32BM1C471M	E CAPACITOR	470UF 16WV	
C916	CK73HB1H102K	C CAPACITOR	1000PF K	
C919	CK73GB1H102K	C CAPACITOR	1000PF K	
C920	CK73HB0J105K	C CAPACITOR	1.0UF K	
C921	CK73HB1H102K	C CAPACITOR	1000PF K	
C922	CK73HB1H102K	C CAPACITOR	1000PF K	
C923	CK73HB1A105K	C CAPACITOR	1.0UF K	
C924	CK73GB1A105K	C CAPACITOR	1.0UF K	
C925	CS77BA1C4R7M	TA E CAPACITOR	4.7UF 16WV	
C926	CK73GB1H102K	C CAPACITOR	1000PF K	
C927	CS77BA1A100M	TA E CAPACITOR	10UF 10WV	
C928	CE32CL1C470M	E CAPACITOR	47UF 16WV	
C929	CS77MB20J101M	TA E CAPACITOR	100UF 6.3WV	
C930	CK73HB1H102K	C CAPACITOR	1000PF K	
C931	CK73HB1E103K	C CAPACITOR	0.010UF K	
C933	CE32BD1C471M	E CAPACITOR	470UF 16WV	
C934	CK73GB1H102K	C CAPACITOR	1000PF K	
C935	CK73HB1H102K	C CAPACITOR	1000PF K	
C936	CE32BD1C471M	E CAPACITOR	470UF 16WV	
C937	CK73GB1H102K	C CAPACITOR	1000PF K	
C938	CK73GB1A105K	C CAPACITOR	1.0UF K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C939	CK73HB1E103K	C CAPACITOR	0.010UF K	
C940	CK73HB1H102K	C CAPACITOR	1000PF K	
C941	CK73EB1E106K	C CAPACITOR	10UF K	
C942	CK73HB1H102K	C CAPACITOR	1000PF K	
C944	CK73FB1E225K	C CAPACITOR	2.2UF K	
C945	CK73HB1A104K	C CAPACITOR	0.10UF K	
C947	CC73HCH1H220J	C CAPACITOR	22PF J	
C948	CK73HB1A393K	C CAPACITOR	0.039UF K	
C949	CK73GB1H102K	C CAPACITOR	1000PF K	
C950	CC73HCH1H470J	C CAPACITOR	47PF J	
C951	CK73GB1H221K	C CAPACITOR	220PF K	
C952	CC73HCH1H101J	C CAPACITOR	100PF J	
C954	CK73GB1H471K	C CAPACITOR	470PF K	
C955	CK73HB1H102K	C CAPACITOR	1000PF K	
C956	CC73HCH1H220J	C CAPACITOR	22PF J	
C957	CC73GCH1H220J	C CAPACITOR	22PF J	
C958	CK73HB1H471K	C CAPACITOR	470PF K	
C959	CK73GB1H102K	C CAPACITOR	1000PF K	
C960	CC73GCH1H470J	C CAPACITOR	47PF J	
C961	CK73HB1E103K	C CAPACITOR	0.010UF K	
C962	CC73HCH1H220J	C CAPACITOR	22PF J	
C965	CK73HB1H102K	C CAPACITOR	1000PF K	
C967	CK73GB1H102K	C CAPACITOR	1000PF K	
C969	CK73GB1H471K	C CAPACITOR	470PF K	
C970	CK73GB1H102K	C CAPACITOR	1000PF K	
C971	CK73GB1H221K	C CAPACITOR	220PF K	
C973	CK73HB1A104K	C CAPACITOR	0.10UF K	
C974	CK73HB1A104K	C CAPACITOR	0.10UF K	
C976	CK73HB0J105K	C CAPACITOR	1.0UF K	
C977	CK73HB0J105K	C CAPACITOR	1.0UF K	
C978	CC73HCH1H560J	C CAPACITOR	56PF J	
C979	CK73HB1A104K	C CAPACITOR	0.10UF K	
C980	CK73GB1A105K	C CAPACITOR	1.0UF K	
C981	CK73HB1H102K	C CAPACITOR	1000PF K	
C982	CK73GB1A105K	C CAPACITOR	1.0UF K	
C983	CK73HB1H102K	C CAPACITOR	1000PF K	
C987	CK73HB1H102K	C CAPACITOR	1000PF K	
C988	CS77BB21A470M	TA E CAPACITOR	47UF 10WV	
C989	CS77BB21A470M	TA E CAPACITOR	47UF 10WV	
C990	CK73HB1E103K	C CAPACITOR	0.010UF K	
R2	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R4	RK73HB1J334J	MG RESISTOR	330K J 1/16W	
R6	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R7	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R8	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R9	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R10	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R11	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R13	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R14	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R15	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R16	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R17	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R19	RK73HB1J122J	MG RESISTOR	1.2K J 1/16W	
R20	RK73HB1J273J	MG RESISTOR	27K J 1/16W	
R21	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R22	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R23	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R24	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R25	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R26	RK73HB1J182J	MG RESISTOR	1.8K J 1/16W	
R27	RK73HB1J393J	MG RESISTOR	39K J 1/16W	
R28	RK73HB1J391J	MG RESISTOR	390 J 1/16W	
R31	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R33	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R35	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R40	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R41	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R42	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R45	RK73HB1J153J	MG RESISTOR	15K J 1/16W	
R47	RK73HB1J105J	MG RESISTOR	1.0M J 1/16W	
R48	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R50	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R51	RK73HB1J683J	MG RESISTOR	68K J 1/16W	
R52	RK73FB2B102J	MG RESISTOR	1.0K J 1/8W	
R53	RK73HB1J271J	MG RESISTOR	270 J 1/16W	
R54	RK73HB1J103J	MG RESISTOR	10K J 1/16W	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R55	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R57	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R58	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R59	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R60	RK73HB1J393J	MG RESISTOR	39K J 1/16W	
R61	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R62	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R63	RN73HH1J471D	MG RESISTOR	470 D 1/16W	
R64	RN73HH1J391D	MG RESISTOR	390 D 1/16W	
R65	RK73GB2A104J	MG RESISTOR	100K J 1/10W	
R66	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R67	RN73HH1J271D	MG RESISTOR	270 D 1/16W	
R68	RN73HH1J121D	MG RESISTOR	120 D 1/16W	
R69	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R70	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R71	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R72	RK73HB1J273J	MG RESISTOR	27K J 1/16W	
R73	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R74	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R75	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R76	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R77	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R78	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R79	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R80	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R81	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R300	RK73GB2A472J	MG RESISTOR	4.7K J 1/10W	
R301	RK73HB1J273J	MG RESISTOR	27K J 1/16W	
R302	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R303	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R310	RK73GB2A4R7J	MG RESISTOR	4.7 J 1/10W	
R311	RK73GB2A4R7J	MG RESISTOR	4.7 J 1/10W	
R312	RK73GB2A271J	MG RESISTOR	270 J 1/10W	
R314	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R316	RK73GB2A470J	MG RESISTOR	47 J 1/10W	
R317	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R318	RK73HB1J154J	MG RESISTOR	150K J 1/16W	
R320	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R321	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R322	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R324	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R325	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R327	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R329	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R330	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R331	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R332	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R334	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R335	RK73GH2A101D	MG RESISTOR	100 D 1/10W	
R336	RK73GH2A681D	MG RESISTOR	680 D 1/10W	
R337	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R338	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R341	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R342	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R343	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R344	RK73GH2A680D	MG RESISTOR	68 D 1/10W	
R345	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R346	RK73RB2H101J	MG RESISTOR	100 J 1/2W	
R348	RK73GB2A102J	MG RESISTOR	1.0K J 1/10W	
R350	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R351	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R352	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R353	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R354	RK73GH2A121D	MG RESISTOR	120 D 1/10W	
R355	RK73GH2A181D	MG RESISTOR	180 D 1/10W	
R356	R92-1061-05	JUMPER REST	0 OHM	
R357	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R358	RK73HB1J151J	MG RESISTOR	150 J 1/16W	
R359	RK73HB1J390J	MG RESISTOR	39 J 1/16W	
R360	RK73HB1J151J	MG RESISTOR	150 J 1/16W	
R362	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R500	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R501	RK73GB2A104J	MG RESISTOR	100K J 1/10W	
R503	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R504	RK73HB1J394J	MG RESISTOR	390K J 1/16W	
R508	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R509	RK73HB1J123J	MG RESISTOR	12K J 1/16W	
R510	RK73HB1J104J	MG RESISTOR	100K J 1/16W	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R512	RK73HB1J123J	MG RESISTOR	12K J 1/16W	
R513	RK73HB1J334J	MG RESISTOR	330K J 1/16W	
R514	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R515	RK73HB1J332J	MG RESISTOR	3.3K J 1/16W	
R516	RK73HB1J332J	MG RESISTOR	3.3K J 1/16W	
R517	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R518	RK73HB1J563J	MG RESISTOR	56K J 1/16W	
R519	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R520	RK73HB1J105J	MG RESISTOR	1.0M J 1/16W	
R521	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R523	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R524	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R525	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R526	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R527	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R528	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R529	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R530	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R532	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R535	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R536	RK73HB1J274J	MG RESISTOR	270K J 1/16W	
R538	RK73HB1J121J	MG RESISTOR	120 J 1/16W	
R540	RK73HB1J183J	MG RESISTOR	18K J 1/16W	
R541	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R542	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R543	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R544	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R545	RK73HB1J681J	MG RESISTOR	680 J 1/16W	
R546	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R547	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R548	RK73HB1J394J	MG RESISTOR	390K J 1/16W	
R550	RK73HB1J151J	MG RESISTOR	150 J 1/16W	
R551	RK73HB1J684J	MG RESISTOR	680K J 1/16W	
R552	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R553	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R554	RK73HB1J394J	MG RESISTOR	390K J 1/16W	
R555	RK73HB1J154J	MG RESISTOR	150K J 1/16W	
R556	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R557	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R558	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R560	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R561	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R562	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R564	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R565	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R566	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R567	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R568	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R569	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R570	RK73HB1J560J	MG RESISTOR	56 J 1/16W	
R571	RK73HB1J154J	MG RESISTOR	150K J 1/16W	
R572	RK73HB1J221J	MG RESISTOR	220 J 1/16W	
R573	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R574	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R575	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R576	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R577	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R578	RK73HB1J683J	MG RESISTOR	68K J 1/16W	
R579	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R580	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R581	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R582	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R583	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R585	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R586	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R588	RK73FB2B000J	MG RESISTOR	0.0 J 1/8W	
R652	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R656	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R658	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R659	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R660	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R661	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R700	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R701	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R702	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R703	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R704	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R705	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R706	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R707	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R708	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R709	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R710	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R711	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R712	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R713	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R714	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R715	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R716	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R717	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R718	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R720	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R721	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R722	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R724	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R727	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R728	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R729	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R730	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R732	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R733	RK73HB1J561J	MG RESISTOR	560 J 1/16W	
R734	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R736	RK73HB1J681J	MG RESISTOR	680 J 1/16W	
R737	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R738	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R739	RK73HB1J821J	MG RESISTOR	820 J 1/16W	
R740	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R741	RK73HB1J221J	MG RESISTOR	220 J 1/16W	
R742	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R743	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R744	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R745	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R747	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R748	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R749	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R750	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R751	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R752	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R755	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R757	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R758	RK73HB1J334J	MG RESISTOR	330K J 1/16W	
R759	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R760	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R761	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R762	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R764	RK73HB1J183J	MG RESISTOR	18K J 1/16W	
R765	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R768	RK73HB1J561J	MG RESISTOR	560 J 1/16W	
R769	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R770	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R771	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R772	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R773	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R774	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R775	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R776	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R777	RK73GB2A124J	MG RESISTOR	120K J 1/10W	
R778	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R779	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R780	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R781	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R782	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R783	RK73HB1J333J	MG RESISTOR	33K J 1/16W	
R784	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R785	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R786	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R789	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R792	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R796	RK73HB1J333J	MG RESISTOR	33K J 1/16W	
R797	RK73HB1J562J	MG RESISTOR	5.6K J 1/16W	
R798	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R799	RK73HB1J393J	MG RESISTOR	39K J 1/16W	
R800	RK73HB1J333J	MG RESISTOR	33K J 1/16W	
R802	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R804	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R805	RK73GB2A104J	MG RESISTOR	100K J 1/10W	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R807	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R809	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R811	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R812	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R813	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R815	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R816	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R819	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R820	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R821	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R822	RK73HB1J393J	MG RESISTOR	39K J 1/16W	
R823	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R824	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R825	RK73GB2A100J	MG RESISTOR	10 J 1/10W	
R826	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R827	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R828	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R829	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R830	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R832	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R833	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R835	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R836	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R837	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R840	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R843	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R846	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R848	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R849	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R850	RK73HH1J124D	MG RESISTOR	120K D 1/16W	
R854	RK73HH1J224D	MG RESISTOR	220K D 1/16W	
R855	RK73HB1J820J	MG RESISTOR	82 J 1/16W	
R857	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R858	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R859	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R861	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R863	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R864	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R865	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R866	RK73HH1J334D	MG RESISTOR	330K D 1/16W	
R867	RK73HH1J154D	MG RESISTOR	150K D 1/16W	
R868	RK73HB1J332J	MG RESISTOR	3.3K J 1/16W	
R870	RK73HB1J220J	MG RESISTOR	22 J 1/16W	
R871	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R872	RK73HB1J820J	MG RESISTOR	82 J 1/16W	
R873	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R875	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R876	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R877	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R878	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R879	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R880	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R881	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R882	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R883	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R884	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R885	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R886	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R888	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R889	RK73HB1J123J	MG RESISTOR	12K J 1/16W	
R890	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R891	RK73HB1J105J	MG RESISTOR	1.0M J 1/16W	
R892	RK73HB1J153J	MG RESISTOR	15K J 1/16W	
R893	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R895	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R896	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R897	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R898	RK73GH2A134D	MG RESISTOR	130K D 1/10W	
R899	RK73GH2A123D	MG RESISTOR	12K D 1/10W	
R900	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R901	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R902	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R903	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R904	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R905	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R906	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R907	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R908	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R909	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R910	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R911	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R912	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R913	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R914	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R916	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R917	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R918	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R919	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R920	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R921	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R922	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R923	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R924	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R925	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R926	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R927	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R928	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R929	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R930	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R931	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R933	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R934	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R936	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R938	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R939	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R940	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R942	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R943	RK73HB1J152J	MG RESISTOR	1.5K J 1/16W	
R944	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R946	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R947	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R948	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R949	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R950	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R951	RK73HB1J224J	MG RESISTOR	220K J 1/16W	
R952	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R953	RK73HB1J823J	MG RESISTOR	82K J 1/16W	
R954	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R955	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R956	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R958	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R959	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R960	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R961	RK73GB2A221J	MG RESISTOR	220 J 1/10W	
R962	RK73HB1J391J	MG RESISTOR	390 J 1/16W	
R964	RK73FB2B000J	MG RESISTOR	0.0 J 1/8W	
R965	RK73GB2A473J	MG RESISTOR	47K J 1/10W	
R966	RK73FB2B000J	MG RESISTOR	0.0 J 1/8W	
R968	RK73GB2A334J	MG RESISTOR	330K J 1/10W	
R969	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R970	RK73HB1J564J	MG RESISTOR	560K J 1/16W	
R971	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R972	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R973	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R974	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R975	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R976	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R977	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R978	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R979	RK73HB1J223J	MG RESISTOR	22K J 1/16W	
R980	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R983	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R984	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R985	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R986	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R987	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R988	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R989	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R990	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R991	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R992	RK73HB1J472J	MG RESISTOR	4.7K J 1/16W	
R993	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R994	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	HK,HVK
R996	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R997	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R998	RK73HB1J101J	MG RESISTOR	100 J 1/16W	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R999	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
L1	L41-4795-39	SMALL FIXED INDUCTOR	(4.7UH)	
L2	L92-0442-05	CHIP FERRITE		
L4	L92-0443-05	CHIP FERRITE		
L7	L40-1575-71	SMALL FIXED INDUCTOR	(15NH)	
L8	L40-2775-71	SMALL FIXED INDUCTOR	(27NH)	
L9	L40-4791-86	SMALL FIXED INDUCTOR	(4.7UH)	
L11	L40-4791-86	SMALL FIXED INDUCTOR	(4.7UH)	
L14	L40-1891-86	SMALL FIXED INDUCTOR	(1.8UH)	
L15	L92-0163-05	BEADS CORE		
L18	L92-0163-05	BEADS CORE		
L19	L40-1891-86	SMALL FIXED INDUCTOR	(1.8UH)	
L20	L40-1891-86	SMALL FIXED INDUCTOR	(1.8UH)	
L25	L40-1891-86	SMALL FIXED INDUCTOR	(1.8UH)	
L26	L40-1001-86	SMALL FIXED INDUCTOR	(10UH)	
L28	L92-0443-05	CHIP FERRITE		
L29	L40-1001-86	SMALL FIXED INDUCTOR	(10UH)	
L30	L41-1588-14	SMALL FIXED INDUCTOR	(157NH)	
L31	L41-1088-14	SMALL FIXED INDUCTOR	(100NH)	
L32	L40-2702-86	SMALL FIXED INDUCTOR	(27UH)	
L33	L40-2702-86	SMALL FIXED INDUCTOR	(27UH)	
L37	L40-2702-86	SMALL FIXED INDUCTOR	(27UH)	
L38	L40-2702-86	SMALL FIXED INDUCTOR	(27UH)	
L39	L92-0443-05	CHIP FERRITE		
L40	L40-1085-71	SMALL FIXED INDUCTOR	(100NH)	
L41	L40-1085-71	SMALL FIXED INDUCTOR	(100NH)	
L300	L40-1575-71	SMALL FIXED INDUCTOR	(15NH)	
L301	L40-1075-71	SMALL FIXED INDUCTOR	(10NH)	
L302	L40-1275-92	SMALL FIXED INDUCTOR	(12NH)	
L303	L40-8265-92	SMALL FIXED INDUCTOR	(8.2NH)	
L304	L40-1285-92	SMALL FIXED INDUCTOR	(120NH)	
L305	L40-4775-92	SMALL FIXED INDUCTOR	(47NH)	
L307	L92-0179-05	CHIP FERRITE		
L308	L92-0179-05	CHIP FERRITE		
L309	L92-0179-05	CHIP FERRITE		
L310	L34-1039-05	AIR-CORE COIL		
L311	L34-4902-05	AIR-CORE COIL		
L312	L34-4903-05	AIR-CORE COIL		
L313	L34-4903-05	AIR-CORE COIL		
L314	L34-4903-05	AIR-CORE COIL		
L315	L34-4902-05	AIR-CORE COIL		
L316	L40-2775-71	SMALL FIXED INDUCTOR	(27NH)	
L317	L40-2275-71	SMALL FIXED INDUCTOR	(22NH)	
L500	L41-1885-53	SMALL FIXED INDUCTOR	(0.18UH)	
L501	L40-1085-71	SMALL FIXED INDUCTOR	(100NH)	
L502	L40-1591-86	SMALL FIXED INDUCTOR	(1.5UH)	
L503	L41-4785-39	SMALL FIXED INDUCTOR	(0.47UH)	
L504	L41-4785-39	SMALL FIXED INDUCTOR	(0.47UH)	
L507	L41-5678-14	SMALL FIXED INDUCTOR	(56NH)	
L509	L41-6878-45	SMALL FIXED INDUCTOR	(68NH)	
L510	L40-2275-92	SMALL FIXED INDUCTOR	(22NH)	
L512	L41-5678-14	SMALL FIXED INDUCTOR	(56NH)	
L513	L41-5678-14	SMALL FIXED INDUCTOR	(56NH)	
L516	L40-5675-92	SMALL FIXED INDUCTOR	(56NH)	
L700	L92-0163-05	BEADS CORE		
L701	L92-0163-05	BEADS CORE		
L702	L92-0163-05	BEADS CORE		
L703	L92-0163-05	BEADS CORE		
L704	L92-0163-05	BEADS CORE		
L705	L92-0443-05	CHIP FERRITE		
L706	L92-0163-05	BEADS CORE		
L707	L92-0163-05	BEADS CORE		
L709	L92-0163-05	BEADS CORE		
L710	L92-0161-05	BEADS CORE		
CN700	E40-6847-05	FLAT CABLE CONNECTOR		
CP1	RK75HA1J101J	CHIP-COM	100 J 1/16W	
CP701	RK74HA1J104J	CHIP-COM	100K J 1/16W	
CP702	RK74HB1J104J	CHIP-COM	100K J 1/16W	
CP703	RK74HA1J104J	CHIP-COM	100K J 1/16W	
CP704	RK75HA1J473J	CHIP-COM	47K J 1/16W	
CP705	RK74HA1J102J	CHIP-COM	1.0K J 1/16W	
CP706	RK75HA1J473J	CHIP-COM	47K J 1/16W	
CP707	RK75HA1J102J	CHIP-COM	1.0K J 1/16W	
CP708	RK74HA1J102J	CHIP-COM	1.0K J 1/16W	
F700	F53-0324-15	FUSE	(2.5A)	
F701	F53-0327-15	FUSE	(4A)	
F702	F53-0324-15	FUSE	(2.5A)	
F703	F53-0317-15	FUSE	(500MA)	
F704	F53-0317-15	FUSE	(500MA)	
J700	E58-0567-05	SUB SOCKET(D)		
J701	E1B-0001-00	3.5D PHONE JACK		
TH301	B57331V2104J	THERMISTOR		
TH302	B57331V2104J	THERMISTOR		
TH303	B57331V2104J	THERMISTOR		
TH502	NCP18WM474J0S	THERMISTOR		
X1	L77-3128-05	TCXO	(16.8MHZ)	
X700	L77-3129-05	TCXO	(19.2MHZ)	
XF500	L71-0684-05	MCF	(49.95MHZ)	