



EXPLODED VIEW (CD MECHANISM)

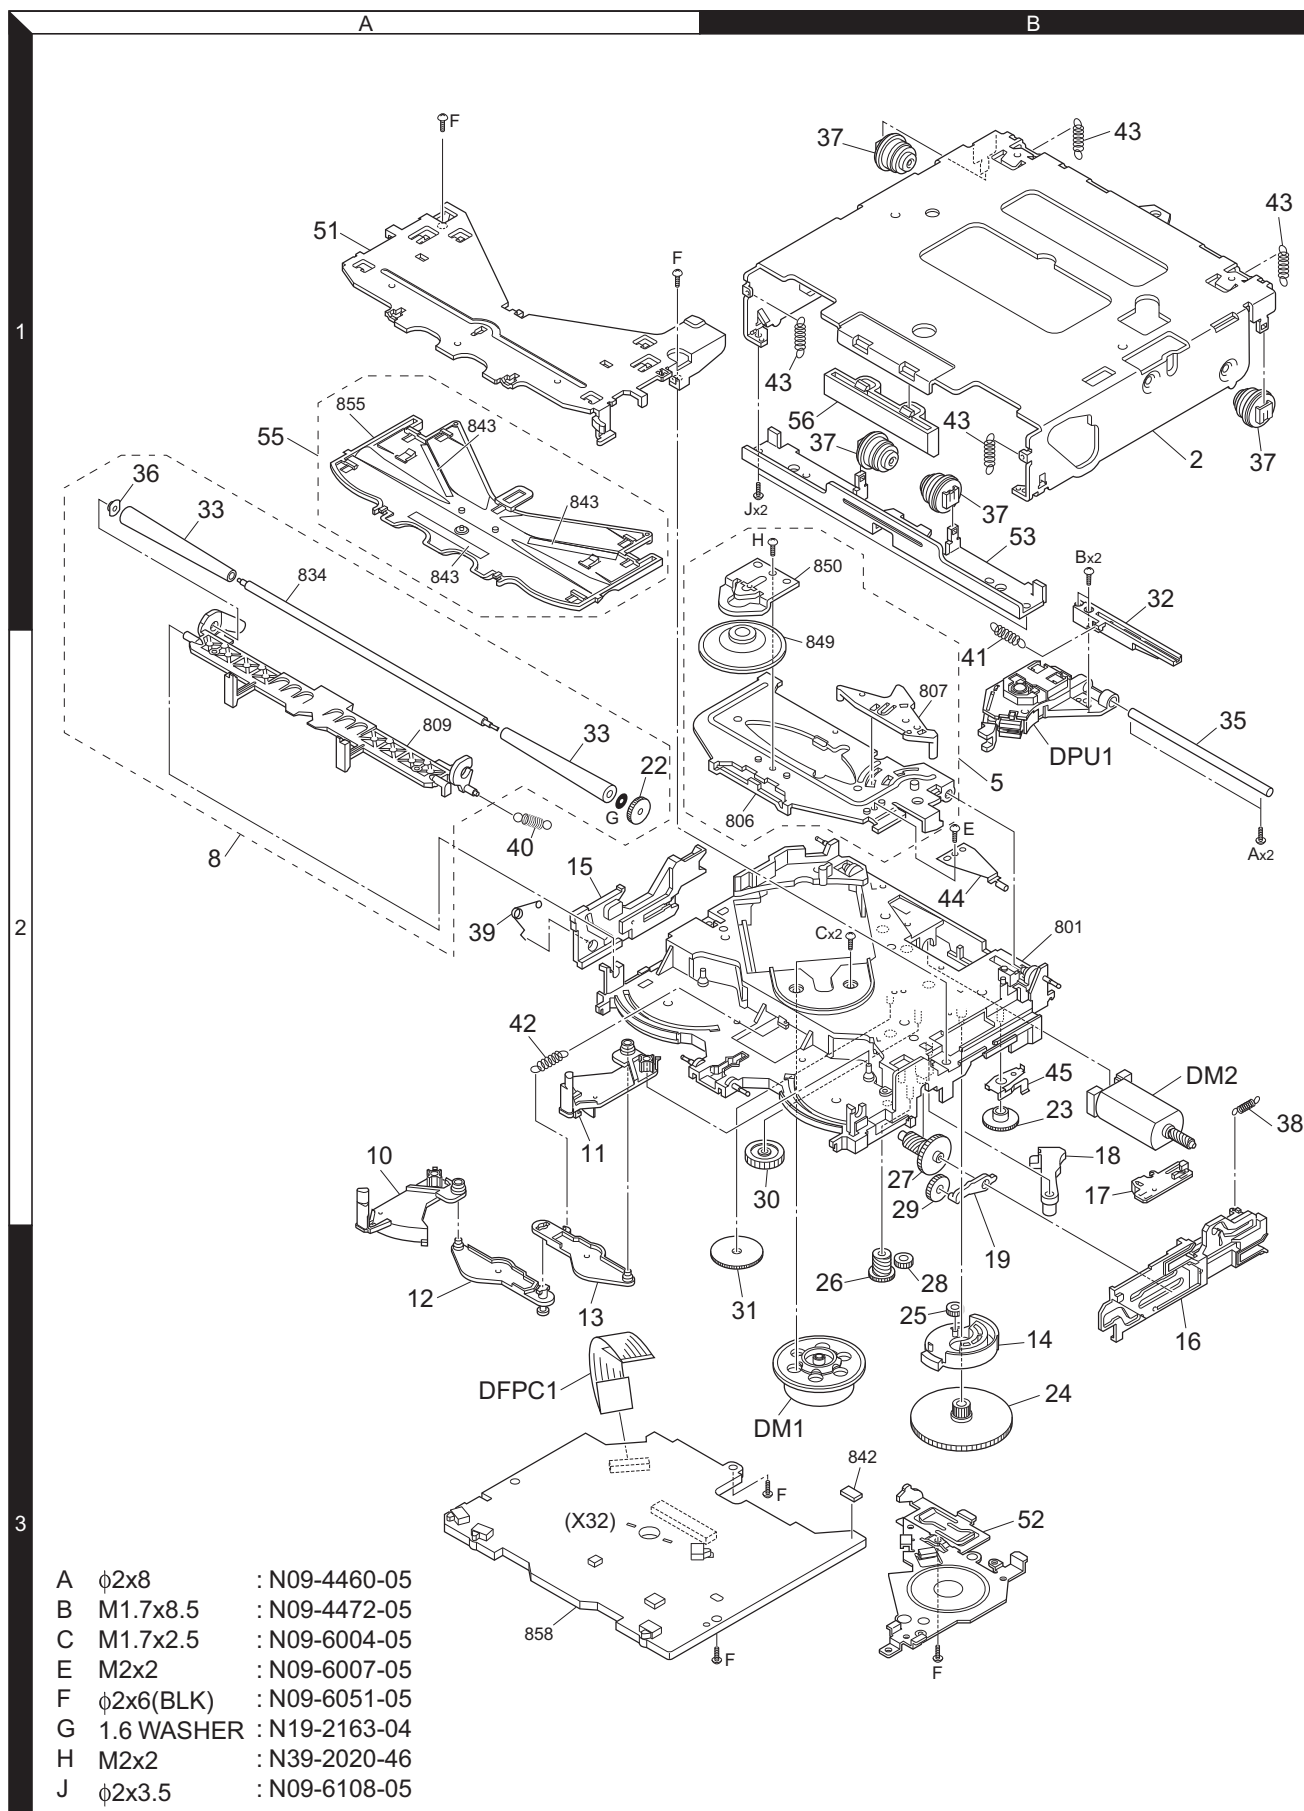

EXPLODED VIEW (UNIT)

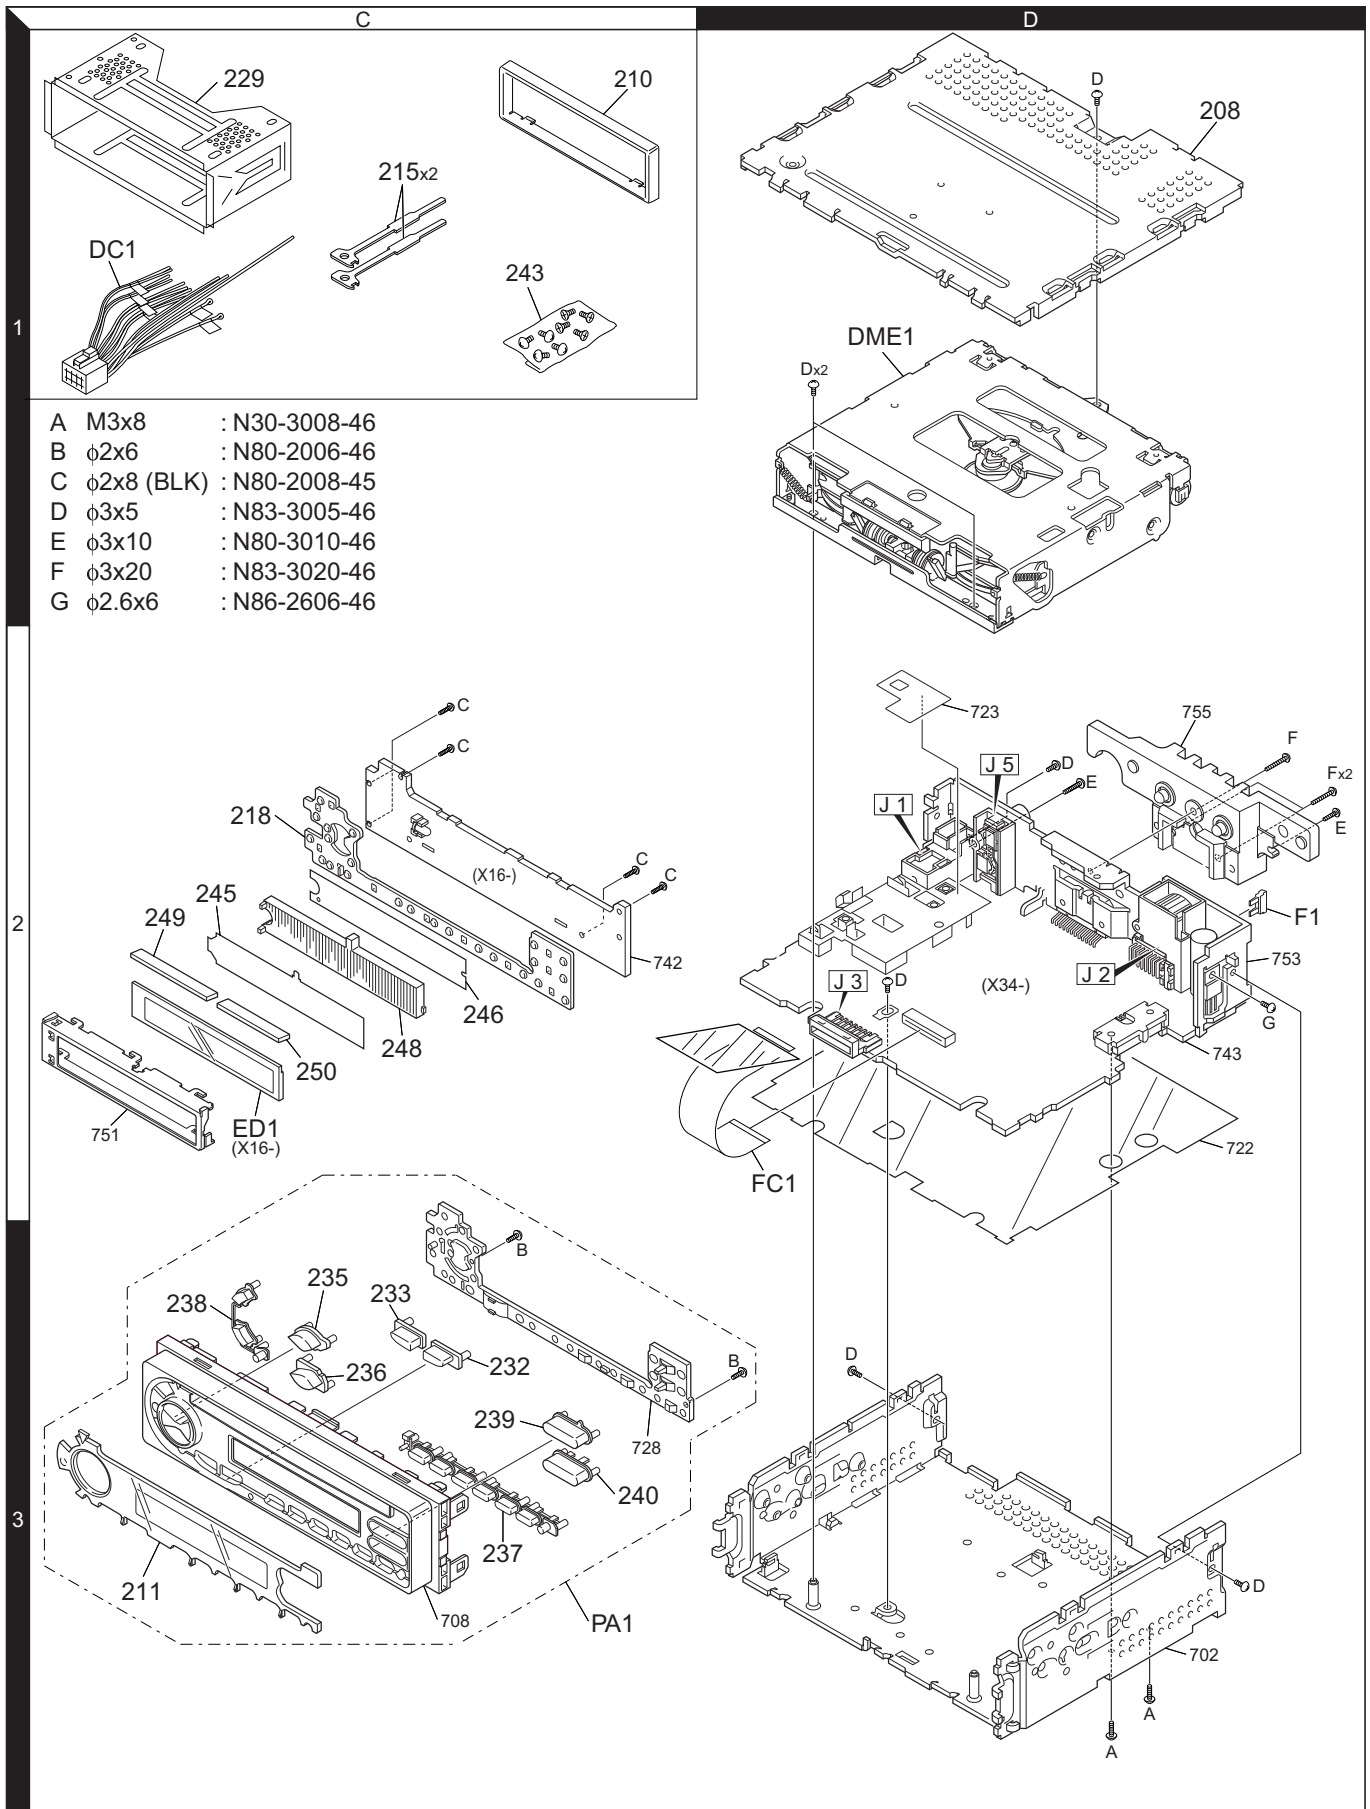

Parts with the exploded numbers larger than 700 are not supplied.

KDC-105,126/126S

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
KDC-105, KDC-126, KDC-126S					
208	1D		A52-0804-02	TOP PLATE	
PA1	3C	*	A64-3151-02	PANEL ASSY	K
PA1	3C	*	A64-3152-02	PANEL ASSY	M1
PA1	3C	*	A64-3154-02	PANEL ASSY	M2
-			B46-0100-50	WARRANTY CARD	
-			B58-1365-04	CAUTION CARD	
-		*	B64-2670-00	INST. MANUAL (ENG,FRE,SPA,POR)	K
-		*	B64-2671-00	INST. MANUAL (ENG,T-CHI)	M1M2
-		*	B64-2672-00	INST. MANUAL (ARABIC)	M1M2
210	1C		B07-3001-02	ESCUTCHEON	M1
210	1C	*	B07-3097-02	ESCUTCHEON	K
210	1C	*	B07-3098-02	ESCUTCHEON	M2
211	3C	*	B10-4445-01	FRONT GLASS	K
211	3C	*	B10-4446-01	FRONT GLASS	M1
211	3C	*	B10-4448-01	FRONT GLASS	M2
215			D10-4589-04	LEVER	
218		*	E29-1964-02	CONDUCTIVE RUBBER	
△ DC1	1C	*	E30-6322-05	DC CORD	
△ DC1	1C	*	E30-6323-05	DC CORD	
FC1	2D		E39-0476-05	FLAT CABLE (22PIN)	
△ F1	2D		F52-0006-05	FUSE (MINI BLADE TYPE 10A)	
△ F1	2D	*	F52-0023-05	FUSE (MINI BLADE TYPE 10A)	
-			H10-4856-12	POLYSTYRENE FOAMED FIXTURE	
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-		*	H54-2989-03	ITEM CARTON CASE	K
-		*	H54-2990-03	ITEM CARTON CASE	M1
-		*	H54-2991-03	ITEM CARTON CASE	M2
229			J21-9716-03	MOUNTING HARDWARE ASSY	
232	3C	*	K24-4098-04	KNOB (SRC)	
233	3C	*	K24-4099-04	KNOB (Q-AUDIO)	
235	3C	*	K24-4096-04	KNOB (VOL.UP)	
236	3C	*	K24-4097-04	KNOB (VOL.DOWN)	
237	3C	*	K25-1589-03	KNOB (PRESET1-6)	
238	3C	*	K25-1590-03	KNOB (EJECT/ATT)	
239	3C	*	K25-1613-03	KNOB (FM/AM)	
240	3C	*	K25-1614-03	KNOB (SEEK)	
243	1C		N99-1719-05	SCREW SET	
A	3D		N30-3008-46	PAN HEAD MACHINE SCREW	
B	3C		N80-2006-46	PAN HEAD TAPTITE SCREW	
C	2C		N80-2008-45	PAN HEAD TAPTITE SCREW	
D	3D		N83-3005-46	PAN HEAD TAPTITE SCREW	
DME1		*	X92-4840-00	MECHANISM ASSY (DXM-6200W)	
SWITCH UNIT (X16-2470-xx)					
245	2C	*	B11-1435-04	OPTICAL DIFFUSER	
246	2C	*	B11-1437-04	REFLECTION SHEET	
248	2C	*	B19-2242-03	LIGHTING BOARD	
D1		*	B30-1633-05	LED (WHITE)	
D2		*	B30-1567-05	LED (1608,RED)	M1M2

Ref. No.	Add	New	Parts No.	Description	Destination
D2-6			B30-1567-05	LED (1608,RED)	K
D3-6		*	B30-1687-05	LED (1608, GRN)	M1M2
D11-19			B30-1533-05	LED (1608,PG)	M1M2
D11-19			B30-1567-05	LED (1608,RED)	K
ED1	2C	*	B38-1140-05	LIQUID CRYSTAL	
C1			CK73GB1H102K	CHIP C 1000PF	K
C2			CK73GB1H103K	CHIP C 0.010UF	K
C3,4			CK73GB1E473K	CHIP C 0.047UF	K
C11			CK73GB1H103K	CHIP C 0.010UF	K
249	2C	*	E29-1965-04	CONDUCTIVE RUBBER	
250	2C	*	E29-1966-04	CONDUCTIVE RUBBER	
J1			E59-0828-05	RECTANGULAR PLUG (15PIN)	
R1			RK73GB2A563J	CHIP R 56K J 1/10W	
R2			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R3			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R6-8			RK73GB2A471J	CHIP R 470 J 1/10W	
R9			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R21,22			RK73FB2B221J	CHIP R 220 J 1/8W	
R26			RK73FB2B361J	CHIP R 360 J 1/8W	M1M2
R26			RK73FB2B391J	CHIP R 390 J 1/8W	K
R27,28			RK73FB2B271J	CHIP R 270 J 1/8W	
R31-33			RK73FB2B331J	CHIP R 330 J 1/8W	M1M2
R31-33			RK73FB2B391J	CHIP R 390 J 1/8W	K
D32-35			RD5.6S	ZENER DIODE	M1M2
D32-35			UDZ55.6B	ZENER DIODE	M1M2
IC1			LC75853NE	MOS-IC	
Q1			DTA114EE	DIGITAL TRANSISTOR	
CD PLAYER UNIT (X32-5490-00)					
C1,2			CK73GB1H222K	CHIP C 2200PF	K
C3			CK73FB1A225K	CHIP C 2.2UF	K
C4			CK73GB1C104K	CHIP C 0.10UF	K
C6-9			CK73GB1C104K	CHIP C 0.10UF	K
C10			CK73GB1H103K	CHIP C 0.010UF	K
C11			CK73GB0J105K	CHIP C 1.0UF	K
C12			CK73GB1C104K	CHIP C 0.10UF	K
C13			CK73FB0J106M	CHIP C 10UF	M
C14			CK73GB1H152K	CHIP C 1500PF	K
C15			CK73GB1H102K	CHIP C 1000PF	K
C16,17			CK73GB0J105K	CHIP C 1.0UF	K
C18,19			CK73GB1C104K	CHIP C 0.10UF	K
C20			CK73FB0J106M	CHIP C 10UF	M
C21			CK73GB1C104K	CHIP C 0.10UF	K
C22			CK73GB1H682K	CHIP C 6800PF	K
C23			CC73GCH1H470J	CHIP C 47PF	J
C24			CC73GCH1H560J	CHIP C 56PF	J
C25-27			CK73GB1C104K	CHIP C 0.10UF	K
C28			CK73FB1A225K	CHIP C 2.2UF	K
C29			CK73GB1H682K	CHIP C 6800PF	K
C30			CK73GB1C104K	CHIP C 0.10UF	K
C31			CK73GB0J105K	CHIP C 1.0UF	K
C32			CC73GCH1H040C	CHIP C 4.0PF	C
C33			CK73GB1H332K	CHIP C 3300PF	K
C34			CK73GB1C104K	CHIP C 0.10UF	K

K : KDC-105

M1: KDC-126

M2: KDC-126S

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5490-00)

Ref. No.	Add	New	Parts No.	Description	Destination
C35			CK73GB1H331K	CHIP C 330PF K	
C36			CK73GB1H472K	CHIP C 4700PF K	
C37			CK73GB1H331K	CHIP C 330PF K	
C38			CK73GB1H152K	CHIP C 1500PF K	
C39			CC73GCH1H330J	CHIP C 33PF J	
C40			CK73GB1C104K	CHIP C 0.10UF K	
C41,42			CK73GB1H103K	CHIP C 0.010UF K	
C43-46			CK73GB1H152K	CHIP C 1500PF K	
CN1		*	E41-2068-05	FLAT CABLE CONNECTOR (16PIN)	
CN1		*	E41-2085-05	FLAT CABLE CONNECTOR (22PIN)	
CN2		*	E41-2082-05	FLAT CABLE CONNECTOR (16PIN)	
L1			L92-0329-05	CHIP FERRITE	
X1			L78-0867-05	RESONATOR (4.19MHZ)	
X2			L78-0851-05	RESONATOR (16.934MHZ)	
CP1			RK74GA1J101J	CHIP-COM 100 J 1/16W	
CP3			RK74GA1J101J	CHIP-COM 100 J 1/16W	
CP4			RK74GA1J104J	CHIP-COM 100K J 1/16W	
CP5			RK74GB1J102J	CHIP-COM 1.0K J 1/16W	
CP6			RK74GA1J102J	CHIP-COM 1.0K J 1/16W	
CP7			RK74GB1J103J	CHIP-COM 10K J 1/16W	
CP8			RK74GB1J472J	CHIP-COM 4.7K J 1/16W	
R1,2			RK73FB2B331J	CHIP R 330 J 1/8W	
R3			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R6			RK73GB2A104J	CHIP R 100K J 1/10W	
R7,8			RK73GB2A103J	CHIP R 10K J 1/10W	
R9			RK73GB2A104J	CHIP R 100K J 1/10W	
R10		*	R92-3494-05	CHIP R 5.6 J 1/2W	
R11			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R12			RK73GB2A104J	CHIP R 100K J 1/10W	
R13-15			RK73GB2A101J	CHIP R 100 J 1/10W	
R16			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R17,18			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R19			RK73GB2A101J	CHIP R 100 J 1/10W	
R20			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R22			RK73GB2A104J	CHIP R 100K J 1/10W	
R23			RK73FB2B4R7J	CHIP R 4.7 J 1/8W	
R24			RK73GB2A104J	CHIP R 100K J 1/10W	
R25			RK73GB2A393J	CHIP R 39K J 1/10W	
R26			RK73GB2A274J	CHIP R 270K J 1/10W	
R27,28			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R29,30			RK73GB2A101J	CHIP R 100 J 1/10W	
R31			RK73GB2A133J	CHIP R 13K J 1/10W	
R32			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R33			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R34			RK73GB2A123J	CHIP R 12K J 1/10W	
R35			RK73GB2A133J	CHIP R 13K J 1/10W	
R36,37			RK73GB2A123J	CHIP R 12K J 1/10W	
R38			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R39			RK73GB2A163J	CHIP R 16K J 1/10W	
R40			RK73GB2A133J	CHIP R 13K J 1/10W	
R41			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R42			RK73GB2A183J	CHIP R 18K J 1/10W	
R43			RK73GB2A333J	CHIP R 33K J 1/10W	
R44			RK73GB2A103J	CHIP R 10K J 1/10W	

Ref. No.	Add	New	Parts No.	Description	Destination
R45			RK73GB2A241J	CHIP R 240 J 1/10W	
R46,47			RK73GB2A562J	CHIP R 5.6K J 1/10W	
S1,2			S68-0863-05	PUSH SWITCH	
S3			S68-0862-05	PUSH SWITCH	
D2		*	DAN202UF	DIODE	
IC1		*	789166YGB-A513	MICROCONTROLLER IC	
IC2		*	NJM2880U133	ANALOGUE IC	
IC3		*	UPD63712GC	MOS-IC	
IC4		*	BA5824FP-F	ANALOGUE IC	
Q2		*	DTA114YUAF	DIGITAL TRANSISTOR	
Q3			2SB0970	TRANSISTOR	
Q4		*	DTC114YUAF	DIGITAL TRANSISTOR	
ELECTRIC UNIT (X34-3110-xx)					
C1			C94-0216-05	ELECTRO 3300UF 16WV	
C21			CK73GB1H103K	CHIP C 0.010UF K	
C40			CK73GB1H103K	CHIP C 0.010UF K	
C50		*	CD04AS1E100M	ELECTRO 10UF 25WV	K
C50,51		*	CD04AS1E100M	ELECTRO 10UF 25WV	M1M2
C52-54		*	CD04AS1C100M	ELECTRO 10UF 16WV	
C55		*	CD04AS1E100M	ELECTRO 10UF 25WV	
C56			CD04AT1H100M	ELECTRO 10UF 50WV	
C57			C90-2980-05	ELECTRO 220UF 16WV	
C58			C90-2962-05	ELECTRO 100UF 16WV	
C63		*	CD04AS1C220M	ELECTRO 22UF 16WV	
C101		*	CD04AS0J101M	ELECTRO 100UF 6.3WV	
C102			CK73GB1H103K	CHIP C 0.010UF K	
C103			CK73GB1C104K	CHIP C 0.10UF K	
C104,105			CC73GCH1H150J	CHIP C 15PF J	
C106			CK73GB1H152K	CHIP C 1500PF K	
C142			CK73GB1C104K	CHIP C 0.10UF K	
C204,205		*	CD04AS1H2R2M	ELECTRO 2.2UF 50WV	
C223,224		*	CD04AS1C100M	ELECTRO 10UF 16WV	
C251-254			C94-0179-05	ELECTRO 0.22UF 50WV	
C255		*	CD04AS1H010M	ELECTRO 1UF 50WV	
C256		*	CD04AS1A101M	ELECTRO 100UF 10WV	
C257		*	CD04AS1H010M	ELECTRO 1UF 50WV	
C258			C90-5663-05	ELECTRO 1UF 50WV	
C502			CK73GB1H152K	CHIP C 1500PF K	
C503			CK73GB1C104K	CHIP C 0.10UF K	
C504			CK73GB1H103K	CHIP C 0.010UF K	
C505			CD04AT1C4R7M	ELECTRO 4.7UF 16WV	
C506			CK73GB1C104K	CHIP C 0.10UF K	
C507			CD04AT1A330M	ELECTRO 33UF 10WV	
C508			CD04AT1A220M	ELECTRO 22UF 10WV	
C509			CC73GCH1H680J	CHIP C 68PF J	
C510			CC73GCH1H101J	CHIP C 100PF J	
C511			CK73GB1H103K	CHIP C 0.010UF K	
C512		*	CD04AT1C4R7M	ELECTRO 4.7UF 16WV	
C513,514			CK73GB1H103K	CHIP C 0.010UF K	
C515			CK73FB1C105K	CHIP C 1.0UF K	
C516			CC73GCH1H100D	CHIP C 10PF D	
C521			CK73GB1C104K	CHIP C 0.10UF K	
C522			CC73GCH1H330J	CHIP C 33PF J	

K : KDC-105

M1: KDC-126

M2: KDC-126S

△ Indicates safety critical components.

KDC-105,126/126S

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X34-3110-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C523			CC73GCH1H270J	CHIP C 27PF J	
C524			CC73GCH1H101J	CHIP C 100PF J	
C525			CK73GB1H103K	CHIP C 0.010UF K	
C526			CC73GCH1H050C	CHIP C 5.0PF C	
C528			CC73GCH1H060D	CHIP C 6.0PF D	
C530			CC73GCH1H040C	CHIP C 4.0PF C	
C531			CK73FB1C105K	CHIP C 1.0UF K	
C533,534			CK73GB1H103K	CHIP C 0.010UF K	
C535			CC73GCH1H020C	CHIP C 2.0PF C	
C536			CC73GCH1H040C	CHIP C 4.0PF C	
C537,538			CC73GCH1H080D	CHIP C 8.0PF D	
C541			CC73GCH1H040C	CHIP C 4.0PF C	
C542			CC73GCH1H220J	CHIP C 22PF J	
C543			CC73GCH1H680J	CHIP C 68PF J	
C544			CC73GCH1H150J	CHIP C 15PF J	
C545			CK73GB1H682K	CHIP C 6800PF K	
C546			CK73GB1H103K	CHIP C 0.010UF K	
C547			CD04AT1A100M	ELECTRO 10UF 10WV	
C548			CK73GB1E223K	CHIP C 0.022UF K	
C549			CK73GB1H222K	CHIP C 2200PF K	
C550			CK73GB1E333K	CHIP C 0.033UF K	
C551,552			CK73GB1H103K	CHIP C 0.010UF K	
C553,554			CK73GB1C104K	CHIP C 0.10UF K	
C555,556			CK73GB1H102K	CHIP C 1000PF K	
C560			CC73GCH1H101J	CHIP C 100PF J	
C561			CD04AT1H010M	ELECTRO 1UF 50WV	
C562			CD04AT1A100M	ELECTRO 10UF 10WV	
C563			CD04AT1HR47M	ELECTRO 0.47UF 50WV	
C564			CK73GB1A474K	CHIP C 0.47UF K	
C565		*	CD04AS1A470M	ELECTRO 47UF 10WV	
C568			CC73GCH1H821J	CHIP C 820PF J	
C580			CK73GB1H103K	CHIP C 0.010UF K	
C581			CC73GCH1H020C	CHIP C 2.0PF C	
C582,583			CK73GB1C104K	CHIP C 0.10UF K	
C584		*	CD04AT1C4R7M	ELECTRO 4.7UF 16WV	
C585			CK73GB1H103K	CHIP C 0.010UF K	
C586			CK73GB1C104K	CHIP C 0.10UF K	
C587			CK73GB1H103K	CHIP C 0.010UF K	
C588			CK73GB1A474K	CHIP C 0.47UF K	
C589			CK73GB1C104K	CHIP C 0.10UF K	
C591			CD04AT1A330M	ELECTRO 33UF 10WV	
C593			CK73FB1C105K	CHIP C 1.0UF K	
C600			CD04AT1A101M	ELECTRO 100UF 10WV	
CN1			E40-9550-05	FLAT CABLE CONNECTOR (22PIN)	
J1			E04-0312-05	RF COAXIAL CABLE RECEPTACLE	
J2			E58-0863-15	RECTANGULAR RECEPTACLE	
J3			E58-0880-05	RECTANGULAR RECEPTACLE	
J5			E63-0852-05	PIN JACK	
P1			E23-0745-05	TERMINAL	
CF51-53			L72-0781-05	CERAMIC FILTER	
CF54			L72-0743-05	CERAMIC FILTER	
L1			L33-1170-05	CHOKE COIL ASSY	
L2			L33-1807-05	CHOKE COIL	
L4			L33-1123-05	LINE FILTER COIL	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
L101			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)	
L501			L40-6891-58	SMALL FIXED INDUCTOR	
L502			L40-3301-58	SMALL FIXED INDUCTOR (33U)	
L503			L40-1021-56	SMALL FIXED INDUCTOR (1MH)	
L504			L40-1011-58	SMALL FIXED INDUCTOR	
L505			L31-0967-05	FM-RF COIL	
L506			L31-0970-05	FM-RF COIL	
L507			L32-0936-05	FM OSCILLATING COIL	
L508			L30-0770-05	FM IFT	
L509			L30-0773-05	AM IFT	
L510			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)	
L512-514			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)	
L516,517			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)	
X1			L77-1167-05	CRYSTAL RESONATOR (4.19M)	
X501			L77-2077-05	CRYSTAL RESONATOR (10.25MHz)	
D	2D		N83-3005-46	PAN HEAD TAPTITE SCREW	
E	2D		N80-3010-46	PAN HEAD TAPTITE SCREW	
F	2D		N83-3020-46	PAN HEAD TAPTITE SCREW	
G	2D		N86-2606-46	BINDING HEAD TAPTITE SCREW	
CP1			R90-1049-05	MULTI-COMP 10K X2	
CP2			R90-1047-05	MULTI-COMP 2.2K X2	
CP3			R90-1046-05	MULTI-COMP 1K X2	
R10			RK73FB2B303J	CHIP R 30K J 1/8W	
R11			RK73GB2A103J	CHIP R 10K J 1/10W	
R12			RK73GB2A104J	CHIP R 100K J 1/10W	
R20			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
R21			RD14BB2C333J	RD 33K J 1/6W	
R22			RK73GB2A103J	CHIP R 10K J 1/10W	
R23			RK73GB2A104J	CHIP R 100K J 1/10W	
R25			RD14BB2C472J	RD 4.7K J 1/6W	M1M2
R28			RD14BB2C472J	RD 4.7K J 1/6W	
R50			RD14BB2C562J	RD 5.6K J 1/6W	
R51			RK73GB2A473J	CHIP R 47K J 1/10W	
R57			RK73FB2B152J	CHIP R 1.5K J 1/8W	
R58			RD14BB2C471J	RD 470 J 1/6W	
R67-69			RK73GB2A103J	CHIP R 10K J 1/10W	M1M2
R68,69			RK73GB2A103J	CHIP R 10K J 1/10W	K
R71			RK73GB2A823J	CHIP R 82K J 1/10W	
R72			RK73GB2A363J	CHIP R 36K J 1/10W	
R73			RK73GB2A104J	CHIP R 100K J 1/10W	
R103,104			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R105			RK73GB2A471J	CHIP R 470 J 1/10W	
R106			RK73GB2A104J	CHIP R 100K J 1/10W	
R107,108			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R110			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R113,114			RK73GB2A473J	CHIP R 47K J 1/10W	
R115			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R116			RK73GB2A103J	CHIP R 10K J 1/10W	
R117			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R118			RK73GB2A103J	CHIP R 10K J 1/10W	
R119			RK73GB2A473J	CHIP R 47K J 1/10W	
R121			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R122			RK73GB2A101J	CHIP R 100 J 1/10W	
R123			RK73GB2A102J	CHIP R 1.0K J 1/10W	

K : KDC-105

M1: KDC-126

M2: KDC-126S

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X34-3110-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
R125			RK73GB2A102J	CHIP R 1.0K J 1/10W		R547			RK73GB2A220J	CHIP R 22 J 1/10W	
R126			RK73GB2A104J	CHIP R 100K J 1/10W		R561			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R127			RK73GB2A222J	CHIP R 2.2K J 1/10W		R563,564			RK73GB2A103J	CHIP R 10K J 1/10W	
R128			RK73GB2A225J	CHIP R 2.2M J 1/10W		R565			RK73GB2A104J	CHIP R 100K J 1/10W	
R129,130			RK73GB2A222J	CHIP R 2.2K J 1/10W		R566,567			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R131			RK73GB2A682J	CHIP R 6.8K J 1/10W		R581			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R132			RK73GB2A222J	CHIP R 2.2K J 1/10W		R585			RD14BB2C1R0J	RD 1.0 J 1/6W	
R133			RK73GB2A123J	CHIP R 12K J 1/10W		W156,157			R92-2053-05	CHIP R 0 J 1/8W	
R135			RK73GB2A473J	CHIP R 47K J 1/10W		W158			R92-1252-05	CHIP R 0 OHM J 1/16W	
R137			RK73GB2A473J	CHIP R 47K J 1/10W	M1M2	W160			R92-2052-05	CHIP R 0 OHM J 1/10W	K
R138,139			RK73GB2A473J	CHIP R 47K J 1/10W	K	W161,162			R92-2053-05	CHIP R 0 J 1/8W	
R139			RK73GB2A473J	CHIP R 47K J 1/10W	M1M2	W165			R92-2053-05	CHIP R 0 J 1/8W	
R141			RD14BB2C472J	RD 4.7K J 1/6W		W415			R92-2053-05	CHIP R 0 J 1/8W	
R143			RD14BB2C472J	RD 4.7K J 1/6W		W500,501			R92-1252-05	CHIP R 0 OHM J 1/16W	
R144			RK73GB2A104J	CHIP R 100K J 1/10W		W504,505			R92-1252-05	CHIP R 0 OHM J 1/16W	
R145			RD14BB2C222J	RD 2.2K J 1/6W		W506			R92-2053-05	CHIP R 0 J 1/8W	
R163			RD14BB2C100J	RD 10 J 1/6W		W507			R92-1252-05	CHIP R 0 OHM J 1/16W	
R164,165			RD14BB2C471J	RD 470 J 1/6W		W508			R92-2053-05	CHIP R 0 J 1/8W	
R166			RD14BB2C102J	RD 1.0K J 1/6W		W509			R92-1252-05	CHIP R 0 OHM J 1/16W	
R167			RD14BB2C101J	RD 100 J 1/6W		W510			R92-2053-05	CHIP R 0 J 1/8W	
R169			RD14BB2C102J	RD 1.0K J 1/6W		W511			R92-1252-05	CHIP R 0 OHM J 1/16W	K
R172			RD14BB2C102J	RD 1.0K J 1/6W		W516			R92-1252-05	CHIP R 0 OHM J 1/16W	
R174			RK73GB2A473J	CHIP R 47K J 1/10W		W517			R92-2053-05	CHIP R 0 J 1/8W	
R201			RK73GB2A473J	CHIP R 47K J 1/10W		W519			R92-2053-05	CHIP R 0 J 1/8W	
R223,224			RK73FB2B271J	CHIP R 270 J 1/8W		W521			R92-1252-05	CHIP R 0 OHM J 1/16W	
R227,228			RD14BB2C303J	RD 30K J 1/6W		W523,524			R92-1252-05	CHIP R 0 OHM J 1/16W	
R231,232			RD14BB2C101J	RD 100 J 1/6W		W530			R92-2053-05	CHIP R 0 J 1/8W	
R251			RK73GB2A472J	CHIP R 4.7K J 1/10W		W531,532			R92-1252-05	CHIP R 0 OHM J 1/16W	
R252,253			RD14BB2C472J	RD 4.7K J 1/6W		W533			R92-2053-05	CHIP R 0 J 1/8W	
R254			RK73GB2A472J	CHIP R 4.7K J 1/10W		W534			R92-1252-05	CHIP R 0 OHM J 1/16W	
R255			RK73GB2A333J	CHIP R 33K J 1/10W		W601			R92-1252-05	CHIP R 0 OHM J 1/16W	
R256			RK73FB2B102J	CHIP R 1.0K J 1/8W		D1			1N5393G-M6	DIODE	
R257			RK73GB2A622J	CHIP R 6.2K J 1/10W		D3			1MSA-6801	SURGE ABSORBER	
R258			RK73GB2A101J	CHIP R 100 J 1/10W		D10			MA4068(N)-M	ZENER DIODE	
R259			RD14BB2C223J	RD 22K J 1/6W		D11			D1F60	DIODE	M1M2
R260			RK73GB2A751J	CHIP R 750 J 1/10W		D12			AM01ZNF	DIODE	M1M2
R261			RK73GB2A431J	CHIP R 430 J 1/10W		D13			D1F60	DIODE	
R263			RK73GB2A184J	CHIP R 180K J 1/10W		D14			AM01ZNF	DIODE	
R264			RK73GB2A473J	CHIP R 47K J 1/10W		D20			MA4068(N)-M	ZENER DIODE	
R415			RK73GB2A104J	CHIP R 100K J 1/10W		D40			1SS133	DIODE	
R501			RK73GB2A682J	CHIP R 6.8K J 1/10W		D50			DAN202U	DIODE	
R502			RK73GB2A222J	CHIP R 2.2K J 1/10W		D51			MA4082(N)-L	ZENER DIODE	
R503			RK73EB2E222J	CHIP R 2.2K J 1/4W		D70			MA4068(N)-M	ZENER DIODE	
R505			RK73GB2A102J	CHIP R 1.0K J 1/10W		D101			1SS133	DIODE	
R506			RK73GB2A105J	CHIP R 1.0M J 1/10W		D103			DA204U	DIODE	
R507			RK73GB2A102J	CHIP R 1.0K J 1/10W		D201,202			MA4068(N)-M	ZENER DIODE	
R521-524			RK73GB2A104J	CHIP R 100K J 1/10W		D251-253			1SS133	DIODE	
R525			RK73GB2A821J	CHIP R 820 J 1/10W		D501			RN739F	DIODE	
R526			RK73GB2A562J	CHIP R 5.6K J 1/10W		D503			RN739F	DIODE	
R527			RK73GB2A104J	CHIP R 100K J 1/10W		D504-506			KV1720S	VARIABLE CAPACITANCE DIODE	
R528			RD14BB2C104J	RD 100K J 1/6W		IC1	*		UPD780058GC556	MICROCONTROLLER IC	
R543			RK73GB2A562J	CHIP R 5.6K J 1/10W		IC4			TDA7386	ANALOGUE IC	
R544			RK73GB2A222J	CHIP R 2.2K J 1/10W		IC7			BA4911-V4	ANALOGUE IC	
R545			RK73GB2A432J	CHIP R 4.3K J 1/10W		IC8			HD74HC27FP-E	MOS-IC	
R546			RK73GB2A333J	CHIP R 33K J 1/10W							

K : KDC-105

M1 : KDC-126

M2 : KDC-126S

△ Indicates safety critical components.

KDC-105,126/126S

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X34-3110-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	
IC10 IC11 IC12 IC12 IC12		*	TDA7513T PST3435UL BR24C01AF-W M24C01-WMN6T S-24CS02AFJ-TB	ANALOGUE IC MOS-IC ROM IC ROM IC MEMORY IC	M1M2	
Q10 Q20 Q40 Q50 Q51			2SC4081 2SC4081 DTA124EUA 2SA1036K UMC2N	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR		
Q53 Q55 Q70 Q223,224 Q251			UMC2N 2SD2375 2SC4081 DTC143TUA DTC114YUA	TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR		
Q501 Q502 TH1		*	CPH5905 3SK126 PRF21BE471QB2	TRANSISTOR DUAL FET POSITIVE RESISTOR		
MECHANISM ASSY (X92-4840-00)						
2	1B		A10-4827-22	CHASSIS		
5	1B	*	D10-4576-63	ARM ASS'Y		
8	2A		D10-4579-13	LEVER ASS'Y		
10	3A		D10-4581-13	ARM		
11	2A		D10-4582-13	ARM		
12	3A		D10-4583-03	ARM		
13	3A		D10-4584-03	ARM		
14	3B		D10-4585-03	ARM		
15	2A		D10-4586-13	SLIDER		
16	3B		D10-4587-32	SLIDER		
17	3B		D10-4588-13	SLIDER		
18	3B		D10-4595-04	ARM		
19	3B		D10-4596-14	ARM		
22	2A		D13-2151-04	GEAR		
23	2B		D13-2152-04	GEAR		
24	3B		D13-2153-04	GEAR		
25	3B		D13-2154-04	GEAR		
26	3B		D13-2155-04	WORM		
27	3B		D13-2156-14	GEAR		
28	3B		D13-2157-04	GEAR		
29	3B		D13-2158-04	GEAR		
30	3B		D13-2168-04	GEAR		
31	3B		D13-2171-04	GEAR		
32	2B		D13-2172-03	RACK (GEAR)		
33	2A		D14-0759-04	ROLLER		
35	2B		D21-2382-04	SHAFT		
36	1A		D23-0954-04	RETAINER		
37	1B		D39-0246-05	DAMPER		
38	2B		G01-3072-04	EXTENSION SPRING		
39	2A		G01-3073-04	TORSION COIL SPRING		
40	2A		G01-3074-04	EXTENSION SPRING		
41	1B		G01-3075-14	EXTENSION SPRING		
42	2A		G01-3076-04	EXTENSION SPRING		
43	1B		G01-3077-14	EXTENSION SPRING		

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
44	2B		G02-1399-04	FLAT SPRING	
45	2B		G02-1408-04	FLAT SPRING	
51	1A		J21-9676-22	MOUNTING HARDWARE	
52	3B		J21-9677-12	MOUNTING HARDWARE	
53	1B		J21-9678-13	MOUNTING HARDWARE	
55	1A		J90-1001-11	GUIDE	
56	1B		J90-1023-03	GUIDE	
DFPC1	3A		J84-0141-05	FLAT CABLE (16PIN)	
A	2B		N09-4460-05	TAPTITE SCREW	
B	1B		N09-4472-15	MACHINE SCREW	
C	2B		N09-6004-05	MACHINE SCREW	
E	2B		N09-6007-05	MACHINE SCREW	
F	1A		N09-6051-05	TAPTITE SCREW	
G	2A		N19-2163-04	FLAT WASHER	
H	1B		N39-2020-46	PAN HEAD MACHIN SCREW	
J	1B		N09-6108-05	MACHINE SCREW	
DM1	3B		T42-1066-04	DC MOTOR ASSY (SPINDLE)	
DM2	3B		T42-1067-04	DC MOTOR ASSY (LOADING)	
DPU1	2B		X93-2010-00	OPTICAL PICKUP ASS'Y	

K : KDC-105

M1 : KDC-126

M2 : KDC-126S

△ Indicates safety critical components.