



EXPLODED VIEW (MECHANISM)

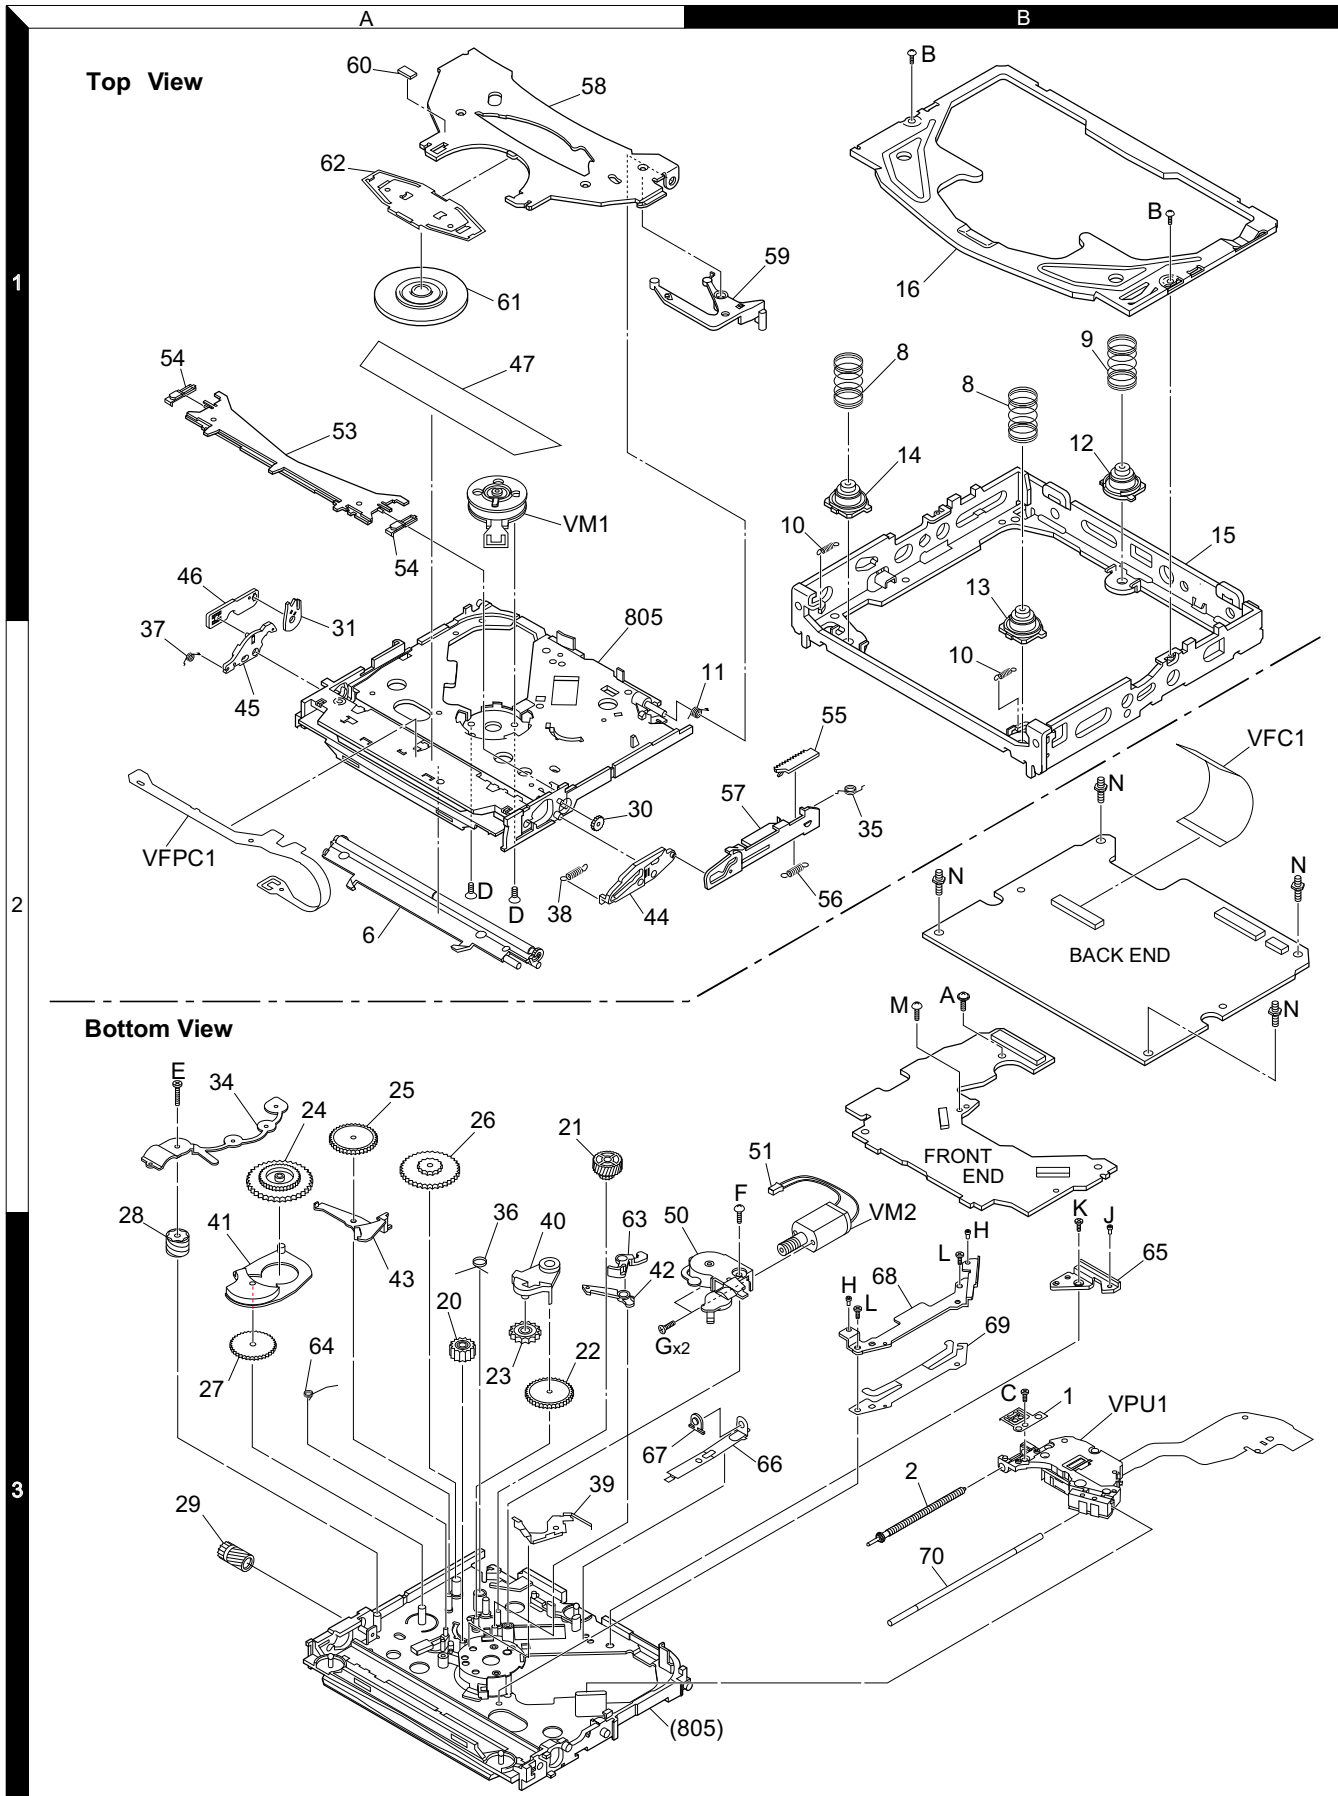


EXPLODED VIEW (UNIT)

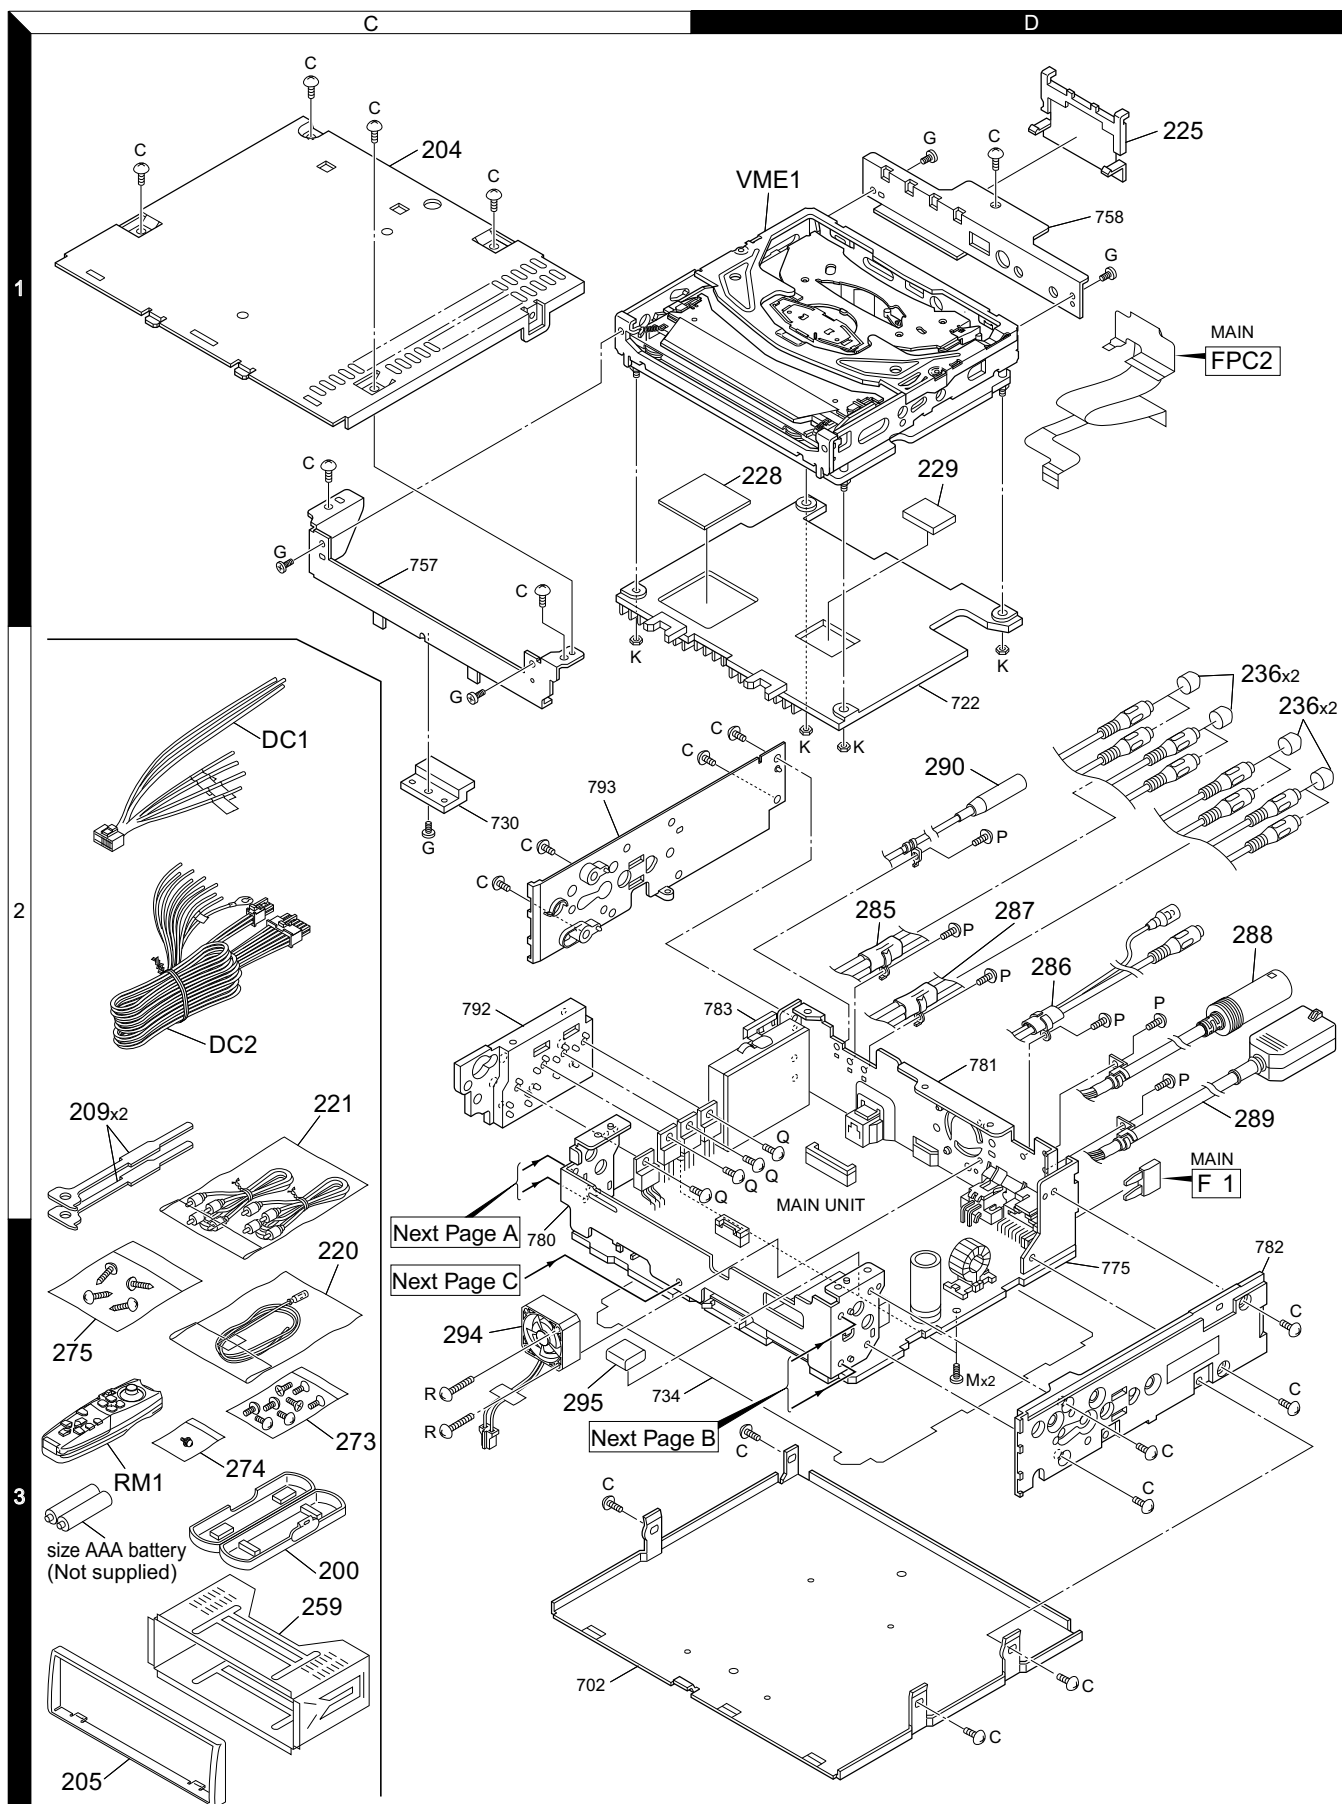

Parts with the exploded numbers larger than 700 are not supplied.

EXPLODED VIEW (PANEL)

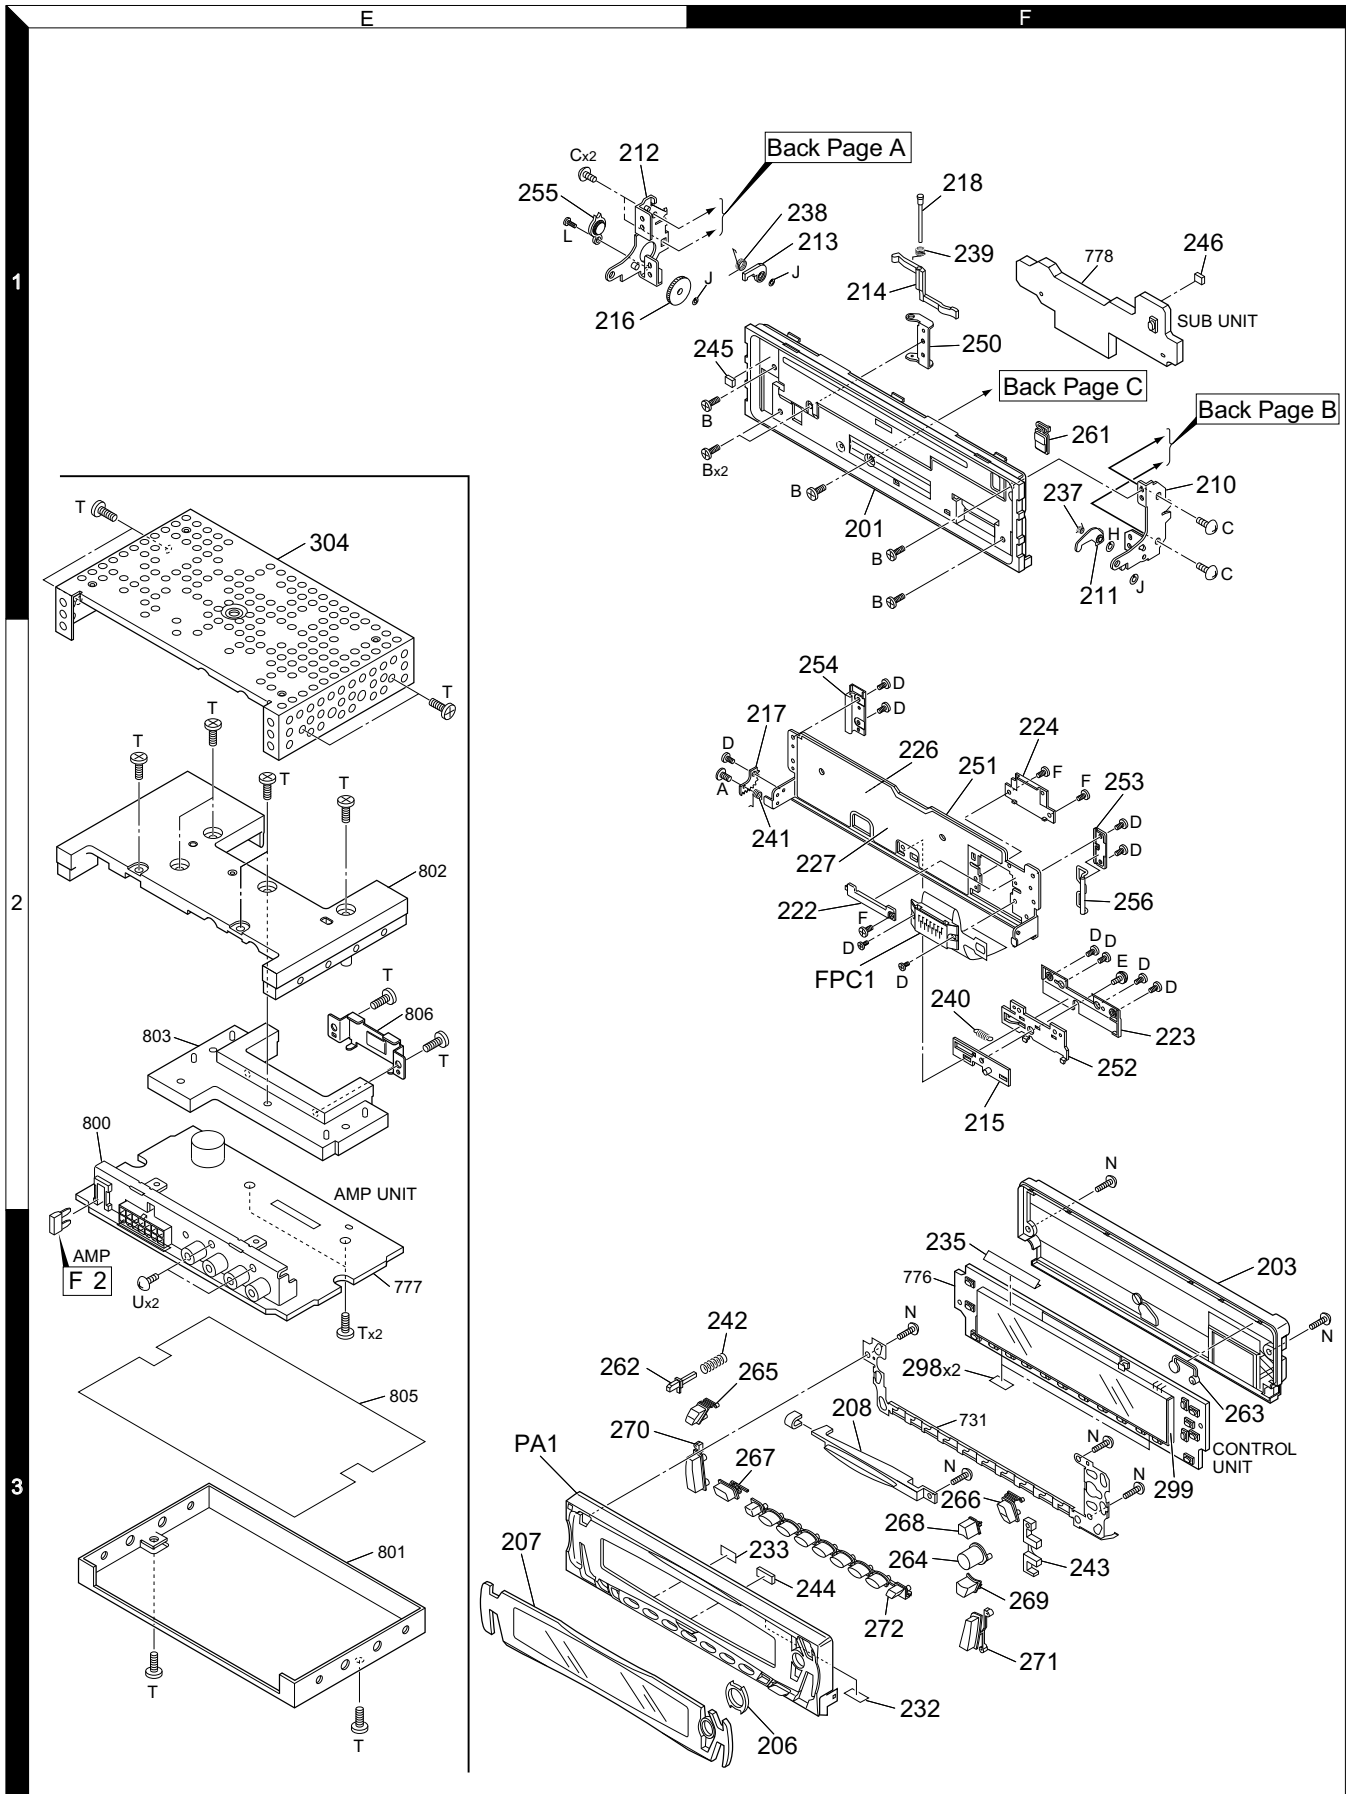

Parts with the exploded numbers larger than 700 are not supplied.

Z910DVD

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Z910DVD					
200	3C		A02-2711-08	PLASTIC CABINET ASSY	
201	1F		A22-2967-08	SUB PANEL ASSY	
203	3F		A46-1744-08	REAR COVER	
204	1C		A52-0814-08	TOP PLATE	
PA1	3E		A64-2753-08	PANEL ASSY	
RM1	3C		A70-2023-08	REMOTE CONTROLLER ASSY	
205	3C		B07-3048-08	ESCUTCHEON	
206	3F		B07-3036-08	DECORATION (SRC)ASSY	
207	3E	*	B10-4290-08	FRONT GLASS ASSY	
208	3F		B19-2126-08	LIGHTING BOARD	
-			B46-0100-50	WARRANTY CARD	
-			B46-0606-04	ID CARD	
-			B46-0645-03	MARKETING CARD	
-		*	B64-2064-00	INSTRUCTION MANUAL (ENGLISH)	
-		*	B64-2065-00	INSTRUCTION MANUAL (FRE.SPA.)	
209	2C		D10-4364-08	LEVER (KEY)	
210	1F		D10-4634-08	ARM (R)	
211	1F		D10-4635-08	LEVER ASSY (STOPPER)	
212	1E		D10-4637-08	ARM ASSY (L)	
213	1F		D10-4639-08	LEVER (RELEASE)	
214	1F		D10-4640-08	LEVER (SW)	
215	2F		D10-4641-08	LEVER ASSY	
216	1E		D13-2218-08	GEAR (B)	
217	2F		D13-2219-08	GEAR (A)	
218	1F		D21-2397-08	SHAFT (SW)	
VME1	1D		D40-1158-05	DVD MECHANISM ASSY	
220	3C	*	E30-6108-08	CONNECTING CORD ASSY (PARKING)	
221	2C		E30-6093-08	CONNECTING CORD ASSY (RCA)	
DC1	2C	*	E30-6129-08	DC CORD ASSY	
DC2	2C		E30-6095-08	DC CORD ASSY (AMP)	
222	2F		F07-1100-08	COVER	
223	2F		F07-1101-08	COVER (LOCK)	
224	2F		F07-1102-08	COVER (CONNECTOR)	
225	1D		F07-1111-08	COVER (FLEX)	
226	2F		F09-1712-08	SHEET (PROTECT B)	
227	2F		F09-1713-08	SHEET (PROTECT A)	
228	1C		F09-1738-08	SHEET (MECHA A)	
229	1D		F09-1739-08	SHEET (MECHA B)	
232	3F		F15-0843-08	SHEET (BLIND)	
233	3F		F15-0846-08	SHEET (BLIND) A	
235	3F		F20-2180-08	DISCHARGE SHEET	
236	2D		F29-0049-05	INSULATING COVER	
-			F09-1745-08	PROTECTION SHEET (PANEL FPC)	
-			F09-1755-08	PROTECTION SHEET (PANEL)	
237	1F		G09-2043-08	SPRING (LEVER)	
238	1F		G09-2044-08	SPRING (RELEASE)	
239	1F		G09-2045-08	SPRING (SW)	
240	2F		G09-2046-08	SPRING (STOPPER)	
241	2F		G09-2047-08	SPRING (MAIN)	
242	3F		G09-2048-08	SPRING	
243	3F		G13-1253-08	CUSHION (BTN)	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
244	3F		G13-1254-08	CUSHION (VFD)	
245	1F		G13-1255-08	CUSHION (SUB) A	
246	1F		G13-1257-08	CUSHION (SUB PWB)	
-			H10-4827-08	POLYSTYRENE FOAMED FIXTURE (L)	
-			H10-4828-08	POLYSTYRENE FOAMED FIXTURE (R)	
-			H25-0334-04	PROTECTION BAG	
-			H25-0337-04	POLY BAG (04x200x290)	
-			H25-1171-08	PROTECTION BAG (03x270x550)	
-		*	H54-2542-08	ITEM CARTON CASE	
250	1F		J19-5108-08	HOLDER (LEVER	
251	2F		J19-5109-08	BRACKET (PANEL ASSY)	
252	2F		J19-5112-08	PLATE (HOLDER)	
253	2F		J19-5113-08	HOLDER (SPRING)	
254	2F		J19-5114-08	HOLDER	
255	1E		J19-5122-08	ROTARY DAMPER	
256	2F		J19-5123-08	HOLDER ASSY	
259	3C		J21-9585-18	MOUNTING HARDWARE	
FPC1	2F		J84-0138-08	FLEXIBLE PRINTED WIRING BOARD	
261	1F		K24-3795-08	KNOB (EJECT)	
262	3E		K24-3834-08	KNOB (RELEASE)	
263	3F		K24-3797-08	KNOB (RESET)	
264	3F		K24-3798-08	KNOB (SRC)	
265	3F		K24-3833-08	KNOB (EQ)	
266	3F		K24-3800-08	KNOB (SA)	
267	3F		K24-3801-08	KNOB (ATT)	
268	3F		K24-3802-08	KNOB (FF)	
269	3F		K24-3803-08	KNOB (REW)	
270	3E		K25-1369-08	KNOB (VOL)	
271	3F		K25-1370-08	KNOB (AM/FM)	
272	3F		K25-1371-08	KNOB (PRESET)	
273	3C		N99-1723-05	SCREW SET	
274	3C		N99-1716-08	SCREW SET	
275	3C		N99-1726-08	SCREW SET	
A	2F		N09-4491-08	MACHINE SCREW	
B	1F		N09-4498-08	MACHINE SCREW	
C	1C		N09-4497-08	MACHINE SCREW	
D	2F		N09-4500-08	MACHINE SCREW	
F	2F		N09-6002-08	MACHINE SCREW	
G	2C		N09-6049-08	MACHINE SCREW	
H	1F		N19-2164-08	FLAT WASHER	
J	1F		N19-2165-08	FLAT WASHER	
K	2D		N14-0711-08	HEXAGON NUT	
L	1E		N09-6037-08	MACHINE SCREW	
N	3F		N82-2006-46	BINDING HEAD TAPTITE SCREW	
-			W01-1589-08	ACCESSORY CASE	
MAIN UNIT					
D400			B30-1424-05	LED	
C100			CE04CW1A101M	ELECTRO 100UF 10WV	
C101			CK73GB1H103K	CHIP C 0.010UF K	
C102			CE04CW1A101M	ELECTRO 100UF 10WV	
C103			CK73GB1H103K	CHIP C 0.010UF K	
C104			CE04DW1A101M	ELECTRO 100UF 10WV	

E : Europe **K** : North America **M** : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C105			CK73GB1H103K	CHIP C 0.010UF K		C552A,B			CK73GB1H102K	CHIP C 1000PF K	
C106			CE04DW1A101M	ELECTRO 100UF 10WV		C553			CK73GB1H103K	CHIP C 0.010UF K	
C107			CK73GB1H103K	CHIP C 0.010UF K		C554			CK73FB1C104K	CHIP C 0.10UF K	
C108			CE04DW1A101M	ELECTRO 100UF 10WV		C580			CK73GB1H103K	CHIP C 0.010UF K	
C111			CK73GB1H103K	CHIP C 0.010UF K		C600			CE04CW1C101M	ELECTRO 100UF 16WV	
C200			C90-2610-05	ELECTRO 2.2UF 50WV		C601			CK73GB1H103K	CHIP C 0.010UF K	
C201A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C602			CE04CW1A101M	ELECTRO 100UF 10WV	
C202			CK73GB1H103K	CHIP C 0.010UF K		C603			C93-1151-08	CHIP C 0.022UF K	
C203			CK73GB1H333K	CHIP C 0.033UF K		C604			CK73GB1H104K	CHIP C 0.10UF K	
C204			CC73FCH1H151J	CHIP C 150PF J		C605			C93-1151-08	CHIP C 0.022UF K	
C205			CK73GB1A474K	CHIP C 0.47UF K		C606			CE04CW1C470M	ELECTRO 47UF 16WV	
C206,207			CK73GB1H104K	CHIP C 0.10UF K		C607,608			C90-2654-05	ELECTRO 220UF 16WV	
C208			CK73GB1H103K	CHIP C 0.010UF K		C609			C90-2597-05	ELECTRO 10UF 16WV	
C209			CE04CW1C470M	ELECTRO 47UF 16WV		C610			C93-1151-08	CHIP C 0.022UF K	
C210A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C611			CE04CW1A101M	ELECTRO 100UF 10WV	
C211A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C612			CK73GB1H103K	CHIP C 0.010UF K	
C212A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C613			C90-2894-08	ELECTRO 100UF 16WV	
C213			C90-2597-05	ELECTRO 10UF 16WV		C614			C90-2597-05	ELECTRO 10UF 16WV	
C214A,B			CK73GB1H472K	CHIP C 4700PF K		C651			C93-1151-08	CHIP C 0.022UF K	
C215			CE04CW1C470M	ELECTRO 47UF 16WV		C652			CK73GB0J105K	CHIP C 1.0UF K	
C216			C93-1219-08	CHIP C 0.056UF K		C653			CE04CW1H3R3M	ELECTRO 3.3UF 50WV	
C217			CK73GB1H103K	CHIP C 0.010UF K		C654			CK73FB1E683KTA	CHIP C 0.068UF K	
C282			C90-2597-05	ELECTRO 10UF 16WV		C655			CE04CW1H0R1M	ELECTRO 0.1UF 50WV	
C283			CE04CW1C220M	ELECTRO 22UF 16WV		C656,657			CK73GB1H103K	CHIP C 0.010UF K	
C284			C90-2597-05	ELECTRO 10UF 16WV		C658,659			CK73FB1C104K	CHIP C 0.10UF K	
C285			CK73FB1C104K	CHIP C 0.10UF K		C660			C90-2822-05	ELECTRO 3900UF 16WV	
C286,287			CC73GCH1H331J	CHIP C 330PF J		C661			CK73GB1H103K	CHIP C 0.010UF K	
C300A,B			CK73GB1A334K	CHIP C 0.33UF K		C662			C93-1191-08	CHIP C 0.001UF K	
C301A,B			CK73GB1A334K	CHIP C 0.33UF K		C663,664			CK73GB1H104K	CHIP C 0.10UF K	
C302A,B			CK73GB1A334K	CHIP C 0.33UF K		C700			CE04CW1C470M	ELECTRO 47UF 16WV	
C303A,B			CK73GB1A334K	CHIP C 0.33UF K		C701			C90-2597-05	ELECTRO 10UF 16WV	
C304			CK73FB1A225K	CHIP C 2.2UF K		C702			CE04CW1A101M	ELECTRO 100UF 10WV	
C305			CE04CW1C470M	ELECTRO 47UF 16WV		C703			CE04CW1A221M	ELECTRO 220UF 10WV	
C306			CK73GB1H103K	CHIP C 0.010UF K		C704			CC73GCH1H150J	CHIP C 15PF J	
C307A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C705			CK73GB1H104K	CHIP C 0.10UF K	
C309A,B			CK73GB1H104K	CHIP C 0.10UF K		C706			CE04CW1C470M	ELECTRO 47UF 16WV	
C310A,B			CK73GB1H104K	CHIP C 0.10UF K		C707			C90-2597-05	ELECTRO 10UF 16WV	
C311A,B			CE04CW1C220M	ELECTRO 22UF 16WV		C711			CK73GB1H103K	CHIP C 0.010UF K	
C312A,B			CE04CW1C220M	ELECTRO 22UF 16WV		C725			CK73GB1H103K	CHIP C 0.010UF K	
C351A,B			CE04CW1C220M	ELECTRO 22UF 16WV		C750			C90-5447-08	ELECTRO 470UF 16WV	
C363-365			CK73FB1C104K	CHIP C 0.10UF K		C751			CK73GB1H333K	CHIP C 0.033UF K	
C370A,B			CC73GCH1H331J	CHIP C 330PF J		C752			C90-5447-08	ELECTRO 470UF 16WV	
C371A,B			CC73GCH1H331J	CHIP C 330PF J		C800			CK73GB1H103K	CHIP C 0.010UF K	
C372A,B			CC73GCH1H331J	CHIP C 330PF J		C801			C90-5397-08	ELECTRO 47UF 63WV	
C400			CK73GB1H103K	CHIP C 0.010UF K		C802			CK73GB1H103K	CHIP C 0.010UF K	
C402			CK73GB1H104K	CHIP C 0.10UF K		C803			C90-5397-08	ELECTRO 47UF 63WV	
C403			C90-5396-08	SUPER-C 0.1F 5.5WV		C804			C93-1191-08	CHIP C 0.001UF K	
C404			CE04CW1A101M	ELECTRO 100UF 10WV		C805			CK73GB1H103K	CHIP C 0.010UF K	
C405			CK73GB1H103K	CHIP C 0.010UF K		C806			C90-2894-08	ELECTRO 100UF 16WV	
C406,407			CC73GCH1H220J	CHIP C 22PF J		C807			CK73GB1H103K	CHIP C 0.010UF K	
C408			CK73GB1H103K	CHIP C 0.010UF K		C808			C90-2894-08	ELECTRO 100UF 16WV	
C409			CK73GB1H102K	CHIP C 1000PF K		C809			CK73GB1H103K	CHIP C 0.010UF K	
C410			CE04CW1H010M	ELECTRO 1.0UF 50WV		C850A,B			CK73GB1H104K	CHIP C 0.10UF K	
C411-417			CK73GB1H103K	CHIP C 0.010UF K		C851			CE04CW1A101M	ELECTRO 100UF 10WV	
C550A,B			C90-2595-05	ELECTRO 4.7UF 16WV		C852			C90-2597-05	ELECTRO 10UF 16WV	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C853-855			CK73FF1A475Z	CHIP C 4.7UF Z	
C856			C90-2597-05	ELECTRO 10UF 16WV	
C857			CK73GB1H102K	CHIP C 1000PF K	
C858			CE04CW1A101M	ELECTRO 100UF 10WV	
285	2D		E30-6086-08	AUDIO CORD (PRE SUB)	
286	2D		E30-6087-08	AUDIO CORD (VTR)	
287	2D		E30-6088-08	AUDIO CORD (PRE MAIN)	
288	2D		E30-6089-08	CORD WITH DIN CONNECTOR (CH)	
289	2D		E30-6090-08	CORD WITH DIN CONNECTOR (DSP)	
290	2D		E30-6079-08	CORD WITH PLUG (ANT)	
CN350			E40-9757-08	PIN ASSY	
CN351			E40-3241-05	PIN ASSY (6P)	
CN354			E41-0162-08	PIN ASSY	
CN550			E40-3257-05	PIN ASSY (13P)	
CN580			E40-3254-05	PIN ASSY (10P)	
CN600			E40-3260-05	PIN ASSY (2P)	
CN650			E03-0403-08	DC JACK	
CN651			E58-0942-08	RECTANGULAR RECEPTACLE	
CN700			E41-0256-08	FLAT CABLE CONNECTOR	
CN701			E40-9757-08	PIN ASSY	
CN702			E56-0836-05	CYLINDRICAL RECEPTACLE	
CN703			E41-0255-08	FLAT CABLE CONNECTOR	
CN800			E40-9490-05	PIN ASSY (20P)	
294	3C		F09-1753-08	FAN	
295	3C		F12-0752-08	SHIELDING TUBE	
F1	2D		F52-0004-05	FUSE 5A (MINI BLADE)	
FPC2	1D		J84-0140-08	FLEXIBLE PRINTED WIRING BOARD	
L100			L33-1123-05	LINE FILTER COIL	
L102-16			L33-1127-08	SMALL FIXED INDUCTOR	
L200			L33-1127-08	SMALL FIXED INDUCTOR	
L282-284			L92-0348-08	CHIP FERRITE 1K	
L350A,B			L92-0348-08	CHIP FERRITE 1K	
L351,352			L92-0348-08	CHIP FERRITE 1K	
L353A,B			L92-0348-08	CHIP FERRITE 1K	
L354A,B			L92-0348-08	CHIP FERRITE 1K	
L355			L92-0348-08	CHIP FERRITE 1K	
L400			L33-1127-08	SMALL FIXED INDUCTOR	
L650			L33-1063-05	CHOKE COIL	
L750			L33-1187-05	CHOKE COIL	
L751			L33-1868-08	CHOKE COIL	
L800			L33-1090-08	CHOKE COIL	
X400			L78-0592-08	RESONATOR	
X401			L78-0533-05	RESONATOR (32.768kHz)	
C	3B		N09-4497-08	MACHINE SCREW	
M	3D		N09-6037-08	MACHINE SCREW	
P	2D		N89-3006-46	BINDING HEAD TAPTITE SCREW	
Q	2D		N86-2606-46	BINDING HEAD MACHINE SCREW	
R	3C		N86-2612-46	BINDING HEAD MACHINE SCREW	
R100			RK73GB1J223J	CHIP R 22K J 1/16W	
R101			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R102			RK73GB1J223J	CHIP R 22K J 1/16W	
R103			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R104			RK73FB2A151J	CHIP R 150 J 1/10W	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R107			RK73GB1J473J	CHIP R 47K J 1/16W	
R108			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R200			RK73GB1J103J	CHIP R 10K J 1/16W	
R201			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R202			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R203			R92-1252-05	CHIP R 0 OHM J 1/16W	
R204			RK73GB1J273J	CHIP R 27K J 1/16W	
R205			RK73GB1J243J	CHIP R 24K J 1/16W	
R206			RK73GB1J622J	CHIP R 6.2K J 1/16W	
R207			RK73GB1J473J	CHIP R 47K J 1/16W	
R208			RK73GB1J473J	CHIP R 47K J 1/16W	
R262			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R263			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R265			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R280,281			RK73FB2A101J	CHIP R 100 J 1/10W	
R350A,B			RK73FB2A101J	CHIP R 100 J 1/10W	
R351A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R352A,B			RK73GB1J471J	CHIP R 470 J 1/16W	
R353A,B			RK73FB2A101J	CHIP R 100 J 1/10W	
R354A,B			RK73FB2A101J	CHIP R 100 J 1/10W	
R355A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R356A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R364A,B			RK73GB1J471J	CHIP R 470 J 1/16W	
R366A			RK73GB1J471J	CHIP R 470 J 1/16W	
R367B			RK73GB1J471J	CHIP R 470 J 1/16W	
R401			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R402			RK73GB1J223J	CHIP R 22K J 1/16W	
R403			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R404			RK73GB1J104J	CHIP R 100K J 1/16W	
R405			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R406			RK73GB1J331J	CHIP R 330 J 1/16W	
R407			RK73GB1J473J	CHIP R 47K J 1/16W	
R408			RK73GB1J223J	CHIP R 22K J 1/16W	
R409			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R410,411			RK73GB1J470J	CHIP R 47 J 1/16W	
R412,413			RK73GB1J473J	CHIP R 47K J 1/16W	
R415			RK73GB1J473J	CHIP R 47K J 1/16W	
R417			RK73GB1J473J	CHIP R 47K J 1/16W	
R420-423			RK73GB1J470J	CHIP R 47 J 1/16W	
R424			RK73GB1J473J	CHIP R 47K J 1/16W	
R425-427			RK73GB1J104J	CHIP R 100K J 1/16W	
R428			RK73GB1J473J	CHIP R 47K J 1/16W	
R429			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R430			RK73GB1J104J	CHIP R 100K J 1/16W	
R431,432			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R433			RK73GB1J471J	CHIP R 470 J 1/16W	
R434			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R435			RK73GB1J473J	CHIP R 47K J 1/16W	
R439			RK73FB2A472J	CHIP R 4.7K J 1/10W	
R440			RK73FB2A471J	CHIP R 470 J 1/10W	
R441			RK73FB2A220J	CHIP R 22 J 1/10W	
R442			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R505			RK73GB1J103J	CHIP R 10K J 1/16W	
R506			RK73GB1J470J	CHIP R 47 J 1/16W	
R510,511			RK73GB1J104J	CHIP R 100K J 1/16W	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R513-515			RK73GB1J104J	CHIP R 100K J 1/16W		R719			R92-1252-05	CHIP R 0 OHM J 1/16W	
R550			RK73FB2A470J	CHIP R 47 J 1/10W		R750			RK73GB1J681J	CHIP R 680 J 1/16W	
R551A,B			RK73FB2A101J	CHIP R 100 J 1/10W		R752			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R552			RK73FB2A470J	CHIP R 47 J 1/10W		R754			RK73GB1J473J	CHIP R 47K J 1/16W	
R553,554			RK73FB2A102J	CHIP R 1.0K J 1/10W		R800			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R555			RK73FB2A222J	CHIP R 2.2K J 1/10W		R801-806			RK73FB2A471J	CHIP R 470 J 1/10W	
R556,557			RK73FB2A472J	CHIP R 4.7K J 1/10W		R808			RK73EB2B473J	CHIP R 47K J 1/8W	
R558			RK73FB2A470J	CHIP R 47 J 1/10W		R809			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R580,581			RK73FB2A470J	CHIP R 47 J 1/10W		R810			RK73GB1J473J	CHIP R 47K J 1/16W	
R582,583			RK73FB2A102J	CHIP R 1.0K J 1/10W		R811			RK73GB1J471J	CHIP R 470 J 1/16W	
R584			RK73FB2A222J	CHIP R 2.2K J 1/10W		R820			R92-1252-05	CHIP R 0 OHM J 1/16W	
R585,586			RK73FB2A472J	CHIP R 4.7K J 1/10W		R850			RK73GB1J100J	CHIP R 10 J 1/16W	
R587			RK73FB2A470J	CHIP R 47 J 1/10W		R851A,B			RK73GB1J394J	CHIP R 390K J 1/16W	
R588,589			RK73GB1J104J	CHIP R 100K J 1/16W		R852			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R591			RK73GB1J104J	CHIP R 100K J 1/16W		R853			RK73GB1J103J	CHIP R 10K J 1/16W	
R600			RK73FB2A103J	CHIP R 10K J 1/10W		R854			RK73GB1J242J	CHIP R 2.4K J 1/16W	
R601			RK73FB2A102J	CHIP R 1.0K J 1/10W		R855			RK73GB1J333J	CHIP R 33K J 1/16W	
R602			RK73GB1J102J	CHIP R 1.0K J 1/16W		R858			RK73GB1J104J	CHIP R 100K J 1/16W	
R603			RK73FB2A152J	CHIP R 1.5K J 1/10W		R859			RK73GB1J471J	CHIP R 470 J 1/16W	
R604			RK73FB2A471J	CHIP R 470 J 1/10W		R860			RK73GB1J103J	CHIP R 10K J 1/16W	
R605,606		*	RK73EB2B0R1J	CHIP R 0.1 J 1/8W		R861			RK73GB1J473J	CHIP R 47K J 1/16W	
R607			RK73FB2A152J	CHIP R 1.5K J 1/10W		R862			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R608			RK73FB2A223J	CHIP R 22K J 1/10W		R863			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R609			RD14DB2H4R7J	SMALL-RD 4.7 J 1/2W		RN400			R90-1016-05	MULTI-COMP 470 X4	
R650			RK73GB1J561J	CHIP R 560 J 1/16W		RN401			R90-1022-05	MULTI-COMP 470 X2	
R651			RK73FB2A102J	CHIP R 1.0K J 1/10W		RN402,403			R90-1016-05	MULTI-COMP 470 X4	
R656			RK73GB1J104J	CHIP R 100K J 1/16W		RN404,405			R90-1022-05	MULTI-COMP 470 X2	
R657			RK73FB2A103J	CHIP R 10K J 1/10W		RN406,407			R90-1043-08	MULTI-COMP 4.7K X2	
R658			RK73FB2A104J	CHIP R 100K J 1/10W							
R659			RK73FB2A472J	CHIP R 4.7K J 1/10W		S800			S74-0809-05	MICRO SWITCH	
R660			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		D100			MA4051 (N)-M	ZENER DIODE	
R661			RK73FB2A223J	CHIP R 22K J 1/10W		D280-282			STZ6.2Z	ZENER DIODE	
R662			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		D350A,B			STZ6.2Z	ZENER DIODE	
R663			RK73FB2A472J	CHIP R 4.7K J 1/10W		D352A,B			STZ6.2Z	ZENER DIODE	
R665			RK73FB2A223J	CHIP R 22K J 1/10W		D354A,B			STZ6.2Z	ZENER DIODE	
R667			RD14DB2H332J	SMALL-RD 3.3K J 1/2W		D401-403			1SS400	DIODE	
R669			RK73GB1J103J	CHIP R 10K J 1/16W		D404,405			STZ6.2Z	ZENER DIODE	
R670			RK73FB2A104J	CHIP R 100K J 1/10W		D500			DAP202U	DIODE	
R671			RK73GB1J103J	CHIP R 10K J 1/16W		D550-553			STZ6.2Z	ZENER DIODE	
R672			RK73FB2A243J	CHIP R 24K J 1/10W		D554A,B			STZ6.2Z	ZENER DIODE	
R673			RK73GB1J103J	CHIP R 10K J 1/16W		D555			STZ6.2Z	ZENER DIODE	
R674,675			RK73GB1J104J	CHIP R 100K J 1/16W		D580-583			STZ6.2Z	ZENER DIODE	
R676			RK73GB1J222J	CHIP R 2.2K J 1/16W		D600			DTZ9.1A	ZENER DIODE	
R677			RK73FB2A103J	CHIP R 10K J 1/10W		D601			MA8140-M	ZENER DIODE	
R680-683			RK73EB2B222J	CHIP R 2.2K J 1/8W		D602			MA8120-M	ZENER DIODE	
R700			RK73GB1J223J	CHIP R 22K J 1/16W		D603			UDZ7.5B	ZENER DIODE	
R701A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W		D604			HZS6B1L	ZENER DIODE	
R702A,B			RK73GB1J473J	CHIP R 47K J 1/16W		D605, 606			1SR154-400	DIODE	
R703			RK73GB1J102J	CHIP R 1.0K J 1/16W		D650			MA8056-M	ZENER DIODE	
R704,705			RK73GB1J104J	CHIP R 100K J 1/16W		D652			1SS400	DIODE	
R707			R92-1252-05	CHIP R 0 OHM J 1/16W		D653-656			1SR154-400	DIODE	
R708-711			RK73GB1J102J	CHIP R 1.0K J 1/16W		D657,658			HZS7L6C	ZENER DIODE	
R712			RK73GB1J391J	CHIP R 390 J 1/16W		D659			RM10Z	DIODE	
R714			RK73GB1J473J	CHIP R 47K J 1/16W		D660			DAN202U	DIODE	
R716-718			RK73GB1J104J	CHIP R 100K J 1/16W		D701			STZ6.2Z	ZENER DIODE	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D702 D750 D800-802 D804 D805			HZM6.2ZWA RB050L-40 HZM6.2ZWA HZM6.2ZWA PTZ5.6A	ZENER DIODE DIODE ZENER DIODE ZENER DIODE ZENER DIODE	
D850-852 IC200 IC201 IC202 IC300			1SS400 TDA7407 AN7399S TC7W66FU TDA7401	DIODE ANALOGUE IC ANALOGUE IC MOS-IC ANALOGUE IC	
IC400 IC402 IC403 IC700 IC701			MN101C49KWA HD74HC02FP S-80842ANNP BA3129F BA3121F	MI-COM IC MOS-IC MOS-IC IC (SWITCH) IC (ISO AMP)	
IC750 IC850 Q100 Q101 Q102			LM2596-ADJLB03 NJM4565MD 2SA1703-AN DTC114YUA 2SA1703-AN	ANALOGUE IC IC (OP AMP X2) TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR	
Q103 Q105 Q200,201 Q202 Q250			DTC114YUA DTC144EUA DTC114YUA DTC124EUA 2SC4081	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR	
Q350A,B Q351A,B Q352A,B Q353 Q400			DTC343TK DTC343TK DTC343TK DTA124EUA DTA124EUA	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q401 Q402 Q403 Q404 Q405			2SA1576A DTC114YUA DTC124EUA 2SB1427 DTC144EUA	TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR	
Q406 Q600 Q601 Q602 Q603			DTA124EUA DTA124EUA DTC114YUA 2SB1565(E,F) 2SC4081	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR	
Q604 Q605 Q606 Q607 Q608			DTA124EUA DTC114YUA 2SB1184 2SC4081 DTA124EUA	DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR	
Q609 Q610 Q611 Q612 Q613			DTC114YUA 2SC4483(R,S,T) 2SB1565(E,F) 2SC4081 2SB1565 (E,F)	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	
Q614 Q615 Q616 Q650 Q651,652			2SC4081 DTA124EUA DTC114YUA DTA123JUA DTC114YUA	TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q653 Q654 Q655 Q656 Q657			2SA1703-AN 2SA1576A DTA124EUA 2SA1703-AN DTC114YUA	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR	
Q658,659 Q660 Q700 Q701 Q850			2SC4081 DTA144EUA DTC114YUA 2SC3437 2SC4081	TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR	
Q851			DTC343TK	DIGITAL TRANSISTOR	
DC800 TU100			W02-3302-08 *****	DC/DC CONVERTER TUNER UNIT	
AMP UNIT					
C354A,B C355 C356 C358,359 C359A,B			C90-2815-05 C90-2844-05 C90-2815-05 C90-2844-05 C90-2815-05	ELECTRO 10UF 16WV ELECTRO 47UF 16WV ELECTRO 10UF 16WV ELECTRO 47UF 16WV ELECTRO 10UF 16WV	
C360 C361 C366A,B C367A,B C368A,B			C90-2844-05 C90-2815-05 CK73FB1C104K CK73FB1C104K CC73GCH1H331J	ELECTRO 47UF 16WV ELECTRO 10UF 16WV CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 330PF J	
C369A, B C501 C503 C504A,B C505A,B			CC73GCH1H331J CK73GB1H103K CE04CW1C220M CK73FB1A105K CK73FB1A105K	CHIP C 330PF J CHIP C 0.010UF K ELECTRO 22UF 16WV CHIP C 1.0UF K CHIP C 1.0UF K	
C506 C508 C509A,B C510A,B C511A,B			C90-2877-08 C90-2877-08 CK73EB1E104K CK73EB1E104K CK73EB1E104K	ELECTRO 1.0UF 50WV ELECTRO 1.0UF 50WV CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C512A,B C513A,B C514A,B C515 C518			CK73EB1E104K CK73FB1A105K CK73FB1A105K CK73EB1E104K C90-2843-05	CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 1.0UF K CHIP C 0.10UF K ELECTRO 2200UF 16WV	
C519,520 C521 C522 C523 C530A,B			CK73FB1C104K C90-2673-05 C90-2672-05 CK73GB1H103K C93-1220-08	CHIP C 0.10UF K ELECTRO 220UF 10WV ELECTRO 100UF 10WV CHIP C 0.010UF K CHIP C 2.2UF K	
C531A,B			C93-1220-08	CHIP C 2.2UF K	
CN352,353 CN500 CN501			E63-0884-08 E58-0804-05 J13-0604-05	PIN JACK RECTANGULAR RECEPTACLE (14P) FUSE HOLDER	
304 F2	1E 3E		F07-1112-08 F06-1032-05	COVER (AMP) FUSE 10A (BLADE)	
L500 L501			L33-1869-08 L33-1127-08	CHOKE COIL SMALL FIXED INDUCTOR	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

AMP UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
T	2E		N86-3006-45	BINDING HEAD MACHINE SCREW	
U	3F		N82-3008-46	BINDING HEAD TAPTITE SCREW	
R358			RK73GB1J104J	CHIP R 100K J 1/16W	
R360-362			RK73GB1J104J	CHIP R 100K J 1/16W	
R373A,B			RK73GB1J752J	CHIP R 7.5K J 1/16W	
R374A,B			RK73GB1J752J	CHIP R 7.5K J 1/16W	
R377A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R378A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R500A,B			RK73GB1J103J	CHIP R 10K J 1/16W	
R501A,B			RK73GB1J103J	CHIP R 10K J 1/16W	
R502			RK73GB1J333J	CHIP R 33K J 1/16W	
R503			RK73GB1J242J	CHIP R 2.4K J 1/16W	
R504			RK73GB1J471J	CHIP R 470 J 1/16W	
R507			RK73GB1J103J	CHIP R 10K J 1/16W	
R508			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R509			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R516,517			RK73GB1J220J	CHIP R 22 J 1/16W	
R518			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R520			RK73GB1J101J	CHIP R 100 J 1/16W	
R521			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R522,523			RK73GB1J103J	CHIP R 10K J 1/16W	
R524			RK73GB1J302J	CHIP R 3.0K J 1/16W	
R530A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R531A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
D355A,B			ST26.2Z	ZENER DIODE	
D357A,B			ST26.2Z	ZENER DIODE	
D360A,B			1SS355	DIODE	
D361A,B			1SS355	DIODE	
D362A,B			1SS355	DIODE	
D363A,B			1SS355	DIODE	
D501			RM10Z	DIODE	
D502			1SS355	DIODE	
D503A,B			1SR154-400	DIODE	
D504A,B			1SR154-400	DIODE	
D505A,B			1SR154-400	DIODE	
D506A,B			1SR154-400	DIODE	
D507			DTZ9.1A	ZENER DIODE	
D508,509			STZ6.2Z	ZENER DIODE	
D510			UDZ7.5B	ZENER DIODE	
IC350,351			BA3121F	IC (ISO AMP)	
IC500			TA8263BH	ANALOGUE IC	
Q501			2SC4483 (R,S,T)	TRANSISTOR	
Q502			DTA124EUA	DIGITAL TRANSISTOR	
Q503			DTC144EUA	DIGITAL TRANSISTOR	
Q504,505			2SC4081	TRANSISTOR	
TH500			TH470	POSITIVE RESISTOR	
SUB UNIT					
D830			B30-2025-05	LED	
CN830			E40-9488-05	SOCKET FOR PIN ASSY (20P)	
CN831			E40-9414-05	FLAT CABLE CONNECTOR (15P)	
R812			RK73FB2A4R7J	CHIP R 4.7 J 1/10W	
R830			RK73GB1J820J	CHIP R 82 J 1/16W	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R831			RK73GB1J473J	CHIP R 47K J 1/16W	
R832			RK73GB1J331J	CHIP R 330 J 1/16W	
S830			S70-0886-08	TACT SWITCH	
D831			MA8062-M	ZENER DIODE	
D832			CL-200IR-X-TS	INFRARED LED	
D833			MA8062-M	ZENER DIODE	
Q830			CPT-182S-C-TSD	PHOTO TRANSISTOR	
CONTROL UNIT					
D900			B30-1564-05	LED	
D901			B30-1628-08	LED	
D982,983			B30-1547-05	LED	
D985,986			B30-1547-05	LED	
D989,990			B30-1547-05	LED	
D994			B30-1547-05	LED	
D997			B30-1547-05	LED	
C900			CK73GB1H103K	CHIP C 0.010UF K	
C901			C90-5327-08	CHIP-TAN 10UF 16WV	
C902,903			CK73GB1H103K	CHIP C 0.010UF K	
C904			CK73GB0J105K	CHIP C 1.0UF K	
C905,906			CC73GCH1H120J	CHIP C 12PF J	
C907			CK73GB1H103K	CHIP C 0.010UF K	
C908-911			CK73GB1H103K	CHIP C 0.010UF K	
C930			C90-5327-08	CHIP-TAN 10UF 16WV	
C940,941			C90-5327-08	CHIP-TAN 10UF 16WV	
C943			C90-5327-08	CHIP-TAN 10UF 16WV	
C950			CK73GB1H104K	CHIP C 0.10UF K	
C951			C90-5327-08	CHIP-TAN 10UF 16WV	
C960			CK73GB1H103K	CHIP C 0.010UF K	
C961			CK73FF1A475Z	CHIP C 4.7UF Z	
C962			C93-1191-08	CHIP C 0.001UF K	
C963			CK73FF1A475Z	CHIP C 4.7UF Z	
C964			CK73GB1H103K	CHIP C 0.010UF K	
C965			CK73GB0J105K	CHIP C 1.0UF K	
C966			CK73GB1H104K	CHIP C 0.10UF K	
CN900			E59-0835-05	RECTANGULAR PLUG (15P)	
298	3F		F15-0843-08	SHEET (BLIND)	
299	3F		J19-5115-08	HOLDER (VFD)	
L900			L33-1127-08	SMALL FIXED INDUCTOR	
L901			L92-0348-08	CHIP FERRITE	
L950			L33-1127-08	SMALL FIXED INDUCTOR	
L960			L92-0348-08	CHIP FERRITE	
L961			L33-1127-08	SMALL FIXED INDUCTOR	
X1			L77-2790-08	CRYSTAL RESONATOR (20MHz)	
R900			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R901			R92-1252-05	CHIP R 0 OHM J 1/16W	
R902			RK73GB1J471J	CHIP R 470 J 1/16W	
R903			RK73GB1J104J	CHIP R 100K J 1/16W	
R904			RK73GB1J101J	CHIP R 100 J 1/16W	
R905			RK73GB1J104J	CHIP R 100K J 1/16W	
R906			RK73GB1J102J	CHIP R 1.0K J 1/16W	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CONTROL UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R907,908			RK73GB1J471J	CHIP R 470 J 1/16W	
R909			RK73GB1J223J	CHIP R 22K J 1/16W	
R910			RK73GB1J101J	CHIP R 100 J 1/16W	
R911			RK73GB1J131J	CHIP R 130 J 1/16W	
R912			RK73GB1J103J	CHIP R 10K J 1/16W	
R913			RK73FB2A392J	CHIP R 3.9K J 1/10W	
R919			RK73GB1J223J	CHIP R 22K J 1/16W	
R920			RK73GB1J103J	CHIP R 10K J 1/16W	
R921			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R930			RK73GB1J101J	CHIP R 100 J 1/16W	
R940			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R941			RK73GB1J473J	CHIP R 47K J 1/16W	
R942			RK73GB1J124J	CHIP R 120K J 1/16W	
R943			RK73GB1J274J	CHIP R 270K J 1/16W	
R944			RK73GB1J274J	CHIP R 270K J 1/16W	
R945			RK73GB1J100J	CHIP R 10 J 1/16W	
R960			RK73EB2B100J	CHIP R 10 J 1/8W	
R961			RK73GB1J100J	CHIP R 10 J 1/16W	
R962			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R963,964			RK73GB1J101J	CHIP R 100 J 1/16W	
R965			RK73GB1J473J	CHIP R 47K J 1/16W	
R966,967			RK73GB1J101J	CHIP R 100 J 1/16W	
R968			RK73GB1J473J	CHIP R 47K J 1/16W	
R980-982			RK73EB2B392J	CHIP R 3.9K J 1/8W	
R914918			RK73FB2A471J	CHIP R 470 J 1/10W	
RN900			R90-0737-05	MULTI-COMP 100K X2	
RN901			R90-1014-05	MULTI-COMP 100 X4	
RN902,903			R90-1019-05	MULTI-COMP 100 X2	
RN904			R90-0720-05	MULTI-COMP 100K X4	
RN905			R90-0724-05	MULTI-COMP 1K X4	
RN906			R90-0725-05	MULTI-COMP 1K X2	
RN907			R90-1020-05	MULTI-COMP 22K X2	
RN908			R90-1022-05	MULTI-COMP 470 X2	
RN950			R90-1014-05	MULTI-COMP 100 X4	
RN951			R90-0748-05	MULTI-COMP 47K X4	
RN952			R90-1014-05	MULTI-COMP 100 X4	
RN953			R90-0748-05	MULTI-COMP 47K X4	
RN954			R90-1014-05	MULTI-COMP 100 X4	
RN955			R90-0748-05	MULTI-COMP 47K X4	
RN956			R90-1014-05	MULTI-COMP 100 X4	
RN957			R90-0748-05	MULTI-COMP 47K X4	
S900			S70-0887-08	TACT SWITCH	
S901			S70-0864-05	TACT SWITCH	
S980,981			S70-0886-08	TACT SWITCH	
S982,983			S70-0887-08	TACT SWITCH	
S984			S70-0886-08	TACT SWITCH	
S985,986			S70-0887-08	TACT SWITCH	
S987,988			S70-0886-08	TACT SWITCH	
S989,990			S70-0887-08	TACT SWITCH	
S991-993			S70-0886-08	TACT SWITCH	
S994			S70-0887-08	TACT SWITCH	
S995,996			S70-0886-08	TACT SWITCH	
S997			S70-0887-08	TACT SWITCH	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D903,904			DA227	DIODE	
D905-908			HZM6.2ZWA	ZENER DIODE	
D960,961			HZM6.2ZWA	ZENER DIODE	
IC900			UPD703033GC097	MI-COM IC	
IC930			RS-171	ANALOGUE IC	
IC940			BA3830F	ANALOGUE IC	
IC950			MSM531622FA1TS	MEMORY IC	
IC960			BA033LBSG	ANALOGUE IC	
IC961			TC74HC4050AFT	MOS-IC	
Q900			2SC4081	TRANSISTOR	
Q930			DTA114EUA	DIGITAL TRANSISTOR	
Q931			DTC124EUA	DIGITAL TRANSISTOR	
Q960			2SK1829	FET	
Q961			DTA124EUA	DIGITAL TRANSISTOR	
Q962			DTC114EUA	DIGITAL TRANSISTOR	
VFD960			CN1989M	FLUORESCENT INDICATOR TUBE	
DVD MECHANISM ASSY					
1	3B		G02-1417-08	FLAT SPRING ASSY	
2	3B		D19-0643-08	LEAD SCREW	
6	2A		D14-0767-08	ROLLER ASSY	
8	1B		G01-3103-08	COMPRESSION SPRING	
9	1B		G01-3104-08	COMPRESSION SPRING	
10	1B		G01-3105-08	EXTENSION SPRING	
11	2A		G01-3106-08	TORSION COIL SPRING	
12	1B		D39-0252-08	DAMPER	
13	1B		D39-0253-08	DAMPER	
14	1B		D39-0257-08	DAMPER	
15	1B		A13-2011-08	FRAME	
16	1B		A13-2012-08	FRAME	
20	3A		D13-2203-08	GEAR	
21	2A		D13-2204-08	GEAR	
22	3A		D13-2205-08	GEAR	
23	3A		D13-2206-08	GEAR	
24	2A		D13-2207-08	GEAR	
25	2A		D13-2208-08	GEAR	
26	2A		D13-2209-08	GEAR	
27	3A		D13-2210-08	GEAR	
28	3A		D13-2211-08	GEAR	
29	3A		D13-2212-08	GEAR	
30	2A		D13-2213-08	GEAR	
31	2A		D12-0634-08	CAM	
34	2A		D32-0643-08	LOCK PLATE	
35	2B		G01-3107-08	TORSION COIL SPRING	
36	3A		G01-3108-08	TORSION COIL SPRING	
37	2A		G01-3109-08	TORSION COIL SPRING	
38	2A		G01-3110-08	EXTENSION SPRING	
39	3A		J21-9778-08	MOUNTING HARDWARE	
40	3A		D10-4623-08	LEVER	
41	3A		D10-4624-08	LEVER	
42	3A		D10-4625-08	LEVER	
43	3A		D10-4626-08	LEVER	
44	2A		D10-4627-08	ARM	
45	2A		D10-4628-08	ARM	
46	1A		D10-4629-08	ARM	

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

DVD MECHANISM ASSY

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
47	1A		F09-1706-08	SHEET							
50	3A		J19-5105-08	HOLDER							
51	2B		E39-0427-08	WIRING HARNESS							
53	1A		J90-1029-08	GUIDE							
54	1A		D10-4630-08	LEVER							
55	2B		D13-2214-08	RACK (GEAR)							
56	2B		G01-3111-08	EXTENSION SPRING							
57	2B		D10-4631-08	SLIDER							
58	1A		D10-4632-08	ARM							
59	1B		D10-4633-08	ARM							
60	1A		G11-1975-08	CUSHION							
61	1A		J11-0644-08	CLAMPER							
62	1A		G02-1418-08	FLAT SPRING							
63	3A		D10-4692-08	LEVER							
64	3A		G01-3143-08	TORSION COIL SPRING							
65	3B		J21-9898-08	MOUNTING HARDWARE							
66	3B		G02-1442-08	FLAT SPRING							
67	3A		J19-5162-08	HOLDER							
68	3B		J21-9899-08	MOUNTING HARDWARE							
69	3B		G02-1443-08	FLAT SPRING							
70	3B		D21-2411-08	SHAFT							
VFC1	2B		E39-0473-08	FLAT CABLE							
VFPC1	2A		J84-0137-08	FLEXIBLE PRINTED WIRING BOARD							
A	2B		N09-4484-08	MACHINE SCREW							
B	1B		N09-6045-08	MACHINE SCREW							
C	3B		N09-6046-08	MACHINE SCREW							
D	2A		N09-4485-08	MACHINE SCREW							
E	2A		N09-4486-08	TAPTITE SCREW							
F	2B		N09-4487-08	TAPTITE SCREW							
G	3A		N09-6040-08	MACHINE SCREW							
H	3B		N09-6041-08	ADJUSTABLE SCREW							
J	3B		N09-6042-08	SET SCREW							
K	3B		N09-6043-08	MACHINE SCREW							
L	3B		N09-6044-08	TAPTITE SCREW							
M	2B		N09-6047-08	TAPTITE SCREW							
N	2B		N09-6048-08	STEPPED SCREW							
VM1	1A		T42-1064-08	MOTOR ASSY (SP)							
VM2	3B		T42-1052-08	MOTOR ASSY (DR)							
VPU1	3B		T25-0226-08	OPTICAL PICKUP HEAD							

E : Europe K : North America M : Other Areas

W : Without Europe

△ Indicates safety critical components.