


EXPLODED VIEW / PARTS LIST


Main section

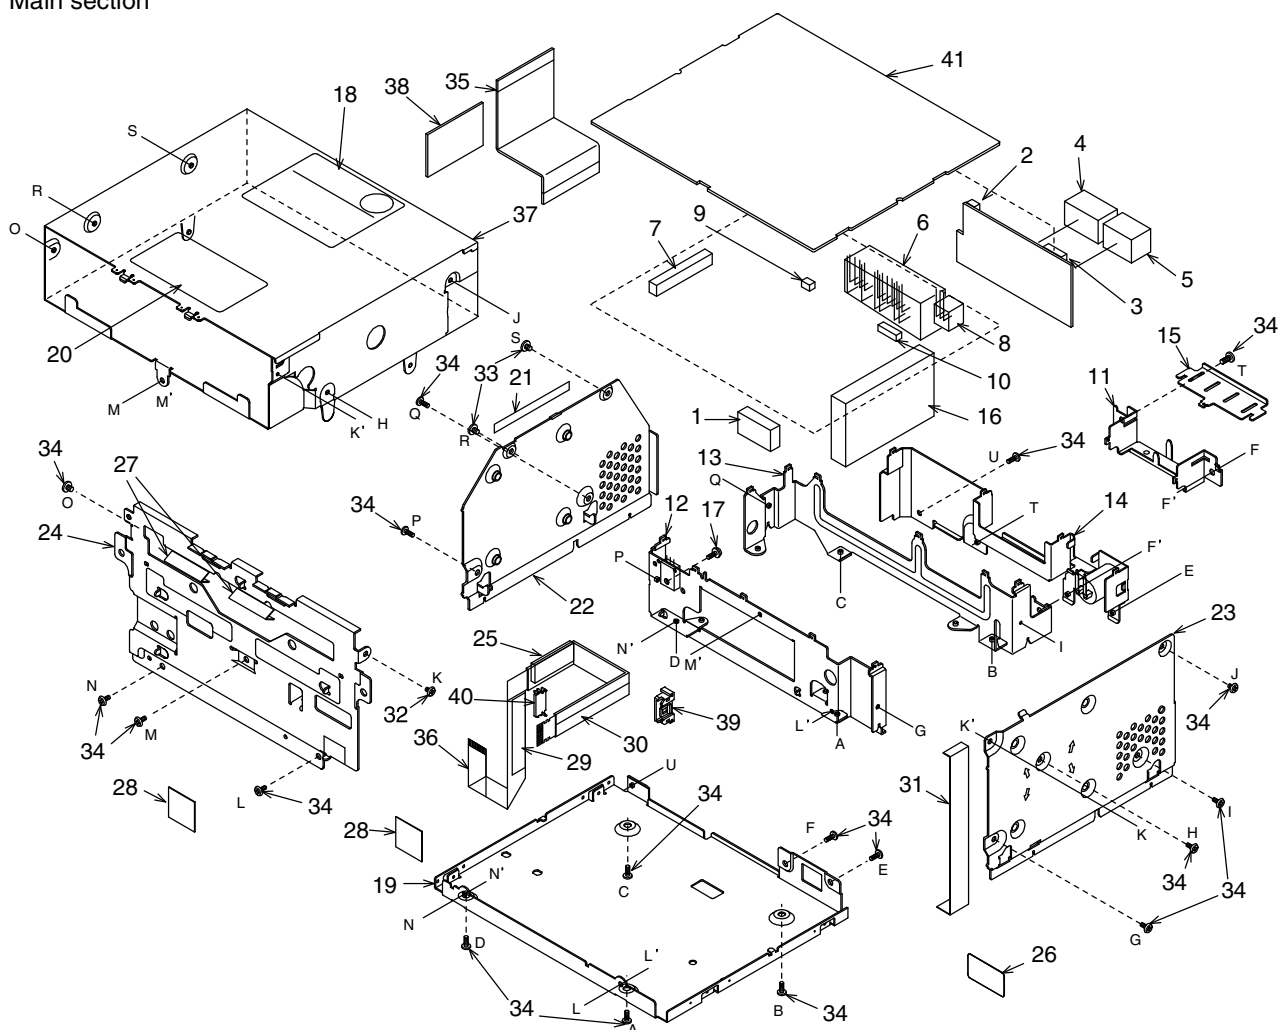

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0834-10	OUTLET SOCKET(10P)	1	21	285-1967-01	GUIDE LABEL	1
2	074-0898-06	OUTLET SOCKET(6P)	1	22	331-3258-22	SIDE CASE(L)	1
3	074-0898-18	OUTLET SOCKET(18P)	1	23	331-3259-22	SIDE CASE(R)	1
4	074-1013-30	OUTLET SOCKET(A-12MW)	1	24	331-3519-11	ES-PLATE	1
5	074-1087-12	OUTLET SOCKET(A-16MW)	1	25	345-5300-01	CUSHIN SPONGE	1
6	074-1141-00	OUTLET SOCKET(NS10+6)	1	26	347-6623-01	SPACER	1
7	074-1192-20	OUTLET SOCKET(20P)	1	27	347-6910-01	PROTECTOR	2
8	074-1236-10	OUTLET SOCKET(8P)	1	28	347-6964-01	PROTECT SHEET	2
9	076-0368-06	PLUG(6P)	1	29	347-6965-01	DOUBLE FACE	1
10	076-0368-18	PLUG(18P)	1	30	347-6966-02	PROTECT SHEET	1
11	331-2025-21	CONN-HOLDER A	1	31	347-6967-01	PROTECT SHEET	1
12	331-3236-22	MECH-BRKT(F)	1	32	714-2004-8B	MACHINE SCREW(M2x4)	1
13	331-3237-21	MECH-BRKT	1	33	714-2603-8A	MACHINE SCREW(M2.6x3)	2
14	331-3239-41	REAR PLATE with ANT.recept	1	34	714-2605-8B	MACHINE SCREW(M2.6x5)	18
15	331-3257-20	CONN-HOLDER B	1	35	816-4021-50	FLAT WIRE	1
16	880-1921V	TUNER	1	36	816-2638-01	FLAT WIRE	1
17	716-1494-50	IT SCREW(M2.6x6)	1	37	929-0730-80	CD-CHANG-MODULE	1
18	286-6666-51	SETPLATE(2708N-A)	1	38	335-6788-01	MOLDED PART	1
	286-6666-06	SETPLATE(2708N-B)	1	39	076-0716-00	PLUG	1
19	311-1834-23	LOWER CASE	1	40	076-0716-10	PLUG	1
20	285-1968-00	GUIDE LABEL	1	41	-----	MAIN PWB	1

CD changer module section

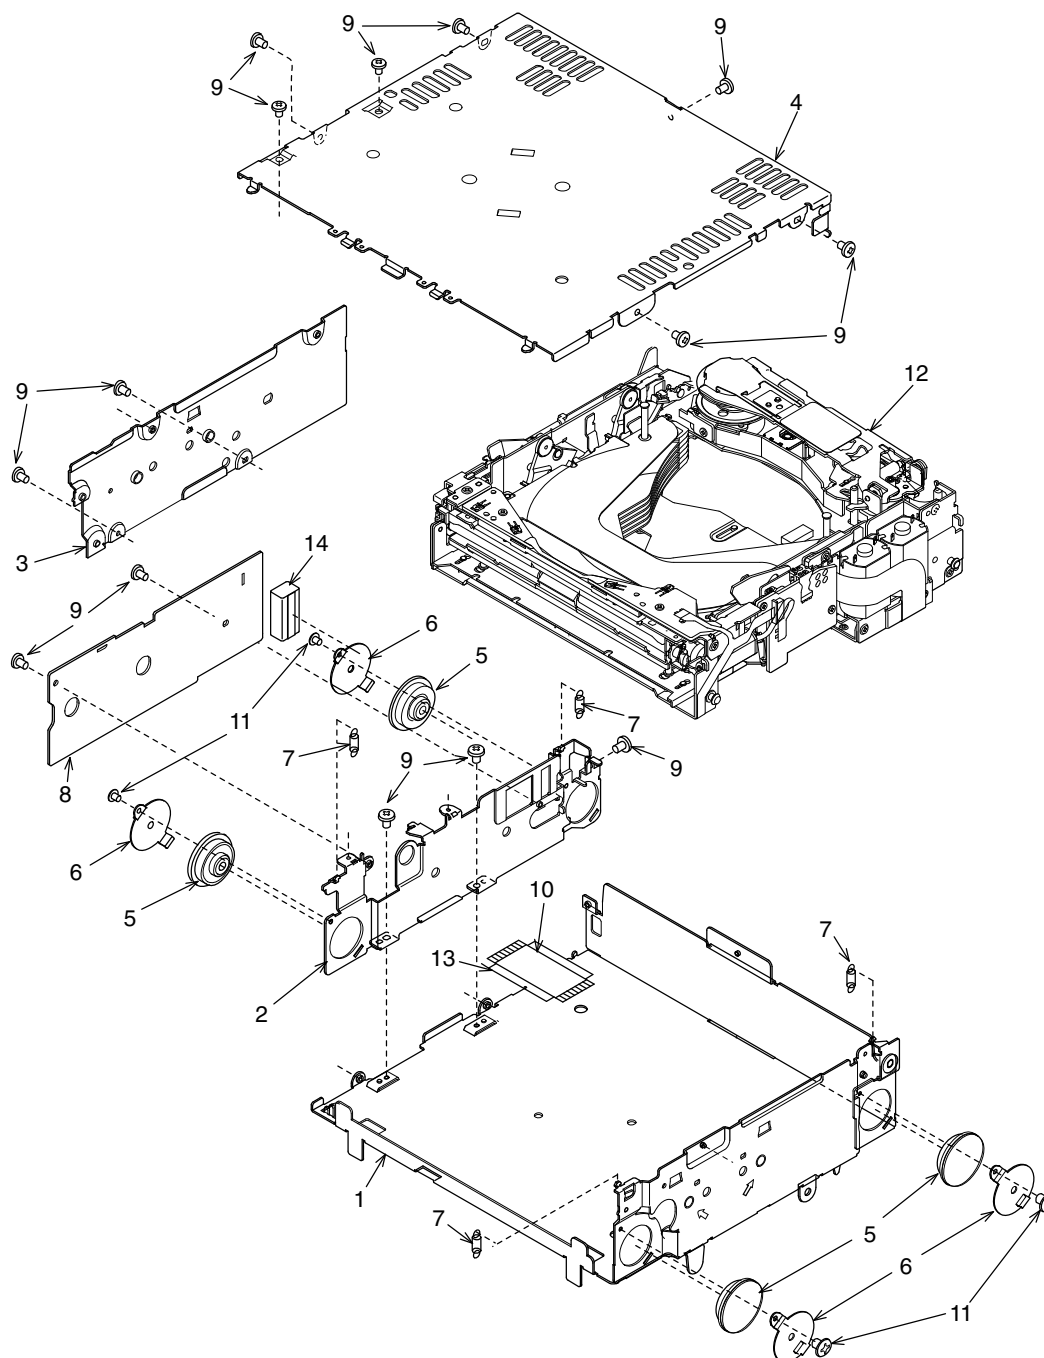


NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-25	LOWER CASE	1
2	331-3896-22	PWB-HOLDER	1
3	305-0334-21	SIDE CASE	1
4	310-1741-27	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	4

NO.	PART NO.	DESCRIPTION	Q'TY
8	-----	CD PWB	1
9	716-1716-02	SCREW(M2x3)	14
10	HBS-561-100	FPC(45P)	1
11	716-3450-00	SCREW(M1.7x2)	4
12	-----	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8748-00	GASKET	1

* No. 12: Refer to CD changer mechanism section. (page 8-10)

CD changer mechanism section: Main chassis

(Parts list: page 10)

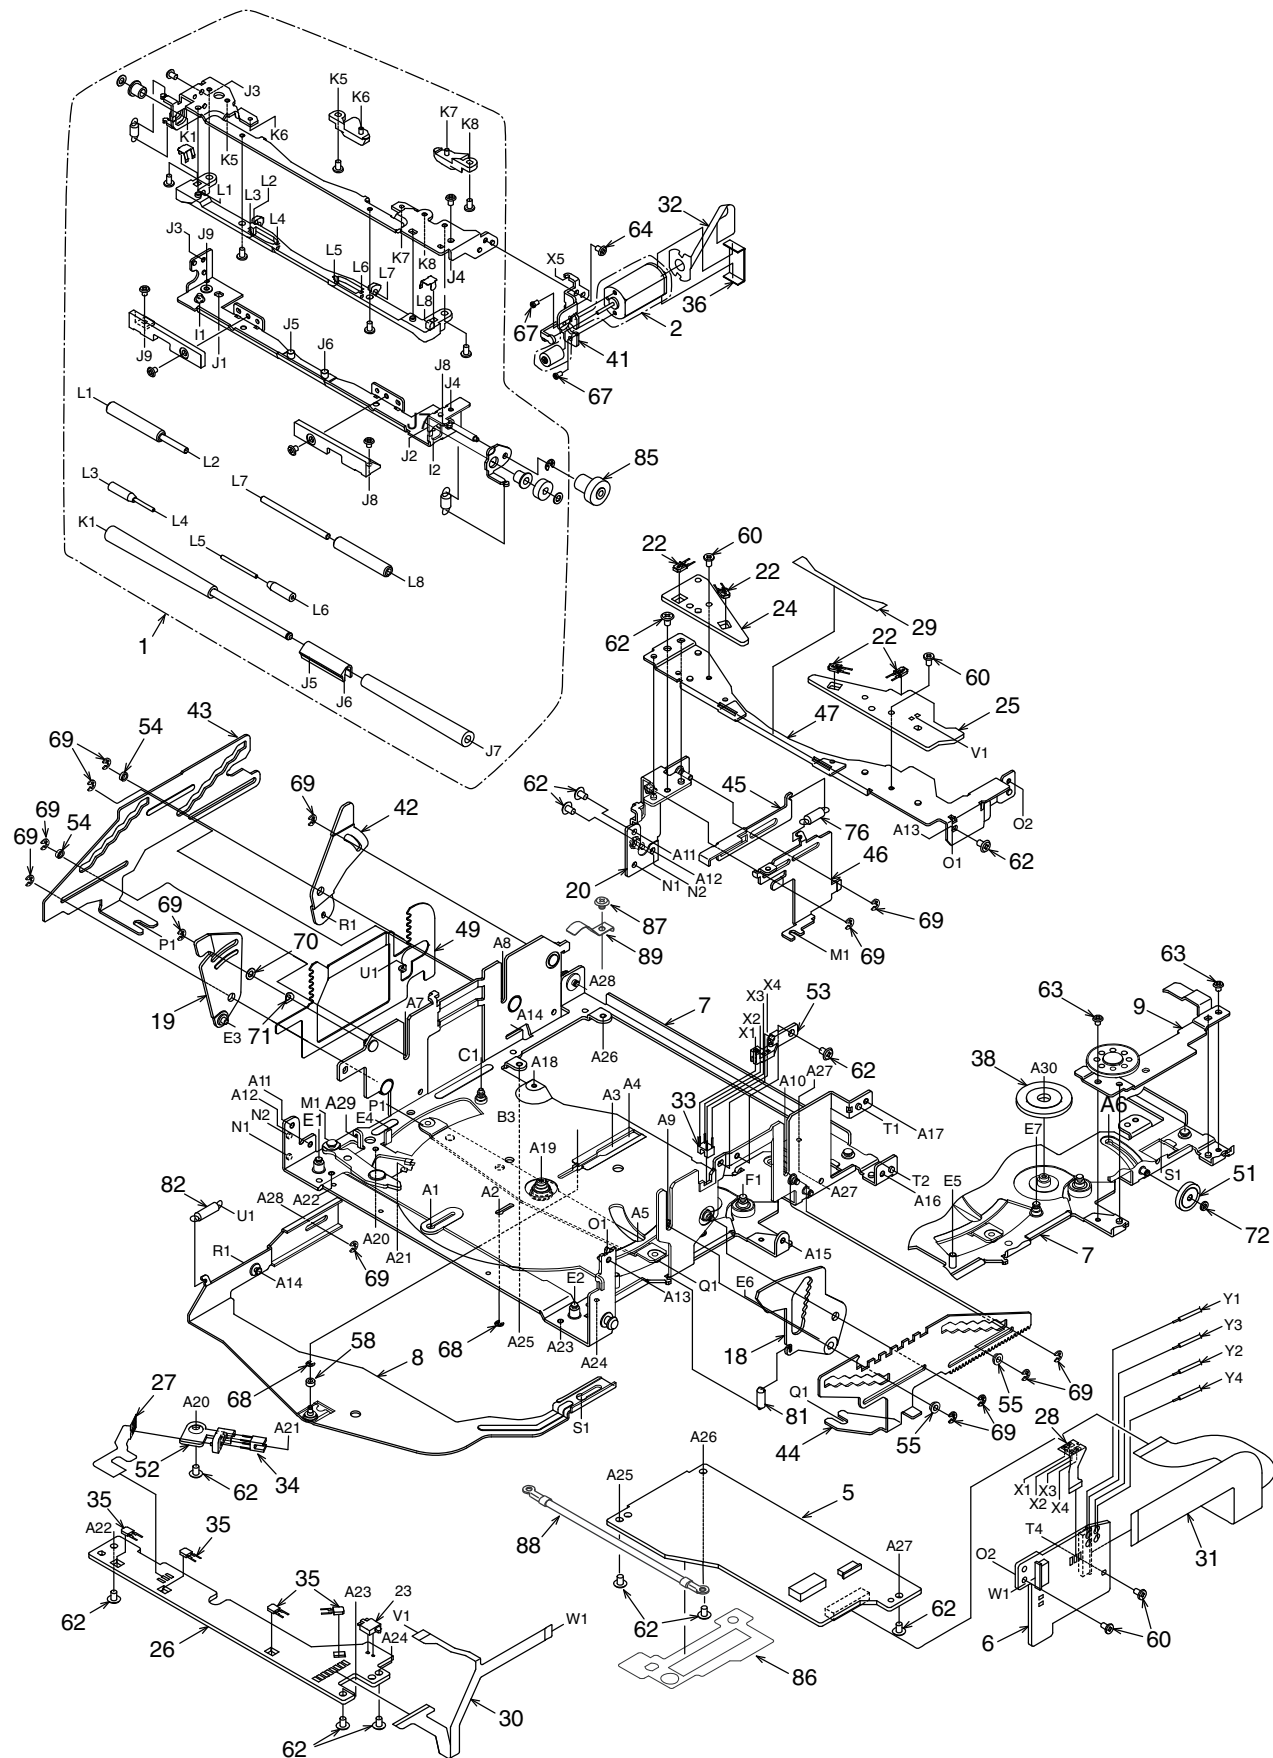


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-562-100	LOADING UNIT	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-530-100	MOTOR PLATE SUB ASSY	1
4	HBS-531-104	DRIVE UNIT	1
5	-----	DSP PWB	1
6	-----	DRIVER PWB	1
7	966-1751-22	CHASSIS ASSY	1
8	966-0600-23	LOCK-P-RE-ASSY	1
9	966-0601-21	M-GEAR-P-ASSY	1
10	966-0602-26	DR-LINK-ASSY	1
11	966-0603-21	MODE-P-ASSY	1
12	966-0604-26	LOCK-PF-ASSY	1
13	966-0605-20	SHIFT-P-ASSY	1
14	966-0606-23	HLC-PLATE-ASSY	1
15	966-0607-26	COV-PLATE-ASSY	1
16	HBS-535-100	TOP-PLATE-ASSY	1
17	966-0652-24	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-1742-20	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	-----	LED-L-PWB	1
25	-----	LED-R-PWB	1
26	-----	SENSOR PWB	1
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
29	039-2011-01	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-04	MOS-FPC	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-26	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-22	HLR-PLATE-L	1
40	620-1580-20	HLR-PLATE-R	1
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-21	SLIDEPLATE-L	1
44	620-1068-22	SLIDEPLATE-R	1
45	620-1071-21	EJECTARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-20	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
49	620-1090-20	GAP PLATE	1
50	620-1568-21	RATTLEPLATE-F	2
51	621-0640-20	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-20	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-23	DU-STP-SLEEVE	1
57	622-1650-23	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-50	SCREW(M1.7x3)	4
61	716-1873-00	SCREW(M2x1.6)	1
62	716-3449-50	SCREW(M2x3)	15
63	716-3450-00	SCREW(M1.7x2)	4
64	716-3451-01	SCREW(M1.7x2.5)	4
65	716-3459-01	SCREW(M1.7x5)	1
66	716-3466-53	SCREW(M2x6)	1
67	738-1422-1B	SCREW(M1.2X2.2)	2
68	743-1200-10	E-RING	2
69	743-1500-10	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-23	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOADGEAR-A	1
86	347-7860-20	FPC COVER	1
87	716-1850-01	SCREW(M2x2)	1
88	854-4348-01	EXTENSION LEAD	1
89	620-1604-20	DR-PLATE-SCREW	1

* No.4 : Refer to Drive unit section.(page 11)

CD changer mechanism section: Drive unit

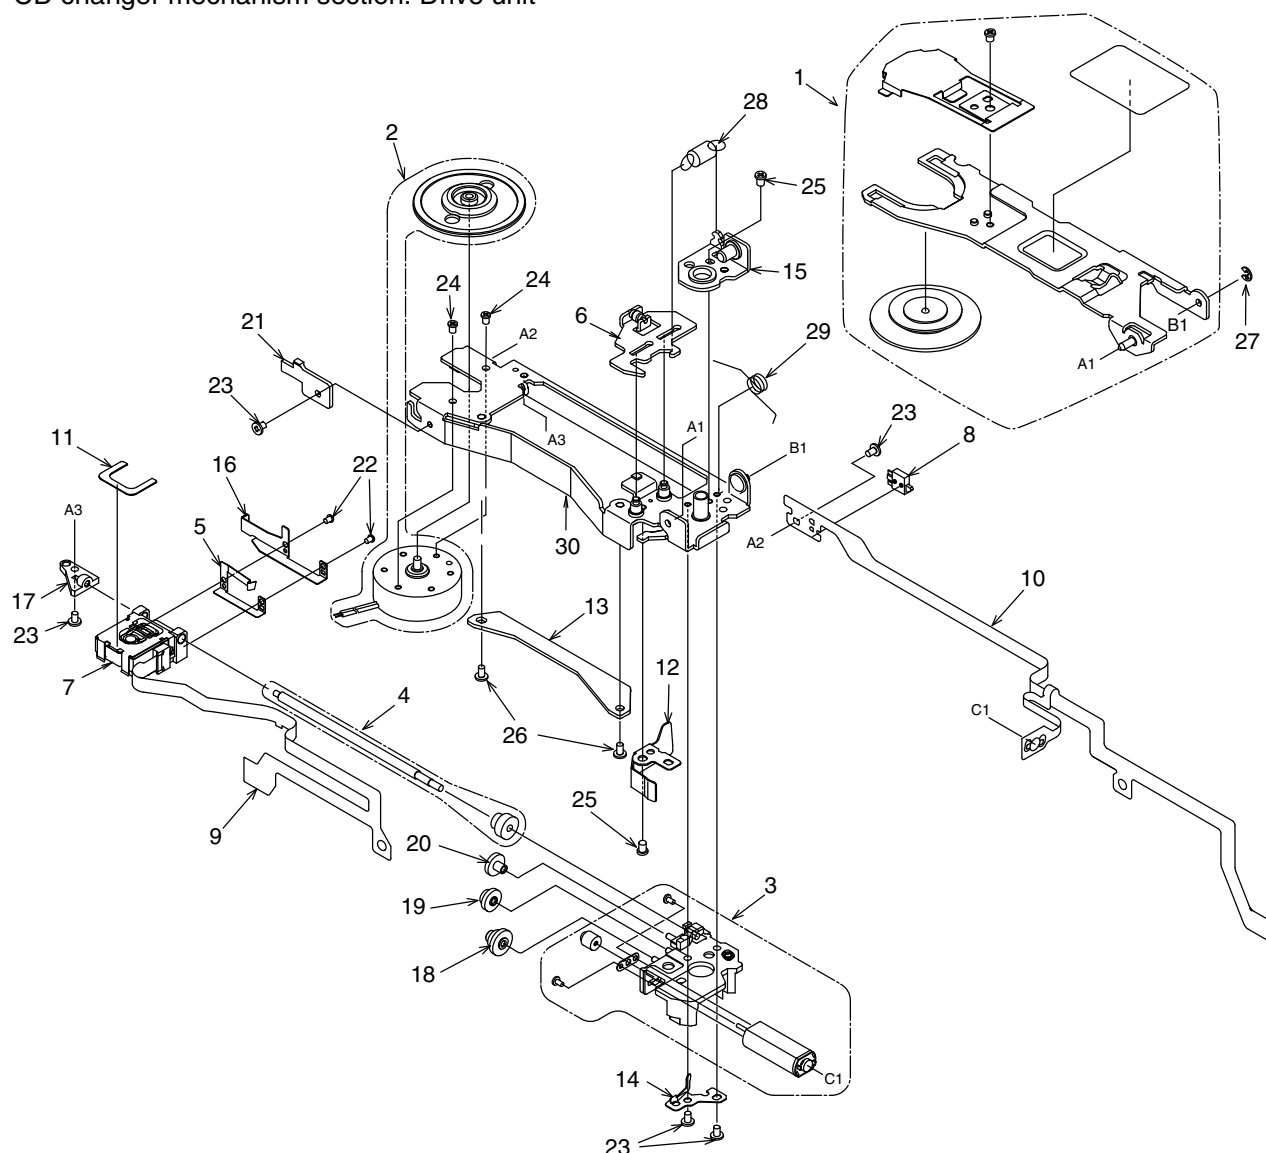

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1
2	SMA-193-101	SPINDLE MOTOR ASSY	1
3	SMA-191-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-83	SH-SP-PLT	1
6	HBS-542-101	D-SHIFT-P-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-21	PUSH PLATE	1
13	620-1080-22	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	966-0650-20	SPRING PLT ASSY	1
16	620-1730-81	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3511-01	SCREW(M1.4x3)	2
23	716-3470-01	SCREW(M1.7x3)	5
24	738-1720-1H	SCREW(M1.7x2)	2
25	738-2025-1H	SCREW(M2x2.5)	2
26	716-3474-01	SCREW(M1.7x3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0649-02	DRIVE PLT-ASSY	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1921V	TUNER	C 209	166-1011-50	100pF CH	C 425	042-0592-58	16V 10uF
C 101	166-1511-50	150pF CH	C 210	166-1011-50	100pF CH	C 426	042-0592-58	16V 10uF
C 102	166-4701-50	47pF CH	C 211	166-1011-50	100pF CH	C 427	042-0592-58	16V 10uF
C 103	166-4701-50	47pF CH	C 212	166-1011-50	100pF CH	C 428	166-5096-50	5pF CH
C 104	178-1542-78	0.15uF	C 213	166-1011-50	100pF CH	C 429	166-5096-50	5pF CH
C 105	168-1032-55	50V 0.01uF K	C 214	168-1042-78	16V 0.1uF	C 430	166-2201-50	22pF CH
C 106	168-1032-55	50V 0.01uF K	C 216	168-1042-78	16V 0.1uF	C 431	166-2201-50	22pF CH
C 107	178-1052-78	1uF	C 217	168-1022-55	1000pF K	C 432	166-5096-50	5pF CH
C 108	168-1042-78	16V 0.1uF	C 301	042-1548-52	10V 220uF	C 433	042-0592-58	16V 10uF
C 109	188-1063-38	16V 10uF	C 302	187-4763-35	16V 47uF	C 434	042-0592-58	16V 10uF
C 110	168-3322-55	3300pF K	C 305	188-1063-38	16V 10uF	C 435	042-0592-58	16V 10uF
C 111	168-1022-55	1000pF K	C 306	042-1562-65	10V 220uF	C 436	042-0592-58	16V 10uF
C 112	168-4732-78	0.047uF K	C 307	166-2201-50	22pF CH	C 437	166-5096-50	5pF CH
C 113	166-1501-50	15pF CH	C 308	163-1073-35	16V 100uF	C 438	168-1042-78	16V 0.1uF
C 115	168-1022-55	1000pF K	C 309	168-1042-78	16V 0.1uF	C 439	166-5601-50	56pF CH
C 116	168-1022-55	1000pF K	C 310	168-6822-55	6800pF K	C 440	166-5601-50	56pF CH
C 117	166-2201-50	22pF CH	C 311	188-1073-28	10V 100uF	C 441	166-2201-50	22pF CH
C 118	187-1073-37	16V 100uF	C 312	188-1063-38	16V 10uF	C 442	166-2201-50	22pF CH
C 119	178-1052-78	1uF	C 313	187-1073-27	10V 100uF	C 443	168-6822-55	6800pF K
C 120	166-1201-50	12pF CH	C 314	168-1042-78	16V 0.1uF	C 444	166-2201-50	22pF CH
C 121	178-2242-78	0.22uF	C 315	163-1073-35	16V 100uF	C 445	166-2201-50	22pF CH
C 122	188-4763-18	6.3V 47uF	C 316	187-1073-37	16V 100uF	C 446	166-5601-50	56pF CH
C 123	166-1007-50	10pF CH	C 317	187-1073-37	16V 100uF	C 447	166-5601-50	56pF CH
C 124	168-5612-55	560pF Z	C 318	168-2222-55	2200pF K	C 448	166-1011-50	100pF CH
C 125	166-4701-50	47pF CH	C 319	168-1042-78	16V 0.1uF	C 449	166-1011-50	100pF CH
C 126	188-1073-28	10V 100uF	C 321	168-2222-55	2200pF K	C 450	178-1052-78	1uF
C 127	188-2253-68	50V 2.2uF	C 322	168-2222-55	2200pF K	C 451	178-1052-78	1uF
C 128	043-0277-51	0.022uF	C 323	168-2222-55	2200pF K	C 452	166-1011-50	100pF CH
C 129	168-1042-78	16V 0.1uF	C 324	168-2222-55	2200pF K	C 453	166-1011-50	100pF CH
C 130	166-5601-50	56pF CH	C 325	168-2222-55	2200pF K	C 454	188-1053-68	50V 1uF
C 131	188-1073-28	10V 100uF	C 326	168-2222-55	2200pF K	C 455	166-5601-50	56pF CH
C 132	168-1032-55	50V 0.01uF K	C 327	168-2222-55	2200pF K	C 456	166-5601-50	56pF CH
C 133	168-3312-55	330pF K	C 328	168-2222-55	2200pF K	C 457	166-2201-50	22pF CH
C 134	166-1011-50	100pF CH	C 329	168-1042-78	16V 0.1uF	C 458	166-2201-50	22pF CH
C 135	166-1011-50	100pF CH	C 330	042-0416-57	10V 47uF M TAN	C 459	166-2201-50	22pF CH
C 136	168-1042-78	16V 0.1uF	C 331	163-1063-35	16V 10uF	C 460	166-2201-50	22pF CH
C 137	188-1073-28	10V 100uF	C 332	168-2222-55	2200pF K	C 461	166-5601-50	56pF CH
C 138	168-1022-55	1000pF K	C 333	168-1042-78	16V 0.1uF	C 462	166-5601-50	56pF CH
C 140	178-1052-78	1uF	C 334	042-1551-02	16V 1000uF	C 463	188-1053-68	50V 1uF
C 142	168-1232-55	0.012uF K	C 335	172-1041-15	0.1uF	C 464	042-1548-52	10V 220uF
C 143	186-1053-69	50V 1uF	C 336	168-1042-78	16V 0.1uF	C 465	042-1548-52	10V 220uF
C 144	043-0277-51	0.022uF	C 338	187-1073-37	16V 100uF	C 466	042-1548-52	10V 220uF
C 145	188-4763-38	16V 47uF	C 339	188-1053-68	50V 1uF	C 467	042-1548-52	10V 220uF
C 147	168-1022-55	1000pF K	C 401	178-4742-78	0.47uF	C 468	042-1548-52	10V 220uF
C 149	168-2232-55	0.022uF K	C 402	163-2263-35	16V 22uF	C 469	042-1548-52	10V 220uF
C 150	188-4763-38	16V 47uF	C 403	042-0592-73	50V 1uF	C 470	042-1548-52	10V 220uF
C 151	166-1011-50	100pF CH	C 404	188-1053-68	50V 1uF	C 471	042-1548-52	10V 220uF
C 152	166-1011-50	100pF CH	C 405	188-1053-68	50V 1uF	C 501	168-2232-55	0.022uF K
C 153	166-1011-50	100pF CH	C 406	188-1053-68	50V 1uF	C 508	168-1022-55	1000pF K
C 154	166-1011-50	100pF CH	C 407	188-1053-68	50V 1uF	C 509	168-1022-55	1000pF K
C 155	166-1801-50	18pF CH	C 408	042-0592-73	50V 1uF	C 510	168-1022-55	1000pF K
C 156	168-3932-78	0.039uF K	C 409	188-1053-68	50V 1uF	C 511	168-1022-55	1000pF K
C 157	168-3932-78	0.039uF K	C 410	188-1053-68	50V 1uF	C 512	168-1022-55	1000pF K
C 158	166-1501-50	15pF CH	C 411	178-1842-78	0.18uF	C 601	042-1562-67	16V 10uF
C 159	168-4722-55	4700pF K	C 412	178-1842-78	0.18uF	C 602	042-1562-67	16V 10uF
C 160	168-3932-78	0.039uF K	C 414	178-1842-78	0.18uF	C 603	042-1562-67	16V 10uF
C 161	168-3932-78	0.039uF K	C 415	178-1842-78	0.18uF	C 604	042-1562-67	16V 10uF
C 162	168-2222-55	2200pF K	C 416	168-2222-55	2200pF K	C 606	168-1022-55	1000pF K
C 201	168-1042-78	16V 0.1uF	C 417	168-8212-55	820pF K	C 607	168-1032-55	50V 0.01uF K
C 202	166-1011-50	100pF CH	C 418	168-8212-55	820pF K	C 608	168-1022-55	1000pF K
C 203	166-1011-50	100pF CH	C 419	168-8212-55	820pF K	C 611	168-1022-55	1000pF K
C 204	188-4763-18	6.3V 47uF	C 420	168-8212-55	820pF K	C 612	168-1022-55	1000pF K
C 205	168-1042-78	16V 0.1uF	C 421	042-0592-58	16V 10uF	C 614	168-1022-55	1000pF K
C 206	168-1022-55	1000pF K	C 422	042-0592-58	16V 10uF	C 615	168-2232-55	0.022uF K
C 207	168-1032-55	50V 0.01uF K	C 423	168-1832-55	50V 0.018uF K	C 616	188-1066-38	16V 10uF NP
C 208	168-1042-78	16V 0.1uF	C 424	042-0592-58	16V 10uF	C 617	188-1066-38	16V 10uF NP

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 618	188-1066-38	16V 10uF NP	Q 107	125-2026-91	UN5211	R 130	119-4721-15	1/10W 4.7k ohm
C 619	188-1066-38	16V 10uF NP	Q 108	192-4116-51	2SC4116GR	R 131	119-3321-15	1/10W 3.3k ohm
CCT201	050-0145-52	1/16W 1k ohm x4J	Q 109	190-1162-00	2SA1162	R 132	119-1001-15	1/10W 10 ohm
D 101	001-9008-90	1SV250	Q 110	190-1162-00	2SA1162	R 133	119-1501-15	1/10W 15 ohm
D 102	001-9008-90	1SV250	Q 202	125-2026-91	UN5211	R 134	119-2221-15	1/10W 2.2k ohm
D 301	001-0529-32	MA8056M	Q 203	125-0020-96	UN5110	R 135	119-2221-15	1/10W 2.2k ohm
D 302	001-0504-49	HZS9C3L	Q 301	193-2118-00	2SD2118	R 136	119-1031-15	1/10W 10k ohm
D 303	001-0529-34	MA8062L	Q 302	125-9017-92	UMD3	R 137	119-1031-15	1/10W 10k ohm
D 304	001-0504-48	HZS9C2L	Q 303	103-2353-00	2SD2353	R 138	119-4721-15	1/10W 4.7k ohm
D 305	001-0516-90	MA111	Q 304	125-9017-92	UMD3	R 139	119-4721-15	1/10W 4.7k ohm
D 306	001-0466-90	S5688B	Q 305	192-4116-00	2SC4116	R 140	119-2221-15	1/10W 2.2k ohm
D 307	001-0516-90	MA111	Q 306	193-2118-00	2SD2118	R 141	119-1021-15	1/10W 1k ohm
D 308	001-0466-90	S5688B	Q 307	125-2026-95	UN521N	R 142	119-1021-15	1/10W 1k ohm
D 309	001-2015-00	RL253	Q 308	193-1858-00	2SD1858	R 143	119-1021-15	1/10W 1k ohm
D 310	001-0466-90	S5688B	Q 309	131-1188-00	2SB1188	R 144	119-2701-15	1/10W 27 ohm
D 311	001-0466-90	S5688B	Q 310	125-9017-92	UMD3	R 145	119-4731-15	1/10W 47k ohm
D 401	001-0516-90	MA111	Q 311	125-2026-95	UN521N	R 201	119-4731-15	1/10W 47k ohm
D 402	001-0516-90	MA111	Q 312	190-1298-00	2SA1298	R 202	119-4731-15	1/10W 47k ohm
D 404	001-0356-91	1SS184	Q 313	125-2026-91	UN5211	R 203	119-1021-15	1/10W 1k ohm
D 602	001-0584-35	MA8240	Q 314	131-1188-00	2SB1188	R 204	119-1021-15	1/10W 1k ohm
D 603	001-0466-90	S5688B	Q 401	125-2026-91	UN5211	R 206	119-4731-15	1/10W 47k ohm
D 604	001-0516-90	MA111	Q 402	125-9017-92	UMD3	R 207	119-1021-15	1/10W 1k ohm
D 605	001-0516-90	MA111	Q 404	191-0709-00	2SB709A	R 208	119-4731-15	1/10W 47k ohm
D 606	001-0516-90	MA111	Q 405	191-0709-00	2SB709A	R 209	119-4731-15	1/10W 47k ohm
D 608	001-0422-38	MTZJ36	Q 406	191-0709-00	2SB709A	R 210	119-4731-15	1/10W 47k ohm
D 609	001-0529-44	MA8082-M	Q 407	191-0709-00	2SB709A	R 211	119-4731-15	1/10W 47k ohm
IC 101	051-4617-90	LA1061M	Q 408	125-2026-91	UN5211	R 212	119-4731-15	1/10W 47k ohm
IC 102	051-3020-90	NJM4565V	Q 409	191-0709-00	2SB709A	R 213	119-4731-15	1/10W 47k ohm
IC 103	051-4607-90	SAA6581	Q 410	193-0601-00	2SD601A	R 214	119-4731-15	1/10W 47k ohm
IC 104	051-6212-08	LC72191JM	Q 411	193-0601-00	2SD601A	R 215	119-4731-15	1/10W 47k ohm
IC 201	051-9418-08	BR93L46FJ-WE2	Q 501	125-2026-91	UN5211	R 216	119-4731-15	1/10W 47k ohm
IC 202	052-3177-40	M30624MGA-EM6GP	Q 601	125-0020-91	UN5111	R 217	119-4731-15	1/10W 47k ohm
IC 203	051-5436-08	S-80933ANMP	Q 602	192-4116-00	2SC4116	R 219	119-2231-15	1/10W 22k ohm
IC 301	051-3020-90	NJM4565V	Q 603	125-2026-91	UN5211	R 220	119-4731-15	1/10W 47k ohm
IC 302	051-3020-90	NJM4565V	Q 604	125-2026-91	UN5211	R 221	119-2231-15	1/10W 22k ohm
IC 303	051-5441-08	BD4828G	Q 605	192-4116-00	2SC4116	R 222	119-4731-15	1/10W 47k ohm
IC 304	051-3341-90	BD3931FP	Q 606	125-2026-91	UN5211	R 223	119-4731-15	1/10W 47k ohm
IC 401	051-5027-00	LC75412WS	Q 607	192-4116-00	2SC4116	R 225	119-4731-15	1/10W 47k ohm
IC 402	051-3020-90	NJM4565V	Q 608	192-4116-00	2SC4116	R 226	119-1021-15	1/10W 1k ohm
IC 403	051-1407-00	NJM4556AL	Q 610	125-0020-91	UN5111	R 227	119-1021-15	1/10W 1k ohm
IC 404	051-1407-00	NJM4556AL	Q 613	192-4116-00	2SC4116	R 228	119-4731-15	1/10W 47k ohm
IC 405	051-3034-90	NJM4558V	R 101	119-1041-15	1/10W 100k ohm	R 230	119-4731-15	1/10W 47k ohm
IC 406	051-1407-00	NJM4556AL	R 102	119-1041-15	1/10W 100k ohm	R 231	119-4731-15	1/10W 47k ohm
IC 407	051-1407-00	NJM4556AL	R 103	119-2731-15	1/10W 27k ohm	R 232	119-1031-15	1/10W 10k ohm
J 301	074-1141-00	NS10+6	R 104	119-2731-15	1/10W 27k ohm	R 233	119-1041-15	1/10W 100k ohm
J 401	074-1236-10	8P	R 105	119-1041-15	1/10W 100k ohm	R 235	119-4731-15	1/10W 47k ohm
J 501	074-1192-20	20P	R 106	119-1041-15	1/10W 100k ohm	R 236	119-4731-15	1/10W 47k ohm
J 602	074-1013-30	A-12MW	R 107	119-1031-15	1/10W 10k ohm	R 237	119-4731-15	1/10W 47k ohm
J 603	074-1087-12	A-16MW	R 108	119-1031-15	1/10W 10k ohm	R 238	119-4731-15	1/10W 47k ohm
L 101	010-2198-65	0.1uH	R 109	119-5631-15	1/10W 56k ohm	R 239	119-1041-15	1/10W 100k ohm
L 102	010-2198-53	5.6uH	R 111	119-3911-15	1/10W 390 ohm	R 241	119-4731-15	1/10W 47k ohm
L 103	010-2312-52	0.27uH	R 112	119-4731-15	1/10W 47k ohm	R 242	119-1021-15	1/10W 1k ohm
L 104	010-2003-04	NLV32 22uH J	R 113	119-1021-15	1/10W 1k ohm	R 244	119-6821-15	1/10W 6.8k ohm
L 105	010-6009-76	22uH	R 114	119-1031-15	1/10W 10k ohm	R 245	119-1021-15	1/10W 1k ohm
L 106	010-6009-76	22uH	R 115	119-1031-15	1/10W 10k ohm	R 246	119-1031-15	1/10W 10k ohm
L 201	010-3407-66	22uH	R 116	119-1011-15	1/10W 100 ohm	R 248	119-4731-15	1/10W 47k ohm
L 301	010-8028-00	COIL	R 117	119-4741-15	1/10W 470k ohm	R 250	119-4731-15	1/10W 47k ohm
P 101	076-0368-06	6P	R 118	119-1021-15	1/10W 1k ohm	R 252	119-4731-15	1/10W 47k ohm
P 102	076-0368-18	18P	R 119	119-1021-15	1/10W 1k ohm	R 301	119-1031-15	1/10W 10k ohm
P 202	074-0834-10	10P	R 121	119-2221-15	1/10W 2.2k ohm	R 302	119-1031-15	1/10W 10k ohm
P 601	074-0898-06	6P	R 122	119-1021-15	1/10W 1k ohm	R 303	119-4731-15	1/10W 47k ohm
P 602	074-0898-18	18P	R 123	119-8201-15	1/10W 82 ohm	R 304	119-4731-15	1/10W 47k ohm
Q 101	192-4116-00	2SC4116	R 124	119-1021-15	1/10W 1k ohm	R 305	117-2211-15	1/8W 220 ohm
Q 102	192-4116-00	2SC4116	R 125	119-1031-15	1/10W 10k ohm	R 306	119-1041-15	1/10W 100k ohm
Q 103	125-2026-91	UN5211	R 126	119-4721-15	1/10W 4.7k ohm	R 307	032-0148-54	1/16W 180k ohm
Q 104	125-2026-91	UN5211	R 127	119-1031-15	1/10W 10k ohm	R 308	032-0148-50	1/10W 100k ohm
Q 105	192-4116-00	2SC4116	R 128	119-1021-15	1/10W 1k ohm	R 309	111-2211-98	1/4W 220 ohm
Q 106	192-4116-51	2SC4116GR	R 129	119-2221-15	1/10W 2.2k ohm	R 310	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 311	119-5611-15	1/10W 560 ohm	R 435	119-3321-15	1/10W 3.3k ohm	R 481	119-2231-15	1/10W 22k ohm
R 312	119-1031-15	1/10W 10k ohm	R 436	119-1031-15	1/10W 10k ohm	R 482	117-1001-15	1/8W 10 ohm
R 313	116-3911-15	1/4W 390 ohm	R 437	119-1031-15	1/10W 10k ohm	R 483	119-2231-15	1/10W 22k ohm
R 314	119-1031-15	1/10W 10k ohm	R 438	119-3321-15	1/10W 3.3k ohm	R 484	119-1031-15	1/10W 10k ohm
R 315	116-1211-15	1/4W 1.2k ohm	R 439	119-3321-15	1/10W 3.3k ohm	R 485	119-1041-15	1/10W 100k ohm
R 316	119-1031-15	1/10W 10k ohm	R 440	117-1001-15	1/8W 10 ohm	R 486	119-4731-15	1/10W 47k ohm
R 317	116-1011-15	1/4W 100 ohm	R 441	119-2231-15	1/10W 22k ohm	R 511	119-1021-15	1/10W 1k ohm
R 318	119-4721-15	1/10W 4.7k ohm	R 442	119-2231-15	1/10W 22k ohm	R 512	119-1021-15	1/10W 1k ohm
R 319	116-1091-15	1/4W 1 ohm	R 443	117-1001-15	1/8W 10 ohm	R 513	119-1021-15	1/10W 1k ohm
R 320	119-1031-15	1/10W 10k ohm	R 444	119-2031-15	1/10W 20k ohm	R 601	119-1031-15	1/10W 10k ohm
R 321	116-1211-15	1/4W 1.2k ohm	R 445	119-2231-15	1/10W 22k ohm	R 602	119-5631-15	1/10W 56k ohm
R 322	119-3321-15	1/10W 3.3k ohm	R 446	119-3931-15	1/10W 39k ohm	R 603	119-3011-15	1/10W 300 ohm
R 323	119-1031-15	1/10W 10k ohm	R 447	119-3931-15	1/10W 39k ohm	R 604	119-3011-15	1/10W 300 ohm
R 324	116-1091-15	1/4W 1 ohm	R 448	119-1021-15	1/10W 1k ohm	R 607	119-1031-15	1/10W 10k ohm
R 326	116-1531-15	1/4W 15k ohm	R 449	119-1031-15	1/10W 10k ohm	R 608	119-3321-15	1/10W 3.3k ohm
R 327	116-2721-15	1/4W 2.7k ohm	R 450	119-1031-15	1/10W 10k ohm	R 609	119-2231-15	1/10W 22k ohm
R 401	119-1831-15	1/10W 18k ohm	R 451	119-1531-15	1/10W 15k ohm	R 610	119-1031-15	1/10W 10k ohm
R 402	119-2731-15	1/10W 27k ohm	R 452	119-2231-15	1/10W 22k ohm	R 611	119-4721-15	1/10W 4.7k ohm
R 403	119-2731-15	1/10W 27k ohm	R 453	117-1001-15	1/8W 10 ohm	R 612	119-1531-15	1/10W 15k ohm
R 404	119-2731-15	1/10W 27k ohm	R 454	119-2231-15	1/10W 22k ohm	R 613	119-3321-15	1/10W 3.3k ohm
R 405	119-2731-15	1/10W 27k ohm	R 455	117-1001-15	1/8W 10 ohm	R 614	119-4731-15	1/10W 47k ohm
R 406	119-2731-15	1/10W 27k ohm	R 456	119-2231-15	1/10W 22k ohm	R 616	119-4731-15	1/10W 47k ohm
R 407	119-2731-15	1/10W 27k ohm	R 457	032-0140-52	1/10W 33k ohm	R 617	119-2231-15	1/10W 22k ohm
R 408	116-1211-15	1/4W 120 ohm	R 458	032-0140-89	1/10W 47k ohm	R 619	119-1031-15	1/10W 10k ohm
R 413	119-4721-15	1/10W 4.7k ohm	R 459	119-1241-15	1/10W 120k ohm	R 620	119-1031-15	1/10W 10k ohm
R 414	119-4721-15	1/10W 4.7k ohm	R 460	119-1241-15	1/10W 120k ohm	R 621	119-1031-15	1/10W 10k ohm
R 415	119-0000-05	1/10W 0 ohm JW	R 461	032-0140-89	1/10W 47k ohm	R 623	119-5631-15	1/10W 56k ohm
R 416	119-4721-15	1/10W 4.7k ohm	R 462	032-0140-52	1/10W 33k ohm	R 628	119-5631-15	1/10W 56k ohm
R 417	119-4721-15	1/10W 4.7k ohm	R 463	117-1001-15	1/8W 10 ohm	R 629	119-5631-15	1/10W 56k ohm
R 418	119-1031-15	1/10W 10k ohm	R 464	119-2231-15	1/10W 22k ohm	R 631	119-1021-15	1/10W 1k ohm
R 419	119-1031-15	1/10W 10k ohm	R 465	119-2231-15	1/10W 22k ohm	R 632	119-5621-15	1/10W 5.6k ohm
R 420	032-0106-65	1/10W 100k ohm	R 466	117-1001-15	1/8W 10 ohm	R 633	119-5621-15	1/10W 5.6k ohm
R 421	032-0106-65	1/10W 100k ohm	R 467	119-2031-15	1/10W 20k ohm	R 635	119-3011-15	1/10W 300 ohm
R 422	032-0106-65	1/10W 100k ohm	R 468	119-2231-15	1/10W 22k ohm	R 636	119-3011-15	1/10W 300 ohm
R 423	032-0106-65	1/10W 100k ohm	R 469	119-1031-15	1/10W 10k ohm	SUP	060-0122-91	DSP-141N-SOOB
R 424	032-0106-69	1/10W 39k ohm	R 470	032-0140-89	1/10W 47k ohm	SUP	060-0122-91	DSP-141N-SOOB
R 425	032-0106-69	1/10W 39k ohm	R 471	032-0140-89	1/10W 47k ohm	TH 301	002-0229-90	1.8 ohm
R 426	032-0106-69	1/10W 39k ohm	R 472	032-0140-19	1/10W 75k ohm	TH 302	002-0229-90	1.8 ohm
R 427	032-0106-69	1/10W 39k ohm	R 473	032-0140-19	1/10W 75k ohm	VR 101	012-5203-63	470k ohm
R 428	119-5621-15	1/10W 5.6k ohm	R 474	119-1041-15	1/10W 100k ohm	VR 102	012-5203-56	10k ohm
R 429	119-5621-15	1/10W 5.6k ohm	R 475	119-3931-15	1/10W 39k ohm	X 101	061-3013-00	4.33MHz
R 430	119-5621-15	1/10W 5.6k ohm	R 476	119-3931-15	1/10W 39k ohm	X 102	061-1066-00	7.2MHz
R 431	119-5621-15	1/10W 5.6k ohm	R 477	119-1031-15	1/10W 10k ohm	X 201	060-1505-50	10MHz
R 432	119-3321-15	1/10W 3.3k ohm	R 478	119-1031-15	1/10W 10k ohm	PWB	039-2758-00	PWB(WITHOUT COMPONENT)
R 433	119-1031-15	1/10W 10k ohm	R 479	119-4731-15	1/10W 47k ohm			
R 434	119-1031-15	1/10W 10k ohm	R 480	117-1001-15	1/8W 10 ohm			

CD PWB(B2) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 1	168-4735-56	0.047uF Z	C 30	178-3342-78	0.33uF	Q 7	125-2020-92	DTC114EKA-T146
C 2	168-4735-56	0.047uF Z	C 31	042-1673-00	10V 220uF	Q 8	125-2004-92	RN1402
C 4	168-1222-55	1200pF K	CCT 4	050-0140-55	1/32W 2.2k ohm x4J	Q 8	125-2020-92	DTC114EKA-T146
C 5	163-2263-35	16V22uF	CCT 5	050-0145-54	1/16W 47k ohm x4	Q 9	125-0014-92	DTA114EK
C 6	168-1222-55	1200pF K	CCT 6	050-0145-53	1/16W 220k ohm x4J	Q 9	125-0002-92	RN2402
C 12	168-1222-55	1200pF K	D 2	001-2610-90	RB480KTL	Q 53	193-0601-00	2SD601A
C 15	168-1222-55	1200pF K	IC 2	051-5445-08	BD5227G-TR	R 2	119-2211-15	1/10W 220 ohm
C 16	163-2263-35	16V22uF	IC 3	052-5061-01	M30621MCM-4S5GP	R 4	119-4731-15	1/10W 47k ohm
C 18	168-1045-56	0.1uF Z	IC 4	051-9402-78	BR93L56RFVM-W	R 8	119-4731-15	1/10W 47k ohm
C 19	166-1011-50	100pF CH	IC 5	051-3332-90	NJU7222U33	R 10	119-2211-15	1/10W 220 ohm
C 21	168-1032-55	0.01uF K	IC 6	051-3293-90	BA033SFP-E2	R 13	119-1041-15	1/10W 100k ohm
C 22	168-1045-56	0.1uF Z	J 1	074-1189-95	45P	R 14	119-2221-15	1/10W 2.2k ohm
C 23	168-1045-56	0.1uF Z	J 3	074-1237-70	20P	R 15	119-1041-15	1/10W 100k ohm
C 24	168-1032-55	0.01uF K	P 1	076-0478-55	PLUG	R 16	119-1021-15	1/10W 1k ohm
C 25	163-1073-15	6.3V100uF	Q 3	190-1162-00	2SA1162	R 20	119-4731-15	1/10W 47k ohm
C 26	178-1052-78	1uF	Q 4	198-3018-00	2SK3018	R 24	119-4731-15	1/10W 47k ohm
C 27	168-1045-56	0.1uF Z	Q 5	131-1188-50	2SB1188PQR	R 25	119-1031-15	1/10W 10k ohm
C 28	042-0671-01	10V 47uF TA	Q 6	198-3018-00	2SK3018	R 26	119-4721-15	1/10W 4.7k ohm
C 29	168-1045-56	0.1uF Z	Q 7	125-2004-92	RN1402	R 27	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 28	119-1041-15	1/10W 100k ohm	R 39	119-2231-15	1/10W 22k ohm	TM 1	073-0768-90	TERMINAL
R 29	119-1041-15	1/10W 100k ohm	R 40	119-2231-15	1/10W 22k ohm	TM 2	073-0766-90	TERMINAL
R 31	119-4731-15	1/10W 47k ohm	R 41	119-4711-15	1/10W 470 ohm	TM 4	073-0766-90	TERMINAL
R 32	119-0000-05	1/10W 0 ohm JW	R 42	119-2231-15	1/10W 22k ohm	TM 5	073-0766-90	TERMINAL
R 35	119-0000-05	1/10W 0 ohm JW	R 43	119-2241-15	1/10W 220k ohm	X 1	060-1533-90	10MHz
R 36	119-4731-15	1/10W 47k ohm	R 60	119-0000-05	1/10W 0 ohm JW	PWB	039-2532-20	PWB(WITHOUT COMPONENT)
R 37	119-4731-15	1/10W 47k ohm	R 530	119-4731-15	1/10W 47k ohm			
R 38	119-2231-15	1/10W 22k ohm	R 550	119-4731-15	1/10W 47k ohm			

DSP PWB(B3) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 1	042-0671-01	10V 47uF TA	C 62	042-0671-01	10V 47uF TA	R 16	033-5631-15	1/10W 56k ohm
C 2	168-4735-56	0.047uF Z	C 63	046-1032-78	0.01uF	R 17	033-3331-15	1/10W 33k ohm
C 3	046-4722-58	4700pF	C 64	168-1045-56	0.1uF Z	R 18	033-6831-15	1/10W 68k ohm
C 4	046-1032-78	0.01uF	C 65	045-1201-50	12pF	R 19	033-6831-15	1/10W 68k ohm
C 5	168-1045-56	0.1uF Z	C 66	046-1032-78	0.01uF	R 20	033-1011-15	1/10W 100 ohm
C 6	042-0671-01	10V 47uF TA	C 67	046-1032-78	0.01uF	R 21	116-4711-15	1/4W 470 ohm
C 7	168-1045-56	0.1uF Z	C 68	168-1045-56	0.1uF Z	R 22	117-1811-15	1/8W 180 ohm
C 8	168-1045-56	0.1uF Z	C 69	045-1201-50	12pF	R 23	116-4711-15	1/4W 470 ohm
C 9	045-1007-50	10pF	C 101	046-1032-78	0.01uF	R 24	033-2231-15	1/10W 22k ohm
C 10	168-1045-56	0.1uF Z	C 102	046-1032-78	0.01uF	R 25	033-2231-15	1/10W 22k ohm
C 11	045-1007-50	10pF	CCT 1	050-0140-68	1/32W 3.3k ohm x4J	R 26	033-2231-15	1/10W 22k ohm
C 12	168-1045-56	0.1uF Z	CCT 4	050-0140-63	1/32W 47k ohm x4J	R 27	033-1011-15	1/10W 100 ohm
C 13	042-0672-00	25V 47uF TA	D 1	001-0367-91	1SS226	R 28	033-4731-15	1/10W 47k ohm
C 14	168-4735-56	0.047uF Z	D 2	001-2610-90	RB480KTL	R 29	033-2231-15	1/10W 22k ohm
C 15	168-4735-56	0.047uF Z	IC 2	051-6399-00	TC94A15F	R 30	033-4721-15	1/10W 4.7k ohm
C 16	168-4735-56	0.047uF Z	IC 3	051-6060-08	BD7961FM-E2	R 31	033-4721-15	1/10W 4.7k ohm
C 17	178-1052-78	1uF	IC 4	051-7518-18	SN74LVC139APWR	R 32	033-4731-15	1/10W 47k ohm
C 18	045-4701-50	47pF	IC 5	052-5062-04	MBM29DL800BA-90PFTN	R 33	033-4731-15	1/10W 47k ohm
C 19	168-1045-56	0.1uF Z	IC 6	051-7518-18	SN74LVC139APWR	R 35	033-4731-15	1/10W 47k ohm
C 20	046-4712-58	470pF	IC 7	051-9330-00	K4S641632F-TC60	R 36	033-3311-15	1/10W 330 ohm
C 21	046-4712-58	470pF	IC 8	051-7203-48	SN74LV74APW	R 37	033-4731-15	1/10W 47k ohm
C 22	168-1045-56	0.1uF Z	IC 9	051-6700-00	TMS320DA140P-GE160	R 38	033-3311-15	1/10W 330 ohm
C 23	046-1532-78	0.015uF	IC 10	051-3315-90	TPS76316DBVR	R 39	033-2211-15	1/10W 220 ohm
C 24	168-1045-56	0.1uF Z	IC 11	051-7221-58	SN74AHC1G04-HDCKR	R 40	033-1011-15	1/10W 100 ohm
C 25	046-6822-58	6800pF	IC 12	051-7525-08	SN74AHC1G04-HDCKR	R 41	033-1001-15	1/10W 10 ohm
C 26	046-1032-78	0.01uF	IC 13	051-7526-08	SN74AHC1G04-HDCKR	R 42	033-1001-15	1/10W 10 ohm
C 28	046-1022-58	1000pF	J 1	074-1201-65	15P	R 45	033-1011-15	1/10W 100 ohm
C 29	046-3332-78	0.033uF	J 2	074-1138-56	6P	R 46	033-4731-15	1/10W 47k ohm
C 32	046-4722-58	4700pF	J 3	074-1059-76	26P	R 47	033-4731-15	1/10W 47k ohm
C 33	046-1522-58	1500pF	J 4	074-1189-95	45P	R 48	033-1011-15	1/10W 100 ohm
C 34	168-1045-56	0.1uF Z	J 5	074-1201-60	10P	R 49	033-0000-05	1/10W 0 ohm
C 35	046-1532-78	0.015uF	L 2	010-3104-54	MPZ1608S601AT	R 50	033-0000-05	1/10W 0 ohm
C 36	168-1045-56	0.1uF Z	L 3	010-3104-54	MPZ1608S601AT	R 51	033-8231-15	1/10W 82k ohm
C 37	168-1045-56	0.1uF Z	Q 1	131-1188-50	2SB1188PQR	R 52	033-0000-05	1/10W 0 ohm
C 38	042-0671-01	10V 47uF TA	Q 2	131-1188-50	2SB1188PQR	R 53	033-4731-15	1/10W 47k ohm
C 39	178-1052-78	1uF	Q 3	125-2004-92	RN1402	R 63	033-2231-15	1/10W 22k ohm
C 40	045-6801-50	68pF	Q 3	125-2020-92	DTC114EKA-T146	R 64	033-2231-15	1/10W 22k ohm
C 41	168-1045-56	0.1uF Z	R 1	033-1021-15	1/10W 1k ohm	R 65	033-4731-15	1/10W 47k ohm
C 42	178-1052-78	1uF	R 2	033-1021-15	1/10W 1k ohm	R 66	033-4731-15	1/10W 47k ohm
C 43	042-0671-01	10V 47uF TA	R 3	033-3311-15	1/10W 330 ohm	R 100	033-1011-15	1/10W 100 ohm
C 44	046-6812-58	680pF	R 4	033-2211-15	1/10W 220 ohm	R 101	033-1011-15	1/10W 100 ohm
C 45	168-1045-56	0.1uF Z	R 5	033-2211-15	1/10W 220 ohm	R 102	033-1011-15	1/10W 100 ohm
C 46	168-1045-56	0.1uF Z	R 6	033-1021-15	1/10W 1k ohm	R 103	033-1011-15	1/10W 100 ohm
C 47	042-0671-01	10V 47uF TA	R 7	033-1051-15	1/10W 1M ohm	R 104	033-1011-15	1/10W 100 ohm
C 48	168-5632-78	16V 0.056uF	R 8	033-0000-05	1/10W 0 ohm	R 105	033-1011-15	1/10W 100 ohm
C 49	168-1045-56	0.1uF Z	R 10	033-5621-15	1/10W 5.6k ohm	R 106	033-1011-15	1/10W 100 ohm
C 50	168-1045-56	0.1uF Z	R 11	033-4731-15	1/10W 47k ohm	R 107	033-4731-15	1/10W 47k ohm
C 51	168-1045-56	0.1uF Z	R 12	119-3341-15	1/10W 330k ohm	R 200	033-1051-15	1/10W 1M ohm
C 53	168-1045-56	0.1uF Z	R 13	033-2231-15	1/10W 22k ohm	R 201	033-1021-15	1/10W 1k ohm
C 54	042-0671-01	10V 47uF TA	R 14	033-2231-15	1/10W 22k ohm	R 202	033-1021-15	1/10W 1k ohm
C 56	168-4712-55	470pF K	R 15	117-1001-15	1/8W 10 ohm	R 220	033-4731-15	1/10W 47k ohm
C 57	046-1032-78	0.01uF				R 301	119-2231-15	1/10W 22k ohm
C 58	168-4712-55	470pF K				R 302	119-3911-15	1/10W 390 ohm
C 59	168-1045-56	0.1uF Z				X 1	061-3534-90	16.932MHz
C 60	168-1045-56	0.1uF Z				PWB	039-2531-20	PWB(WITHOUT COMPONENT)
C 61	046-1032-78	0.01uF						

Sensor PWB(B4) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT 3	060-0252-01	PT4850F	S 1	013-7414-50	SPVG22
PT 4	060-0252-01	PT4850F	PWB	039-1956-00	PWB(WITHOUT COMPONET)
PT 5	060-0252-01	PT4850F			
PT 6	060-0252-01	PT4850F			

PIM-FPC PWB(B5) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC 5	051-5806-02	GPIS95

Driver PWB(B6) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 1	168-1045-56	0.1uF	J 1	074-1239-76	26P	R 3	032-0104-59	1/4W 2.2 ohm
C 2	163-1073-35	16V100uF	J 2	074-1100-59	9P	S 1	013-7412-50	SPVG21
D 1	001-0529-29	MA8051-M	R 1	033-1021-15	1/10W 1k ohm	PWB	039-2242-00	PWB(WITHOUT COMPONET)
IC 1	051-6044-18	BA6920FP-Y	R 2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC PWB(B7) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC 6	051-5806-01	GPIS93

LED-L-PWB(B8) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED 3	001-7042-00	GL4800	PWB	039-1954-20	PWB(WITHOUT COMPONET)
LED 4	001-7042-00	GL4800			

LED-R-PWB(B9) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED 5	001-7042-00	GL4800	PWB	039-1955-20	PWB(WITHOUT COMPONET)
LED 6	001-7042-00	GL4800			

L-Motor-FPC(B10) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
M 1	SMA-186-100	LOADING

M/S-FPC(B11) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M 2	SMA-193-101	SPINDLE	M 3	SMA-191-100	SLED	S 2	013-7414-50	SPVG22