


9. EXPLODED VIEWS AND PARTS LIST

*NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to  mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

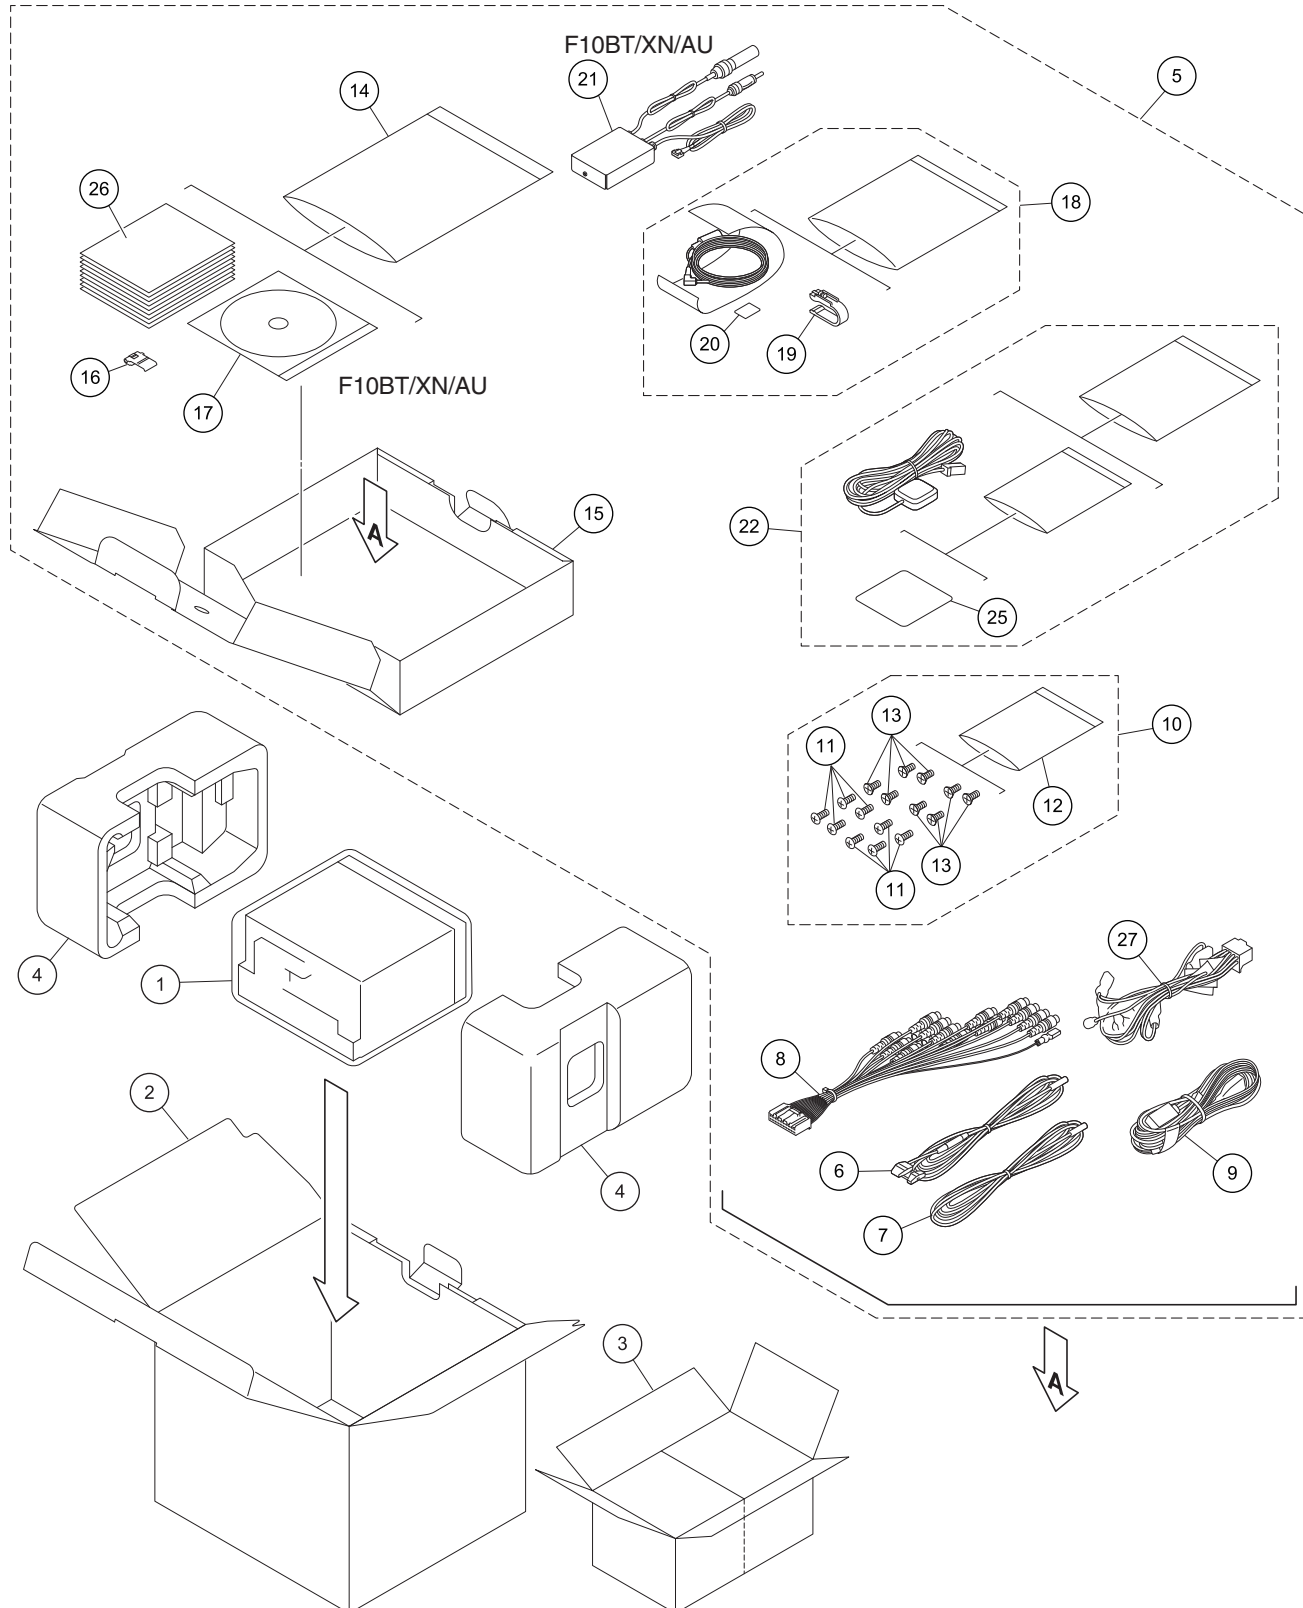

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Polyethylene Bag	See Contrast table (2)	* 19	Clip Holder	CZN7912
2	Unit Box	See Contrast table (2)	* 20	Cushion	CZN7913
3	Contain Box	See Contrast table (2)			
4	Protector	CHP3827	21	RDS-TMC Tuner	See Contrast table (2)
5	Sub Unit Box Assy	See Contrast table (2)	22	GPS Antenna Assy	CXE2705
			23	*****	
6	Cord	CDE6825	24	*****	
7	Cord	CDP1157	25	Sheet	CZN7151
8	Cord Assy	CDP1194			
9	Cord Assy	CDP1195	26-1	Owner's Manual	See Contrast table (2)
10	Screw Assy	CEA2788	26-2	Owner's Manual	See Contrast table (2)
			26-3	Quick Start Guide	See Contrast table (2)
11	Screw	BMZ50P080FTC	26-4	Quick Start Guide	See Contrast table (2)
* 12	Polyethylene Bag	CEG-127	26-5	Important Information	See Contrast table (2)
13	Screw	CMZ50P080FTC			
14	Polyethylene Bag	CEG1116	26-6	Installation Manual	See Contrast table (2)
15	Sub Unit Box	CHG6937	26-7	Caution Card	CRP1310
			* 26-8	Warranty Card	See Contrast table (2)
16	Connector	CKX1049	* 26-9	Registration Card	See Contrast table (2)
17	IM CD-ROM	See Contrast table (2)	27	Cord Assy	CDP1095
18	Microphone Assy	CPM1083			

(2) CONTRAST TABLE

AVIC-Z110BT/XN/UC and AVIC-F10BT/XN/AU are constructed the same except for the following:

Mark	No.	Description	AVIC-Z110BT/XN/UC	AVIC-F10BT/XN/AU
	1	Polyethylene Bag	CEG1359	*****
	2	Unit Box	CHG6940	CHG6942
	3	Contain Box	CHL6940	CHL6942
	5	Sub Unit Box Assy	CHX2124	CHX2127
	17	IM CD-ROM	Not used	CPJ1283
	21	RDS-TMC Tuner	Not used	CXE2176
	26-1	Owner's Manual	CRB3035	Not used
	26-2	Owner's Manual	CRB3036	Not used
	26-3	Quick Start Guide	CRB3037	CRB3056
	26-4	Quick Start Guide	CRB3038	Not used
	26-5	Important Information	Not used	CRB3057
	26-6	Installation Manual	CRD4418	CRB3058
*	26-8	Warranty Card	CRY1246	Not used
*	26-9	Registration Card	CRY1271	Not used

Owner's Manual,Installation Manual

Part No.	Language
CRB3035 (UC)	English
CRB3036 (UC)	French
CRB3037 (UC)	English
CRB3038 (UC)	French
CRD4418 (UC)	English, French
CRB3056 (AU)	English
CRB3057 (AU)	English
CRB3058 (AU)	English


CONTENTS OF CD-ROM (Operation Manual), CPJ1283

Part No.	Language
* CRB3051 (UC)	English
* CRB3052 (UC)	Russian
* CRB3055 (AU)	English

All operation manuals are supplied in PDF files by the CD-ROM.

Regarding the availability of paper manual, contact Pioneer Service representative in your region.


9.2 EXTERIOR(1)

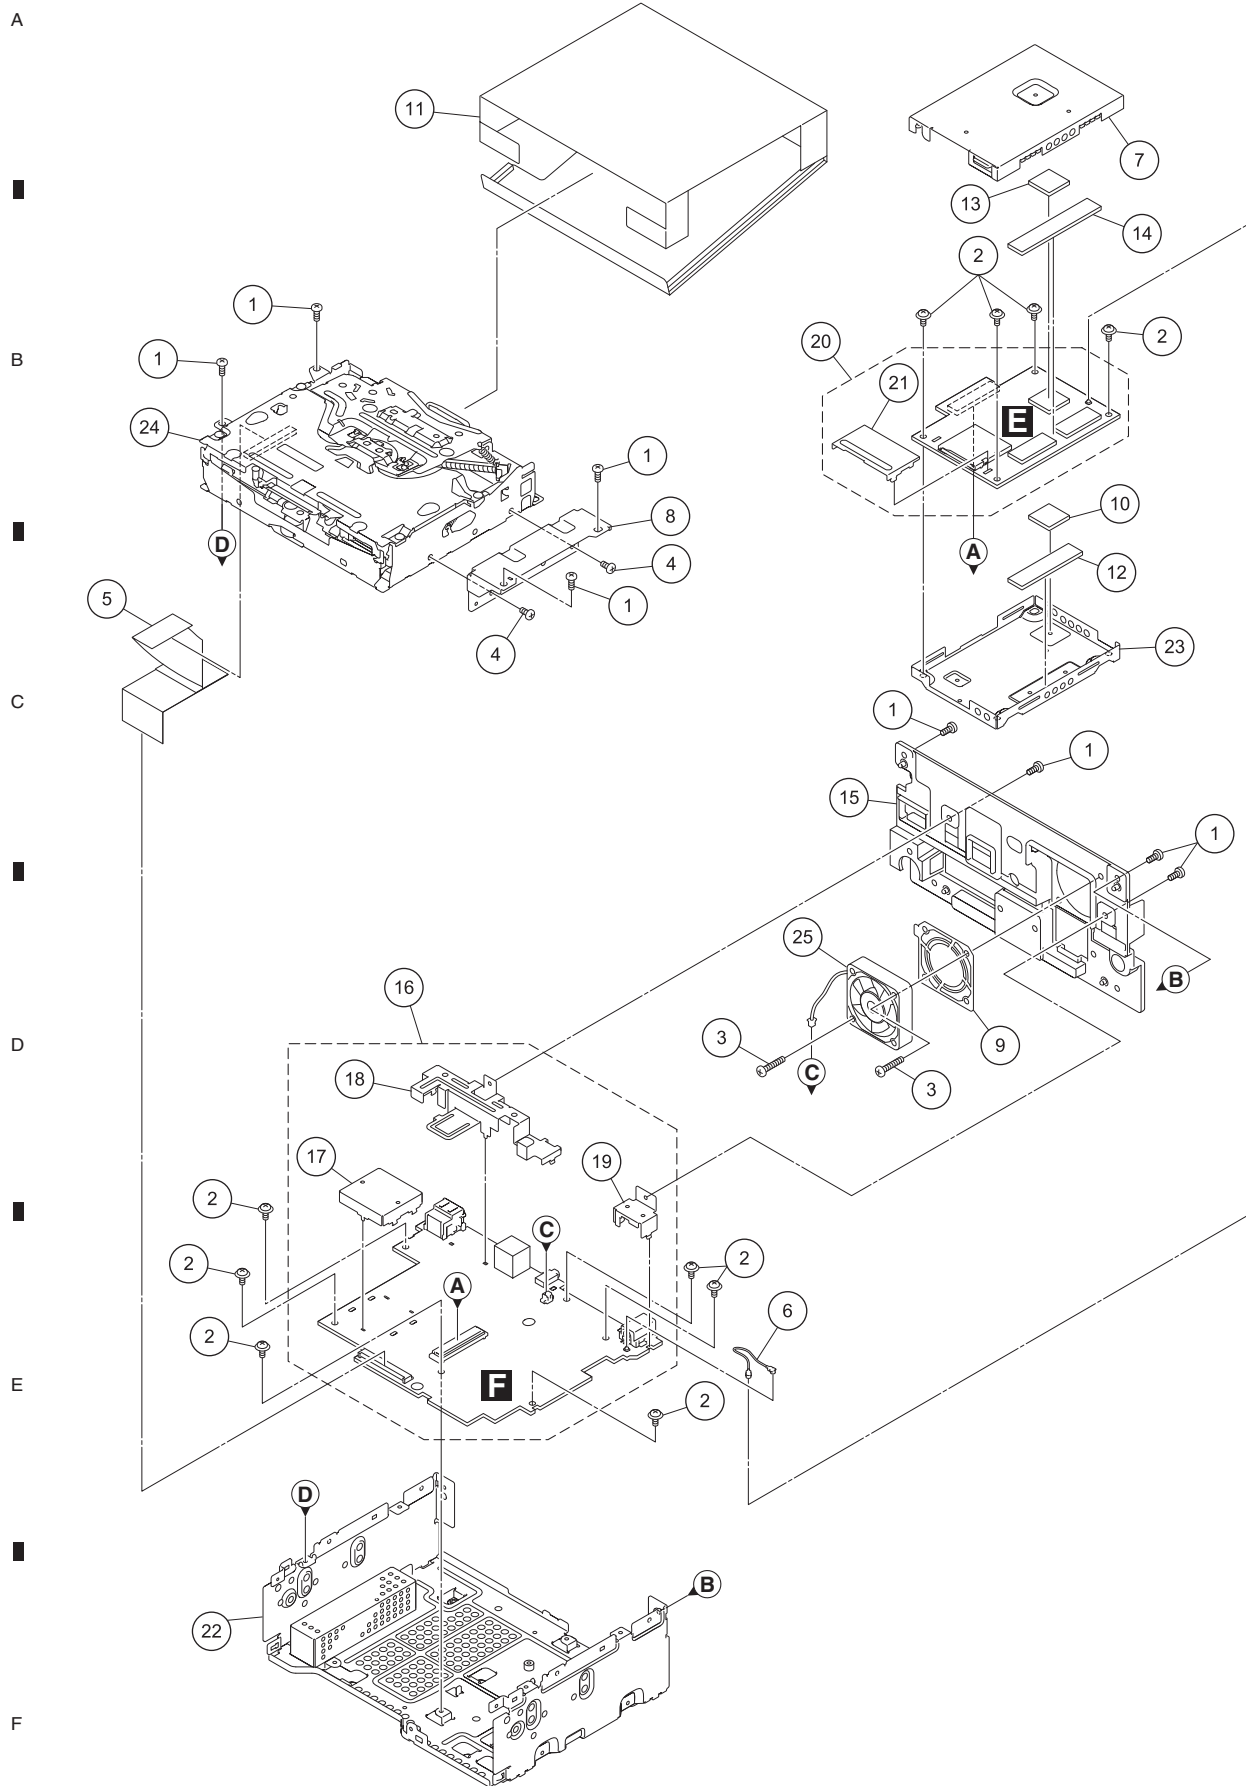

EXTERIOR(1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BMZ26P050FTC	
2	Screw(M2.6 x 4)	CBA2048	A
3	Screw(M2.6 x 14)	CBA2103	
4	Screw(M2.5 x 4)	CBA2217	
5	FFC	CDE8902	
6	Cord Assy	CDE8990	
7	Shield	CND4940	
8	Bracket	CND4941	
9	Cover	CND4961	
10	Sheet	CNN2803	
11	Sheet	CNN2804	B
12	Sheet	CNN2813	
13	Sheet	CNN3148	
14	Sheet	CNN3149	
15	Heat Sink	CNR1988	
16	Navi Unit	CWN3985	
17	Shield	CND4932	
18	Holder	CND4933	
19	Holder	CND4935	
20	Service CC Assy(UC)	CXX2608	C
	Service CC Assy(AU)	CXX2607	
21	Holder Unit	CXE2706	
22	Chassis Unit	CXE1612	
23	Shield Unit	CXE1620	
24	DVD Mechanism Module(LS1)	CXK6801	
25	Fan Motor	CXM1394	
			D
			E
			F

9.3 EXTERIOR(2)

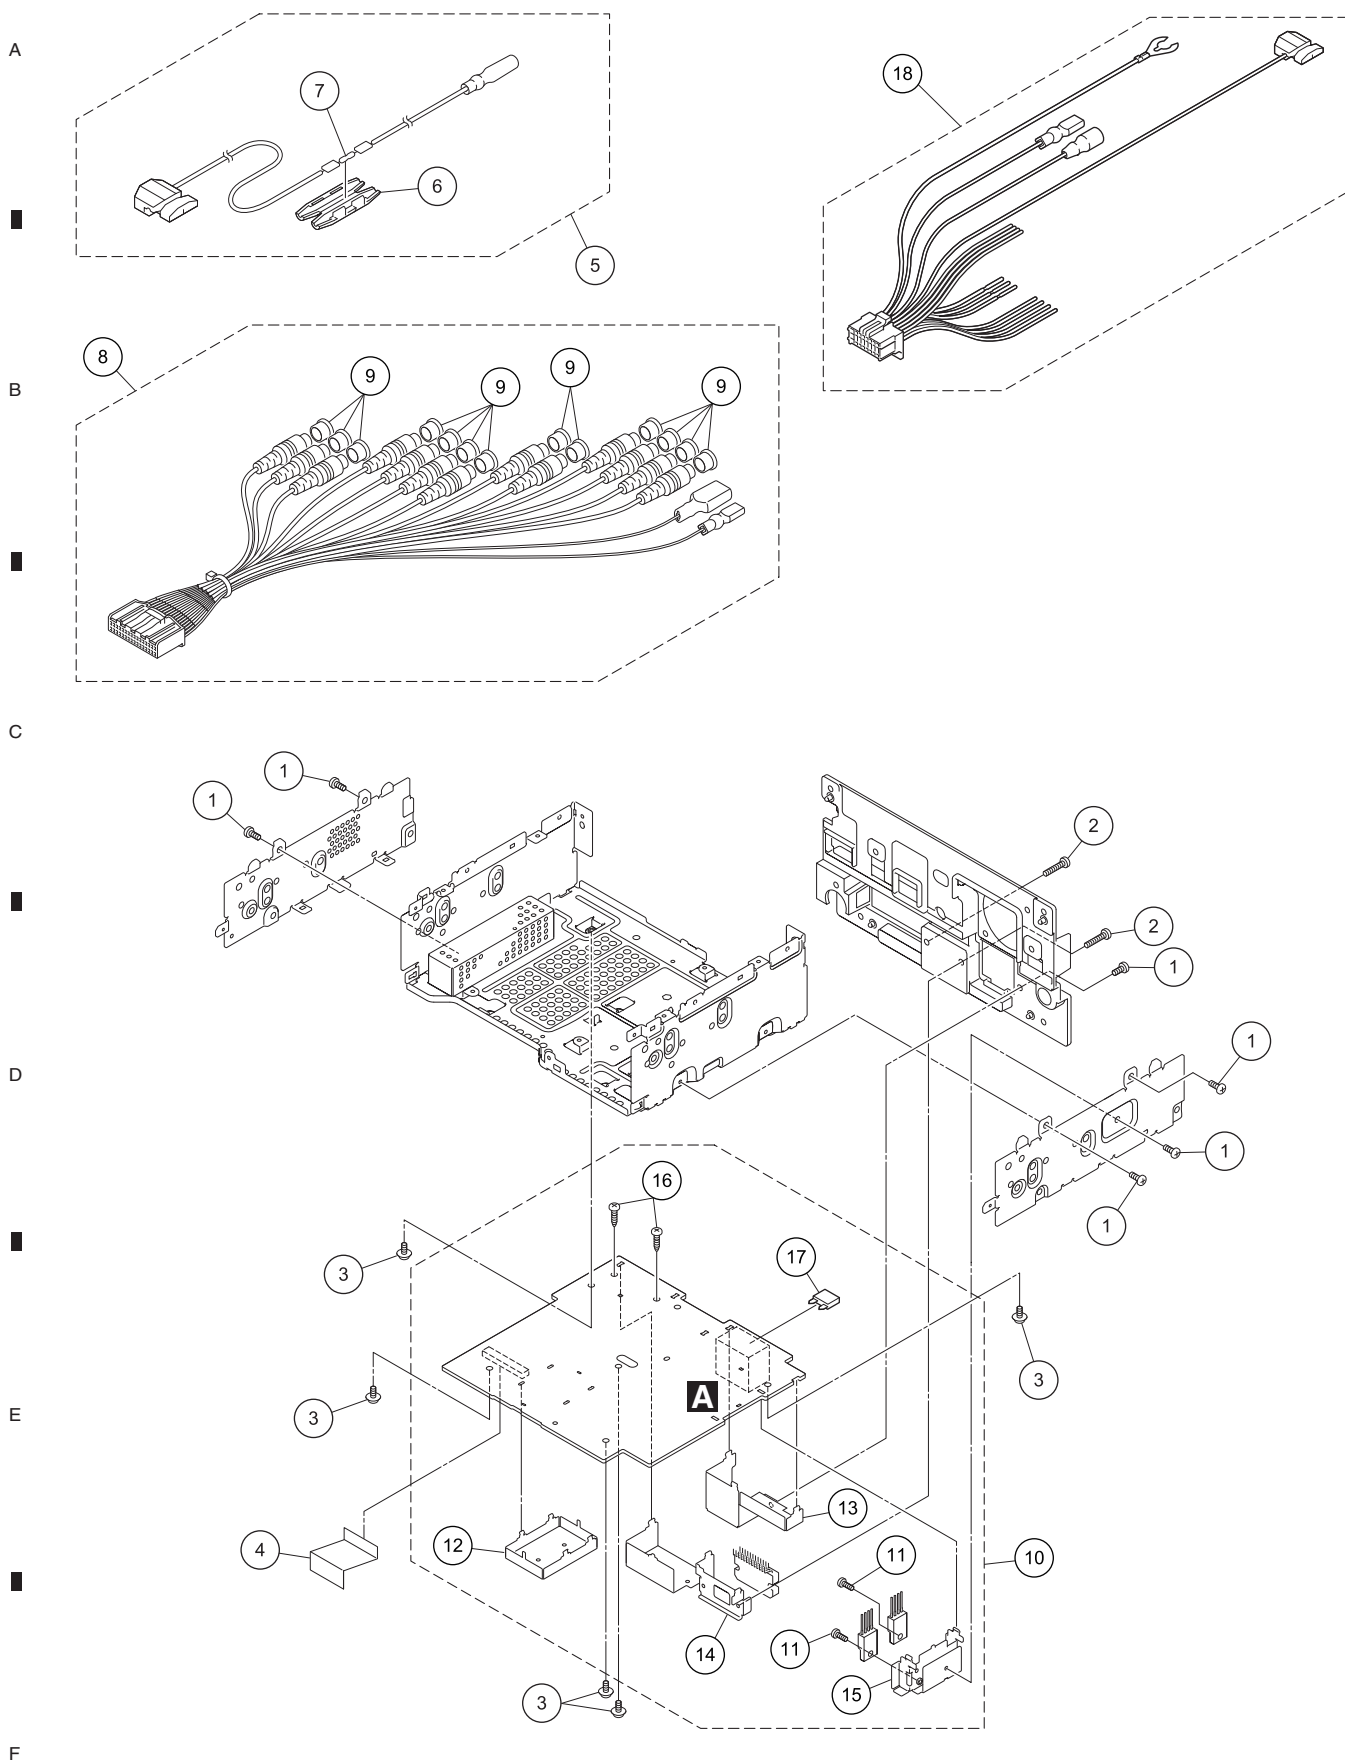

△

F



<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	CBA1735	
2	Screw(M2 x 3)	CBA1877	A
3	Holder	CND5243	
4	Flexible PCB	CNQ2911	
5	Cover	CNS9804	
6	Screw(M2 x 3)	CBA1877	
7	Cord Assy	CDE8991	
8	Lighting Conductor	CNW1606	
9	Spacer	CNW1607	
10	Touch Panel	CSX1148	
11	Keyboard Unit	CWN3988	B
* 12	Spacer Unit	CXE1707	
13	Screw	AMZ20P040FTC	
14	Screw(M2 x 2)	CBA1771	
15	Holder	CND4965	
16	Insulator	CNN2805	
17	Monitor Unit	CWN3935	
18	Cord Assy	CDE8990	
19	Bluetooth Module	CWX3851	
20	Shield Unit	CXE2163	C
21	Insulator	CNN2822	
22	LCD Panel	CWX3813	
23	Holder Unit	CXE1741	
24	Case Unit	CXE2836	
25	Cushion	CNN3115	
26	Grille Unit(UC)	CXE2206	
	Grille Unit(AU)	CXE1974	
27	Grille	CNS9807	
28	Guide	CNS9824	D
29	Guide	CNS9825	
30	Plate(UC)	CNS9899	
	Plate(AU)	CNS9949	
31	Button Unit	CXE1706	
32	Panel Unit(UC)	CXE1991	
	Panel Unit(AU)	CXE1992	
33	Case	CNB3574	E

9.5 EXTERIOR(4)

A


B

C

D

E

F

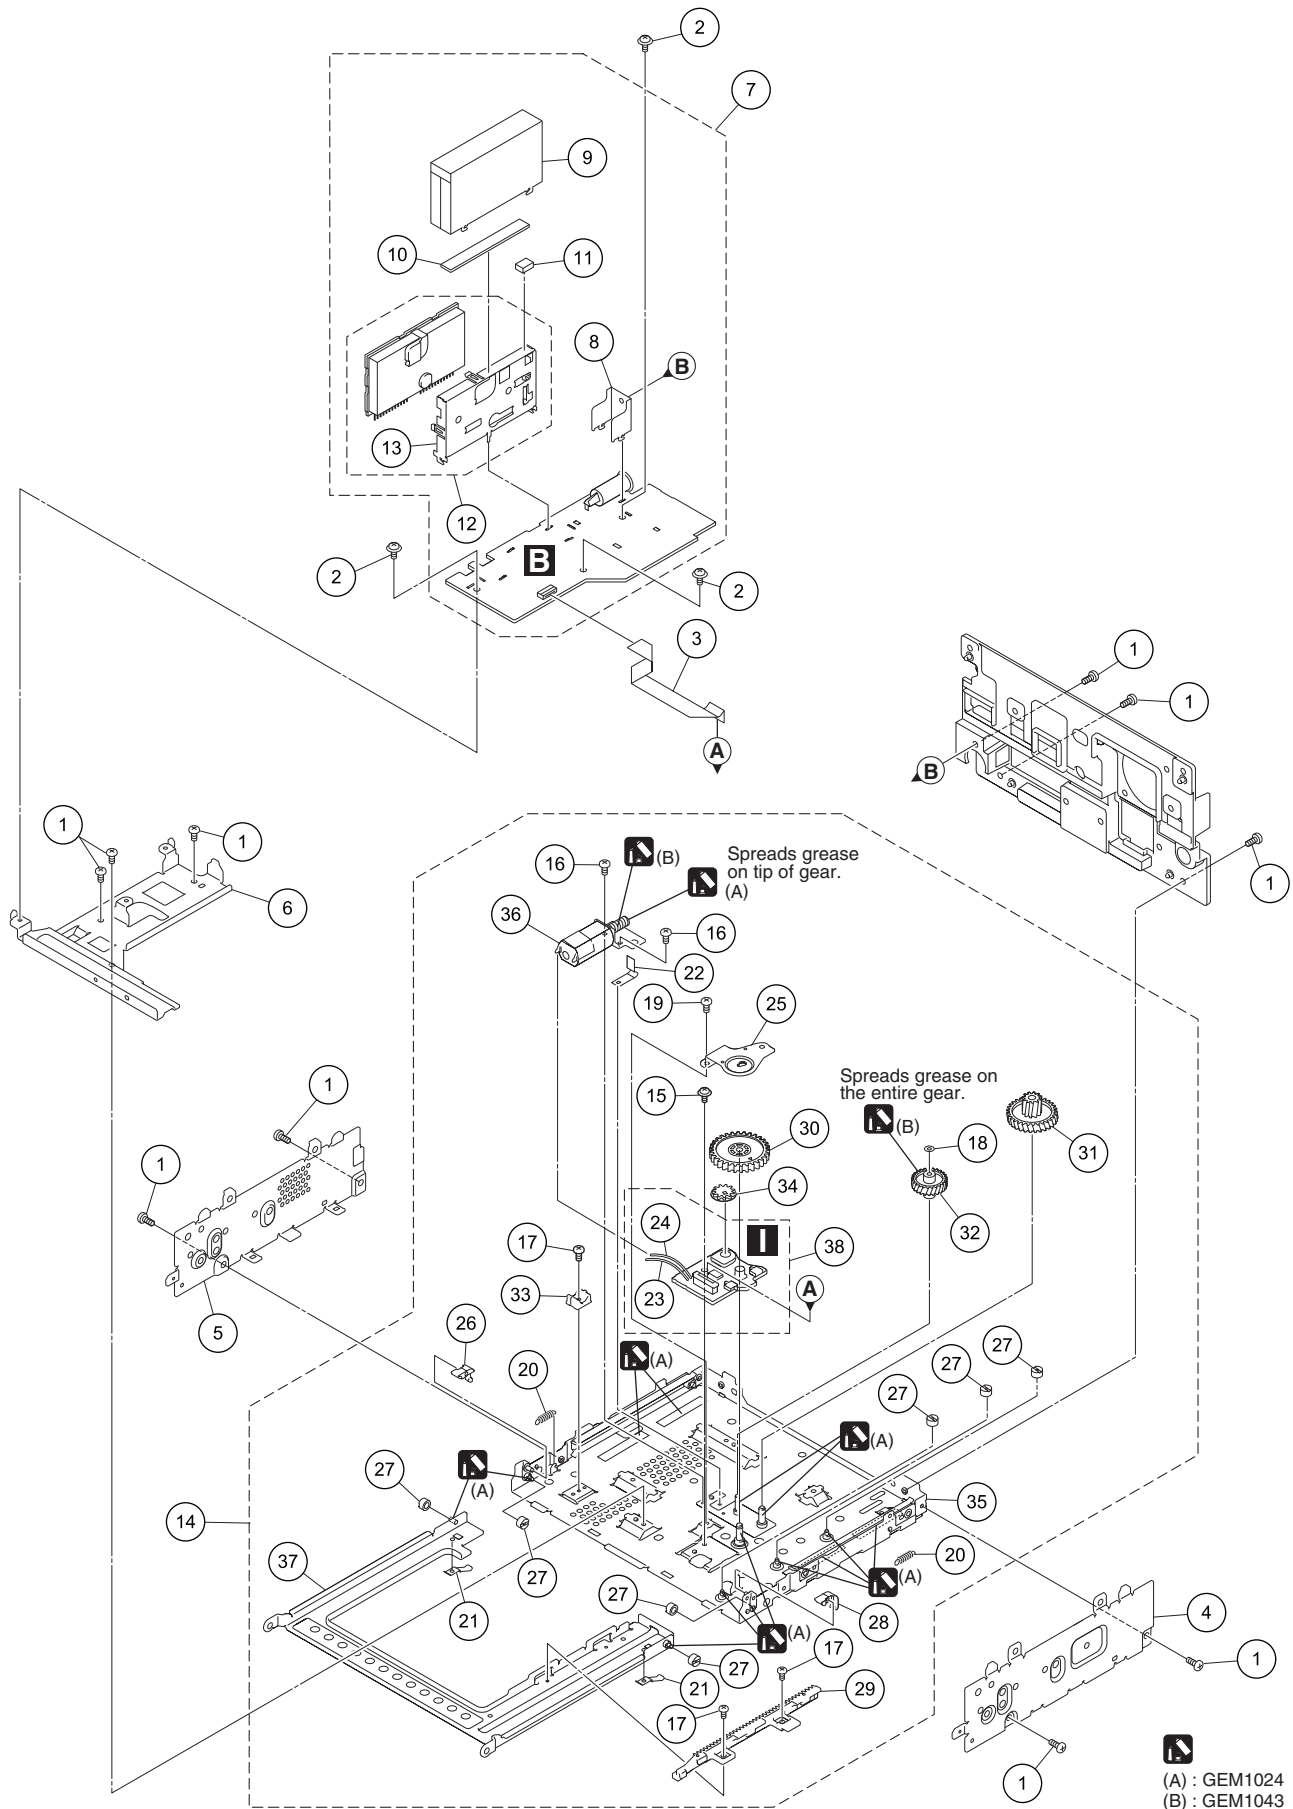

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BMZ26P050FTC	
2	Screw(M2.6 x 4)	CBA2048	A
3	FFC	CDE8899	
4	Bracket	CND4916	
5	Bracket	CND4917	
6	Bracket	CND5037	
7	Tuner IF Unit(UC)	CWN4824	
	Tuner IF Unit(AU)	CWN4339	
8	Holder	CND5159	
9	Shield	CND5426	
10	Sheet	CNN3157	B
11	Cushion	CNN3159	
12	FM/AM Tuner Unit(UC)	CWE2097	
	FM/AM Tuner Unit(AU)	CWE2128	
13	Holder	CND4324	
14	Drive Unit	CXE1522	
15	Screw	AMZ26P030FTC	
16	Screw	BMZ20P020FTC	
17	Screw(M2 x 2)	CBA1527	
18	Washer	CBF1039	C
19	Screw	EBA1051	
20	Spring	EBH1684	
21	Spring	EBL1033	
22	Spring	EBL1034	
23	Cord(Purple)	EDC1026	
24	Cord(Green)	EDC1027	
25	Bracket	ENC1604	
26	Arm	ENV1615	
27	Roller	ENV1619	D
28	Arm	ENV1623	
29	Rack	ENV1629	
30	Gear	ENV1630	
31	Gear	ENV1631	
32	Gear	ENV1632	
33	Holder	ENV1634	
34	Gear	ENV1635	
35	Chassis Unit	EXA1688	
36	Motor Unit	EXA1692	E
37	Frame Unit	EXA1693	
38	PCB Assy(Service)	EXX1060	

9.6 DVD MECHANISM MODULE

A


B

C

D

E

F

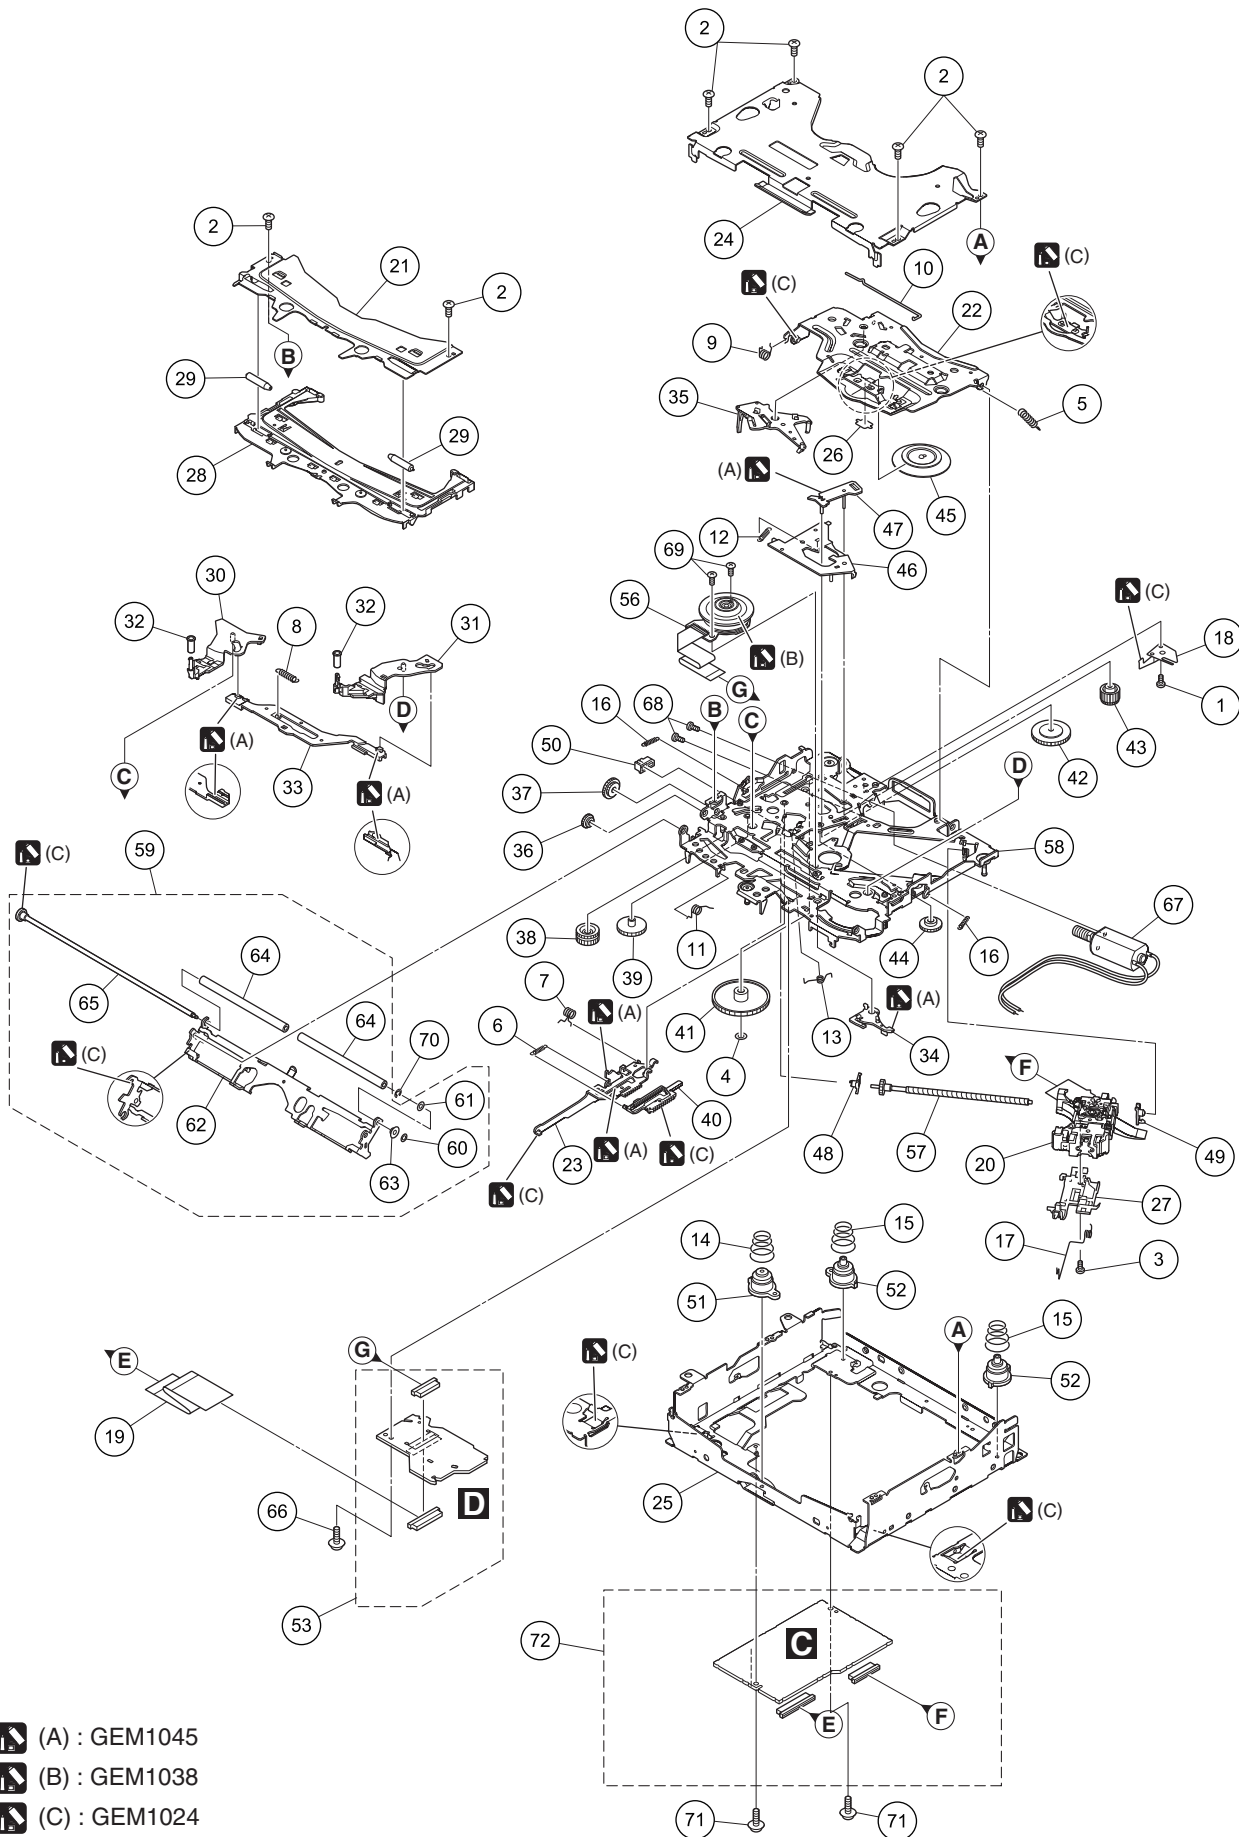

- (A) : GEM1045
- (B) : GEM1038
- (C) : GEM1024

5

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FTC	50	Holder		CNW1195
	2	Screw	BSZ20P040FTC				
	3	Screw(M2 x 4)	CBA1835	51	Damper		CNW1197
	4	Washer	CBF1038	52	Damper		CNW1198
	5	Spring	CBH2860	*	53	Connect PCB Unit	CWX3618
				54			
				55			
	6	Spring	CBH3010				
	7	Spring	CBH3011				
	8	Spring	CBH3012	56	Motor		EXM1050 ①
	9	Spring	CBH3013	57	Screw Unit		CXC8894
	10	Spring	CBH3014	58	Chassis Unit		CXC8895
				59	Arm Assy		CXC8896
				60	Washer		CBF1037
	11	Spring	CBH3015				
	12	Spring	CBH3016				
	13	Spring	CBH3017	61	Washer		CBF1038
	14	Spring	CBH3018	62	Arm		CND4554
	15	Spring	CBH3019	63	Collar		CNV6906
				64	Roller		CNW1196
				65	Gear Unit		CXC8893
	16	Spring	CBH3020				
	17	Spring	CBH3030				
	18	Plate Spring	CBL1797	66	Screw(M2 x 5)		EBA1028
	19	Cable	CDE8631	67	Motor Unit		CXC4026 ①
	20	Service PU Unit	CXX2398	68	Screw		JFZ20P025FTC
				69	Screw		JGZ17P022FTC
				70	Washer		YE15FTC
	21	Bracket	CND4553				
	22	Arm	CND4555				
	23	Lever	CND4556				
	24	Frame	CND4557	71	Screw		IMS20P030FTC
	25	Frame	CND4558	72	DVD Core Unit		YWX5009
	26	Sheet	CNN2280				
	27	Rack	CNW1170				
	28	Guide	CNW1171				
	29	Roller	CNW1172				
	30	Arm	CNW1173				
	31	Arm	CNW1174				
	32	Roller	CNW1175				
	33	Lever	CNW1176				
	34	Arm	CNW1177				
	35	Arm	CNW1178				
	36	Gear	CNW1180				
	37	Gear	CNW1181				
	38	Gear	CNW1182				
	39	Gear	CNW1183				
	40	Rack	CNW1184				
	41	Gear	CNW1185				
	42	Gear	CNW1186				
	43	Gear	CNW1187				
	44	Gear	CNW1188				
	45	Clamper	CNW1190				
	46	Arm	CNW1191				
	47	Arm	CNW1192				
	48	Holder	CNW1193				
	49	Holder	CNW1194				

6

7

8

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J,RS1/○○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Circuit Symbol and No.

Part No.

Unit Number: CWN4335(UC)

Unit Number: CWN4336(AU)

Unit Name : Audio Unit

Unit Number: CWN4824(UC)

Unit Number: CWN4339(AU)

Unit Name : Tuner IF Unit

Unit Number: CXX2608(UC)

Unit Number: CXX2607(AU)

Unit Name : Service CC Assy

Unit Number: CWN3985

Unit Name : Navi Unit

Unit Number: CWN3935

Unit Name : Monitor Unit

Unit Number: CWN3988

Unit Name : Keyboard Unit

Unit Number: EXX1060

Unit Name : PCB Unit(Service)

Unit Number: YWX5009

Unit Name : DVD Core Unit

Unit Number:

Unit Name : Connect PCB

A

Unit Number: CWN4335(UC)

Unit Number: CWN4336(AU)

Unit Name : Audio Unit

MISCELLANEOUS

Circuit Symbol and No.

Part No.

IC 2051	(B,61,82) IC	BD3931FP
IC 2056	(B,67,78) IC	S-1200B33-M5
IC 2121	(A,11,99) IC	NJM2388F84
IC 2131	(A,11,76) IC	NJM2388F84
IC 2151	(A,92,15) IC	LT3505EDD
IC 2161	(A,84,42) Regulator IC	BD9781HFP
IC 2181	(A,97,30) IC	LT3461AES6
IC 2182	(A,112,39) IC	S-812C56AUA-C3K
IC 2190	(B,136,32) IC	S-812C56AUA-C3K
IC 2216	(B,36,109) IC	TPD1018F
IC 2300	(A,86,134) IC	PA2030A
IC 2302	(A,41,35) IC	S-93C56BD01-I8
IC 2303	(B,54,49) IC(UC)	PEG554A8
	(B,54,49) IC(AU)	PEG555A8
IC 2304	(A,59,51) IC	BD5229FVE
IC 2491	(A,9,42) IC	NJM2904M
IC 2511	(A,21,111) IC	TC7WH126FU
IC 2512	(A,22,118) IC	TPD1018F
IC 2513	(B,19,118) L-MOS And Gate(UC)	TC7SET08FUS1
IC 2530	(A,36,44) IC	TC74VHCT541AFTS1
IC 2531	(A,50,49) Logic IC	TC74VHCT32AFT
IC 2611	(A,97,70) IC	BA4558RFVM
IC 2621	(A,105,70) IC	NJM2125F
IC 2625	(B,95,63) IC	BA4558RFVM
IC 2641	(B,135,88) IC	NJM2747V
IC 2661	(B,127,52) IC	AN15887A
IC 2771	(B,110,80) IC	PML017A
IC 2889	(A,138,16) IC	NJM4580V
Q 2031	(B,35,83) Transistor	2SC4081
Q 2032	(B,38,86) Transistor	2SC4081
Q 2041	(A,46,117) Transistor	2SC4116
Q 2046	(B,10,127) Chip Transistor	DTC114EUA
Q 2061	(A,19,39) Transistor	2SA1577
Q 2062	(A,21,39) Chip Transistor	DTC114EUA
Q 2066	(B,11,32) Transistor	2SA1577
Q 2067	(B,12,27) Chip Transistor	DTC114EUA
Q 2071	(A,28,36) Transistor	2SA1577
Q 2072	(A,31,36) Chip Transistor	DTC114EUA
Q 2101	(B,118,28) Chip Transistor	UMF21N
Q 2181	(B,90,36) Transistor	UMD3N
Q 2182	(B,89,29) Transistor	2SD1767

5				6				7				8			
Circuit Symbol and No.				Part No.				Circuit Symbol and No.				Part No.			
Q 2226	(A,25,47)	Transistor		2SC4116				D 2432	(A,55,56)	Diode		RB501V-40			
Q 2231	(B,69,32)	Transistor		2SA1576A				D 2433	(A,52,58)	Diode		RB751S-40			
Q 2242	(A,74,95)	Transistor		UMD3N				D 2491	(A,13,49)	Diode		1SS352			
Q 2276	(A,35,68)	Chip Transistor		DTC114EUA				D 2519	(B,30,126)	Diode		UDZS18(B)			A
Q 2281	(B,83,121)	Chip Transistor		DTC114EUA				D 2520	(B,33,126)	Diode		UDZS18(B)			
Q 2302	(A,58,46)	Transistor		UMD3N				D 2521	(A,22,129)	Diode		1SR154-400			
Q 2303	(A,37,30)	Transistor		2SA1576A				D 2522	(A,17,128)	Diode		1SR154-400			
Q 2491	(A,11,35)	Transistor		DTC114WK				D 2527	(B,26,121)	Diode		UDZS18(B)			
Q 2492	(A,15,43)	Chip Transistor		DTC114EUA				D 2531	(A,62,98)	Diode		UDZS8R2(B)			
Q 2505	(A,74,57)	Transistor(UC)		UMH1N				D 2552	(A,137,7)	Diode		DAP202U			
Q 2506	(A,76,60)	Transistor(UC)		UMH1N				D 2621	(A,99,61)	Diode		EDZ4R3(B)			
Q 2512	(B,23,126)	Transistor		2SA1576A				D 2622	(A,102,67)	Diode		1SS352			
Q 2513	(B,23,118)	Digital Transistor		DTC144EUA				D 2641	(B,145,88)	Diode		HZU6R8(B1)			
Q 2514	(B,22,121)	Digital Transistor		DTC144EUA				D 2643	(B,144,71)	Diode		RB715Z			
Q 2515	(B,22,116)	Chip Transistor(UC)		DTC114EUA				D 2644	(B,145,74)	Diode		RB715Z			B
Q 2531	(A,61,90)	Transistor		2SC4081				D 2761	(A,142,67)	Diode		DAP202U			
Q 2551	(A,141,6)	Transistor		IMH23				D 2762	(A,140,60)	Diode		DAP202U			
Q 2552	(A,133,7)	Transistor		UMD3N				D 2841	(B,109,101)	Diode		DAP202U			
Q 2641	(B,142,74)	Transistor		UMD3N				D 2862	(A,133,116)	Diode		MALS180X			
Q 2642	(B,142,80)	Transistor		UMD3N				D 2865	(A,136,116)	Diode		MALS180X			
Q 2643	(B,139,75)	Transistor		DTC323TU				D 2867	(A,128,116)	Diode		MALS180X			
Q 2644	(B,139,79)	Transistor		DTC323TU				D 2868	(A,131,116)	Diode		MALS180X			
Q 2731	(A,122,69)	Transistor		2SC4081				D 2869	(A,130,116)	Diode		MALS180X			
Q 2732	(A,122,64)	Transistor		2SA1576A				D 2870	(B,104,118)	Diode		UDZS18(B)			
Q 2761	(B,142,69)	Transistor		FMG12				D 2871	(B,117,139)	Diode		UDZS18(B)			
Q 2762	(A,136,59)	Transistor		UMD3N				D 2872	(B,109,114)	Diode		1SS352			C
Q 2831	(B,116,100)	Transistor		FMG12				D 2873	(B,117,115)	Diode		PTZ27(B)			
Q 2841	(A,122,95)	Transistor		FMG12				D 2874	(B,121,139)	Diode		UDZS18(B)			
Q 2842	(A,109,97)	Transistor		FMG12				D 2880	(B,8,124)	Diode		MALS180X			
D 2001	(A,34,108)	Diode		ST70-27F				D 2881	(B,6,124)	Diode		MALS180X			
D 2026	(B,73,90)	Diode		KS926S2				L 2001	(A,53,108)	Choke Coil 600 uH		CTH1347			
D 2027	(B,78,84)	Diode		RB160M-30				L 2151	(A,90,20)	Inductor		CTF1744			
D 2028	(B,68,89)	Diode		1SR154-400				L 2152	(A,99,17)	Inductor		BTH1112			
D 2029	(B,47,77)	Diode		RB500V-40				L 2161	(A,84,16)	Inductor		CTH1257			
D 2031	(B,42,81)	Diode		RB500V-40				L 2162	(A,98,38)	Inductor		CTH1254			
D 2032	(B,40,81)	Diode		HZU7R5(B3)				L 2181	(A,88,27)	Inductor		CTF1473			D
D 2033	(B,49,77)	Diode		RB500V-40				L 2182	(A,90,32)	Choke Coil 22 uH		CTH1426			
D 2034	(B,45,78)	Diode		EDZ20(B)				L 2183	(A,103,32)	Inductor		CTF1389			
D 2041	(A,52,121)	Diode		1SR154-400				L 2226	(B,53,136)	Inductor		CTF1410			
D 2042	(A,52,116)	Diode		HZU8R2(B1)				L 2236	(B,61,136)	Inductor		CTF1410			
D 2046	(B,18,128)	Diode		1SR154-400				L 2239	(B,113,111)	Inductor		CTF1556			
D 2151	(A,94,20)	Diode		RB160M-40				L 2302	(A,46,69)	Inductor		LCTAW2R2J2520			
D 2152	(A,95,13)	Diode		1SS352				L 2303	(A,41,31)	Inductor		CTF1306			
D 2160	(A,65,21)	Diode		RB051LA-40				L 2311	(A,65,55)	Inductor		CTF1305			
D 2162	(A,93,47)	Diode		RB050L-40				L 2331	(A,69,46)	Inductor		CTF1305			
D 2181	(B,90,34)	Diode		HZU9R1(B2)				L 2351	(A,64,37)	Inductor		CTF1305			
D 2216	(B,30,109)	Diode		1SR154-400				L 2371	(A,56,35)	Inductor		CTF1305			E
D 2217	(B,27,109)	Diode		1SR154-400				L 2411	(A,43,57)	Inductor		CTF1305			
D 2227	(B,59,139)	Diode		UDZS18(B)				L 2421	(A,41,57)	Inductor		CTF1305			
D 2228	(A,21,47)	Diode		UDZS5R6(B)				L 2461	(A,63,69)	Inductor		CTF1305			
D 2229	(A,28,46)	Diode		RB715W				L 2491	(A,15,36)	Inductor		CTF1334			
D 2231	(A,61,116)	Diode		PTZ18A				L 2492	(A,14,40)	Inductor		CTF1334			
D 2232	(B,65,29)	Diode		1SS352				L 2511	(A,18,114)	Inductor		CTF1410			
D 2236	(B,67,118)	Diode		1SR154-400				L 2530	(A,37,37)	Inductor		CTF1410			
D 2237	(B,65,114)	Diode		MALS180X				L 2531	(A,54,46)	Inductor		CTF1410			
D 2239	(B,120,115)	Diode		PTZ27(B)				L 2553	(B,110,15)	Inductor		CTF1488			
D 2240	(B,111,107)	Diode		1SS355				L 2554	(B,112,19)	Inductor		CTF1410			
D 2241	(A,67,98)	Diode		1SS352				L 2571	(B,17,35)	Inductor		CTF1306			F
D 2296	(B,144,103)	Diode		1SR154-400				L 2622	(A,94,63)	Inductor		CTF1410			
D 2297	(B,144,108)	Diode		1SR154-400				L 2641	(A,143,98)	Inductor		CTF1410			

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	L 2661 (A,133,51) Chip Coil	LCTAW100J2520		
	L 2662 (A,119,43) Chip Coil	LCTAW100J2520	R 2063 (A,19,36)	RS1/16SS683J
	L 2731 (A,127,61) Inductor	CTF1473	R 2066 (B,11,30)	RS1/16SS472J
	L 2771 (A,109,78) Inductor	LCTAW2R2J2520	R 2067 (B,10,27)	RS1/16SS472J
	L 2861 (B,111,114) Inductor	LCTC2R2K1608	R 2068 (B,9,33)	RS1/16SS104J
			R 2071 (A,28,38)	RS1/16SS222J
	L 2880 (A,6,120) Inductor	CTF1334		
	L 2881 (A,11,122) Inductor	CTF1334	R 2072 (A,30,34)	RS1/16SS222J
	L 2889 (A,134,19) Inductor	CTF1410	R 2073 (A,31,33)	RS1/16SS473J
	X 2301 (B,58,66) Oscillator 15 000 kHz CSS1781		R 2075 (A,137,9)	RS1/16SS0R0J
	F 2161 (A,71,18) EMI Filter	CCG1267	R 2083 (A,137,109)	RS1/10SR0R0J
			R 2084 (A,135,26)	RS1/10SR0R0J
	F 2861 (B,133,114) EMI Filter	CCG1082		
	F 2867 (B,137,114) EMI Filter	CCG1082	R 2085 (B,33,30)	RS1/16SS0R0J
	F 2868 (B,126,114) EMI Filter	CCG1082	R 2101 (A,125,28)	RS1/16SS102J
	F 2873 (B,131,114) EMI Filter	CCG1067	R 2102 (A,113,49)	RS1/16SS102J
B	F 2874 (B,129,114) EMI Filter	CCG1067	R 2104 (A,133,29)	RS1/16SS0R0J
			R 2105 (B,122,27)	RS1/16SS473J
	VR2731 (A,115,68) Semi-fixed 1 kohm(B) CCP1442			
	⚠P2107 (A,37,23) Fuse 250 mA	CEK1276	R 2106 (B,120,27)	RS1/16SS102J
	⚠P2151 (A,8,65) Fuse 1 A	CEK1254	R 2121 (B,17,106)	RS1/16SS473J
	⚠P2161 (A,39,91) Fuse 3.15 A	CEK1259	R 2125 (B,18,99)	RS1/8SQ0R0J
	⚠P2162 (A,118,23) Fuse 1.5 A	CEK1282	R 2128 (B,17,110)	RS1/16SS332J
			R 2131 (B,16,89)	RS1/16SS473J
	⚠P2176 (A,110,26) Fuse 0.5 A	CEK1278		
	P 2861 (B,123,133) Poly Switch	MINISMDC075F/24	R 2136 (B,16,91)	RS1/16SS332J
	P 2862 (B,140,138) Poly Switch	MINISMDC075F/24	R 2151 (B,96,12)	RS1/16SS223J
	P 2863 (B,129,136) Poly Switch	MINISMDC075F/24	R 2152 (B,92,13)	RS1/16SS2002D
	P 2864 (B,134,136) Poly Switch	MINISMDC075F/24	R 2153 (B,97,14)	RS1/16SS0R0J
C			R 2154 (B,95,14)	RS1/10SR1303D
	P 2880 (A,18,135) Poly Switch	MINISMDC075F/24		
	VA2861 (B,126,131) Varistor	AVR-M1608C270KT2AB	R 2155 (B,92,14)	RS1/16SS2402D
	VA2862 (B,129,131) Varistor	AVR-M1608C270KT2AB	R 2157 (B,89,16)	RS1/16SS0R0J
	VA2863 (B,123,115) Varistor	AVR-M1608C270KT2AB	R 2161 (B,88,41)	RS1/10SR1003D
	VA2864 (B,125,115) Varistor	AVR-M1608C270KT2AB	R 2162 (B,88,43)	RS1/10SR1002D
			R 2163 (B,94,44)	RS1/10SR104J
	CN2101 (A,133,34) Connector	CKS5546		
	CN2512 (A,30,142) Connector	CKS6155	R 2164 (B,97,45)	RS1/10SR0R0J
	CN2551 (B,128,7) Terminal	VKN1620	R 2165 (B,97,47)	RS1/10SR6802D
	CN2571 (B,25,52) Connector	CKS6124	R 2166 (B,94,47)	RS1/10SR3001D
	CN2861 (A,128,138) Plug	CKM1567	R 2167 (B,91,46)	RS1/10SR1002D
			R 2168 (B,94,46)	RS1/10SR103J
D	JA2001 (A,54,135) Plug	CKM1550		
	JA2880 (A,11,131) Jack	CKN1042	R 2169 (A,103,45)	RS1/8SQR30J
	U 2511 (A,6,57) Remote IC(AU)	RS-750	R 2171 (A,74,19)	RS1/10SR105J
			R 2181 (B,87,31)	RS1/16SS122J
			R 2182 (B,98,31)	RS1/16SS1003D
			R 2183 (B,97,31)	RS1/16SS1603D
	R 2021 (B,62,94)	RS1/4S4R7J		
	R 2022 (B,59,94)	RS1/4S4R7J	R 2184 (B,99,29)	RS1/16SS0R0J
	R 2023 (B,65,89)	RS1/10SR473J	R 2185 (B,95,31)	RS1/16SS1202D
	R 2026 (B,79,88)	RS1/4S4R7J	R 2186 (B,95,29)	RS1/16SS1102D
	R 2027 (B,79,94)	RS1/4S4R7J	R 2187 (B,100,30)	RS1/10SR473J
			R 2188 (A,109,42)	RS1/16SS5601D
	R 2028 (B,74,84)	RS1/10SR473J		
E	R 2031 (B,38,83)	RS1/10SR473J	R 2189 (A,108,40)	RS1/16SS6801D
	R 2032 (B,36,81)	RS1/10SR473J	R 2190 (B,138,29)	RS1/16SS5601D
	R 2033 (B,42,78)	RS1/10SR103J	R 2191 (B,138,28)	RS1/10SR6201D
	R 2034 (B,40,88)	RS1/10SR103J	R 2193 (B,135,28)	RS1/10SR1801D
			R 2226 (B,56,135) 1 kohm	CCN1179
	R 2041 (B,47,138) 4.7 kohm	CCN1180		
	R 2042 (B,47,140) 1 kohm	CCN1179	R 2227 (B,56,139)	RS1/10SR472J
	R 2043 (A,50,117)	RS1/10SR473J	R 2228 (B,56,140)	RS1/10SR102J
	R 2044 (A,48,117)	RS1/10SR473J	R 2229 (A,23,47)	RS1/16SS104J
	R 2046 (B,51,139) 1 kohm	CCN1179	R 2230 (A,23,46)	RS1/16SS473J
			R 2231 (A,58,120) 10 kohm	CCN1191
	R 2047 (B,16,125) 4.7 kohm	CCN1180		
F	R 2048 (B,13,127)	RS1/10SR103J	R 2232 (B,70,34)	RS1/16SS153J
	R 2056 (B,69,81)	RS1/16SS472J	R 2233 (B,68,34)	RS1/16SS103J
	R 2061 (A,19,41)	RS1/16SS472J	R 2234 (B,66,34)	RS1/16SS102J
	R 2062 (A,20,37)	RS1/16SS472J	R 2239 (B,112,107)	RS1/8SQ103J
			R 2241 (A,71,97)	RS1/16SS391J

RESISTORS

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 2242	(A,71,95)	RS1/16SS391J		R 2379	(A,47,41)	RS1/16SS102J	A
R 2243	(A,72,94)	RS1/16SS102J		R 2381	(B,42,31)	RS1/16SS151J	
R 2251	(B,88,49)	RS1/10SR102J		R 2382	(B,42,33)	RS1/16SS151J	
R 2269	(B,25,21)	RS1/10SR0R0J		R 2384	(B,47,36)	RS1/16SS221J	
R 2274	(B,32,25)	RS1/10SR0R0J		R 2385	(B,46,36)	RS1/16SS221J	
R 2276	(A,38,71)	RS1/16SS103J		R 2386	(A,46,36)	RS1/16SS681J	
R 2277	(A,38,69)	RS1/16SS103J		R 2387	(B,40,36)	RS1/16SS102J	
R 2281	(B,89,121)	RS1/10SR103J		R 2388	(B,36,35)	RS1/16SS221J	
R 2282	(B,89,123)	RS1/10SR103J		R 2390	(B,38,35)	RS1/16SS104J	
R 2283	(B,76,121)	RS1/16SS0R0J		R 2391	(B,45,34)	RS1/16SS104J	
R 2301	(A,57,52)	RS1/16SS104J		R 2392	(B,45,35)	RS1/16SS104J	B
R 2304	(A,43,38)	RS1/16SS473J		R 2394	(B,40,37)	RS1/16SS102J	
R 2305	(A,39,36)	RS1/16SS473J		R 2395	(B,41,39)	RS1/16SS102J	
R 2306	(A,39,33)	RS1/16SS0R0J		R 2396	(B,40,40)	RS1/16SS102J	
R 2310	(B,53,65)	RS1/16SS102J		R 2397	(B,40,41)	RS1/16SS102J	
R 2311	(A,68,50)	RS1/16SS104J		R 2398	(B,40,42)	RS1/16SS471J	
R 2312	(B,71,49)	RS1/16SS472J		R 2401	(B,39,45)	RS1/16SS681J	
R 2313	(B,70,51)	RS1/16SS472J		R 2403	(B,34,41)	RS1/16SS681J	
R 2314	(A,68,55)	RS1/16SS473J		R 2404	(B,37,48)	RS1/16SS104J	
R 2315	(B,65,60)	RS1/16SS471J		R 2405	(B,35,48)	RS1/10SR104J	
R 2316	(B,67,59)	RS1/16SS471J		R 2406	(B,37,49)	RS1/16SS104J	C
R 2317	(B,71,57)	RS1/16SS681J		R 2407	(B,35,50)	RS1/16SS221J	
R 2320	(B,69,57)	RS1/16SS0R0J		R 2409	(B,38,51)	RS1/16SS0R0J	
R 2321	(B,69,56)	RS1/16SS0R0J		R 2410	(B,40,52)	RS1/16SS0R0J	
R 2326	(A,61,50)	RS1/16SS0R0J		R 2411	(B,40,50)	RS1/16SS681J	
R 2327	(B,69,52)	RS1/16SS471J		R 2413	(A,44,53)	RS1/16SS681J	
R 2328	(B,67,52)	RS1/16SS681J		R 2414	(A,42,52)	RS1/16SS681J	
R 2329	(B,67,51)	RS1/16SS101J		R 2415	(A,46,50)	RS1/16SS104J	
R 2331	(B,69,50)	RS1/16SS221J		R 2416	(A,54,56)	RS1/16SS0R0J	
R 2332	(A,62,48)	RS1/16SS102J		R 2417	(A,58,58)	RS1/16SS102J	
R 2334	(B,67,49)	RS1/16SS0R0J		R 2418	(A,50,56)	RS1/16SS0R0J	D
R 2336	(B,69,45)	RS1/16SS102J		R 2419	(A,50,57)	RS1/16SS102J	
R 2337	(B,67,43)	RS1/16SS102J		R 2420	(B,38,62)	RS1/16SS681J	
R 2339	(A,61,43)	RS1/16SS0R0J		R 2421	(B,37,62)	RS1/16SS681J	
R 2341	(B,67,41)	RS1/16SS681J		R 2423	(B,39,59)	RS1/16SS470J	
R 2342	(A,62,40)	RS1/16SS0R0J		R 2424	(B,38,45)	RS1/16SS473J	
R 2343	(B,67,40)	RS1/16SS0R0J		R 2427	(A,39,61)	RS1/10SR392J	
R 2344	(B,67,39)	RS1/16SS471J		R 2428	(A,37,61)	RS1/10SR392J	
R 2345	(B,66,36)	RS1/16SS0R0J		R 2429	(A,44,54)	RS1/16SS104J	
R 2348	(B,69,37)	RS1/16SS473J		R 2431	(B,36,60)	RS1/16SS182J	
R 2351	(B,60,34)	RS1/16SS104J		R 2432	(A,53,56)	RS1/16SS103J	
R 2353	(B,65,36)	RS1/16SS0R0J		R 2433	(A,52,56)	RS1/16SS103J	
R 2355	(B,62,34)	RS1/16SS102J		R 2435	(B,36,63)	RS1/16SS182J	
R 2356	(B,60,36)	RS1/16SS102J		R 2436	(B,39,62)	RS1/16SS470J	
R 2357	(A,59,38)	RS1/16SS221J		R 2437	(B,43,60)	RS1/16SS473J	
R 2358	(B,59,36)	RS1/16SS0R0J		R 2438	(B,43,62)	RS1/16SS0R0J	E
R 2359	(A,34,34)	RS1/10SR472J		R 2439	(B,43,63)	RS1/16SS102J	
R 2360	(A,34,30)	RS1/10SR473J		R 2441	(B,44,64)	RS1/16SS0R0J	
R 2365	(B,56,34)	RS1/16SS473J		R 2442	(B,45,63)	RS1/16SS0R0J	
R 2366	(B,55,34)	RS1/16SS473J		R 2443	(B,46,64)	RS1/16SS0R0J	
R 2367	(A,53,37)	RS1/16SS104J		R 2444	(A,40,61)	RS1/16SS473J	
R 2368	(B,53,33)	RS1/16SS221J		R 2445	(B,47,63)	RS1/16SS0R0J	
R 2369	(B,54,35)	RS1/16SS104J		R 2446	(B,48,63)	RS1/16SS471J	
R 2371	(A,53,38)	RS1/16SS0R0J		R 2451	(B,43,66)	RS1/16SS104J	
R 2372	(B,52,33)	RS1/16SS221J		R 2452	(B,44,69)	RS1/16SS472J	
R 2373	(A,55,40)	RS1/10SR0R0J		R 2453	(B,52,63)	RS1/16SS102J	F
R 2375	(B,51,34)	RS1/16SS681J		R 2454	(B,53,63)	RS1/16SS0R0J	
R 2376	(A,53,40)	RS1/16SS681J		R 2458	(A,52,62)	RS1/16SS473J	
R 2377	(A,50,35)	RS1/16SS681J		R 2460	(B,55,64)	RS1/16SS561J	
R 2378	(A,48,36)	RS1/16SS681J		R 2461	(B,62,65)	RS1/16SS473J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 2463	(A,29,46)	RS1/16SS104J	R 2572	(B,33,58)	RS1/16SS0R0J
	R 2464	(B,68,64)	RS1/16SS0R0J	R 2573	(B,34,58)	RS1/16SS0R0J
	R 2472	(B,63,63)	RS1/16SS0R0J	R 2574	(B,33,46)	RS1/16SS0R0J
	R 2473	(B,63,62)	RS1/16SS221J	R 2575	(B,33,41)	RS1/16SS0R0J
	R 2475	(B,67,62)	RS1/16SS0R0J	R 2576	(B,34,53)	RS1/16SS0R0J
	R 2476	(B,63,65)	RS1/16SS0R0J	R 2577	(B,34,54)	RS1/16SS221J
	R 2477	(A,44,35)	RS1/16SS104J	R 2578	(B,34,56)	RS1/16SS0R0J
	R 2491	(A,7,37)	RS1/16SS104J	R 2579	(B,33,55)	RS1/16SS0R0J
	R 2492	(A,10,37)	RS1/16SS473J	R 2580	(B,34,51)	RS1/16SS0R0J
	R 2493	(A,12,37)	RS1/16SS563J	R 2581	(B,36,37)	RS1/16SS0R0J
B	R 2494	(A,5,43)	RS1/16SS513J	R 2582	(B,36,36)	RS1/16SS0R0J
	R 2495	(A,8,48)	RS1/16SS104J	R 2583	(B,36,34)	RS1/16SS0R0J
	R 2496	(A,10,48)	RS1/16SS513J	R 2584	(B,18,39)	RS1/16SS0R0J
	R 2497	(A,11,47)	RS1/16SS513J	R 2585	(B,18,51)	RS1/16SS0R0J
	R 2498	(A,10,49)	RS1/16SS102J	R 2586	(B,17,49)	RS1/16SS0R0J
	R 2499	(A,9,49)	RS1/16SS102J	R 2587	(B,37,67)	RS1/10SR0R0J
	R 2500	(A,11,48)	RS1/16SS564J	R 2589	(B,10,38)	RS1/10SR0R0J
	R 2501	(A,14,48)	RS1/16SS202J	R 2590	(B,17,46)	RS1/16SS0R0J
	R 2502	(A,15,48)	RS1/16SS822J	R 2591	(B,34,57)	RS1/16SS0R0J
	R 2503	(A,14,47)	RS1/16SS203J	R 2613	(A,94,64)	RS1/10SR473J
C	R 2504	(A,16,47)	RS1/16SS333J	R 2614	(A,95,76)	RS1/10SR473J
	R 2507	(A,71,58) (UC)	RS1/10SR223J	R 2615	(A,93,68)	RS1/10SR473J
	R 2508	(A,74,58) (UC)	RS1/16SS223J	R 2616	(A,93,72)	RS1/10SR473J
	R 2509	(A,72,61) (UC)	RS1/10SR223J	R 2617	(A,93,67)	RS1/10SR473J
	R 2511	(A,18,108)	RS1/10SR105J	R 2618	(A,93,73)	RS1/10SR473J
	R 2513	(B,25,125)	RS1/10SR473J	R 2619	(A,97,64)	RS1/10SR473J
	R 2514	(B,24,128)	RS1/10SR473J	R 2620	(A,97,76)	RS1/10SR473J
	R 2520	(A,29,131)	RS1/8SQ102J	R 2621	(A,97,62)	RS1/16SS102J
	R 2521	(A,31,131)	RS1/8SQ102J	R 2628	(B,88,62)	RS1/10SR332J
	R 2522	(A,33,131)	RS1/8SQ102J	R 2629	(B,90,66)	RS1/10SR332J
D	R 2523	(A,5,50) (AU)	RS1/16SS0R0J	R 2630	(B,89,62)	RS1/10SR103J
	R 2524	(A,5,49) (AU)	RS1/10SR470J	R 2631	(B,90,65)	RS1/10SR103J
	R 2527	(A,27,131)	RS1/8SQ102J	R 2632	(B,104,59)	RS1/10SR102J
	R 2529	(A,41,47)	RS1/16SS104J	R 2633	(B,99,60)	RS1/10SR104J
	R 2530	(B,71,45)	RS1/16SS104J	R 2634	(B,101,64)	RS1/10SR104J
	R 2532	(A,58,43)	RS1/16SS104J	R 2635	(B,103,62)	RS1/10SR683J
	R 2533	(A,60,92)	RS1/10SR473J	R 2636	(B,101,62)	RS1/10SR473J
	R 2534	(A,60,41)	RS1/16SS104J	R 2641	(B,130,83)	RS1/10SR473J
	R 2535	(A,61,44)	RS1/16SS104J	R 2642	(B,138,83)	RS1/10SR473J
	R 2536	(A,56,51)	RS1/16SS104J	R 2643	(B,132,83)	RS1/10SR683J
E	R 2537	(B,38,42)	RS1/16SS104J	R 2644	(B,136,83)	RS1/10SR683J
	R 2538	(A,65,92)	RS1/10SR104J	R 2645	(B,132,85)	RS1/10SR473J
	R 2539	(A,41,42)	RS1/16SS104J	R 2646	(B,138,85)	RS1/10SR473J
	R 2540	(A,17,116) (UC)	RS1/10SR0R0J	R 2647	(B,129,90)	RS1/10SR473J
	R 2541	(A,17,118) (AU)	RS1/10SR0R0J	R 2648	(B,141,90)	RS1/10SR473J
F	R 2543	(B,17,113) (UC)	RS1/10SR104J	R 2649	(B,128,86)	RS1/10SR473J
	R 2551	(B,141,17)	RS1/10SR182J	R 2650	(B,141,86)	RS1/10SR473J
	R 2552	(B,143,19)	RS1/10SR104J	R 2652	(B,142,83)	RS1/10SR0R0J
	R 2553	(B,143,16)	RS1/10SR104J	R 2653	(B,146,93)	RS1/10SR302J
	R 2554	(B,141,18)	RS1/10SR182J	R 2654	(B,144,93)	RS1/10SR302J
	R 2555	(A,123,15)	RS1/10SR0R0J	R 2656	(A,143,96)	RS1/10SR0R0J
	R 2556	(B,136,13)	RS1/16SS0R0J	R 2657	(B,130,76)	RS1/10SR821J
	R 2557	(B,119,19)	RS1/16SS471J	R 2658	(B,134,74)	RS1/10SR821J
	R 2558	(B,122,19)	RS1/16SS471J	R 2659	(B,140,74)	RS1/16SS104J
	R 2559	(A,121,11)	RS1/16SS471J	R 2660	(B,139,78)	RS1/16SS104J
	R 2560	(B,118,19)	RS1/16SS102J	R 2669	(B,142,58)	RS1/10SR0R0J
	R 2561	(B,120,19)	RS1/16SS221J	R 2673	(B,142,62)	RS1/10SR101J
	R 2562	(B,121,19)	RS1/16SS221J	R 2677	(B,145,50)	RS1/16SS0R0J
	R 2569	(A,27,65)	RS1/16SS0R0J	R 2678	(B,142,50)	RS1/16SS0R0J
	R 2570	(A,28,92)	RS1/16SS0R0J	R 2681	(B,145,46)	RS1/10SR0R0J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 2682	(B,144,44)	RS1/10SR0R0J		R 2778	(A,122,86)	RS1/10SR472J		A
R 2683	(B,142,49)	RS1/16SS101J		R 2779	(A,117,84)	RS1/10SR472J		
R 2684	(B,142,48)	RS1/16SS101J		R 2780	(A,117,85)	RS1/10SR472J		
R 2685	(B,144,46)	RS1/16SS750J		R 2781	(A,117,82)	RS1/10SR472J		
R 2686	(B,144,42)	RS1/10SR0R0J		R 2782	(A,122,88)	RS1/10SR472J		
R 2688	(B,141,42)	RS1/16SS101J		R 2784	(B,102,76)	RS1/16SS0R0J		
R 2689	(B,141,41)	RS1/16SS0R0J		R 2785	(B,102,77)	RS1/16SS0R0J		
R 2692	(B,140,40)	RS1/10SR0R0J		R 2786	(B,102,78)	RS1/16SS0R0J		
R 2694	(B,143,22)	RS1/8SQ0R0J		R 2787	(B,102,79)	RS1/16SS0R0J		
R 2695	(B,117,34)	RS1/16SS472J		R 2788	(A,109,75)	RS1/10SR0R0J		
R 2696	(B,115,39)	RS1/16SS472J		R 2811	(B,131,93)	RS1/10SR822J		
R 2697	(B,120,35)	RS1/16SS472J		R 2812	(B,139,93)	RS1/10SR822J		
R 2698	(B,115,36)	RS1/16SS472J		R 2813	(B,130,93)	RS1/10SR822J		
R 2699	(B,119,33)	RS1/16SS101J		R 2814	(B,138,93)	RS1/10SR822J		B
R 2700	(B,113,36)	RS1/16SS101J		R 2815	(B,124,82)	RS1/10SR822J		
R 2701	(B,120,33)	RS1/16SS101J		R 2816	(B,124,85)	RS1/10SR822J		
R 2702	(B,111,36)	RS1/16SS101J		R 2817	(B,124,81)	RS1/10SR822J		
R 2703	(B,119,34)	RS1/16SS123J		R 2818	(B,124,86)	RS1/10SR822J		
R 2704	(B,113,35)	RS1/16SS123J		R 2831	(B,119,97)	RS1/10SR390J		
R 2705	(B,113,45)	RS1/16SS102J		R 2832	(B,113,97)	RS1/10SR390J		
R 2706	(B,112,42)	RS1/16SS102J		R 2835	(B,119,98)	RS1/10SR223J		
R 2707	(B,112,43)	RS1/16SS102J		R 2836	(B,113,98)	RS1/10SR223J		
R 2708	(B,112,41)	RS1/16SS102J		R 2841	(A,125,94)	RS1/10SR390J		
R 2709	(B,116,45)	RS1/16SS473J		R 2842	(A,119,94)	RS1/10SR390J		C
R 2710	(B,115,42)	RS1/16SS473J		R 2843	(A,112,96)	RS1/10SR390J		
R 2711	(B,111,56)	RS1/16SS0R0J		R 2844	(A,106,96)	RS1/10SR390J		
R 2712	(B,114,57)	RS1/16SS0R0J		R 2849	(A,125,95)	RS1/10SR223J		
R 2713	(B,112,56)	RS1/16SS0R0J		R 2850	(A,119,95)	RS1/10SR223J		
R 2714	(B,114,56)	RS1/16SS0R0J		R 2851	(A,112,97)	RS1/10SR223J		
R 2717	(B,111,60)	RS1/16SS101J		R 2852	(A,106,97)	RS1/10SR223J		
R 2718	(B,112,65)	RS1/16SS101J		R 2861	(A,127,115)	RS1/8SQ0R0J		
R 2719	(B,111,61)	RS1/16SS223J		R 2862	(A,124,115)	RS1/8SQ0R0J		
R 2720	(B,112,64)	RS1/16SS223J		R 2867	(B,108,117)	RS1/8SQ102J		
R 2721	(B,112,63)	RS1/16SS101J		R 2868	(B,118,135)	RS1/8SQ102J		D
R 2722	(B,112,67)	RS1/16SS101J		R 2869	(B,112,114)	RS1/8SQ153J		
R 2723	(B,133,61)	RS1/16SS221J		R 2870	(A,131,104)	RS1/16SS750J		
R 2724	(B,133,62)	RS1/16SS221J		R 2871	(A,127,104)	RS1/16SS750J		
R 2725	(B,131,62)	RS1/16SS0R0J		R 2873	(A,108,114)	RS1/10SR0R0J		
R 2726	(B,128,62)	RS1/16SS0R0J		R 2874	(B,120,135)	RS1/8SQ102J		
R 2728	(B,129,62)	RS1/16SS0R0J		R 2875	(A,116,115)	RS1/8SQ0R0J		
R 2731	(A,127,67)	RS1/16SS0R0J		R 2876	(A,118,115)	RS1/8SQ0R0J		
R 2733	(A,126,66)	RS1/16SS223J		R 2877	(A,122,115)	RS1/8SQ0R0J		
R 2734	(A,125,67)	RS1/16SS303J		R 2878	(A,120,115)	RS1/8SQ0R0J		
R 2735	(A,120,69)	RS1/10SR681J		R 2879	(A,113,115)	RS1/8SQ0R0J		E
R 2736	(A,118,69)	RS1/10SR102J		R 2880	(A,111,115)	RS1/8SQ0R0J		
R 2737	(A,118,66)	RS1/10SR821J		R 2881	(A,96,99)	RS1/10SR0R0J		
R 2738	(A,122,61)	RS1/10SR681J		R 2889	(A,139,9)	RS1/10SR473J		
R 2740	(A,127,62)	RS1/10SR0R0J		R 2890	(A,139,24)	RS1/10SR473J		
R 2749	(A,142,76)	RS1/10SR0R0J		R 2891	(A,134,11)	RS1/10SR473J		
R 2750	(A,143,76)	RS1/10SR75R0D		R 2892	(A,136,24)	RS1/10SR473J		
R 2761	(B,139,66)	RS1/16SS821J		R 2893	(A,139,10)	RS1/10SR363J		
R 2762	(B,144,66)	RS1/16SS821J		R 2894	(A,139,23)	RS1/10SR363J		
R 2763	(B,139,68)	RS1/16SS223J		R 2895	(A,133,13)	RS1/10SR363J		
R 2764	(B,144,68)	RS1/16SS223J		R 2896	(A,136,23)	RS1/10SR363J		F
R 2772	(A,90,81)	RS1/10SR0R0J		R 2993	(A,7,25) (AU)	RS1/16SS332J		
R 2773	(B,111,70)	RS1/10SR102J		R 2995	(A,7,22) (UC)	RS1/16SS333J		
R 2774	(B,111,90)	RS1/10SR102J		R 2996	(A,7,19)	RS1/16SS0R0J		
R 2775	(B,104,71)	RS1/10SR0R0J						
R 2776	(B,104,89)	RS1/10SR0R0J						
R 2777	(A,122,84)	RS1/10SR472J						

CAPACITORS

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 2001 (A,74,104) 3 300 uF/16 V
 C 2007 (B,48,121)
 C 2027 (A,85,92) 10 000 uF/16 V
 C 2028 (A,50,91)
 C 2029 (B,74,82)

CCH1928(P35)
 CKSRYB392K50
 CCH1849(P35)
 CEAT472M16(P35)
 CKSRYB104K50

C 2281 (A,95,125)
 C 2282 (A,89,125)
 C 2283 (A,78,125)
 C 2284 (A,84,125)
 C 2285 (A,94,123)

CKSRYB105K16
 CKSRYB105K16
 CKSRYB105K16
 CKSRYB105K16
 CKSQYB105K16

C 2041 (A,53,118)
 C 2042 (A,53,117)
 C 2046 (B,17,123)
 C 2047 (B,12,125)
 C 2051 (B,60,89)

CKSRYB104K50
 CKSSYB102K50
 CKSRYB102K50
 CKSQYB105K16
 CKSYB105K35

C 2286 (A,88,123)
 C 2287 (A,79,123)
 C 2288 (A,85,123)
 C 2289 (B,96,120)
 C 2290 (B,96,121)

CKSQYB105K16
 CKSQYB105K16
 CKSQYB105K16
 CKSRYB104K50
 CKSRYB104K50

C 2052 (B,65,83)
 C 2053 (A,68,79)
 C 2056 (B,66,81)
 C 2057 (B,64,75)
 C 2058 (A,59,79)

CKSSYB103K16
 CEVW101M16
 CKSRYB105K16
 CKSRYB105K16
 CEVW101M16

C 2292 (A,101,125)
 C 2293 (A,98,123)
 C 2294 (A,102,118)
 C 2296 (B,147,101)
 C 2297 (B,143,106)

CKSQYB475K10
 CKSYB475K16
 CEHVW100M16
 CKSRYB104K50
 CKSRYB104K50

C 2101 (A,143,28)
 C 2121 (B,17,102)
 C 2122 (B,16,106)
 C 2123 (A,19,102) 100 uF/16 V
 C 2124 (A,15,103)

CKSSYB103K16
 CKSRYB104K50
 CKSSYB223K16
 CCH1565
 CKSSYB102K50

C 2302 (A,51,70)
 C 2303 (A,48,68)
 C 2304 (A,41,33)
 C 2305 (A,60,45)
 C 2306 (A,59,49)

CEVW100M16
 CKSRYB102K50
 CKSRYB104K16
 CKSRYB104K16
 CKSRYB153K50

C 2131 (B,17,85)
 C 2132 (B,15,89)
 C 2133 (A,16,83)
 C 2134 (A,19,89) 100 uF/16 V
 C 2151 (A,91,21)

CKSRYB104K50
 CKSSYB223K16
 CKSSYB102K50
 CCH1565
 CKSYB225K25

C 2307 (A,58,53)
 C 2308 (A,61,46)
 C 2311 (B,69,60)
 C 2321 (B,66,57)
 C 2331 (B,67,47)

CKSRYB104K16
 CKSRYB104K16
 CCSSCH101J50
 CKSRYB103K50
 CKSRYB103K50

C 2153 (B,98,12)
 C 2154 (A,95,16)
 C 2155 (B,93,13)
 C 2156 (A,102,22) 22 uF
 C 2161 (A,83,25) 100 uF/16 V

CCSRCH151J50
 CKSRYB104K16
 CCSSCH221J50
 CCG1183
 CCH1565

C 2351 (B,63,36)
 C 2352 (B,59,34)
 C 2355 (A,59,37)
 C 2374 (B,53,35)
 C 2411 (B,41,52)

CKSRYB103K50
 CCSSCH101J50
 CKSSYB103K16
 CKSRYB103K50
 CKSRYB103K50

C 2162 (A,82,31) 10 uF
 C 2163 (A,82,34) 10 uF
 C 2167 (B,90,42)
 C 2168 (B,93,44)
 C 2169 (B,94,42)

CCG1223
 CCG1223
 CKSSYB104K16
 CCSRCH102J50
 CKSRYB104K50

C 2412 (A,42,50)
 C 2413 (B,51,36)
 C 2414 (A,47,51)
 C 2415 (A,44,51)
 C 2416 (A,50,54)

CKSSYB103K16
 CKSSYB104K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

D C 2170 (A,100,48) 330 uF/10 V
 C 2171 (B,97,46)
 C 2173 (A,122,24)
 C 2181 (B,86,25)
 C 2182 (B,90,32)

CCH1623
 CCSRCH331J50
 CKSYB475K16
 CKSYB475K25
 CKSRYB104K16

C 2417 (A,46,56)
 C 2418 (B,39,55)
 C 2419 (A,47,57)
 C 2420 (B,40,56)
 C 2424 (B,40,57)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSRYB105K10
 CKSRYB103K50

C 2183 (A,90,26)
 C 2184 (A,91,28)
 C 2185 (B,97,30)
 C 2186 (A,98,28)
 C 2187 (A,101,29)

CKSRYB104K16
 CKSYB475K16
 CCSRCH220J50
 CKSSYB473K10
 CKSQYB105K25

C 2430 (B,35,59)
 C 2431 (A,57,55)
 C 2432 (A,51,56)
 C 2434 (B,44,66)
 C 2435 (B,39,64)

CCSSCH470J50
 CKSSYB104K16
 CKSSYB104K16
 CCSSCH331J50
 CCSSCH470J50

E C 2188 (A,108,39)
 C 2189 (A,108,42)
 C 2191 (B,132,31)
 C 2192 (B,136,29)
 C 2193 (B,140,34)

CKSSYB103K25
 CKSSYB103K25
 CKSQYB105K25
 CKSSYB103K25
 CKSSYB103K25

C 2436 (A,42,66)
 C 2437 (B,43,65)
 C 2438 (A,48,66)
 C 2450 (B,48,67)
 C 2459 (B,53,68)

CCSSCH151J50
 CCSSCH471J16
 CKSSYB103K16
 CKSQYB475K10
 CKSRYB104K16

C 2194 (B,103,32)
 C 2195 (B,108,30)
 C 2216 (B,32,111)
 C 2217 (B,40,111)
 C 2226 (B,53,139)

CKSSYB103K25
 CKSSYB103K25
 CKSRYB102K50
 CKSRYB104K50
 CKSRYB102K50

C 2460 (B,57,64)
 C 2461 (B,59,64)
 C 2462 (B,56,62)
 C 2464 (A,57,60)
 C 2471 (B,68,63)

CCSSCH100D50
 CCSSCH100D50
 CKSRYB103K50
 CKSRYB105K10
 CCSSCH101J50

F C 2227 (B,58,140)
 C 2232 (A,60,118)
 C 2238 (B,113,110)
 C 2241 (A,70,89)
 C 2276 (A,41,76)

CKSSYB102K50
 CKSRYB103K50
 CKSRYB103K50
 CEVW470M25
 CEHVW330M16

C 2491 (A,12,40)
 C 2492 (A,8,47)
 C 2493 (A,13,45)
 C 2494 (A,15,45)
 C 2495 (A,13,43)

CKSRYB104K16
 CKSSYB102K50
 CKSRYB104K16
 CKSRYB103K50
 CKSRYB823K16

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 2510	(A,21,127)	CKSRYB102K50		C 2667	(B,140,58)	CKSRYB105K10	A
C 2511	(A,18,110)	CKSRYB104K16		C 2668	(B,139,55)	CKSRYB105K10	
C 2512	(A,21,126)	CKSSYB103K25		C 2671	(B,139,50)	CKSRYB105K10	
C 2513	(B,28,126)	CKSRYB103K50		C 2672	(B,139,49)	CKSSYB104K16	
C 2516	(A,5,51) (AU)	CKSRYB104K50		C 2673	(B,139,48)	CKSRYB105K10	
C 2517	(B,20,120) (UC)	CKSSYB104K10					
C 2518	(A,18,121)	CKSRYB104K50		C 2674	(B,139,46)	CKSRYB105K10	
C 2527	(B,26,122)	CKSRYB103K50		C 2675	(B,138,43)	CKSRYB105K10	
C 2530	(A,37,39)	CKSRYB104K16		C 2676	(B,138,41)	CKSRYB105K10	
C 2531	(A,54,48)	CKSRYB104K16		C 2679	(B,137,52)	CKSSYB104K16	
C 2551	(B,144,16)	CCSRCH101J50		C 2680	(B,137,54)	CKSSYB104K16	
C 2552	(B,144,19)	CCSRCH101J50		C 2685	(B,125,34)	CKSQYB475K10	B
C 2557	(B,115,13)	CKSRYB104K16		C 2686	(B,113,38)	CKSQYB475K10	
C 2558	(B,118,13)	CKSRYB104K16		C 2687	(B,123,34)	CKSQYB475K10	
C 2559	(B,119,15)	CKSQYB475K10		C 2688	(B,111,38)	CKSQYB475K10	
C 2561	(B,115,19)	CKSRYB104K16		C 2689	(B,114,46)	CKSQYB475K10	
C 2563	(B,114,17) 10 uF	CCG1221		C 2690	(B,116,50)	CKSQYB475K10	
C 2564	(B,115,20) 10 uF	CCG1203		C 2691	(B,116,48)	CKSQYB475K10	
C 2565	(A,113,17)	CEVQW220M16		C 2692	(B,112,50)	CKSQYB475K10	
C 2572	(B,16,35)	CKSRYB104K16		C 2693	(B,111,53)	CKSQYB475K10	
C 2611	(B,86,71) 10 uF	DCH1201		C 2694	(B,113,53)	CKSQYB475K10	
C 2612	(B,91,78) 10 uF	DCH1201		C 2695	(B,116,53)	CKSQYB475K10	C
C 2613	(B,88,71) 10 uF	DCH1201		C 2696	(B,116,55)	CKSQYB475K10	
C 2614	(B,89,78) 10 uF	DCH1201		C 2697	(B,115,61)	CKSQYB475K10	
C 2615	(A,94,66)	CCSRCH330J50		C 2698	(B,115,65)	CKSQYB475K10	
C 2616	(A,95,75)	CCSRCH330J50		C 2699	(B,115,63)	CKSQYB475K10	
C 2617	(A,97,66)	CCSRCH330J50		C 2700	(B,115,67)	CKSQYB475K10	
C 2618	(A,97,75)	CCSRCH330J50		C 2701	(A,125,44)	CEVW470M16	
C 2619	(A,99,70)	CKSSYB104K16		C 2702	(B,123,42)	CKSRYB104K16	
C 2621	(A,88,61)	CEVW101M16		C 2703	(B,120,40)	CKSYB226K6R3	
C 2622	(A,100,61)	CKSSYB103K16		C 2705	(B,129,42)	CKSSYB104K16	
C 2623	(A,103,63)	CEVW100M16		C 2706	(B,127,42)	CKSSYB104K16	D
C 2624	(A,103,70)	CKSSYB104K16		C 2707	(B,128,42)	CKSSYB104K16	
C 2625	(B,96,70) 10 uF	DCH1201		C 2708	(B,126,42)	CKSSYB104K16	
C 2626	(B,93,70) 10 uF	DCH1201		C 2713	(B,116,32)	CKSRYB102K50	
C 2627	(B,90,64)	CCSRCH221J50		C 2714	(B,116,37)	CKSRYB102K50	
C 2628	(B,90,62)	CCSRCH221J50		C 2715	(B,121,34)	CKSRYB102K50	
C 2629	(B,95,61)	CKSSYB104K16		C 2716	(B,114,33)	CKSRYB102K50	
C 2630	(B,103,59)	CKSRYB103K50		C 2725	(B,102,71)	CKSQYB475K10	
C 2631	(B,103,63)	CKSRYB104K16		C 2726	(B,102,89)	CKSQYB475K10	
C 2632	(B,99,65)	CCSRCH151J50		C 2733	(A,127,71)	CEVW101M4	
C 2633	(B,99,62)	CCSRCH151J50		C 2734	(A,124,62)	CKSRYB105K16	
C 2641	(B,128,79)	CKSQYB475K10		C 2743	(A,136,73)	CEVW101M6R3	
C 2642	(B,134,79)	CKSQYB475K10		C 2744	(A,136,65)	CEVQW221M6R3	
C 2643	(B,130,79)	CKSRYB105K10		C 2761	(B,137,71)	CKSQYB475K10	
C 2644	(B,132,80)	CKSRYB105K10		C 2762	(B,135,71)	CKSQYB475K10	
C 2645	(B,130,85)	CCSSCH220J50		C 2771	(A,104,82)	CEVW470M16	E
C 2646	(B,140,85)	CCSSCH220J50		C 2772	(B,102,81)	CKSSYB104K16	
C 2647	(B,130,91)	CCSSCH220J50		C 2774	(B,102,85)	CKSSYB104K16	
C 2648	(B,139,91)	CCSSCH220J50		C 2775	(A,112,86)	CEVW100M16	
C 2649	(B,135,92)	CKSRYB104K50		C 2779	(B,106,71)	CKSRYB105K10	
C 2650	(A,133,98)	CEVW101M25		C 2780	(B,106,89)	CKSRYB105K10	
C 2651	(B,145,83) 10 uF	CCG1195		C 2781	(B,108,71)	CKSSYB104K16	
C 2652	(B,146,88)	CKSRYB103K50		C 2782	(B,108,89)	CKSSYB104K16	
C 2653	(B,105,62)	CKSQYB225K10		C 2785	(B,111,71)	CKSRYB105K10	
C 2661	(A,137,45)	CEVW470M16		C 2786	(B,112,90)	CKSRYB105K10	
C 2662	(B,134,42)	CKSRYB104K16		C 2787	(B,115,71)	CKSQYB475K10	F
C 2663	(B,132,41)	CKSYB226K6R3		C 2788	(B,114,90)	CKSQYB475K10	
C 2664	(B,131,43)	CKSSYB104K16		C 2789	(B,118,72)	CKSQYB475K10	
C 2665	(B,137,57)	CKSSYB104K16		C 2790	(B,116,90)	CKSQYB475K10	
C 2666	(B,138,57)	CKSSYB104K16		C 2791	(B,120,72)	CKSQYB475K10	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 2792	(B,118,90)	CKSQYB475K10
	C 2799	(A,114,78)	CEVW100M16
	C 2800	(B,119,78)	CKSSYB104K16
	C 2801	(A,123,79)	CEVW470M16
	C 2831	(B,119,95) 10 uF	CCG1182
	C 2832	(B,113,95) 10 uF	CCG1182
	C 2841	(A,127,92) 10 uF	CCG1182
	C 2842	(A,118,92) 10 uF	CCG1182
	C 2843	(A,112,94) 10 uF	CCG1182
	C 2844	(A,106,94) 10 uF	CCG1182
	C 2864	(B,115,115)	CKSRYB102K50
	C 2865	(B,120,138)	CKSRYB103K50
	C 2874	(A,138,116)	CKSRYB392K50
	C 2880	(A,13,122)	CKSSYB102K50
	C 2881	(A,6,122)	CKSSYB102K50
B	C 2889	(A,143,16)	CKSQYB225K10
	C 2890	(A,143,19)	CKSQYB225K10
	C 2891	(A,144,13)	CKSQYB225K10
	C 2892	(A,143,21)	CKSQYB225K10
	C 2893	(A,141,11)	CCSRCH330J50
	C 2894	(A,139,21)	CCSRCH330J50
	C 2895	(A,135,13)	CCSRCH330J50
	C 2896	(A,136,21)	CCSRCH330J50
	C 2897	(A,135,17)	CKSSYB104K16
	C 2965	(A,115,62)	CEVW101M4

R 411	(B,33,42) (UC)	RS1/16SS681J
R 412	(B,33,44) (UC)	RS1/16SS681J
R 415	(A,29,70)	RS1/16SS6800D
R 416	(A,29,68)	RS1/16SS681J
R 417	(A,29,63)	RS1/16SS681J
R 418	(A,29,60)	RS1/16SS0R0J
R 419	(A,29,58)	RS1/16SS681J
R 420	(A,29,55)	RS1/16SS103J
R 421	(B,28,49)	RS1/16SS102J
R 424	(A,13,9)	RS1/10SR101J
R 425	(A,16,10)	RS1/10SR101J
R 426	(A,14,10) (UC)	RS1/16SS104J
R 427	(A,15,12) (UC)	RS1/16SS104J
R 434	(A,29,71)	RS1/16SS1501D
R 461	(A,24,96)	RS1/10SR0R0J
R 492	(A,46,22)	RS1/10SR0R0J
R 493	(A,46,25)	RS1/10SR0R0J
R 494	(A,50,24)	RS1/10SR473J
R 495	(A,49,24)	RS1/10SR473J
R 496	(B,45,22)	RS1/16SS223J
R 497	(B,49,30)	RS1/10SR101J
R 498	(B,48,32)	RS1/10SR181J
R 499	(B,44,26)	RS1/16SS471J
R 500	(B,43,26)	RS1/16SS271J
R 501	(B,49,27)	RS1/16SS332J
R 506	(A,50,39)	RS1/16SS303J
R 511	(B,35,10)	RS1/10SR0R0J
R 512	(A,47,14)	RS1/10SR0R0J
R 514	(B,52,36)	RS1/16SS0R0J
R 516	(B,53,8)	RS1/16SS0R0J
R 520	(A,10,13) (UC)	RS1/16SS472J
R 522	(A,10,10) (AU)	RS1/16SS223J
R 528	(B,31,11)	RS1/10SR0R0J

B**Unit Number: CWN4824(UC)****Unit Number: CWN4339(AU)****Unit Name : Tuner IF Unit****MISCELLANEOUS**

D	IC 401	(A,52,52) IC	NJM2885DL1-33
	Q 491	(B,41,22) Transistor	2SB1260
	Q 492	(B,46,25) Transistor	IMX1
	Q 493	(B,43,32) Transistor	UMD3N
	D 401	(B,52,42) Diode	1SR154-400
	D 402	(B,54,47) Diode	1SR154-400
	D 403	(B,50,47) Diode	1SR154-400
	D 494	(B,37,22) Diode	RSX201L-30
	D 495	(B,40,26) Diode	HZU7R5(B1)
	D 496	(B,42,26) Diode	HZU6R2(B1)
E	L 401	(A,22,100) Inductor	LCTC220K2125
	L 402	(B,36,69) Inductor	CTF1607
	L 403	(B,34,72) Inductor	CTF1386
	L 404	(B,32,48) Inductor	CTF1607
	L 405	(A,39,55) Inductor	CTF1607
	L 532	(A,32,21) Inductor	CTF1606
	P 401	(A,22,106) Surge Protector	CSA30-201N
	CN491	(A,56,34) Connector	CKS6095
	CN511	(A,43,10) Connector	CKS5546
	JA401	(A,14,118) Antenna Jack	CKX1056
	FM/AM Tuner Unit(UC)		CWE2097
	FM/AM Tuner Unit(AU)		CWE2128

CAPACITORS

C 401	(B,47,49)	CKSQYB334K16
C 402	(A,52,46)	CKSSYB103K16
C 403	(A,39,47)	CEVW470M6R3
C 411	(B,36,72)	CKSRYB103K50
C 412	(B,32,72)	CKSRYB104K16
C 418	(B,30,45)	CKSRYB103K50
C 419	(B,28,51)	CKSRYB103K50
C 420	(A,32,44) 100 uF/16 V	CCH1565
C 423	(A,39,61)	CEVW470M6R3
C 425	(B,35,48)	CKSRYB102K50
C 428	(A,13,7)	CKSRYB105K16
C 429	(A,16,8)	CKSRYB105K16
C 431	(A,14,11) (UC)	CKSSYB122K50
C 432	(A,15,13) (UC)	CKSSYB122K50
C 434	(A,20,77)	CCSSCH101J50
C 492	(B,48,27)	CKSSYB153K16
C 493	(A,47,33) 100 uF/16 V	CCH1565
C 494	(B,46,34)	CKSRYB105K10
C 516	(B,70,75)	CKSQYB334K16
C 517	(A,31,18)	CKSRYB103K50
C 519	(A,38,73)	CEVW471M10
C 520	(A,31,32)	CEVW101M16

E**RESISTORS**

R 401	(A,27,102)	RS1/4SA0R0J
R 410	(B,32,40) (UC)	RS1/16SS681J

1

2

3

4

5
Circuit Symbol and No. **Part No.**
Unit Number : CXX2608(UC)
Unit Number : CXX2607(AU)
Unit Name : Service CC Assy

MISCELLANEOUS

IC 4001	(A,46,66) IC	TT4421
IC 4202	(A,24,44) IC	BU33TA2WNVX
IC 4203	(A,20,31) IC	S-80944CNNB-G9E
IC 4204	(B,62,13) IC	LTC3412AEFE
IC 4205	(B,41,13) IC	LTC3412AEFE
IC 4206	(A,20,34) IC	S-80929CNNB-G8Z
IC 4207	(A,20,14) IC	TC7SH08FUS1
IC 4208	(B,27,66) IC	BU15TA2WNVX
IC 4209	(A,32,87) IC	BU25TA2WNVX
IC 4210	(B,39,40) IC	BU18TA2WNVX
IC 4211	(A,19,43) IC	BU18TA2WNVX
IC 4212	(A,25,14) IC	TC7SH08FUS1
IC 4213	(B,50,78) IC	BU33TA2WNVX
IC 4216	(B,41,23) IC	S-80830CLNB-B6P
IC 4217	(A,23,26) IC	S-80835CLNB-B6U
IC 4218	(B,65,20) IC	S-80844CLNB-B65
IC 4219	(A,42,92) IC	BD6522F
IC 4220	(B,28,5) Logic IC	TC7SA34FU
IC 4221	(B,18,59) Logic IC	TC7SA34FU
IC 4401	(A,70,66) IC	HY5DU121622DTP-D43
IC 4402	(A,70,38) IC	HY5DU121622DTP-D43
IC 4403	(A,45,48) IC	PEH224A8
IC 4404	(B,70,66) IC	HY5DU121622DTP-D43
IC 4405	(B,70,38) IC	HY5DU121622DTP-D43
IC 4406	(A,35,41) IC	CY62147EV30LL45BVA
IC 4407	(A,28,37) IC	TC7PA53FU
IC 4501	(B,39,87) IC	PEM002B8
IC 4602	(B,23,43) IC	TC7SH86FUS1
IC 4621	(B,49,32) IC	PE9019A
IC 4654	(B,29,52) IC	WM1616LGEFL
IC 4701	(B,24,20) IC	341S2162
IC 4711	(A,55,85) IC	GRF3I-0336B
IC 4713	(B,64,90) IC	BA2115FVM
IC 4901	(A,25,75) IC	TC90192XBG
IC 4902	(B,29,33) IC	DS90C241QVS
IC 4903	(A,27,52) IC	AK8853VN
Q 4206	(B,36,40) Chip Transistor	DTC114EUA
Q 4207	(B,57,50) Chip Transistor	DTC114EUA
Q 4209	(B,39,43) Transistor	2SA2030
Q 4210	(B,59,43) Transistor	2SA2030
Q 4211	(B,55,44) Transistor	2SC4081
Q 4212	(B,59,65) Chip Transistor	DTC114EUA
Q 4214	(B,59,71) Chip Transistor	2SB1689
Q 4216	(B,59,61) Chip Transistor	DTC114EUA
Q 4217	(B,55,65) Chip Transistor	2SB1689
Q 4218	(B,52,53) Chip Transistor	2SB1689
Q 4219	(B,21,53) Chip Transistor	DTC114EUA
Q 4220	(B,22,59) Transistor	2SA2030
Q 4701	(B,23,26) Chip Transistor	DTC114TUA
Q 4711	(B,62,82) Transistor	2SB1132
Q 4901	(A,6,62) Transistor	2SC4617
Q 4902	(A,20,60) Transistor	2SA1774
Q 4903	(A,19,86) Transistor	2SC4617
D 4201	(B,39,18) Diode	RB521G-30

7	Circuit Symbol and No.	Part No.
D 4202	(B,63,6) Diode	RB521G-30
D 4601	(A,27,33) Diode	RB520G-30
D 4711	(B,73,93) Diode	HZU5R6(B3)
D 4712	(B,77,93) Diode	HZU5R6(B3)
L 4002	(B,55,70) Inductor	CTF1736
L 4005	(B,42,58) Inductor	CTF1736
L 4006	(B,51,75) Inductor	CTF1736
L 4007	(B,41,59) Inductor	CTF1736
L 4010	(B,35,62) Inductor	CTF1736
L 4011	(B,46,73) Inductor	CTF1736
L 4012	(B,46,74) Inductor	CTF1736
L 4013	(B,46,75) Inductor	CTF1736
L 4014	(B,55,62) Inductor	CTF1736
L 4015	(B,49,53) Inductor	CTF1736
L 4016	(B,44,70) Inductor	CTF1736
L 4018	(B,40,59) Inductor	CTF1736
L 4201	(B,4,63) Inductor	CTF1735
L 4202	(B,18,62) Choke Coil 160 mA	CTH1319
L 4203	(A,23,16) Inductor	CTF1736
L 4204	(B,4,51) Ferrite Bead	CTF1528
L 4205	(B,4,62) Inductor	CTF1735
L 4206	(B,4,59) Inductor	CTF1732
L 4207	(B,4,50) Ferrite Bead	CTF1528
L 4208	(A,36,89) Inductor	CTF1736
L 4209	(B,18,57) Inductor	CTF1739
L 4210	(B,4,57) Inductor	CTF1739
L 4211	(B,4,61) Inductor	CTF1735
L 4212	(B,4,52) Inductor	CTF1739
L 4213	(B,18,54) Inductor	CTF1739
L 4214	(B,4,45) Ferrite Bead	CTF1528
L 4215	(B,18,52) Inductor	CTF1739
L 4216	(B,4,48) Inductor	CTF1739
L 4217	(B,31,5) Inductor	CTF1736
L 4218	(B,20,50) Inductor	CTF1732
L 4221	(B,19,57) Inductor	CTF1736
L 4224	(B,55,13) Choke Coil 1 uH	CTH1416
L 4225	(B,47,13) Choke Coil 1 uH	CTH1416
L 4226	(B,20,41) Inductor	CTF1736
L 4227	(A,19,17) Inductor	CTF1736
L 4234	(B,21,64) Inductor	CTF1735
L 4245	(B,4,43) Inductor	CTF1732
L 4246	(B,18,47) Inductor	CTF1739
L 4251	(B,18,45) Inductor	CTF1739
L 4252	(B,18,42) Inductor	CTF1739
L 4255	(B,18,40) Inductor	CTF1739
L 4256	(B,18,37) Inductor	CTF1739
L 4257	(B,20,37) Inductor	CTF1735
L 4258	(B,20,36) Inductor	CTF1735
L 4410	(A,52,46) Inductor	CTF1736
L 4414	(A,25,40) Inductor	CTF1736
L 4415	(A,27,35) Inductor	CTF1736
L 4501	(A,36,82) Inductor	CTF1736
L 4502	(A,40,83) Inductor	CTF1736
L 4601	(B,21,44) Inductor	CTF1736
L 4651	(B,44,53) Inductor	CTF1736
L 4711	(B,65,87) Inductor	CTF1736
L 4714	(B,53,90) Inductor	CTF1736
L 4715	(A,62,83) Inductor	CTF1736
L 4716	(A,62,84) Inductor	CTF1736
L 4718	(B,73,91) Inductor	LCYC1R0K2125

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

L 4781 (B,38,49) Inductor

CTF1736

R 4021 (A,31,66)

RS1/16SS103J

L 4782 (B,31,60) Inductor

CTF1736

R 4022 (A,36,67)

RS1/16SS101J

L 4783 (B,50,85) Inductor

CTF1736

R 4024 (A,35,64)

RS1/16SS471J

L 4784 (B,59,38) Inductor

CTF1736

R 4025 (B,42,72)

RS1/16SS103J

L 4785 (A,41,42) Inductor

CTF1736

R 4026 (A,54,47)

RS1/16SS220J

L 4786 (B,38,36) Inductor

CTF1736

R 4027 (A,61,71)

RAB4CQ104J

L 4787 (B,52,79) Inductor

CTF1394

R 4028 (A,57,71)

RAB4CQ104J

L 4788 (B,18,26) Inductor

CTF1736

R 4029 (A,60,77)

RAB4CQ104J

L 4903 (B,24,67) Inductor

CTF1736

R 4030 (B,47,72)

RS1/16SS102J

L 4904 (B,29,92) Inductor

CTF1736

R 4032 (B,48,54)

RS1/16SS0R0J

L 4905 (B,30,68) Inductor

CTF1736

R 4033 (A,55,52)

RS1/16SS220J

L 4907 (B,18,34) Inductor

CTF1731

R 4034 (A,62,9)

RS1/16SS103J

L 4931 (A,37,47) Inductor

CTF1736

R 4035 (A,62,9)

RS1/16SS103J

L 4933 (A,23,62) Inductor

CTF1736

R 4036 (A,62,12)

RS1/16SS103J

L 4934 (B,28,92) Inductor

CTF1736

R 4037 (A,62,13)

RS1/16SS103J

L 4935 (A,11,64) Inductor

CTF1736

R 4038 (A,60,75)

RAB4CQ104J

L 4936 (A,18,50) Inductor

CTF1736

R 4040 (A,62,8)

RS1/16SS103J

L 4937 (B,37,25) Inductor

CTF1736

R 4043 (B,32,61)

RS1/16SS222J

X 4001 (A,33,62) Oscillator 12.000 MHz CSS1708

R 4044 (B,33,62)

RS1/16SS222J

X 4002 (A,35,68) Oscillator 32.768 kHz CSS1777

R 4045 (B,60,54)

RS1/16SS222J

X 4652 (B,41,52) Oscillator 24.576 MHz CWX3635

R 4046 (A,62,10)

RS1/16SS103J

X 4711 (B,56,92) TCXO 16.367 667 MHz CWX3728

R 4048 (B,17,50)

RS1/16SS222J

X 4901 (A,24,85) Oscillator 42.000 000 MHz CSS1779

R 4049 (B,4,61)

RS1/16SS222J

X 4902 (A,29,60) Oscillator 24.576 MHz CSS1699

R 4050 (A,33,59)

RS1/16SS104J

F 4001 (B,54,71) Chip EMI Filter

VTL1171

R 4051 (A,33,58)

RS1/16SS104J

F 4003 (B,50,74) Chip EMI Filter

VTL1171

R 4052 (A,39,79)

RS1/16SS104J

F 4005 (B,34,63) Chip EMI Filter

VTL1171

R 4053 (B,32,79)

RS1/16SS104J

F 4201 (A,7,32) EMI Filter

CCG1162

R 4054 (B,32,78)

RS1/16SS104J

F 4202 (A,8,35) EMI Filter

CCG1162

R 4055 (A,31,58)

RS1/16SS684J

F 4203 (A,4,38) EMI Filter

CCG1162

R 4057 (B,34,71)

RS1/16SS821J

F 4204 (A,19,38) EMI Filter

CCG1162

R 4058 (B,13,65)

RS1/16SS222J

F 4206 (B,47,47) EMI Filter

CCG1162

R 4059 (B,41,66)

RS1/16SS153J

F 4409 (A,27,39) Chip EMI Filter

DTL1106

R 4060 (A,34,75)

RS1/16SS222J

F 4651 (B,44,51) Chip EMI Filter

DTL1106

R 4061 (B,4,64)

RS1/16SS104J

F 4711 (A,59,91) Filter

CTF1706

R 4062 (A,34,74)

RS1/16SS222J

F 4901 (B,31,71) Chip EMI Filter

DTL1106

R 4063 (B,51,73)

RS1/16SS222J

P4201 (B,48,9) Fuse 1.75 A

CEK1283

R 4064 (A,37,67)

RS1/16SS103J

P4202 (B,51,14) Fuse 1.5 A

CEK1282

R 4065 (A,33,74)

RS1/16SS222J

CN4201 (B,9,48) Connector

CKS6126

R 4066 (A,51,80)

RS1/16SS0R0J

CN4601 (A,45,17) Connector

CKS6107

R 4067 (A,50,80)

RS1/16SS0R0J

JA4711 (A,77,92) Connector

CKS5749

R 4068 (B,44,57)

RS1/8SQ0R0J

SN4201 (A,36,91) Sensor

S-58LM20A-N4

R 4069 (A,38,48)

RS1/16SS0R0J

R 4101 (B,61,71)

RAB4CQ220J

R 4102 (B,61,62)

RAB4CQ220J

R 4103 (B,61,59)

RAB4CQ220J

R 4001 (B,57,67)

RS1/16SS222J

R 4104 (B,61,68)

RAB4CQ220J

R 4002 (B,57,68)

RS1/16SS222J

R 4105 (B,62,45)

RAB4CQ220J

R 4004 (B,58,78)

RS1/16SS103J

R 4106 (B,62,52)

RAB4CQ220J

R 4005 (A,62,13)

RS1/16SS103J

R 4107 (B,62,48)

RAB4CQ220J

R 4006 (B,57,69)

RS1/16SS182J

R 4108 (B,62,43)

RAB4CQ220J

R 4007 (B,57,70)

RS1/16SS103J

R 4109 (B,40,72)

RS1/16SS0R0J

R 4008 (B,60,78)

RS1/16SS103J

R 4110 (A,46,55)

RAB4CQ220J

R 4009 (B,59,78)

RS1/16SS103J

R 4111 (A,43,55)

RAB4CQ220J

R 4010 (B,49,55)

RS1/16SS0R0J

R 4112 (A,44,53)

RAB4CQ220J

R 4013 (A,32,66)

RS1/16SS103J

R 4113 (A,41,53)

RAB4CQ220J

R 4014 (B,46,72)

RS1/16SS0R0J

R 4114 (B,41,73)

RS1/16SS0R0J

R 4016 (B,47,75)

RS1/16SS6041F

R 4115 (A,42,75)

RS1/16SS470J

R 4017 (A,36,64)

RS1/16SS105J

R 4116 (A,44,77)

RS1/16SS220J

R 4018 (B,47,73)

RS1/16SS0R0J

R 4117 (A,44,75)

RS1/16SS220J

R 4020 (A,36,69)

RS1/16SS106J

R 4118 (A,43,75)

RS1/16SS220J

RESISTORS

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4119	(A,42,77)	RS1/16SS220J		R 4235	(B,41,41)	RS1/10SR0R0J	A
R 4120	(A,43,77)	RS1/16SS220J		R 4236	(B,53,50)	RS1/10SR103J	
R 4121	(A,38,50)	RS1/16SS0R0J		R 4237	(B,51,43)	RS1/10SR103J	
R 4133	(A,39,52)	RS1/16SS330J		R 4238	(B,57,41)	RS1/10SR331J	
R 4134	(A,38,52)	RS1/16SS330J		R 4239	(A,62,44)	RS1/8SQ0R0J	
R 4135	(A,40,50)	RS1/16SS220J		R 4241	(B,36,43)	RS1/10SR103J	
R 4136	(A,51,51)	RS1/16SS220J		R 4242	(B,33,15)	RS1/8SQ0R0J	
R 4137	(A,50,51)	RS1/16SS470J		R 4243	(A,48,91)	RS1/8SQ0R0J	
R 4138	(A,39,50)	RS1/16SS0R0J		R 4246	(B,35,43)	RS1/10SR331J	
R 4139	(A,53,52)	RAB4CQ470J		R 4247	(B,55,50)	RS1/10SR561J	
R 4140	(A,50,53)	RAB4CQ470J		R 4249	(A,19,39)	RS1/10SR0R0J	B
R 4141	(A,49,55)	RAB4CQ470J		R 4250	(B,39,21)	RS1/16SS0R0J	
R 4142	(A,47,53)	RAB4CQ470J		R 4251	(B,22,38)	RS1/16SS0R0J	
R 4143	(A,45,75)	RS1/16SS470J		R 4253	(B,39,20)	RS1/16SS0R0J	
R 4144	(A,46,75)	RS1/16SS0R0J		R 4254	(B,59,68)	RS1/10SR103J	
R 4145	(B,45,77)	RAB4CQ470J		R 4255	(B,20,38)	RS1/16SS0R0J	
R 4146	(B,42,77)	RAB4CQ470J		R 4257	(B,63,22)	RS1/16SS0R0J	
R 4147	(A,37,52)	RS1/16SS330J		R 4259	(B,59,67)	RS1/10SR681J	
R 4148	(B,62,57)	RS1/16SS220J		R 4261	(B,38,46)	RS1/16SS102J	
R 4149	(B,62,56)	RS1/16SS220J		R 4262	(B,37,38)	RS1/16SS0R0J	
R 4150	(B,62,56)	RS1/16SS220J		R 4265	(A,5,54)	RS1/10SR0R0J	C
R 4151	(B,62,55)	RS1/16SS220J		R 4266	(A,19,24)	RS1/16SS105J	
R 4152	(B,41,71)	RS1/16SS473J		R 4267	(A,22,14)	RS1/16SS0R0J	
R 4153	(B,41,74)	RS1/16SS103J		R 4268	(B,56,63)	RS1/10SR103J	
R 4154	(B,54,60)	RN1/16SSE1501D		R 4269	(A,56,35)	RS1/10SR471J	
R 4155	(B,52,60)	RN1/16SSE1501D		R 4270	(B,47,77)	RS1/16SS103J	
R 4194	(A,50,75)	RS1/16SS0R0J		R 4271	(B,57,61)	RS1/10SR561J	
R 4196	(B,61,27)	RS1/16SS104J		R 4275	(A,36,93)	RS1/16SS471J	
R 4197	(B,61,32)	RS1/16SS104J		R 4277	(A,23,40)	RS1/10SR0R0J	
R 4198	(B,44,55)	RS1/16SS104J		R 4278	(A,28,44)	RS1/10SR0R0J	
R 4199	(A,40,55)	RS1/16SS272J		R 4279	(B,49,76)	RS1/10SR0R0J	D
R 4201	(A,6,37)	RS1/10SR0R0J		R 4282	(B,22,56)	RS1/10SR103J	
R 4202	(B,6,66)	RS1/10SR0R0J		R 4283	(B,23,54)	RS1/10SR561J	
R 4206	(A,64,14)	RS1/16SS4702D		R 4286	(B,48,79)	RS1/16SS0R0J	
R 4207	(A,63,14)	RS1/16SS1003D		R 4287	(A,7,52) (AU)	RS1/16SS0R0J	
R 4208	(A,20,19)	RS1/16SS4702D		R 4288	(A,8,52) (UC)	RS1/16SS0R0J	
R 4209	(A,19,20)	RS1/16SS1003D		R 4290	(A,10,52)	RS1/16SS0R0J	
R 4210	(B,63,8)	RS1/16SS223J		R 4292	(B,4,55)	RS1/16SS0R0J	
R 4211	(B,39,17)	RS1/16SS223J		R 4293	(B,4,54)	RS1/16SS0R0J	
R 4212	(B,68,14)	RS1/16SS512J		R 4294	(B,44,44)	RS1/10SR102J	
R 4213	(B,34,10)	RS1/16SS512J		R 4295	(B,32,5)	RS1/16SS105J	
R 4214	(B,53,18)	RS1/4S0R0J		R 4296	(A,12,41)	RS1/16SS0R0J	
R 4215	(B,45,6)	RS1/4S0R0J		R 4297	(A,12,53)	RS1/16SS0R0J	
R 4216	(B,64,16)	RS1/10SR103J		R 4298	(A,5,52)	RS1/16SS0R0J	
R 4217	(B,38,9)	RS1/10SR103J		R 4401	(B,79,76)	RAB4CQ220J	
R 4218	(B,69,12)	RS1/16SS5102D		R 4402	(B,79,73)	RAB4CQ220J	E
R 4219	(B,67,13)	RS1/16SS0R0J		R 4403	(B,79,70)	RAB4CQ220J	
R 4220	(B,69,14)	RS1/16SS2402D		R 4404	(A,77,63)	RS1/16SS471J	
R 4221	(B,34,13)	RS1/16SS1003D		R 4405	(B,79,67)	RAB4CQ220J	
R 4222	(B,36,12)	RS1/16SS9101D		R 4406	(B,79,28)	RAB4CQ220J	
R 4223	(B,33,10)	RS1/16SS2003D		R 4407	(B,79,31)	RAB4CQ220J	
R 4224	(B,51,8)	RS1/16SS0R0J		R 4408	(B,79,34)	RAB4CQ220J	
R 4225	(B,45,16)	RS1/16SS0R0J		R 4409	(B,79,37)	RAB4CQ220J	
R 4226	(A,19,27)	RS1/16SS104J		R 4410	(B,79,64)	RS1/16SS220J	
R 4228	(A,18,12)	RS1/16SS103J		R 4411	(B,79,64)	RS1/16SS220J	
R 4229	(B,59,45)	RS1/10SR103J		R 4412	(B,78,43)	RS1/16SS220J	F
R 4230	(B,57,44)	RS1/10SR102J		R 4413	(B,78,42)	RS1/16SS220J	
R 4231	(A,53,49)	RS1/16SS220J		R 4414	(A,51,48)	RS1/16SS103J	
R 4233	(A,29,86)	RS1/10SR0R0J		R 4415	(A,63,41)	RS1/16SS471J	
R 4234	(B,24,65)	RS1/10SR0R0J		R 4419	(A,51,49)	RS1/16SS473J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 4420 (B,63,63)

RS1/16SS471J

R 4639 (B,44,22)

RS1/16SS0R0J

R 4424 (A,39,48)

RS1/16SS0R0J

R 4640 (A,62,7)

RS1/16SS473J

R 4431 (B,77,41)

RS1/16SS471J

R 4641 (A,62,4)

RS1/16SS473J

R 4432 (A,57,62)

RS1/16SS150J

R 4642 (A,62,5)

RS1/16SS473J

R 4433 (A,57,63)

RS1/16SS150J

R 4643 (A,62,6)

RS1/16SS473J

R 4434 (A,60,50)

RS1/16SS390J

R 4647 (B,49,22)

RS1/16SS103J

R 4435 (B,62,54)

RS1/16SS390J

R 4648 (B,50,22)

RS1/16SS103J

R 4436 (A,63,61)

RS1/16SS560J

R 4649 (B,53,22)

RS1/16SS103J

R 4437 (A,63,63)

RS1/16SS560J

R 4661 (B,25,56)

RS1/16SS0R0J

R 4438 (A,62,50)

RS1/16SS560J

R 4667 (B,37,52)

RS1/16SS101J

R 4439 (A,62,49)

RS1/16SS560J

R 4668 (B,20,47)

RS1/10SR0R0J

R 4440 (A,60,69)

RAB4CQ330J

R 4669 (B,26,46)

RS1/16SS0R0J

R 4441 (A,60,66)

RAB4CQ330J

R 4670 (B,26,47)

RS1/16SS0R0J

R 4442 (A,57,68)

RAB4CQ330J

R 4671 (B,28,46)

RS1/16SS0R0J

R 4443 (A,57,65)

RAB4CQ330J

R 4677 (B,28,47)

RS1/16SS0R0J

R 4444 (A,58,50)

RAB4CQ330J

R 4678 (B,37,51)

RS1/16SS0R0J

R 4446 (A,39,39)

RS1/16SS104J

R 4679 (B,35,48)

RS1/16SS330J

R 4448 (A,30,37)

RS1/16SS104J

R 4680 (B,35,47)

RS1/16SS330J

R 4449 (A,40,39)

RS1/16SS104J

R 4681 (B,35,46)

RS1/16SS0R0J

R 4450 (B,78,39)

RN1/16SSE1501D

R 4682 (B,33,47)

RS1/16SS0R0J

R 4451 (B,78,41)

RN1/16SSE1501D

R 4683 (B,25,58)

RS1/16SS1000D

R 4452 (B,62,64)

RN1/16SSE1501D

R 4684 (B,25,57)

RS1/16SS1000D

R 4453 (B,61,64)

RN1/16SSE1501D

R 4685 (B,31,43)

RS1/16SS0R0J

R 4454 (A,63,38)

RN1/16SSE1501D

R 4686 (B,32,43)

RS1/16SS0R0J

R 4455 (A,62,38)

RN1/16SSE1501D

R 4687 (B,33,43)

RS1/16SS0R0J

R 4456 (A,78,64)

RN1/16SSE1501D

R 4688 (B,34,43)

RS1/16SS0R0J

R 4457 (A,78,66)

RN1/16SSE1501D

R 4702 (B,21,26)

RS1/16SS0R0J

R 4501 (B,40,79)

RS1/16SS820J

R 4703 (B,25,16)

RS1/16SS0R0J

R 4502 (B,40,78)

RS1/16SS472J

R 4704 (B,24,16)

RS1/16SS0R0J

R 4503 (B,34,79)

RAB4CQ563J

R 4707 (B,24,23)

RS1/16SS473J

R 4504 (B,37,79)

RAB4CQ563J

R 4708 (B,22,16)

RS1/16SS104J

R 4505 (B,34,77)

RS1/16SS0R0J

R 4709 (B,21,23)

RS1/16SS103J

R 4506 (A,41,81)

RS1/10SR0R0J

R 4710 (B,20,25)

RS1/16SS223J

R 4507 (A,41,80)

RS1/10SR0R0J

R 4711 (A,57,89)

RS1/16SS2R7J

R 4603 (A,40,37)

RS1/16SS0R0J

R 4712 (A,52,85)

RS1/16SS472J

R 4604 (A,53,35)

RS1/16SS220J

R 4713 (B,52,86)

RS1/16SS203J

R 4605 (A,50,35)

RS1/16SS220J

R 4714 (A,55,82)

RS1/16SS101J

R 4606 (A,48,35)

RS1/16SS220J

R 4715 (A,54,82)

RS1/16SS101J

R 4607 (A,35,35)

RS1/16SS220J

R 4716 (A,53,82)

RS1/16SS101J

R 4608 (A,34,35)

RS1/16SS220J

R 4718 (A,57,82)

RS1/16SS0R0J

R 4609 (A,31,35)

RS1/16SS152J

R 4719 (A,58,82)

RS1/16SS0R0J

R 4610 (A,29,35)

RS1/16SS330J

R 4720 (A,56,82)

RS1/16SS0R0J

R 4612 (B,26,42)

RS1/16SS104J

R 4721 (B,68,87)

RS1/16SS0R0J

R 4613 (B,25,43)

RS1/16SS104J

R 4723 (B,59,87)

RN1/16SC10R0D

R 4617 (B,46,22)

RS1/16SS103J

R 4724 (B,60,88)

RN1/16SSE1501D

R 4618 (B,61,30)

RS1/16SS104J

R 4725 (B,60,90)

RN1/16SSE2402D

R 4619 (B,60,27)

RS1/16SS104J

R 4726 (B,60,92)

RN1/16SSE3302D

R 4620 (B,61,31)

RS1/16SS104J

R 4728 (B,64,88)

RN1/16SSE4702D

R 4622 (B,59,32)

RS1/16SS101J

R 4729 (B,62,92)

RN1/16SSE4702D

R 4623 (B,59,31)

RS1/16SS0R0J

R 4730 (B,61,88)

RS1/16SS432J

R 4624 (B,59,30)

RS1/16SS101J

R 4731 (B,62,88)

RN1/16SSE1002D

R 4625 (B,59,29)

RS1/16SS101J

R 4732 (B,67,89)

RN1/16SSE2202D

R 4628 (B,57,23)

RS1/16SS0R0J

R 4733 (B,68,89)

RN1/16SSE3302D

R 4631 (B,53,42)

RS1/16SS151J

R 4734 (B,68,91)

RS1/16SS103J

R 4633 (B,58,22)

RS1/16SS0R0J

R 4735 (B,68,90)

RS1/16SS102J

R 4634 (B,55,22)

RS1/16SS0R0J

R 4736 (B,63,86)

RS1/16SS102J

R 4635 (B,59,25)

RS1/16SS0R0J

R 4739 (A,52,83)

RS1/16SS151J

R 4636 (B,45,22)

RS1/16SS0R0J

R 4740 (A,55,89)

RS1/16SS0R0J

R 4637 (B,47,41)

RS1/16SS0R0J

R 4742 (A,61,91)

RS1/16SS0R0J

R 4638 (B,45,22)

RS1/16SS0R0J

R 4771 (A,55,35)

RS1/16SS103J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4772	(A,52,35)	RS1/16SS103J		R 4933	(B,28,81)	RS1/16SS104J	
R 4773	(A,49,35)	RS1/16SS103J		R 4935	(B,26,27)	RS1/16SS0R0J	
R 4774	(A,39,35)	RS1/16SS103J		R 4937	(A,18,48)	RS1/10SR0R0J	A
R 4775	(A,37,35)	RS1/16SS103J		R 4938	(A,21,63)	RS1/16SS151J	
R 4776	(A,33,35)	RS1/16SS103J		R 4939	(A,20,66)	RS1/16SS151J	
R 4781	(B,21,42)	RS1/16SS221J		R 4940	(A,20,63)	RS1/16SS151J	
R 4801	(A,23,46)	RS1/16SS470J		R 4941	(A,21,66)	RS1/16SS151J	
R 4802	(A,24,46)	RS1/16SS470J		R 4942	(A,22,63)	RS1/16SS151J	
R 4803	(A,25,46)	RS1/16SS470J		R 4943	(A,22,66)	RS1/16SS151J	
R 4804	(A,25,46)	RS1/16SS470J		R 4944	(A,23,63)	RS1/16SS151J	
R 4805	(A,26,46)	RS1/16SS470J		R 4945	(A,23,66)	RS1/16SS151J	
R 4806	(A,29,45)	RS1/16SS470J		R 4946	(A,24,63)	RS1/16SS151J	
R 4807	(A,29,46)	RS1/16SS470J		R 4947	(A,24,66)	RS1/16SS151J	
R 4808	(A,30,46)	RS1/16SS470J		R 4948	(A,25,63)	RS1/16SS151J	B
R 4809	(A,30,46)	RS1/16SS470J		R 4949	(A,25,66)	RS1/16SS151J	
R 4810	(A,31,46)	RS1/16SS470J		R 4950	(A,26,63)	RS1/16SS151J	
R 4811	(A,23,45)	RS1/16SS470J		R 4951	(A,5,60)	RS1/16SS1003D	
R 4812	(A,25,58)	RS1/16SS6801D		R 4953	(A,19,66)	RS1/16SS151J	
R 4813	(A,28,58)	RS1/16SS0R0J		R 4955	(A,17,80)	RS1/16SS0R0J	
R 4814	(A,33,51)	RS1/16SS0R0J		R 4956	(B,18,85)	RS1/16SS0R0J	
R 4815	(A,32,49)	RS1/16SS470J		R 4957	(B,23,79)	RS1/16SS0R0J	
R 4816	(A,33,56)	RS1/16SS103J		R 4958	(A,17,82)	RS1/16SS0R0J	
R 4817	(A,33,57)	RS1/16SS151J		R 4959	(A,28,66)	RS1/16SS151J	
R 4818	(A,33,55)	RS1/16SS103J		R 4960	(A,19,84)	RS1/16SS152J	
R 4819	(A,33,52)	RS1/16SS0R0J		R 4961	(A,22,84)	RS1/16SS1001D	C
R 4821	(A,33,53)	RS1/16SS0R0J		R 4962	(A,20,86)	RS1/16SS1201F	
R 4822	(A,28,63)	RS1/16SS151J		R 4963	(B,19,83)	RS1/10SR0R0J	
R 4823	(A,27,66)	RS1/16SS151J		R 4964	(A,29,65)	RS1/16SS151J	
R 4824	(A,27,63)	RS1/16SS151J		R 4965	(B,31,26)	RS1/16SS0R0J	
R 4825	(A,26,66)	RS1/16SS151J		R 4966	(A,18,60)	RS1/16SS6800D	
R 4901	(A,32,85)	RS1/16SS151J		R 4967	(B,35,29)	RS1/16SS0R0J	
R 4902	(A,33,85)	RS1/16SS151J		R 4968	(B,35,30)	RS1/16SS0R0J	
R 4903	(A,18,65)	RS1/10SR270J		R 4969	(B,35,31)	RS1/16SS0R0J	
R 4904	(A,34,78)	RS1/16SS151J		R 4970	(B,35,32)	RS1/16SS0R0J	
R 4905	(A,27,84)	RS1/16SS151J		R 4971	(B,35,32)	RS1/16SS0R0J	
R 4906	(A,36,80)	RS1/16SS151J		R 4972	(B,35,35)	RS1/16SS0R0J	D
R 4907	(A,36,81)	RS1/16SS151J		R 4973	(B,23,34)	RS1/16SS1000D	
R 4908	(A,34,78)	RS1/16SS151J		R 4974	(B,36,38)	RS1/16SS0R0J	
R 4909	(A,34,79)	RS1/16SS151J		R 4975	(B,33,40)	RS1/16SS0R0J	
R 4910	(A,34,80)	RS1/16SS151J		R 4976	(B,31,40)	RS1/16SS0R0J	
R 4911	(A,28,84)	RS1/16SS151J		R 4977	(B,30,40)	RS1/16SS0R0J	
R 4912	(A,34,83)	RS1/16SS151J		R 4978	(B,27,40)	RS1/16SS0R0J	
R 4913	(A,34,84)	RS1/16SS151J		R 4979	(B,26,40)	RS1/16SS0R0J	
R 4914	(A,29,84)	RS1/16SS151J		R 4980	(B,25,40)	RS1/16SS0R0J	
R 4915	(A,34,82)	RS1/16SS151J		R 4981	(B,24,40)	RS1/16SS0R0J	
R 4916	(A,34,82)	RS1/16SS151J		R 4982	(B,27,26)	RS1/16SS473J	E
R 4917	(A,29,84)	RS1/16SS151J		R 4984	(B,32,40)	RS1/16SS0R0J	
R 4918	(A,34,81)	RS1/16SS151J		R 4985	(B,32,40)	RS1/16SS0R0J	
R 4919	(A,30,84)	RS1/16SS151J		R 4986	(B,35,38)	RS1/16SS0R0J	
R 4920	(A,31,84)	RS1/16SS151J		R 4987	(B,35,36)	RS1/16SS0R0J	
R 4921	(B,17,66)	RS1/16SS0R0J		R 4988	(B,31,26)	RS1/16SS0R0J	
R 4922	(A,6,64)	RS1/16SS2202D		R 4989	(B,32,26)	RS1/16SS0R0J	
R 4923	(A,4,62)	RS1/16SS182J		R 4990	(B,27,40)	RS1/16SS0R0J	
R 4924	(A,18,58)	RS1/16SS8200D		R 4991	(B,34,38)	RS1/16SS0R0J	
R 4925	(A,20,61)	RS1/16SS561J		R 4992	(B,26,26)	RS1/16SS0R0J	
R 4926	(A,23,84)	RS1/16SS274J		R 4993	(B,30,26)	RS1/16SS562J	
R 4928	(A,25,89)	RS1/16SS0R0J		R 4994	(A,6,56)	RS1/16SS104J	F
R 4929	(A,25,88)	RS1/16SS0R0J		R 4995	(A,29,67)	RS1/16SS151J	
R 4930	(A,28,85)	RS1/16SS0R0J		R 4996	(A,30,65)	RS1/16SS151J	
R 4932	(A,27,86)	RS1/16SS223J		R 4997	(A,30,67)	RS1/16SS151J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 4999 (B,25,27)

RS1/16SS562J

C 4062 (B,43,68)

CKSSYB104K10

C 4063 (B,42,62)

CKSSYB104K10

C 4064 (B,42,64)

CKSSYB104K10

C 4065 (B,42,65)

CKSSYB104K10

CAPACITORS

A

C 4002 (B,53,69)

CKSQYB106K6R3

C 4003 (B,52,58)

CKSSYB102K50

C 4004 (B,52,59)

CKSRYB104K10

C 4005 (B,54,68)

CKSSYB104K10

C 4007 (B,50,55)

CKSSYB104K10

C 4066 (B,41,65)

CKSSYB104K10

C 4069 (B,39,67)

CKSSYB104K10

C 4070 (B,39,65)

CKSSYB104K10

C 4071 (B,49,59)

CKSQYB106K6R3

C 4072 (B,50,71)

CKSQYB106K6R3

C 4008 (B,53,62)

CKSSYB104K10

C 4009 (B,47,54)

CKSSYB104K10

C 4010 (B,53,63)

CKSSYB102K50

C 4011 (B,53,64)

CKSSYB102K50

C 4012 (B,53,65)

CKSSYB102K50

C 4073 (B,40,64)

CKSSYB104K10

C 4074 (B,44,59)

CKSRYB105K10

C 4075 (B,43,58)

CKSSYB104K10

C 4076 (B,41,70)

CKSSYB104K10

C 4077 (B,42,71)

CKSSYB104K10

B

C 4013 (B,53,66)

CKSSYB102K50

C 4014 (B,53,67)

CKSSYB102K50

C 4015 (B,53,68)

CKSSYB102K50

C 4016 (B,50,63)

CKSSYB102K50

C 4017 (B,50,63)

CKSSYB102K50

C 4078 (B,51,74)

CKSSYB104K10

C 4079 (B,39,66)

CKSSYB104K10

C 4080 (B,41,67)

CKSSYB104K10

C 4081 (B,42,70)

CKSSYB104K10

C 4082 (B,42,74)

CKSSYB104K10

C 4018 (B,50,64)

CKSSYB104K10

C 4019 (B,50,65)

CKSSYB102K50

C 4020 (B,50,66)

CKSSYB102K50

C 4021 (B,50,67)

CKSSYB104K10

C 4022 (B,50,69)

CKSSYB104K10

C 4083 (B,40,61)

CKSRYB105K10

C 4084 (B,39,62)

CKSRYB105K10

C 4086 (B,36,64)

CKSQYB106K6R3

C 4087 (B,41,68)

CKSRYB105K10

C 4088 (B,36,62)

CKSSYB104K10

C

C 4023 (B,49,64)

CKSSYB104K10

C 4026 (B,49,67)

CKSSYB104K10

C 4027 (B,50,67)

CKSSYB104K10

C 4028 (B,50,68)

CKSSYB104K10

C 4029 (B,55,53)

CKSSYB103K16

C 4089 (B,44,72)

CKSRYB105K10

C 4090 (B,43,74)

CKSRYB105K10

C 4091 (B,44,74)

CKSRYB105K10

C 4092 (A,33,60)

CCSSCH120J50

C 4093 (A,34,71)

CCSSCH220J50

C 4030 (B,54,53)

CKSSYB103K16

C 4031 (B,48,60)

CKSSYB102K50

C 4032 (B,49,69)

CKSSYB104K10

C 4033 (B,48,70)

CKSSYB104K10

C 4034 (B,48,62)

CKSSYB104K10

C 4094 (A,33,66)

CCSSCH220J50

C 4095 (A,33,64)

CCSSCH120J50

C 4096 (B,54,62)

CKSRYB105K10

C 4097 (B,49,54)

CKSRYB105K10

C 4098 (B,56,53)

CKSSYB103K16

D

C 4035 (B,48,60)

CKSSYB102K50

C 4036 (B,48,69)

CKSSYB104K10

C 4037 (B,48,62)

CKSSYB104K10

C 4038 (B,47,64)

CKSSYB104K10

C 4039 (B,47,69)

CKSSYB104K10

C 4103 (B,46,59) 47 uF/6.3 V

CCH1852

C 4104 (B,48,72)

CKSSYB104K10

C 4201 (A,6,30)

CKSSYB104K10

C 4202 (A,6,34)

CKSSYB104K10

C 4203 (A,5,41)

CKSSYB104K10

C 4040 (B,55,53)

CKSSYB103K16

C 4041 (B,47,63)

CKSSYB104K10

C 4042 (B,47,70)

CKSSYB104K10

C 4043 (B,46,63)

CKSSYB104K10

C 4044 (B,47,69)

CKSSYB104K10

C 4204 (A,19,36)

CKSSYB104K10

C 4205 (A,10,31) 10 uF

DCH1201

C 4206 (A,10,34) 10 uF

DCH1201

C 4207 (A,12,38) 10 uF

DCH1201

C 4208 (A,22,37) 10 uF

DCH1201

E

C 4045 (B,46,62)

CKSSYB104K10

C 4046 (B,46,69)

CKSSYB104K10

C 4047 (B,45,62)

CKSSYB104K10

C 4048 (B,45,69)

CKSSYB104K10

C 4049 (B,44,62)

CKSSYB104K10

C 4209 (A,12,31) 10 uF

DCH1201

C 4210 (A,12,34) 10 uF

DCH1201

C 4211 (A,10,38) 10 uF

DCH1201

C 4212 (A,24,37) 10 uF

DCH1201

C 4213 (B,63,9)

CKSSYB104K10

C 4050 (B,44,69)

CKSSYB104K10

C 4051 (B,43,62)

CKSSYB104K10

C 4052 (B,46,70)

CKSSYB104K10

C 4053 (B,44,61)

CKSSYB104K10

C 4054 (B,42,63)

CKSSYB104K10

C 4214 (B,38,16)

CKSSYB104K10

C 4215 (A,18,31)

CKSSYB104K10

C 4216 (B,67,14)

CCSSCH101J50

C 4217 (B,35,10)

CCSSCH101J50

C 4218 (B,68,16)

CCSSCH102J50

F

C 4055 (B,45,63)

CKSSYB104K10

C 4056 (B,44,63)

CKSSYB104K10

C 4057 (B,42,65)

CKSSYB104K10

C 4059 (B,42,66)

CKSSYB104K10

C 4060 (B,44,66)

CKSSYB104K10

C 4219 (B,34,9)

CCSSCH102J50

C 4221 (A,24,42)

CKSRYB105K10

C 4222 (B,69,13)

CCSSCH100D50

C 4223 (B,34,12)

CCSSCH220J50

C 4224 (A,19,29)

CKSSYB392K50

C 4061 (B,43,68)

CKSSYB104K10

C 4226 (A,26,44)

CKSRYB105K10

5			6			7			8		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.		
C 4227	(B,61,9)	10 uF	DCH1201			C 4415	(A,78,29)		CKSSYB103K16		
C 4228	(B,42,17)	10 uF	DCH1201			C 4416	(A,78,33)		CKSSYB103K16		
C 4229	(A,17,34)		CKSSYB104K10			C 4417	(A,77,36)		CKSSYB103K16		
C 4230	(B,60,17)	10 uF	DCH1201			C 4418	(A,77,39)		CKSSYB103K16		A
C 4231	(B,42,9)	10 uF	DCH1201			C 4419	(A,77,49)		CKSSYB103K16		
C 4232	(B,60,19)	47 uF/10 V	CCH1820			C 4420	(A,75,24)		CKSQYB106K6R3		
C 4233	(B,40,6)	47 uF/10 V	CCH1820			C 4421	(A,71,25)		CKSRYB105K10		
C 4236	(B,57,9)	10 uF	CCG1234			C 4422	(A,63,32)		CKSSYB103K16		
C 4237	(B,44,18)	10 uF	CCG1234			C 4423	(A,63,36)		CKSSYB103K16		
C 4238	(B,55,9)	10 uF	CCG1234			C 4424	(A,70,25)		CKSSYB104K10		
C 4239	(B,46,18)	10 uF	CCG1234			C 4425	(A,63,39)		CKSSYB103K16		
C 4240	(A,20,32)		CKSSYB392K50			C 4426	(A,74,53)		CKSRYB105K10		
C 4241	(B,53,8)	100 uF/4 V	CCH1809			C 4427	(B,77,76)		CKSSYB103K16		
C 4242	(B,48,18)	100 uF/4 V	CCH1809			C 4428	(B,77,74)		CKSSYB103K16		
C 4243	(A,19,28)		CKSSYB102K50			C 4429	(B,77,71)		CKSSYB103K16		B
C 4244	(B,60,39)		CKSSYB104K10			C 4430	(B,77,67)		CKSSYB103K16		
C 4245	(B,53,43)		CKSRYB474K16			C 4431	(B,77,64)		CKSSYB103K16		
C 4246	(A,19,16)		CKSSYB104K10			C 4432	(B,77,56)		CKSSYB103K16		
C 4247	(A,23,14)		CKSSYB104K10			C 4433	(B,68,78)		CKSQYB106K6R3		
C 4248	(B,26,65)		CKSRYB105K10			C 4435	(B,63,72)		CKSSYB103K16		
C 4249	(A,31,87)		CKSRYB105K10			C 4436	(B,63,68)		CKSSYB103K16		
C 4250	(B,40,40)		CKSRYB105K10			C 4437	(A,50,46)		CKSSYB104K10		
C 4251	(A,34,88)		CKSRYB105K10			C 4438	(B,62,76)		CKSSYB104K10		
C 4252	(B,28,67)		CKSRYB105K10			C 4439	(B,63,64)		CKSSYB103K16		
C 4253	(B,39,37)		CKSRYB105K10			C 4441	(A,51,46)		CKSRYB105K10		C
C 4255	(B,38,45)		CKSSYB104K10			C 4442	(B,63,27)		CKSSYB103K16		
C 4256	(B,50,52)		CKSSYB104K10			C 4443	(B,63,29)		CKSSYB103K16		
C 4257	(A,19,41)		CKSRYB105K10			C 4444	(B,63,32)		CKSSYB103K16		
C 4259	(A,18,45)		CKSRYB105K10			C 4445	(B,63,36)		CKSSYB103K16		
C 4260	(B,59,74)		CKSSYB104K10			C 4446	(B,63,39)		CKSSYB103K16		
C 4261	(B,41,21)		CKSSYB103K16			C 4447	(B,64,50)		CKSSYB103K16		
C 4265	(B,57,65)		CKSSYB104K10			C 4448	(B,66,25)		CKSQYB106K6R3		
C 4266	(B,49,78)		CKSRYB105K10			C 4450	(B,77,31)		CKSSYB103K16		
C 4267	(B,49,81)		CKSRYB105K10			C 4451	(B,77,35)		CKSSYB103K16		
C 4269	(A,22,24)		CKSSYB103K16			C 4452	(B,71,25)		CKSSYB104K10		
C 4270	(B,64,20)		CKSSYB103K16			C 4453	(B,77,39)		CKSSYB103K16		D
C 4271	(A,42,88)		CKSSYB104K10			C 4455	(A,27,35)		CKSSYB104K10		
C 4272	(A,38,93)		CKSSYB104K10			C 4456	(A,26,41)		CKSSYB104K10		
C 4273	(A,38,90)		CKSSYB104K10			C 4457	(A,29,41)		CKSQYB106K6R3		
C 4274	(B,47,45)		CKSSYB104K10			C 4458	(A,31,41)		CKSSYB104K10		
C 4275	(B,50,48)	10 uF	DCH1201			C 4459	(A,39,41)		CKSSYB104K10		
C 4277	(B,51,48)	10 uF	DCH1201			C 4511	(A,42,84)		CKSSYB104K10		
C 4278	(A,37,93)		CKSSYB104K10			C 4512	(A,37,83)		CKSRYB105K10		
C 4279	(B,30,5)		CKSSYB104K10			C 4513	(A,42,86)		CKSSYB104K10		
C 4280	(B,20,59)		CKSSYB104K10			C 4514	(A,40,85)		CKSSYB104K10		
C 4282	(B,24,60)		CKSSYB104K10			C 4515	(A,41,87)		CKSSYB104K10		
C 4401	(A,62,76)		CKSSYB103K16			C 4516	(A,36,87)		CKSSYB104K10		E
C 4402	(A,62,75)		CKSSYB103K16			C 4517	(A,36,85)		CKSSYB104K10		
C 4403	(A,63,71)		CKSSYB103K16			C 4518	(A,36,84)		CKSSYB104K10		
C 4404	(A,63,68)		CKSSYB103K16			C 4519	(A,36,86)		CKSSYB104K10		
C 4405	(A,63,64)		CKSSYB103K16			C 4520	(A,39,89)		CKSSYB104K10		
C 4406	(A,63,56)		CKSSYB103K16			C 4521	(A,38,87)		CKSSYB104K10		
C 4407	(A,77,52)		CKSQYB106K6R3			C 4522	(A,39,84)		CKSRYB105K10		
C 4408	(B,70,25)		CKSRYB105K10			C 4607	(A,30,35)		CKSSYB104K10		
C 4409	(A,77,73)		CKSSYB103K16			C 4608	(A,29,35)		CKSSYB104K10		
C 4410	(A,77,68)		CKSSYB103K16			C 4609	(A,44,35)		CKSRYB104K50		
C 4411	(A,73,52)		CKSSYB104K10			C 4613	(B,40,30)		CKSSYB473K10		F
C 4412	(A,77,64)		CKSSYB103K16			C 4614	(B,23,45)		CKSSYB104K10		
C 4413	(B,63,77)		CKSRYB105K10			C 4621	(B,59,28)		CKSSYB473K10		
C 4414	(A,78,27)		CKSSYB103K16			C 4622	(B,57,24)		CKSSYB473K10		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 4623 (B,48,22) CKSSYB473K10
 C 4624 (B,40,25) CKSSYB473K10
 C 4625 (B,48,41) CKSSYB473K10
 C 4626 (B,55,41) CKSSYB473K10

C 4814 (B,23,74)
 C 4815 (B,21,74)
 C 4816 (B,24,76)
 C 4817 (B,23,76)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4651 (B,43,53) CKSSYB104K10
 C 4653 (B,30,57) 4.7 uF CCG1201
 C 4661 (B,31,47) 4.7 uF CCG1201
 C 4662 (B,35,50) 4.7 uF CCG1201
 C 4665 (B,36,53) 4.7 uF CCG1201

C 4818 (B,22,76)
 C 4819 (B,21,75)
 C 4820 (B,20,74)
 C 4821 (B,21,76)
 C 4822 (B,20,77)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB104K10

C 4666 (B,23,49) 4.7 uF CCG1201
 C 4667 (B,27,58) 4.7 uF CCG1201
 C 4668 (B,28,45) CKSRYB105K10
 C 4670 (B,24,53) 4.7 uF CCG1201
 C 4671 (B,23,51) 4.7 uF CCG1201

C 4823 (B,21,80)
 C 4824 (B,22,78)
 C 4825 (B,21,78)
 C 4826 (B,22,80)
 C 4827 (B,23,78)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

C 4701 (B,26,23) CKSSYB104K10
 C 4711 (A,58,89) CKSSYB105K6R3
 C 4712 (B,58,90) CKSSYB103K16
 C 4713 (B,53,92) CKSSYB102K50
 C 4714 (A,60,84) CKSSYB104K10

C 4828 (B,22,81)
 C 4829 (B,18,77)
 C 4830 (B,18,79)
 C 4831 (B,18,78)
 C 4832 (B,18,80)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

C 4715 (A,60,83) CCSSCH101J50
 C 4716 (A,60,85) 10 uF CCG1244
 C 4717 (A,59,84) CKSSYB104K10
 C 4718 (A,59,86) CCSSCH470J50
 C 4719 (A,56,89) CKSSYB104K10

C 4833 (B,18,81)
 C 4834 (B,18,81)
 C 4835 (B,18,82)
 C 4836 (B,18,83)
 C 4837 (B,22,82)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB103K16

C 4720 (A,56,89) CCSSCH470J50
 C 4721 (A,56,90) CCSSCH101J50
 C 4722 (A,53,88) CCSSCH470J50
 C 4723 (A,52,87) CCSSCH470J50
 C 4724 (A,63,91) CCSSCH101J50

C 4838 (B,24,72)
 C 4839 (B,24,73)
 C 4840 (B,26,72)
 C 4841 (B,26,73)
 C 4842 (B,27,73)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4725 (A,71,92) CCSSCH101J50
 C 4727 (B,76,92) CCSSCH101J50
 C 4728 (B,70,89) CKSSYB102K50
 C 4729 (B,69,88) CKSSYB103K16
 C 4730 (B,66,86) CKSSYB104K10

C 4843 (B,28,73)
 C 4844 (B,29,73)
 C 4845 (B,29,73)
 C 4846 (B,28,74)
 C 4847 (B,28,74)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4731 (B,65,84) CKSSYB104K10
 C 4732 (B,65,86) CKSSYB103K16
 C 4733 (B,61,90) CCSSCH101J50
 C 4734 (B,66,88) CKSSYB104K10
 C 4735 (A,68,92) CCSSCK1R0C50

C 4848 (B,29,74)
 C 4849 (B,30,74)
 C 4850 (B,30,76)
 C 4851 (B,31,77)
 C 4852 (B,29,77)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4781 (B,36,49) 10 uF CCG1234
 C 4782 (B,30,59) 10 uF CCG1234
 C 4783 (B,49,87) 10 uF CCG1234
 C 4784 (B,59,39) CKSRYB105K10
 C 4785 (A,41,40) CKSRYB105K10

C 4853 (B,29,76)
 C 4854 (B,28,76)
 C 4855 (B,28,76)
 C 4856 (B,30,78)
 C 4857 (B,30,81)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4786 (B,39,34) CKSRYB105K10
 C 4787 (B,51,81) CKSSYB102K50
 C 4788 (B,19,27) 10 uF CCG1234
 C 4801 (B,22,32) CKSSYB103K16
 C 4802 (B,29,26) CKSSYB104K10

C 4858 (B,29,78)
 C 4859 (B,28,78)
 C 4860 (B,29,81)
 C 4861 (B,28,78)
 C 4862 (B,27,77)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4803 (B,21,71) CKSSYB103K16
 C 4804 (B,24,71) CKSSYB103K16
 C 4805 (B,26,71) CKSSYB103K16
 C 4806 (B,27,71) CKSSYB103K16
 C 4807 (B,27,69) CKSSYB103K16

C 4863 (B,27,79)
 C 4864 (B,26,77)
 C 4865 (B,26,79)
 C 4866 (B,25,78)
 C 4867 (B,24,76)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4808 (B,29,71) CKSSYB103K16
 C 4809 (B,21,72) CKSSYB103K16
 C 4810 (B,24,74) CKSSYB103K16
 C 4811 (B,21,73) CKSSYB103K16
 C 4812 (B,23,72) CKSSYB103K16

C 4868 (B,26,76)
 C 4869 (B,25,79)
 C 4870 (B,27,81)
 C 4871 (B,26,81)
 C 4872 (B,25,81)

CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16
 CKSSYB103K16

C 4813 (B,22,74) CKSSYB103K16

C 4901 (B,21,70)

CKSSYB103K16

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 4902	(B,24,70)	CKSSYB103K16		C 4989	(A,17,86)	CCSSCH4R0C50	
C 4903	(B,26,70)	CKSSYB103K16		C 4990	(A,22,86)	CCSSCH100D50	
C 4904	(B,27,70)	CKSSYB103K16		C 4991	(A,25,87)	CCSSCH100D50	
C 4905	(B,28,69)	CKSSYB103K16		C 4993	(B,21,69)	CKSRYB105K10	A
C 4906	(B,29,70)	CKSSYB103K16		C 4994	(A,4,60) 10 uF	CCG1244	
C 4907	(B,21,36)	CKSSYB104K10		C 4995	(B,29,40)	CKSSYB104K10	
C 4908	(B,21,34)	CKSSYB104K16		C 4996	(B,35,34)	CKSSYB104K10	
C 4909	(B,21,33)	CKSSYB104K16		C 4998	(B,22,36)	CKSSYB103K16	
C 4910	(B,21,32)	CKSSYB104K10		C 4999	(B,22,30)	CKSSYB103K16	
C 4912	(B,18,84)	CKSSYB104K10		F Unit Number : CWN3985 Unit Name : Navi Unit			
C 4913	(B,20,79)	CKSSYB104K10					
C 4914	(B,20,80)	CKSSYB104K10					
C 4915	(B,21,81)	CKSSYB104K10		MISCELLANEOUS			
C 4916	(B,20,79)	CKSSYB104K10					
C 4917	(B,20,78)	CKSSYB104K10					
C 4918	(B,17,68)	CKSSYB474K6R3		IC 5001	(B,51,39) IC	LTC3850IGN	
C 4921	(A,36,48)	CKSQYB106K6R3		IC 5102	(A,88,68) IC	TC7SET04FUS1	
C 4922	(A,23,60)	CKSQYB106K6R3		IC 5103	(A,89,72) L-MOS And Gate	TC7SET08FUS1	
C 4923	(A,36,50)	CKSQYB106K6R3		IC 5104	(A,90,76) IC	BD6538G	
C 4924	(A,24,60)	CKSQYB106K6R3		IC 5105	(A,119,79) IC	S-1200B33-M5	
C 4925	(A,22,52)	CKSSYB333K10		IC 5202	(B,54,82) IC	HA12241FP	
C 4926	(A,21,53)	CKSSYB104K10		IC 5402	(B,91,113) IC	NJM13403V	
C 4927	(A,22,53)	CKSSYB103K16		IC 5403	(B,89,101) IC	NJM2125F	
C 4928	(A,22,55)	CKSSYB104K10		IC 5404	(B,97,101) IC	NJM2125F	
C 4929	(A,22,54)	CKSSYB104K10		IC 5407	(A,147,86) IC	CSX1149	C
C 4930	(A,22,50)	CKSSYB104K10		IC 5451	(B,58,19) IC	NJM2115V	
C 4931	(A,25,56)	CKSSYB104K10		IC 5501	(B,154,93) IC	ADS7828E	
C 4932	(A,26,60)	CCSSCH4R0C50		IC 5503	(A,135,99) IC	BH30NB1WHFV	
C 4933	(A,27,57)	CKSSYB103K16		IC 5507	(B,86,15) IC	NJM2125F	
C 4934	(A,28,46)	CKSSYB103K16		Q 5001	(A,41,32) FET	SP8K10S	
C 4935	(A,27,58)	CKSSYB104K10		Q 5002	(A,61,33) FET	SP8K10S	
C 4936	(A,28,47)	CKSSYB104K10		Q 5003	(B,40,30) Chip Transistor	DTC114EUA	
C 4937	(A,31,57)	CKSSYB103K16		Q 5102	(A,124,90) Transistor	2SA1576A	
C 4938	(A,31,58)	CKSSYB104K10		Q 5103	(A,123,86) Transistor	2SC4081	
C 4939	(A,29,62)	CCSSCH4R0C50		Q 5104	(B,43,73) Transistor	2SD1760F5	
C 4940	(A,33,50)	CKSSYB104K10		Q 5105	(B,52,76) Transistor	UMF23N	D
C 4941	(A,34,52)	CKSSYB103K16		Q 5106	(B,75,27) Transistor	2SB1184F5	
C 4942	(A,35,52)	CKSSYB104K10		Q 5107	(B,75,41) Digital Transistor	DTC143EUA	
C 4943	(A,19,48)	CKSQYB106K6R3		Q 5108	(A,119,102) Transistor	2SA1587	
C 4944	(A,21,48)	CKSQYB106K6R3		Q 5109	(A,117,97) Chip Transistor	DTC114EUA	
C 4945	(B,34,24) 47 uF/6.3 V	CCH1852		Q 5110	(B,124,102) Transistor	IMX1	
C 4946	(B,33,29)	CKSSYB103K16		Q 5111	(B,117,109) Digital Transistor	DTC143EUA	
C 4947	(B,35,26)	CKSQYB106K6R3		Q 5112	(B,111,111) Transistor	2SD1760F5	
C 4948	(B,34,28) 47 uF/6.3 V	CCH1852		Q 5113	(B,117,89) Transistor	2SA1576A	
C 4963	(B,26,87)	CKSQYB106K6R3		Q 5114	(B,123,89) Chip Transistor	DTC114EUA	
C 4964	(B,21,85)	CKSSYB103K16		Q 5115	(B,119,83) Transistor	2SA1577	E
C 4965	(B,28,88) 47 uF/6.3 V	CCH1852		Q 5116	(B,124,82) Chip Transistor	DTC114EUA	
C 4969	(B,21,30)	CKSRYB104K16		Q 5201	(A,61,86) Transistor	2SA1576A	
C 4971	(B,29,39)	CKSSYB103K16		Q 5202	(B,67,83) Chip Transistor	DTC114EUA	
C 4972	(B,34,34)	CKSSYB103K16		Q 5251	(B,82,104) Transistor	IMH23	
C 4973	(B,29,27)	CKSSYB103K16		Q 5252	(B,80,109) Transistor	IMD2A	
C 4979	(A,11,60) 33 uF/10 V	CCH1586		Q 5304	(B,120,33) Transistor	2SA1576A	
C 4981	(B,27,27)	CCSSCH220J50		D 5001	(B,48,30) Diode	RB160M-40	
C 4982	(B,21,67) 47 uF/6.3 V	CCH1852		D 5002	(B,54,30) Diode	RB160M-40	
C 4983	(B,21,70)	CKSSYB103K16		D 5003	(B,124,108) Diode	RB551V-30	
C 4984	(B,28,84) 47 uF/6.3 V	CCH1852		D 5004	(B,114,103) Diode	RB551V-30	
C 4985	(B,23,83)	CKSSYB103K16		D 5005	(B,116,105) Diode	HZU6R8(B1)	F
C 4986	(B,25,83)	CKSQYB106K6R3		D 5006	(B,112,104) Diode	HZU11(B2)	
C 4987	(B,31,75)	CKSQYB106K6R3		D 5007	(A,129,85) Diode	RB551V-30	
C 4988	(A,20,84)	CKSSYB103K16		D 5008	(B,125,85) Diode	RB551V-30	

	1		2	3		4
	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	D 5203	(B,19,110) Diode	UDZS18(B)	JA5302	(A,15,123) Connector	CKS5271
	D 5204	(B,22,110) Diode	EDZ5R6(B)	SN5501	(A,152,91) Sensor	S-58LM20A-N4
	D 5205	(B,21,110) Diode	EDZ5R6(B)	RESISTORS		
	D 5251	(B,63,112) Diode	MALS180X			
	D 5252	(A,68,109) Diode	MALS180X			
B	D 5253	(B,67,110) Diode	MALS180X	R 5001	(B,49,45)	RS1/10SR1303D
	D 5254	(B,74,111) Diode	MALS180X	R 5002	(B,43,41)	RS1/16SS100J
	D 5255	(A,72,110) Diode	MALS180X	R 5003	(B,43,43)	RS1/16SS100J
	D 5256	(A,64,110) Diode	1SR154-400	R 5004	(B,47,50)	RS1/10SR682J
	D 5257	(A,82,112) Diode	RSB12JS2	R 5005	(B,51,30)	RS1/10SR2R2J
C	D 5258	(B,85,123) Diode	EDZ6R8(B)	R 5006	(B,49,49)	RS1/10SR2402D
	D 5502	(B,144,86) Diode	UDZS5R6(B)	R 5007	(B,52,49)	RS1/10SR6802D
	L 5001	(A,41,42) Choke Coil 6.8 uH CTH1396		R 5008	(B,54,50)	RS1/10SR682J
	L 5002	(A,60,42) Choke Coil 4.7 uH CTH1399		R 5009	(B,53,45)	RS1/10SR2203D
	L 5003	(A,84,67) Inductor	CTF1306	R 5010	(B,59,42)	RS1/16SS100J
D	L 5201	(B,56,76) Inductor	LCYC2R2K1608	R 5011	(B,59,41)	RS1/16SS100J
	L 5251	(A,82,109) Choke Coil 160 mA CTH1319		R 5012	(B,45,28)	RS1/16SS104J
	L 5252	(B,71,105) Inductor	CTF1689	R 5013	(A,41,49) 0.027 ohm	CCN1190
	L 5253	(B,69,105) Inductor	CTF1689	R 5014	(A,59,49) 0.027 ohm	CCN1190
	L 5254	(B,74,105) Inductor	CTF1689	R 5015	(B,46,46)	RS1/10SR0R0J
E	L 5310	(A,129,46) Inductor	CTF1736	R 5016	(B,56,46)	RS1/10SR0R0J
	L 5311	(A,129,41) Inductor	CTF1736	R 5017	(B,43,31)	RS1/10SR4R7J
	L 5404	(A,145,93) Inductor	CTF1410	R 5018	(B,58,31)	RS1/10SR2R2J
	L 5501	(A,158,91) Inductor	CTF1410	R 5019	(A,63,61)	RS1/8SQ0R0J
	L 5502	(A,148,90) Inductor	CTF1410	R 5020	(B,57,40)	RS1/16SS104J
F	L 5503	(A,154,92) Inductor	CTF1410	R 5022	(A,56,27)	RS1/8SQ0R0J
	L 5601	(A,81,22) Inductor	CTF1453	R 5025	(B,44,62)	RS1/4SA0R0J
	L 5602	(A,65,20) Inductor	CTH1256	R 5026	(A,51,66)	RS1/4SA0R0J
	L 5603	(A,86,37) Inductor	CTF1393	R 5027	(B,39,62)	RS1/4SA221J
	L 5604	(A,89,35) Inductor	CTF1393	R 5028	(A,54,66)	RS1/4SA221J
G	L 5605	(A,84,37) Inductor	CTF1393	R 5029	(B,41,34)	RS1/10SR1501D
	F 5001	(B,39,64) EMI Filter	CCG1267	R 5030	(B,42,36)	RS1/10SR2001D
	F 5002	(A,58,66) EMI Filter	CCG1267	R 5031	(B,39,36)	RS1/10SR2001D
	F 5003	(A,61,27) EMI Filter	CCG1267	R 5032	(B,122,91)	RS1/10SR682J
	F 5005	(B,75,73) Chip EMI Filter	DTF1106	R 5104	(A,123,88)	RS1/10SR682J
H	F 5101	(B,162,71) EMI Filter	CCG1172	R 5105	(A,126,87)	RS1/10SR153J
	F 5102	(B,162,64) EMI Filter	CCG1172	R 5107	(B,50,75)	RS1/10SR103J
	F 5251	(B,70,108) EMI Filter	CCG1067	R 5109	(B,52,69)	RS1/10SR330J
	F 5252	(B,73,108) EMI Filter	CCG1067	R 5110	(B,53,73)	RS1/16SS223J
	F 5253	(B,66,108) EMI Filter	CCG1060	R 5111	(B,53,71)	RS1/8SQ472J
I	F 5254	(B,88,122) EMI Filter	CCG1161	R 5113	(B,73,35)	RS1/10SR153J
	F 5255	(A,128,43) Chip EMI Filter	DTF1106	R 5114	(B,76,36)	RS1/4SA331J
	⚠P5001	(A,70,31) Fuse 3.15 A	CEK1259	R 5115	(B,76,38)	RS1/4SA331J
	⚠P5102	(A,41,68) Fuse 1 A	CEK1254	R 5116	(A,120,100)	RS1/16SS103J
	⚠P5103	(A,75,47) Fuse 1.25 A	CEK1255	R 5117	(A,120,98)	RS1/16SS512J
J	⚠P5104	(A,123,104) Fuse 1 A	CEK1254	R 5118	(B,122,106)	RS1/16SS224J
	P 5378	(B,79,115) Poly Switch	MINISMDC020F	R 5119	(B,126,105)	RS1/16SS472J
	GY5501	(A,153,96) IC	CSX1147	R 5120	(B,121,103)	RS1/8SQ102J
	VA5201	(B,13,109) Varistor	AVR-M1608C270KT2AB	R 5121	(B,118,100)	RS1/4SA681J
	VA5202	(B,15,109) Varistor	AVR-M1608C270KT2AB	R 5122	(B,119,108)	RS1/10SR102J
K	VA5203	(B,10,110) Varistor	AVR-M1608C270KT2AB	R 5123	(A,90,70)	RS1/16SS0R0J
	VA5204	(B,12,110) Varistor	AVR-M1608C270KT2AB	R 5124	(A,89,71)	RS1/16SS0R0J
	CN5001	(A,103,115) Connector	CKS4822	R 5126	(A,82,68)	RS1/8SQ0R0J
	CN5251	(A,68,124) Connector	CKS5867	R 5128	(B,116,82)	RS1/10SR0R0J
	CN5601	(A,86,8) Connector	CKS6118	R 5131	(A,126,82)	RS1/10SR0R0J
L	CN5602	(A,100,50) Connector	CKS6116	R 5132	(B,118,86)	RS1/10SR153J
	CN5603	(B,151,51) Connector	CKS6123	R 5136	(A,128,32)	RS1/10SR102J
	JA5201	(A,166,113) Connector	CKS5749	R 5140	(B,119,81)	RS1/10SR153J
	JA5202	(A,162,126) Connector	CKS5702	R 5141	(B,122,82)	RS1/10SR681J
	JA5251	(A,90,128) Connector	CKS5589	R 5144	(A,70,24)	RS1/16SS0R0J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 5146	(B,126,89)	RS1/10SR0R0J		R 5504	(B,160,95)	RS1/16SS202J	A
R 5150	(A,74,27)	RS1/4SA682J		R 5511	(B,149,96)	RS1/16SS471J	
R 5151	(A,128,90)	RS1/10SR6800D		R 5516	(B,151,96)	RS1/16SS101J	
R 5152	(A,127,90)	RS1/10SR6800D		R 5519	(B,145,93)	RS1/10SR3900D	
R 5153	(A,120,86)	RS1/16SS473J		R 5521	(B,157,82)	RS1/10SR222J	
R 5154	(A,119,88)	RS1/16SS393J		R 5522	(B,157,83)	RS1/10SR222J	B
R 5209	(B,63,83)	RS1/10SR332J		R 5523	(A,150,97)	RS1/16SS153J	
R 5210	(B,65,83)	RS1/10SR682J		R 5524	(A,150,99)	RS1/16SS153J	
R 5211	(A,60,92)	RS1/10SR222J		R 5525	(B,147,88)	RS1/16SS0R0J	
R 5214	(B,65,80)	RS1/10SR0R0J		R 5526	(B,153,86)	RS1/16SS0R0J	
R 5216	(B,49,79)	RS1/10SR101J		R 5527	(B,154,87)	RS1/16SS0R0J	C
R 5218	(B,45,81)	RS1/4SA680J		R 5528	(A,139,96)	RS1/10SR0R0J	
R 5220	(B,43,81)	RS1/4SA680J		R 5529	(A,138,92)	RS1/10SR0R0J	
R 5222	(B,59,81)	RS1/16SS103J		R 5533	(A,137,103)	RS1/10SR471J	
R 5223	(B,49,82)	RS1/10SR101J		R 5601	(A,92,65)	RS1/16SS331J	
R 5224	(B,58,85)	RS1/16SS681J		R 5603	(A,111,73)	RS1/16SS0R0J	D
R 5225	(B,59,85)	RS1/16SS101J		R 5604	(B,72,16)	RS1/16SS0R0J	
R 5226	(B,47,81)	RS1/4SA680J		R 5605	(B,68,12)	RS1/16SS0R0J	
R 5227	(B,36,82)	RS1/4SA680J		R 5606	(B,160,33)	RS1/16SS0R0J	
R 5253	(B,81,101)	RS1/10SR0R0J		R 5607	(B,144,67)	RS1/16SS0R0J	
R 5359	(B,124,33)	RS1/10SR0R0J		R 5608	(B,159,31)	RS1/16SS0R0J	E
R 5360	(B,120,36)	RS1/16SS103J		R 5609	(B,140,64)	RS1/16SS0R0J	
R 5361	(B,123,34)	RS1/16SS102J		R 5610	(B,136,50)	RS1/16SS0R0J	
R 5362	(B,117,35)	RS1/16SS103J		R 5611	(B,134,50)	RS1/16SS0R0J	
R 5401	(B,91,106)	RS1/10SR333J		R 5612	(B,134,52)	RS1/16SS0R0J	
R 5402	(B,92,103)	RS1/10SR683J		R 5613	(B,136,52)	RS1/16SS0R0J	F
R 5403	(B,93,103)	RS1/10SR154J		R 5614	(B,134,53)	RS1/16SS0R0J	
R 5404	(B,92,97)	RS1/10SR101J		R 5615	(B,136,53)	RS1/16SS0R0J	
R 5405	(B,97,91)	RS1/8SQ0R0J		R 5616	(B,141,54)	RS1/16SS0R0J	
R 5409	(A,97,106)	RS1/10SR393J		R 5617	(B,136,55)	RS1/16SS0R0J	
R 5410	(A,96,109)	RS1/10SR393J		R 5618	(B,134,54)	RS1/16SS0R0J	A
R 5411	(A,88,116)	RS1/10SR102J		R 5619	(B,140,40)	RS1/16SS0R0J	
R 5412	(B,88,120)	RS1/10SR102J		R 5620	(B,162,50)	RS1/16SS0R0J	
R 5413	(A,93,117)	RS1/10SR683J		R 5621	(B,161,50)	RS1/16SS0R0J	
R 5414	(A,89,116)	RS1/10SR153J		R 5622	(A,158,43)	RS1/16SS0R0J	
R 5415	(B,92,109)	RS1/10SR0R0J		R 5623	(B,142,30)	RS1/16SS0R0J	B
R 5416	(B,97,111)	RS1/10SR682J		R 5624	(B,161,31)	RS1/16SS0R0J	
R 5417	(B,99,114)	RS1/10SR124J		R 5625	(B,144,30)	RS1/16SS0R0J	
R 5418	(B,100,111)	RS1/10SR473J		R 5626	(B,144,34)	RS1/16SS0R0J	
R 5419	(B,98,109)	RS1/10SR101J		R 5627	(B,142,34)	RS1/16SS0R0J	
R 5420	(B,86,115)	RS1/10SR683J		R 5628	(A,86,18)	RS1/16SS0R0J	C
R 5421	(B,98,106)	RS1/10SR333J		R 5629	(A,85,18)	RS1/16SS0R0J	
R 5422	(B,99,103)	RS1/10SR683J		R 5630	(A,87,18)	RS1/16SS0R0J	
R 5423	(B,101,103)	RS1/10SR154J		R 5631	(B,84,12)	RS1/16SS0R0J	
R 5424	(B,98,97)	RS1/10SR101J		R 5632	(B,82,12)	RS1/16SS0R0J	
R 5426	(B,86,109)	RS1/10SR473J		R 5634	(A,89,15)	RS1/16SS0R0J	D
R 5427	(B,88,106)	RS1/10SR101J		R 5635	(A,91,15)	RS1/16SS0R0J	
R 5428	(B,86,111)	RS1/10SR153J		R 5636	(A,90,15)	RS1/16SS0R0J	
R 5453	(B,62,16)	RS1/16SS153J		R 5637	(B,86,13)	RS1/16SS0R0J	
R 5454	(B,65,18)	RS1/16SS153J		R 5638	(B,88,12)	RS1/16SS0R0J	
R 5455	(B,60,16)	RS1/10SR473J		R 5639	(A,88,18)	RS1/16SS0R0J	E
R 5456	(B,64,15)	RS1/10SR473J		R 5641	(A,85,50)	RS1/16SS820J	
R 5457	(B,55,16)	RS1/10SR103J		R 5642	(A,112,63)	RS1/16SS0R0J	
R 5458	(B,64,20)	RS1/10SR103J		R 5645	(A,109,48)	RS1/16SS0R0J	
R 5475	(B,132,67)	RS1/10SR0R0J		R 5646	(A,111,49)	RS1/16SS0R0J	
R 5476	(B,132,69)	RS1/10SR0R0J		R 5647	(A,108,61)	RS1/16SS0R0J	F
R 5481	(B,132,65)	RS1/10SR0R0J		R 5648	(A,110,61)	RS1/16SS0R0J	
R 5501	(B,160,88)	RS1/16SS0R0J		R 5650	(A,111,50)	RS1/16SS0R0J	
R 5502	(B,161,89)	RS1/16SS0R0J		R 5651	(A,109,57)	RS1/16SS0R0J	
R 5503	(B,160,92)	RS1/16SS202J		R 5653	(A,114,57)	RS1/16SS0R0J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 5655	(A,117,56)	RS1/16SS0R0J
	R 5656	(A,118,55)	RS1/16SS0R0J
	R 5659	(A,116,55)	RS1/16SS0R0J
	R 5660	(A,111,54)	RS1/16SS0R0J
	R 5661	(A,109,54)	RS1/16SS0R0J
	R 5662	(A,111,53)	RS1/16SS0R0J
	R 5663	(A,86,51)	RS1/16SS151J
	R 5664	(A,84,53)	RS1/16SS0R0J
	R 5665	(A,111,52)	RS1/16SS0R0J
	R 5666	(A,85,52)	RS1/16SS0R0J
B	R 5667	(A,113,45)	RS1/16SS0R0J
	R 5668	(A,111,44)	RS1/16SS0R0J
	R 5669	(A,115,34)	RS1/16SS0R0J
	R 5670	(A,111,43)	RS1/16SS0R0J
	R 5671	(A,112,40)	RS1/16SS0R0J
	R 5672	(A,115,37)	RS1/16SS331J
	R 5673	(A,113,46)	RS1/16SS101J
	R 5674	(A,111,45)	RS1/16SS101J
	R 5675	(A,115,35)	RS1/16SS0R0J
	R 5676	(A,117,35)	RS1/16SS0R0J
C	R 5677	(A,114,40)	RS1/16SS0R0J
	R 5678	(A,113,44)	RS1/16SS0R0J
	R 5679	(A,113,42)	RS1/16SS221J
	R 5680	(A,116,42)	RS1/16SS221J
	R 5682	(A,117,38)	RS1/16SS0R0J
	R 5689	(A,84,42)	RS1/16SS0R0J
	R 5693	(A,143,55)	RS1/10SR0R0J
	R 5694	(A,109,47)	RS1/16SS0R0J
	R 5698	(B,118,49)	RS1/16SS182J
	R 5711	(B,86,37)	RS1/10SR0R0J
	R 5714	(B,45,40)	RS1/16SS104J

CAPACITORS

D	C 5001	(B,56,45)	CKSRYB152K50
	C 5002	(B,45,42)	CCSRCH102J50
	C 5003	(B,44,35)	CKSRYB104K50
	C 5004	(B,49,46)	CCSRCH330J50
	C 5005	(B,48,48)	CCSRCH221J50
	C 5006	(B,46,49)	CCSRCH681J50
	C 5007	(B,52,33)	CKSQYB475K10
	C 5008	(B,50,33)	CKSRYB104K50
	C 5009	(B,55,49)	CCSRCH681J50
	C 5010	(B,54,48)	CCSRCH471J50
E	C 5011	(B,57,34)	CKSRYB104K50
	C 5012	(B,53,46)	CCSRCH220J50
	C 5013	(B,57,42)	CCSRCH102J50
	C 5014	(B,46,45)	CKSRYB273K25
	C 5015	(A,45,52) 68 uF/10 V	CCH1635
	C 5016	(A,55,52) 68 uF/10 V	CCH1635
	C 5017	(A,44,49) 10 uF	DCH1201
	C 5018	(A,56,49) 10 uF	DCH1201
	C 5020	(A,45,29) 10 uF	CCG1223
	C 5021	(A,56,32) 10 uF	CCG1223
F	C 5106	(A,121,90)	CKSQYB103K50
	C 5107	(A,56,73)	CKSQYB104K50
	C 5108	(A,51,75)	CEVW101M16
	C 5110	(A,41,74)	CEVW101M16
	C 5111	(A,74,20)	CEVW101M16

C 5112	(A,74,25)	CKSQYB104K50
C 5113	(A,76,35)	CKSQYB104K50
C 5114	(A,76,40)	CEVW101M16
C 5115	(B,125,106)	CKSRYB472K50
C 5116	(B,122,108)	CKSRYB104K16
C 5117	(B,110,104)	CKSSYB103K16
C 5118	(A,114,105)	CEVW470M16
C 5119	(A,108,113)	CKSSYB103K16
C 5120	(A,105,105)	CEVW101M16
C 5121	(B,164,68)	CKSRYB104K50
C 5122	(B,165,60)	CKSRYB104K50
C 5123	(A,86,66)	CKSSYB104K10
C 5124	(A,87,72)	CKSSYB104K10
C 5125	(A,82,78)	CEVW101M16
C 5126	(A,86,77)	CKSRYB103K50
C 5129	(B,74,71)	CKSRYB103K50
C 5130	(B,74,75)	CKSRYB104K16
C 5131	(A,86,74)	CKSRYB103K50
C 5132	(A,51,31) 100 uF/16 V	CCH1565
C 5133	(B,115,86)	CKSQYB103K50
C 5134	(A,129,124) 330 uF/10 V	CCH1623
C 5137	(A,124,82)	CKSQYB105K16
C 5138	(A,122,82)	CKSSYB104K10
C 5139	(A,116,75)	CKSQYB106K6R3
C 5140	(A,118,75)	CKSSYB104K10
C 5141	(B,122,85)	CKSQYB103K50
C 5149	(A,119,86)	CKSRYB105K10
C 5212	(B,17,110)	CKSRYB104K50
C 5214	(B,57,78)	CKSSYB472K16
C 5340	(B,85,122)	CKSRYB104K50
C 5344	(B,118,36)	CKSSYB104K10
C 5402	(B,90,104)	CCSRCH471J50
C 5403	(B,92,101)	CCSRCH680J50
C 5404	(B,87,101)	CKSRYB104K16
C 5409	(A,94,102)	CKSRYB104K16
C 5410	(A,96,103) 10 uF	DCH1201
C 5411	(A,98,103) 10 uF	DCH1201
C 5412	(A,94,109)	CKSRYB105K10
C 5413	(B,85,113)	CCSRCH471J50
C 5414	(B,85,111)	CCSRCH821J50
C 5415	(A,89,119)	CKSRYB473K50
C 5416	(A,91,118)	CKSRYB473K50
C 5417	(B,90,110)	CKSRYB104K16
C 5418	(B,96,110)	CKSRYB104K16
C 5419	(B,99,113)	CCSRCH331J50
C 5420	(B,98,111)	CKSRYB152K50
C 5421	(B,97,106)	CKSRYB105K10
C 5422	(B,97,104)	CCSRCH471J50
C 5423	(B,99,101)	CCSRCH680J50
C 5424	(B,94,91)	CKSRYB105K10
C 5429	(B,89,106)	CKSRYB105K10
C 5430	(B,89,109)	CKSRYB104K16
C 5433	(B,95,101)	CKSRYB104K16
C 5434	(B,90,117) 22 uF	CCG1178
C 5451	(B,67,16)	CKSQYB475K10
C 5452	(B,67,19)	CKSQYB475K10
C 5453	(B,57,16)	CCSRCH391J50
C 5454	(B,64,21)	CCSRCH391J50
C 5455	(B,52,16)	CCSRCH221J50
C 5456	(B,63,18)	CCSRCH221J50

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 5460	(B,57,22)	CKSRYB104K16		Q 3100	(B,99,65) Transistor	2SC4617	
C 5471	(B,87,49)	CKSQYB475K10		Q 3101	(B,99,59) Transistor	2SC4617	A
C 5472	(B,85,50)	CKSQYB475K10		Q 3102	(B,103,66) Transistor	2SC4617	
C 5501	(B,160,94)	CKSSYB104K10		Q 3103	(B,99,68) Transistor	2SC4617	
C 5502	(B,157,97)	CKSRYB104K16		Q 3106	(A,131,63) FET	SP8K22	
				Q 3200	(A,19,46) Transistor	2SC4617	
C 5503	(B,157,89)	CKSRYB104K16		Q 3201	(A,26,49) Transistor	2SA1774	
C 5504	(B,157,87)	CKSQYB106K6R3		Q 3202	(A,27,45) Transistor	2SC4617	
C 5505	(B,150,89)	CKSSYB104K10		Q 3203	(A,22,49) Transistor	2SA1774	
C 5508	(B,147,92)	CKSSYB104K10		Q 3300	(A,75,18) Transistor	UMZ1N	
C 5509	(B,147,93)	CKSSYB104K10		Q 3301	(A,75,20) Transistor	UMZ1N	
C 5510	(B,148,95)	CKSSYB104K10		Q 3302	(A,66,16) Transistor	UMZ1N	
C 5511	(A,148,99)	CKSSYB105K6R3		Q 3303	(A,66,19) Transistor	UMZ1N	
C 5512	(A,148,97)	CKSSYB105K6R3		Q 3304	(A,66,25) Transistor	UMZ1N	B
C 5513	(A,154,93)	CKSSYB104K10		Q 3305	(A,66,22) Transistor	UMZ1N	
C 5514	(A,150,92)	CKSSYB104K10		Q 3360	(B,85,32) Transistor	DTC114EE	
C 5515	(A,153,81)	CKSRYB154K10		D 3001	(B,120,38) Diode	RB160M-30	
C 5516	(A,153,84)	CKSRYB154K10		D 3002	(B,102,20) Diode	RB500V-40	
C 5517	(A,153,86) 2.2 uF	CCG1205		D 3003	(B,106,20) Diode	RB500V-40	
C 5518	(A,145,90)	CKSQYB106K6R3		D 3004	(B,104,20) Diode	RB500V-40	
C 5519	(A,146,89)	CKSSYB104K10		D 3005	(B,109,18) Diode	RB500V-40	
C 5520	(A,135,101)	CKSSYB104K10		D 3006	(B,107,42) Diode	RB160M-30	
C 5521	(A,135,102)	CKSQYB106K6R3		D 3007	(B,101,36) Diode	RB500V-40	
C 5523	(A,137,95)	CKSQYB106K6R3		D 3008	(B,97,41) Diode	RB548W	
C 5524	(A,135,96)	CKSSYB104K10		D 3009	(B,99,41) Diode	RB548W	C
C 5525	(B,151,98)	CKSSYB104K10		D 3010	(B,88,17) Diode	RB548W	
C 5526	(B,83,15)	CKSRYB104K16		D 3011	(B,91,17) Diode	RB548W	
C 5601	(A,82,18) 10 uF	CCG1223		D 3012	(B,93,17) Diode	RB548W	
C 5603	(A,54,19)	CEVW101M16		D 3100	(B,108,64) Diode	UDZS6R8(B)	
C 5604	(A,46,19)	CEVW101M16		D 3101	(B,95,67) Diode	RB500V-40	
C 5615	(A,92,42)	CKSRYB104K16		D 3102	(B,108,61) Diode	RB500V-40	
C 5616	(A,90,37)	CKSRYB104K16		D 3103	(B,108,57) Diode	RB500V-40	
C 5617	(B,88,43)	CKSRYB104K16		D 3105	(A,139,50) Diode	RB160VA-40	
C 5623	(B,110,40)	CKSRYB104K16		L 3001	(B,130,50) Choke Coil 18 uH	CTH1250	
C 5624	(B,109,42)	CKSRYB104K16		L 3002	(B,126,26) Inductor	CTF1635	
C 5626	(A,125,42)	CKSRYB104K16		L 3003	(B,125,38) Choke Coil 68 uH	CTH1318	D
				L 3004	(B,111,45) Choke Coil 68 uH	CTH1318	
				L 3005	(B,112,49) Inductor	CTF1635	
				L 3006	(B,95,45) Inductor	DTL1096	
				L 3007	(B,96,15) Inductor	CTF1635	
				L 3100	(B,104,60) Inductor	CTF1306	
				L 3101	(A,137,55) Choke Coil 56 uH	CTH1394	
				L 3150	(A,54,48) Inductor	CTF1731	
				L 3151	(A,48,53) Inductor	CTF1306	
				L 3152	(A,47,41) Inductor	CTF1306	
				L 3153	(A,44,37) Inductor	CTF1748	
				L 3154	(A,43,37) Inductor	CTF1748	E
				L 3155	(A,43,59) Inductor	CTF1734	
				L 3156	(A,42,36) Inductor	CTF1748	
				L 3157	(A,42,59) Inductor	CTF1734	
				L 3158	(A,40,37) Inductor	CTF1748	
				L 3159	(A,41,59) Inductor	CTF1734	
				L 3160	(A,39,38) Inductor	CTF1748	
				L 3161	(A,38,58) Inductor	CTF1734	
				L 3162	(A,38,37) Inductor	CTF1748	
				L 3163	(A,37,58) Inductor	CTF1734	
				L 3164	(A,37,38) Inductor	CTF1748	F
				L 3165	(A,36,58) Inductor	CTF1748	
				L 3166	(A,36,37) Inductor	CTF1748	
				L 3167	(A,31,55) Inductor	CTF1748	



Unit Number : CWN3935
Unit Name : Monitor Unit

MISCELLANEOUS

IC 3001	(B,108,28) IC	BD6171KV		L 3101	(A,137,55) Choke Coil 56 uH	CTH1394	
IC 3100	(B,103,63) IC	TC7SH08FUS1		L 3150	(A,54,48) Inductor	CTF1731	
IC 3101	(B,103,57) IC	TC7SH08FUS1		L 3151	(A,48,53) Inductor	CTF1306	
IC 3102	(A,117,64) IC	BD8113EFV		L 3152	(A,47,41) Inductor	CTF1306	
IC 3150	(A,41,48) IC	DS90C124QVS		L 3153	(A,44,37) Inductor	CTF1748	
IC 3151	(A,31,48) IC	TC7SZ08FU		L 3154	(A,43,37) Inductor	CTF1748	
IC 3200	(A,23,64) IC	NJM2100V		L 3155	(A,43,59) Inductor	CTF1734	
IC 3201	(A,30,60) IC	TC7S66FU		L 3156	(A,42,36) Inductor	CTF1748	
IC 3202	(A,24,54) IC	NJM082BV		L 3157	(A,42,59) Inductor	CTF1734	
IC 3203	(A,33,62) IC	TC7WT240FU		L 3158	(A,40,37) Inductor	CTF1748	
IC 3204	(B,60,38) Logic IC	TC74VHCT04AFTS1		L 3159	(A,41,59) Inductor	CTF1734	
IC 3300	(A,72,30) IC	BH2227AFV		L 3160	(A,39,38) Inductor	CTF1748	
IC 3360	(B,86,53) IC	AK4388VT		L 3161	(A,38,58) Inductor	CTF1734	
IC 3362	(B,82,35) IC	TC7SH08FUS1		L 3162	(A,38,37) Inductor	CTF1748	
Q 3001	(B,117,37) FET	RSQ035P03		L 3163	(A,37,58) Inductor	CTF1734	
Q 3002	(B,104,42) FET	RSQ035P03		L 3164	(A,37,38) Inductor	CTF1748	F
Q 3003	(B,95,22) Transistor	2SA1577		L 3165	(A,36,58) Inductor	CTF1748	
Q 3004	(B,97,19) Transistor	2SC4097		L 3166	(A,36,37) Inductor	CTF1748	
Q 3005	(B,95,32) Transistor	DTC114EE		L 3167	(A,31,55) Inductor	CTF1748	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

L 3168 (A,40,58) Inductor

CTF1306

R 3007 (B,128,31)

RS1/10SR82R0D

L 3169 (A,40,62) Inductor

CTF1736

R 3008 (B,123,31)

RS1/10SR3300D

L 3170 (A,35,40) Inductor

CTF1748

R 3009 (B,126,34)

RS1/10SR102J

L 3171 (A,34,40) Inductor

CTF1748

R 3010 (B,122,30)

RS1/10SR102J

L 3172 (A,33,40) Inductor

CTF1748

R 3011 (B,118,29)

RS1/10SR104J

L 3173 (A,32,40) Inductor

CTF1748

R 3012 (B,122,33)

RS1/10SR333J

L 3174 (A,30,43) Inductor

CTF1734

R 3013 (B,118,30)

RS1/16SS331J

L 3175 (A,31,51) Inductor

CTF1748

R 3014 (B,117,25)

RS1/10SR2001D

L 3176 (A,30,52) Inductor

CTF1748

R 3015 (B,118,25)

RS1/10SR3900D

L 3177 (A,31,53) Inductor

CTF1748

R 3016 (B,120,25)

RS1/10SR1000D

L 3178 (A,31,54) Inductor

CTF1748

R 3017 (B,112,40)

RS1/10SR273J

L 3179 (A,49,43) Inductor

CTF1306

R 3018 (B,114,37)

RS1/10SR150J

L 3180 (A,34,47) Inductor

CTF1306

R 3019 (B,103,37)

RS1/10SR150J

L 3200 (A,30,64) Inductor

CTF1306

R 3020 (B,108,36)

RS1/10SR563J

L 3202 (A,26,57) Inductor

LCTAW101J2520

R 3021 (B,100,15)

RS1/10SR1002D

L 3203 (A,19,50) Inductor

LCTAW101J2520

R 3022 (B,101,31)

RS1/10SR6202D

L 3205 (A,31,67) Inductor

CTF1306

R 3023 (B,99,17)

RS1/10SR1802D

L 3206 (B,62,46) Inductor

CTF1635

R 3024 (B,96,16)

RS1/10SR2202D

L 3207 (B,55,34) Inductor

CTF1306

R 3025 (B,98,35)

RS1/10SR1802D

L 3208 (B,62,34) Inductor

CTF1306

R 3026 (B,97,33)

RS1/10SR8200D

L 3300 (A,127,16) Ferrite Bead

CTF1528

R 3027 (B,99,24)

RS1/16SS470J

L 3301 (A,128,16) Ferrite Bead

CTF1528

R 3028 (B,99,23)

RS1/16SS470J

L 3302 (A,111,18) Ferrite Bead

CTF1528

R 3030 (B,96,38)

RS1/10SR3303D

L 3303 (A,112,16) Ferrite Bead

CTF1528

R 3031 (B,96,50)

RS1/10SR203J

L 3304 (A,86,56) Inductor

CTF1488

R 3034 (B,95,35)

RS1/10SR2703D

L 3305 (A,77,36) Chip Coil

LCTAW100J2520

R 3100 (B,97,67)

RS1/16SS222J

L 3310 (A,64,57) Inductor

CTF1635

R 3101 (B,100,61)

RS1/16SS222J

L 3360 (B,94,58) Inductor

LCTAW2R7J2520

R 3102 (B,100,55)

RS1/16SS222J

L 3361 (A,80,32) Inductor

CTF1394

R 3104 (A,108,62)

RS1/16SS473J

L 3362 (B,79,33) Inductor

CTF1306

R 3105 (B,100,56)

RS1/16SS472J

L 3401 (A,21,39) Inductor

DTL1096

R 3106 (B,97,59)

RS1/16SS101J

L 3402 (A,12,35) Inductor

DTL1096

R 3107 (B,105,65)

RS1/16SS103J

L 3403 (A,22,43) Inductor

CTF1635

R 3108 (B,105,67)

RS1/16SS473J

L 3404 (A,14,42) Inductor

CTF1635

R 3109 (B,100,62)

RS1/16SS472J

TH3350 (A,65,5) Thermistor

CCX1084

R 3110 (A,108,63)

RS1/16SS473J

VA3300 (A,126,18) Varistor

AVR-M1608C120MT6AB

R 3111 (B,97,65)

RS1/16SS101J

VA3301 (A,128,20) Varistor

AVR-M1608C120MT6AB

R 3112 (B,102,69)

RS1/16SS223J

VA3302 (A,113,19) Varistor

AVR-M1608C120MT6AB

R 3113 (A,111,63)

RS1/16SS470J

VA3303 (A,114,16) Varistor

AVR-M1608C120MT6AB

R 3114 (A,111,62)

RS1/16SS470J

VA3305 (A,88,19) Varistor

AVR-M1608C120MT6AB

R 3115 (B,98,63)

RS1/16SS104J

VA3307 (A,90,19) Varistor

AVR-M1608C120MT6AB

R 3116 (B,98,57)

RS1/16SS224J

VA3308 (A,87,19) Varistor

AVR-M1608C120MT6AB

R 3117 (B,101,68)

RS1/16SS101J

VA3310 (A,84,18) Varistor

AVR-M1608C120MT6AB

R 3118 (B,96,68)

RS1/16SS273J

CN3100 (A,136,38) Connector

CKS5715

R 3119 (B,105,63)

RS1/16SS102J

CN3300 (A,120,14) Connector

CKS5105

R 3120 (B,105,57)

RS1/16SS102J

CN3301 (A,68,69) Connector

CKS6118

R 3122 (B,114,61)

RS1/16SS0R0J

CN3302 (A,88,12) Connector

CKS5501

R 3123 (B,117,66)

RS1/10SR225J

CN3360 (A,88,35) Connector

CKS6117

R 3124 (A,109,65)

RS1/10SR1003D

CN3361 (A,106,8) Connector

CKS5749

R 3125 (B,113,69)

RS1/10SR392J

CN3362 (A,106,14) Connector

CKS5749

R 3126 (B,126,62)

RS1/10SR1203D

CN3401 (A,33,30) Connector

CKS5773

R 3128 (A,124,65)

RS1/10SR150J

RESISTORS

R 3001 (B,131,29)

RS1/10SR0R0J

R 3133 (A,113,71)

RS1/16SS0R0J

R 3002 (B,129,28)

RS1/10SR6801D

R 3134 (B,123,58)

RS1/10SR3602D

R 3003 (B,125,29)

RS1/10SR2000D

R 3135 (B,122,59)

RS1/10SR1801D

R 3004 (B,125,28)

RS1/10SR1001D

R 3136 (A,126,72)

RS1/8SQ0R0J

R 3005 (B,130,36)

RS1/10SR0R0J

R 3137 (B,124,66)

RS1/10SR0R0J

R 3006 (B,129,32)

RS1/10SR1001D

R 3150 (A,47,48)

RS1/16SS1000D

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
R 3151 (A,45,55)	RS1/16SS103J	R 3327 (A,71,16)	RS1/10SR2400D
R 3152 (A,44,57)	RS1/16SS103J	R 3328 (A,69,19)	RS1/10SR2000D
R 3153 (A,50,52)	RS1/16SS103J	R 3329 (A,71,19)	RS1/10SR2400D
R 3154 (A,43,55)	RS1/16SS103J	R 3330 (A,70,24)	RS1/10SR333J
			A
R 3156 (B,47,32)	RS1/16SS0R0J	R 3331 (A,63,25)	RS1/10SR2000D
R 3157 (A,44,39)	RS1/16SS181J	R 3332 (A,62,25)	RS1/10SR2400D
R 3158 (A,43,39)	RS1/16SS151J	R 3333 (A,63,22)	RS1/10SR2000D
R 3159 (A,43,57)	RS1/16SS151J	R 3334 (A,62,22)	RS1/10SR2400D
R 3160 (A,42,38)	RS1/16SS151J	R 3335 (A,68,28)	RS1/10SR333J
R 3161 (A,42,57)	RS1/16SS151J	R 3336 (A,66,56)	RS1/16SS0R0J
R 3162 (A,40,39)	RS1/16SS151J	R 3337 (A,67,56)	RS1/16SS0R0J
R 3163 (A,41,57)	RS1/16SS151J	R 3338 (A,68,56)	RS1/16SS0R0J
R 3164 (B,22,33)	RS1/16SS0R0J	R 3339 (A,77,40)	RS1/16SS0R0J
R 3166 (A,39,40)	RS1/16SS151J	R 3350 (A,68,6)	RS1/16SS183J
			B
R 3167 (A,38,56)	RS1/16SS151J	R 3360 (B,83,64)	RS1/16SS221J
R 3168 (A,38,39)	RS1/16SS151J	R 3361 (B,86,65)	RS1/16SS221J
R 3169 (A,37,56)	RS1/16SS151J	R 3362 (B,84,63)	RS1/16SS223J
R 3170 (A,37,40)	RS1/16SS151J	R 3363 (B,86,63)	RS1/16SS223J
R 3171 (A,36,56)	RS1/16SS151J	R 3364 (B,83,47)	RS1/16SS103J
R 3172 (A,36,39)	RS1/16SS151J	R 3365 (B,83,51)	RS1/16SS103J
R 3173 (A,33,55)	RS1/16SS151J	R 3366 (A,83,42)	RS1/16SS470J
R 3175 (A,35,42)	RS1/16SS151J	R 3367 (B,83,52)	RS1/16SS103J
R 3176 (A,34,42)	RS1/16SS151J	R 3368 (A,84,43)	RS1/16SS470J
R 3177 (A,33,42)	RS1/16SS151J	R 3369 (A,82,41)	RS1/16SS470J
R 3178 (A,32,42)	RS1/16SS151J	R 3371 (B,93,40)	RS1/16SS470J
R 3179 (A,33,49)	RS1/16SS820J	R 3372 (B,92,38)	RS1/16SS473J
R 3180 (A,32,51)	RS1/16SS151J	R 3373 (B,85,47)	RS1/16SS470J
R 3181 (A,32,52)	RS1/16SS151J	R 3374 (B,84,47)	RS1/16SS103J
R 3182 (A,33,53)	RS1/16SS151J	R 3375 (B,92,37)	RS1/16SS470J
			C
R 3183 (A,33,54)	RS1/16SS151J	R 3376 (B,82,40)	RS1/16SS470J
R 3185 (A,30,45)	RS1/16SS470J	R 3377 (B,84,36)	RS1/16SS0R0J
R 3200 (A,25,68)	RS1/10SR5102D	R 3378 (A,78,33)	RS1/16SS0R0J
R 3201 (A,27,68)	RS1/10SR3602D	R 3380 (A,83,37)	RS1/16SS223J
R 3202 (A,21,70)	RS1/16SS103J	R 3382 (A,83,31)	RS1/16SS0R0J
R 3204 (A,22,68)	RS1/16SS104J	R 3383 (A,83,30)	RS1/16SS0R0J
R 3205 (A,24,61)	RS1/10SR6801D	R 3386 (B,87,33)	RS1/16SS0R0J
R 3206 (A,21,61)	RS1/10SR1002D	R 3401 (B,52,34)	RS1/10SR18R0D
R 3207 (A,27,61)	RS1/16SS101J	R 3402 (B,52,36)	RS1/10SR24R0D
R 3208 (A,24,59)	RS1/16SS101J	R 3403 (B,52,37)	RS1/10SR1000D
			D
R 3209 (A,22,60)	RS1/16SS223J	R 3404 (B,54,40)	RS1/10SR91R0D
R 3210 (A,29,58)	RS1/16SS472J	R 3405 (B,53,40)	RS1/10SR1000D
R 3211 (A,21,59)	RS1/16SS101J	R 3406 (B,51,40)	RS1/10SR30R0D
R 3212 (A,22,57)	RS1/10SR5602D	R 3407 (B,54,43)	RS1/10SR47R0D
R 3213 (A,19,54)	RS1/10SR4703D	R 3408 (B,56,43)	RS1/10SR47R0D
R 3214 (A,23,51)	RS1/10SR3302D	R 3409 (B,57,43)	RS1/10SR27R0D
R 3215 (A,34,58)	RS1/16SS0R0J	R 3410 (B,56,47)	RS1/10SR91R0D
R 3217 (A,28,48)	RS1/16SS153J	R 3411 (B,57,47)	RS1/10SR1000D
R 3218 (A,21,49)	RS1/16SS153J	R 3412 (B,59,47)	RS1/10SR75R0D
R 3219 (A,27,47)	RS1/16SS0R0J	R 3414 (A,38,36)	RS1/16SS0R0J
			E
R 3220 (A,22,47)	RS1/16SS0R0J	R 3416 (B,30,35)	RS1/16SS473J
R 3221 (A,25,45)	RS1/10SR100J	R 3418 (B,40,34)	RS1/16SS0R0J
R 3222 (A,24,48)	RS1/10SR100J	R 3420 (B,34,36)	RS1/16SS0R0J
R 3300 (A,73,8)	RS1/16SS0R0J	R 3422 (B,22,37)	RS1/16SS473J
R 3303 (A,94,17)	RS1/10SR0R0J	R 3423 (B,105,13)	RS1/16SS0R0J
R 3321 (A,78,17)	RS1/10SR2000D	R 3424 (B,106,13)	RS1/16SS104J
R 3322 (A,80,17)	RS1/10SR2400D	R 3432 (A,139,27)	RS1/16SS0R0J
R 3323 (A,78,20)	RS1/10SR2000D		
R 3324 (A,79,22)	RS1/10SR2400D		
R 3325 (A,75,23)	RS1/10SR333J		
			F
R 3326 (A,69,16)	RS1/10SR2000D		

CAPACITORS

C 3001 (B,124,54) 100 uF

CCG1232

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 3002 (B,128,29)	CKSRYB103K50	C 3112 (A,138,47) 10 uF	CCG1223
	C 3003 (B,124,51)	CKSQYB105K16	C 3113 (B,136,43)	CKSRYB102K50
	C 3004 (B,129,34)	CCSRCH681J50	C 3116 (A,124,60)	CKSRYB102K50
	C 3005 (B,124,45) 68 uF/10 V	CCH1635	C 3150 (A,49,47)	CKSSYB104K16
	C 3006 (B,126,32)	CCSRCH331J50	C 3151 (A,49,48)	CKSSYB104K16
	C 3007 (B,122,28)	CKSRYB104K50	C 3152 (A,49,45)	CKSSYB104K10
	C 3008 (B,126,24)	CKSRYB104K50	C 3153 (A,48,44)	CKSSYB104K10
	C 3009 (B,123,43)	CKSRYB104K50	C 3154 (A,48,45)	CKSSYB103K16
	C 3010 (B,119,34)	CKSRYB103K50	C 3155 (B,48,49)	CKSSYB104K10
	C 3011 (B,123,25) 10 uF	CCG1192	C 3156 (B,48,53)	CKSSYB104K10
B	C 3012 (B,118,32)	CKSRYB393K50	C 3157 (A,48,43)	CKSSYB103K16
	C 3013 (B,120,29)	CKSRYB472K50	C 3158 (B,48,48)	CKSSYB103K16
	C 3015 (B,117,27)	CKSRYB393K50	C 3159 (B,48,52)	CKSSYB103K16
	C 3016 (B,121,25)	CKSRYB104K50	C 3160 (A,46,44)	CKSSYB104K10
	C 3017 (B,113,18)	CKSRYB393K50	C 3161 (A,46,43)	CKSSYB103K16
	C 3018 (B,112,39)	CKSRYB104K50	C 3162 (B,39,47)	CKSSYB104K10
	C 3020 (B,117,40)	CKSRYB103K50	C 3163 (B,40,47)	CKSSYB103K16
	C 3021 (B,118,42) 10 uF	CCG1236	C 3164 (B,39,51)	CKSSYB104K10
	C 3022 (B,118,44) 10 uF	CCG1236	C 3165 (B,40,51)	CKSSYB103K16
	C 3023 (B,112,37)	CKSRYB105K10	C 3166 (B,39,49)	CKSSYB104K10
C	C 3024 (B,110,37)	CCSRCH102J50	C 3167 (B,38,49)	CKSSYB103K16
	C 3025 (B,104,46) 10 uF	CCG1236	C 3168 (B,41,63) 68 uF/10 V	CCH1635
	C 3026 (B,108,37)	CKSRYB104K50	C 3200 (A,28,67)	CKSSYB104K10
	C 3027 (B,103,45)	CKSRYB103K50	C 3201 (A,22,67)	CKSSYB104K10
	C 3028 (B,108,21)	CCSRCH102J50	C 3202 (A,28,65)	CKSSYB104K10
	C 3029 (B,106,37)	CKSRYB105K10	C 3203 (A,28,63)	CKSRYB105K6R3
	C 3030 (B,104,37)	CKSRYB103K50	C 3204 (A,19,56)	CKSSYB104K10
	C 3032 (B,102,17)	CKSRYB105K10	C 3205 (A,30,62)	CKSSYB104K10
	C 3033 (B,101,28)	CKSRYB103K50	C 3206 (A,26,51)	CKSRYB105K6R3
	C 3034 (B,99,28)	CKSYB475K16	C 3207 (B,24,54)	CKSRYB104K50
D	C 3035 (B,102,25)	CKSRYB104K16	C 3208 (B,20,49)	CKSRYB104K50
	C 3036 (B,99,33)	CCSRCH181J50	C 3209 (B,21,54) 10 uF	CCG1236
	C 3037 (B,108,49)	CKSRYB104K50	C 3210 (B,22,49) 4.7 uF	CCG1222
	C 3038 (B,107,51) 33 uF/10 V	CCH1586	C 3211 (B,18,54) 10 uF	CCG1236
	C 3039 (B,95,38)	CCSRCH181J50	C 3213 (A,32,66)	CKSSYB104K10
	C 3040 (B,99,38)	CKSRYB472K50	C 3214 (B,62,43) 10 uF	DCH1201
	C 3041 (B,98,38)	CKSRYB472K50	C 3215 (B,61,42)	CKSSYB104K10
	C 3042 (B,87,20)	CKSRYB474K16	C 3300 (A,107,70) 10 uF	CCG1236
	C 3043 (B,89,20)	CKSRYB474K16	C 3302 (A,81,56)	CKSQYB224K50
	C 3044 (B,116,49)	CKSQYB105K16	C 3303 (A,76,24)	CKSQYB106K6R3
E	C 3045 (B,90,20)	CKSRYB474K16	C 3304 (A,71,22)	CKSQYB106K6R3
	C 3046 (B,97,45)	CKSQYB105K25	C 3305 (A,66,28)	CKSQYB106K6R3
	C 3047 (B,101,44)	CKSRYB104K50	C 3309 (A,76,32) 10 uF	DCH1201
	C 3048 (B,91,13)	CKSQYB225K16	C 3310 (A,64,52)	CKSSYB104K10
	C 3049 (B,93,13)	CKSQYB225K16	C 3311 (A,63,54)	CKSQYB106K6R3
	C 3050 (B,99,46)	CKSQYB105K25	C 3350 (A,65,6)	CKSSYB104K10
	C 3051 (B,96,48)	CKSQYB105K25	C 3360 (B,84,64)	CKSSYB222K50
	C 3052 (B,87,13)	CKSQYB105K16	C 3361 (B,85,65)	CKSSYB222K50
	C 3053 (B,89,13)	CKSQYB105K16	C 3362 (B,84,60)	CKSQYB106K6R3
	C 3054 (B,92,21)	CKSQYB105K16	C 3363 (B,86,61)	CKSQYB106K6R3
F	C 3055 (B,96,12)	CKSQYB105K16	C 3364 (B,88,60)	CKSQYB106K6R3
	C 3100 (B,100,63)	CKSSYB104K16	C 3365 (B,88,63)	CKSSYB102K50
	C 3101 (B,100,57)	CKSSYB104K16	C 3366 (B,90,59)	CKSQYB106K6R3
	C 3102 (B,103,61)	CKSSYB104K16	C 3367 (B,88,58)	CKSSYB102K50
	C 3103 (B,103,58)	CKSSYB104K16	C 3368 (A,80,35)	CKSQYB106K6R3
	C 3105 (A,111,66)	CCSSCH470J50	C 3369 (A,82,35)	CKSQYB106K6R3
	C 3106 (B,113,67)	CKSSYB473K16	C 3370 (B,91,34)	CKSSYB104K10
	C 3107 (B,115,65)	CKSRYB104K50	C 3371 (B,92,34)	CKSSYB104K10
	C 3108 (A,123,70)	CKSQYB225K10	C 3372 (B,94,34)	CKSSYB104K10
	C 3111 (A,138,44) 10 uF	CCG1223	C 3373 (A,84,29)	CKSSYB104K10

5		6
<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 3374	(B,80,34)	CKSSYB104K16
C 3403	(A,21,41)	CKSRYB104K50
C 3404	(A,11,41)	CKSRYB104K50
C 3405	(A,11,38)	CKSRYB104K50
C 3406	(A,19,43)	CKSRYB104K50
C 3407	(A,25,42) 10 uF	CCG1192
C 3408	(A,17,38)	CKSQYB334K50
C 3409	(A,15,37) 10 uF	CCG1236
C 3410	(A,25,38) 10 uF	CCG1192
C 3411	(A,27,40) 10 uF	CCG1192
C 3412	(A,24,36)	CKSRYB104K50
C 3413	(A,20,36)	CKSRYB104K50
C 3414	(A,29,38) 10 uF	CCG1192
C 3415	(A,27,37)	CKSSYB104K10
C 3416	(A,24,35)	CKSSYB102K50
C 3417	(A,21,35)	CKSSYB102K50
C 3418	(A,29,37)	CKSSYB104K10
C 3419	(A,27,36)	CKSSYB102K10
C 3420	(A,30,36)	CKSSYB102K10
C 3421	(A,30,35)	CCSSCH101J50
C 3422	(A,27,35)	CCSSCH101J50
C 3423	(A,32,47)	CKSSYB103K16

H

Unit Number : CWN3988

Unit Name : Keyboard Unit

MISCELLANEOUS

D 2901	(A,24,33) Chip LED	NSSM038A-7306
D 2902	(A,143,33) Chip LED	NSSM038A-7306
L 2902	(A,10,31) Inductor	CTF1767
L 2903	(A,7,31) Inductor	CTF1767
S 2902	(A,133,33) Switch	CSG1191
S 2903	(A,91,33) Switch	CSG1191
S 2904	(A,34,33) Switch	CSG1191
S 2905	(A,77,33) Switch	CSG1191
S 2906	(A,48,33) Switch	CSG1191
S 2907	(A,63,33) Switch	CSG1191
S 2908	(A,104,33) Switch	CSG1191
S 2909	(A,119,33) Switch	CSG1191
CN2901	(A,15,33) Connector	CKS5749
JA2901	(A,5,33) Antenna	CTX1110

RESISTORS

R 2901	(A,81,32)	RS1/10SR122J
R 2902	(A,68,33)	RS1/10SR242J
R 2903	(A,53,32)	RS1/10SR122J
R 2904	(A,97,32)	RS1/10SR242J
R 2905	(A,115,32)	RS1/10SR682J

CAPACITORS

C 2901	(A,44,33)	CKSRYB104K50
C 2902	(A,40,33)	CKSRYB104K50
C 2903	(A,124,33)	CKSRYB104K50
C 2904	(A,128,33)	CKSRYB104K50

I

Unit Number : EXX1060

Unit Name : PCB Unit(Service)

7		8
<u>Circuit Symbol and No.</u>		<u>Part No.</u>
<u>MISCELLANEOUS</u>		
IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch	CSN1067
S 102	Switch	CSN1068
CN101	Connector	CKS4997
<u>RESISTORS</u>		
R 101		RS1/16S221J
R 102		RS1/16S221J
R 103		RS1/16S0R0J
<u>CAPACITORS</u>		
C 101		CEVW220M16
C 102		CKSRYB104K16

C

Unit Number : YWX5009

Unit Name : DVD Core Unit

MISCELLANEOUS

IC 1002	(B,21,41) Regulator IC	S-1133B50-U5
IC 1003	(B,35,23) IC	S-1200B50-M5
IC 1004	(B,25,11) IC	NJM2885DL1-33
IC 1005	(B,19,21) IC	R1232D121B
IC 1201	(A,15,29) IC	BD8231EFV
*IC1401	(B,63,36) Flash ROM Unit	CWW1825
*IC1402	(B,50,36) Flash ROM Unit	CWW1826
IC 1480	(B,59,13) SDRAM(64M)	K4S641632N-LC75
IC 1501	(A,60,20) IC	MN2DS0018MAUB
IC 1801	(B,37,16) D/A Converter	PCM1753DBQ
Q 1101	(A,35,39) Transistor	2SC4081
Q 1102	(A,46,42) Transistor	2SC4081
Q 1103	(A,38,45) Transistor	2SB1132
Q 1104	(A,45,49) Transistor	2SB1132
L 1003	(B,22,26) Inductor	CTF1677
L 1004	(B,14,17) Inductor	CTF1678
L 1512	(A,57,5) Inductor	CTF1743
L 1902	(B,5,8) Inductor	CTF1487
L 1903	(B,12,11) Inductor	CTF1558
L 1904	(B,46,19) Inductor	CTF1473
X 1501	(B,43,7) Oscillator 27.000 MHz	CSS1768
EF1001	(B,5,12) Chip EMI Filter	DTF1106
EF1002	(B,11,13) Chip EMI Filter	DTL1106
CN1101	(A,66,49) Connector	CKS5775
CN1201	(A,16,44) Connector	CKS6003
CN1901	(A,21,7) Connector	CKS6025

RESISTORS

R 1002	(B,18,27)	RS1/16SS101J
R 1004	(A,29,27)	RS1/16SS4702D
R 1007	(A,29,26)	RS1/16SS6801D
R 1019	(B,15,9)	RS1/16SS101J
R 1021	(A,27,15)	RS1/16SS0R0J
R 1025	(B,19,11)	RS1/16SS101J
R 1027	(A,27,19)	RS1/16SS101J
R 1101	(A,35,36)	RS1/16SS104J

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1102 (A,43,42)
R 1103 (A,34,41)

RS1/16SS104J
RS1/16SS391J

R 1522 (A,65,38)
R 1523 (A,66,37)

RS1/16SS104J
RS1/16SS221J

A

R 1104 (A,36,36)
R 1105 (A,42,44)
R 1106 (A,45,39)
R 1109 (A,34,43)
R 1110 (A,41,43)

RS1/16SS511J
RS1/16SS391J
RS1/16SS561J
RS1/16SS3R3J
RS1/16SS3R3J

R 1524 (A,64,37)
R 1525 (A,71,34)
R 1526 (A,67,34)
R 1527 (B,77,29)
R 1528 (A,78,20)

RS1/16SS472J
RS1/16SS103J
RS1/16SS103J
RS1/16SS682J
RS1/16SS103J

R 1111 (A,38,39)
R 1112 (A,38,38)
R 1113 (A,49,46)
R 1114 (A,48,46)
R 1115 (A,41,38)

RS1/10SR1R5J
RS1/10SR1R5J
RS1/10SR1R5J
RS1/10SR1R5J
RS1/10SR1R5J

R 1529 (A,76,18)
R 1530 (A,77,20)
R 1531 (A,75,24)
R 1533 (A,75,29)
R 1534 (A,78,30)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS104J
RS1/16SS221J

B

R 1116 (A,41,39)
R 1117 (A,48,43)
R 1118 (A,49,43)
R 1201 (A,16,36)
R 1202 (A,17,35)

RS1/10SR1R5J
RS1/10SR1R5J
RS1/10SR1R5J
RS1/16SS221J
RS1/16SS221J

R 1535 (B,70,34)
R 1536 (A,78,31)
R 1537 (A,73,35)
R 1538 (A,61,4)
R 1539 (A,77,23)

RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J

R 1203 (A,22,35)
R 1204 (A,19,35)
R 1212 (A,7,36)
R 1213 (B,8,29)
R 1214 (B,8,27)

RS1/16SS103J
RS1/16SS153J
RS1/16SS271J
RS1/16SS1R0J
RS1/16SS1R0J

R 1540 (A,73,32)
R 1541 (A,75,32)
R 1542 (A,77,29)

RS1/16SS221J
RS1/16SS221J
RS1/16SS103J

C

R 1215 (B,8,28)
R 1216 (B,8,24)
R 1217 (B,8,25)
R 1218 (B,8,26)
R 1222 (B,26,39)

RS1/16SS1R0J
RS1/16SS1R0J
RS1/16SS1R0J
RS1/16SS1R0J
RS1/16SS271J

R 1546 (B,75,29)
R 1601 (A,42,25)
R 1602 (A,44,25)
R 1603 (A,43,30)
R 1604 (A,50,35)

RS1/16SS682J
RS1/16SS123J
RS1/16SS123J
RN1/16SE1002D
RS1/16SS105J

R 1300 (B,39,24)
R 1401 (B,63,49)
R 1402 (B,70,27)
R 1405 (B,56,24)
R 1406 (B,54,25)

RS1/16SS0R0J
RS1/16SS221J
RS1/16SS104J
RS1/16SS104J
RS1/16SS104J

R 1605 (A,49,37)
R 1670 (A,34,21)
R 1671 (A,36,21)
R 1672 (A,45,19)
R 1674 (A,45,20)

RS1/16SS105J
RS1/16SS1002D
RS1/16SS2402D
RS1/16SS2000D
RS1/16SS3002D

D

R 1480 (B,52,21)
R 1481 (B,56,21)
R 1482 (B,61,21)
R 1483 (B,64,21)
R 1484 (B,67,21)

RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J

R 1801 (B,35,6)
R 1802 (B,33,6)
R 1803 (B,35,11)
R 1804 (B,34,11)

RS1/16SS104J
RS1/16SS104J
RS1/16SS821J
RS1/16SS821J

CAPACITORS

R 1485 (B,50,5)
R 1486 (B,55,5)
R 1487 (B,64,5)
R 1488 (B,68,5)
R 1489 (B,59,5)

RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RAB4CQ560J
RS1/16SS560J

C 1001 (B,36,21)
C 1003 (B,18,44)
C 1004 (B,24,40)
C 1005 (B,32,23)
C 1008 (B,20,31) 10 uF

CKSRYB105K10
CKSSYB104K16
CKSQYB475K10
CKSRYB105K16
DCH1201

E

R 1490 (B,50,21)
R 1501 (B,46,7)
R 1503 (B,45,8)
R 1504 (B,45,13)
R 1505 (A,43,13)

RS1/16SS560J
RS1/16SS122J
RS1/16SS105J
RS1/16SS120J
RS1/16SS101J

C 1009 (B,18,31) 10 uF
C 1010 (B,26,18)
C 1011 (B,22,18)
C 1013 (B,15,25) 10 uF
C 1014 (B,13,25) 10 uF

DCH1201
CKSQYB225K10
CKSRYB105K10
DCH1201
DCH1201

R 1506 (A,37,14)
R 1507 (A,44,14)
R 1508 (A,43,15)
R 1509 (A,63,35)
R 1510 (A,64,35)

RS1/16SS101J
RS1/16SS101J
RS1/16SS221J
RS1/16SS102J
RS1/16SS102J

C 1015 (B,7,8)
C 1016 (B,12,10)
C 1018 (A,28,28)
C 1019 (A,10,17)
C 1021 (B,34,4)

CKSSYB102K50
CKSSYB102K50
CKSSYB104K10
CKSSYB104K10
CCSRCH681J50

F

R 1511 (B,46,13)
R 1512 (A,58,5)
R 1513 (A,66,35)
R 1514 (A,68,35)
R 1516 (A,65,36)

RS1/16S0R0J
RS1/16SS101J
RS1/16SS103J
RS1/16SS183J
RS1/16SS103J

C 1022 (A,23,21)
C 1101 (B,31,40) 10 uF
C 1104 (A,34,42)
C 1105 (A,42,45)
C 1106 (A,37,48)

CCSRCH681J50
DCH1201
CKSSYB104K10
CKSSYB104K10
CKSSYB103K16

R 1517 (A,76,16)
R 1518 (A,74,24)
R 1519 (A,70,34)

RS1/16SS103J
RS1/16SS103J
RS1/16SS102J

C 1107 (A,41,49)
C 1108 (A,74,42)
C 1109 (A,56,41)

CKSSYB103K16
CKSSYB103K16
CKSRYB224K10

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 1110	(A,71,42)	CKSSYB103K16		C 1609	(A,48,35)	CKSSYB104K10		
C 1111	(A,61,39)	CKSRYB224K10		C 1610	(A,50,37)	CKSSYB104K10		
C 1112	(B,40,39) 22 uF	CCG1178		C 1611	(A,51,37)	CKSSYB104K10		A
C 1113	(B,36,38) 22 uF	CCG1178		C 1612	(A,52,34)	CKSSYB104K10		
C 1201	(B,12,34)	CEVW101M16		C 1613	(A,52,37)	CKSSYB104K10		
C 1204	(A,8,24)	CKSSYB222K50		C 1614	(A,53,34)	CKSSYB104K10		
C 1205	(A,13,23)	CKSSYB104K16		C 1615	(A,54,34)	CKSSYB104K10		
C 1207	(A,22,25)	CKSSYB104K16		C 1616	(A,54,37)	CKSSYB104K10		
C 1208	(A,15,36)	CKSSYB103K16		C 1617	(A,54,38)	CKSSYB104K10		
C 1209	(B,10,25)	CKSSYB104K16		C 1618	(A,56,34)	CCSSCH101J50		
C 1210	(B,6,23)	CKSSYB104K16		C 1619	(A,57,34)	CKSSYB562K25		
C 1211	(B,9,22)	CKSYB475K16		C 1620	(A,58,34)	CKSSYB224K6R3		
C 1401	(B,63,48)	CKSSYB103K16		C 1621	(A,57,37)	CKSSYB224K6R3		
C 1403	(B,69,23)	CKSSYB104K10		C 1622	(A,59,35)	CKSSYB333K16		B
C 1404	(B,58,25)	CKSQYB475K6R3		C 1623	(A,45,35)	CKSRYB105K10		
C 1408	(B,47,25)	CKSSYB104K10		C 1624	(A,58,37)	CKSSYB104K10		
C 1409	(B,47,23)	CKSQYB475K6R3		C 1625	(A,56,37)	CKSSYB104K10		
C 1480	(B,47,21)	CKSSYB104K10		C 1671	(A,44,17)	CKSSYB104K10		
C 1481	(B,49,23)	CKSSYB104K10		C 1672	(A,45,18)	CKSSYB104K10		
C 1482	(B,54,21)	CKSSYB104K10		C 1673	(A,45,22)	CKSSYB104K10		
C 1484	(B,59,20)	CKSSYB104K10		C 1674	(A,43,21)	CKSSYB104K10		
C 1485	(B,69,21)	CKSSYB104K10		C 1676	(A,38,22)	CKSRYB105K10		
C 1487	(B,58,4)	CKSSYB104K10		C 1801	(B,34,8)	CKSQYB475K6R3		
C 1488	(B,52,5)	CKSSYB104K10		C 1802	(B,32,8)	CKSQYB475K6R3		
C 1489	(B,45,20)	CKSQYB106K6R3		C 1803	(B,36,8)	CCSRCH182J50		C
C 1490	(B,45,23)	CKSSYB102K50		C 1804	(B,31,7)	CCSRCH182J50		
C 1501	(B,72,9)	CKSQYB106K6R3		C 1805	(B,32,19)	CKSSYB104K10		
C 1502	(A,35,32)	CKSQYB106K6R3		C 1806	(B,39,9) 10 uF	DCH1201		
C 1503	(A,60,4)	CKSSYB104K10		C 1809	(B,43,16)	CKSSYB104K10		
C 1504	(A,51,5)	CKSSYB104K10		C 1934	(B,42,29)	CCSRCH680J50		
C 1505	(A,53,5)	CKSSYB104K10						
C 1506	(A,55,5)	CKSSYB104K10						
C 1507	(A,62,5)	CKSSYB104K10						
C 1508	(A,66,5)	CKSSYB104K10						
C 1509	(A,69,5)	CKSSYB104K10						
C 1510	(B,46,5)	CCSSCH120J50						
C 1511	(A,46,9)	CKSSYB104K10						
C 1512	(B,43,10)	CCSSCH100D50						
C 1513	(B,74,12)	CKSSYB104K10						
C 1514	(A,46,13)	CKSSYB104K10						
C 1515	(A,45,15)	CKSSYB104K10						
C 1516	(A,75,15)	CKSSYB104K10						
C 1517	(A,74,16)	CKSSYB104K10						
C 1518	(A,75,22)	CKSSYB104K10						
C 1519	(A,74,26)	CKSSYB104K10						
C 1520	(A,75,30)	CKSSYB104K10						
C 1521	(A,60,37)	CKSSYB104K10						
C 1522	(A,65,34)	CKSSYB104K10						
C 1523	(A,68,37)	CKSSYB104K10						
C 1524	(A,69,37)	CKSSYB473K10						
C 1526	(A,68,37)	CKSSYB103K16						
C 1528	(A,78,29)	CCSSCH471J16						
C 1601	(A,44,29)	CKSSYB103K16						
C 1602	(A,42,24)	CCSSCH101J50						
C 1603	(A,44,27)	CCSSCH101J50						
C 1604	(A,41,27)	CCSSCH680J50						
C 1605	(A,43,27)	CCSSCH680J50						
C 1606	(A,41,23)	CKSSYB104K10						
C 1607	(A,41,35)	CKSQYB106K6R3						
C 1608	(A,43,36)	CKSRYB105K10						

D

Unit Number :
Unit Name : Connect PCB

MISCELLANEOUS

S 101	(B,51,37) Switch(HOME)	CSN1068
S 102	(B,12,23) Switch(DSCSNS)	CSN1068
S 103	(B,22,10) Switch(8SNS)	CSN1068
R 101	(B,52,27)	RS1/16S101J
R 102	(B,15,29)	RS1/16S101J
R 103	(B,16,11)	RS1/16S101J
C 101	(B,51,23)	CKSRYB104K50

Miscellaneous Parts List

M 1	Pickup Unit(Service)	CXX2398
M 2	Motor Unit(LOAD/CRG)	CXC4026
	Motor(SPINDLE)	EXM1050