30

ded View (Cabinet)

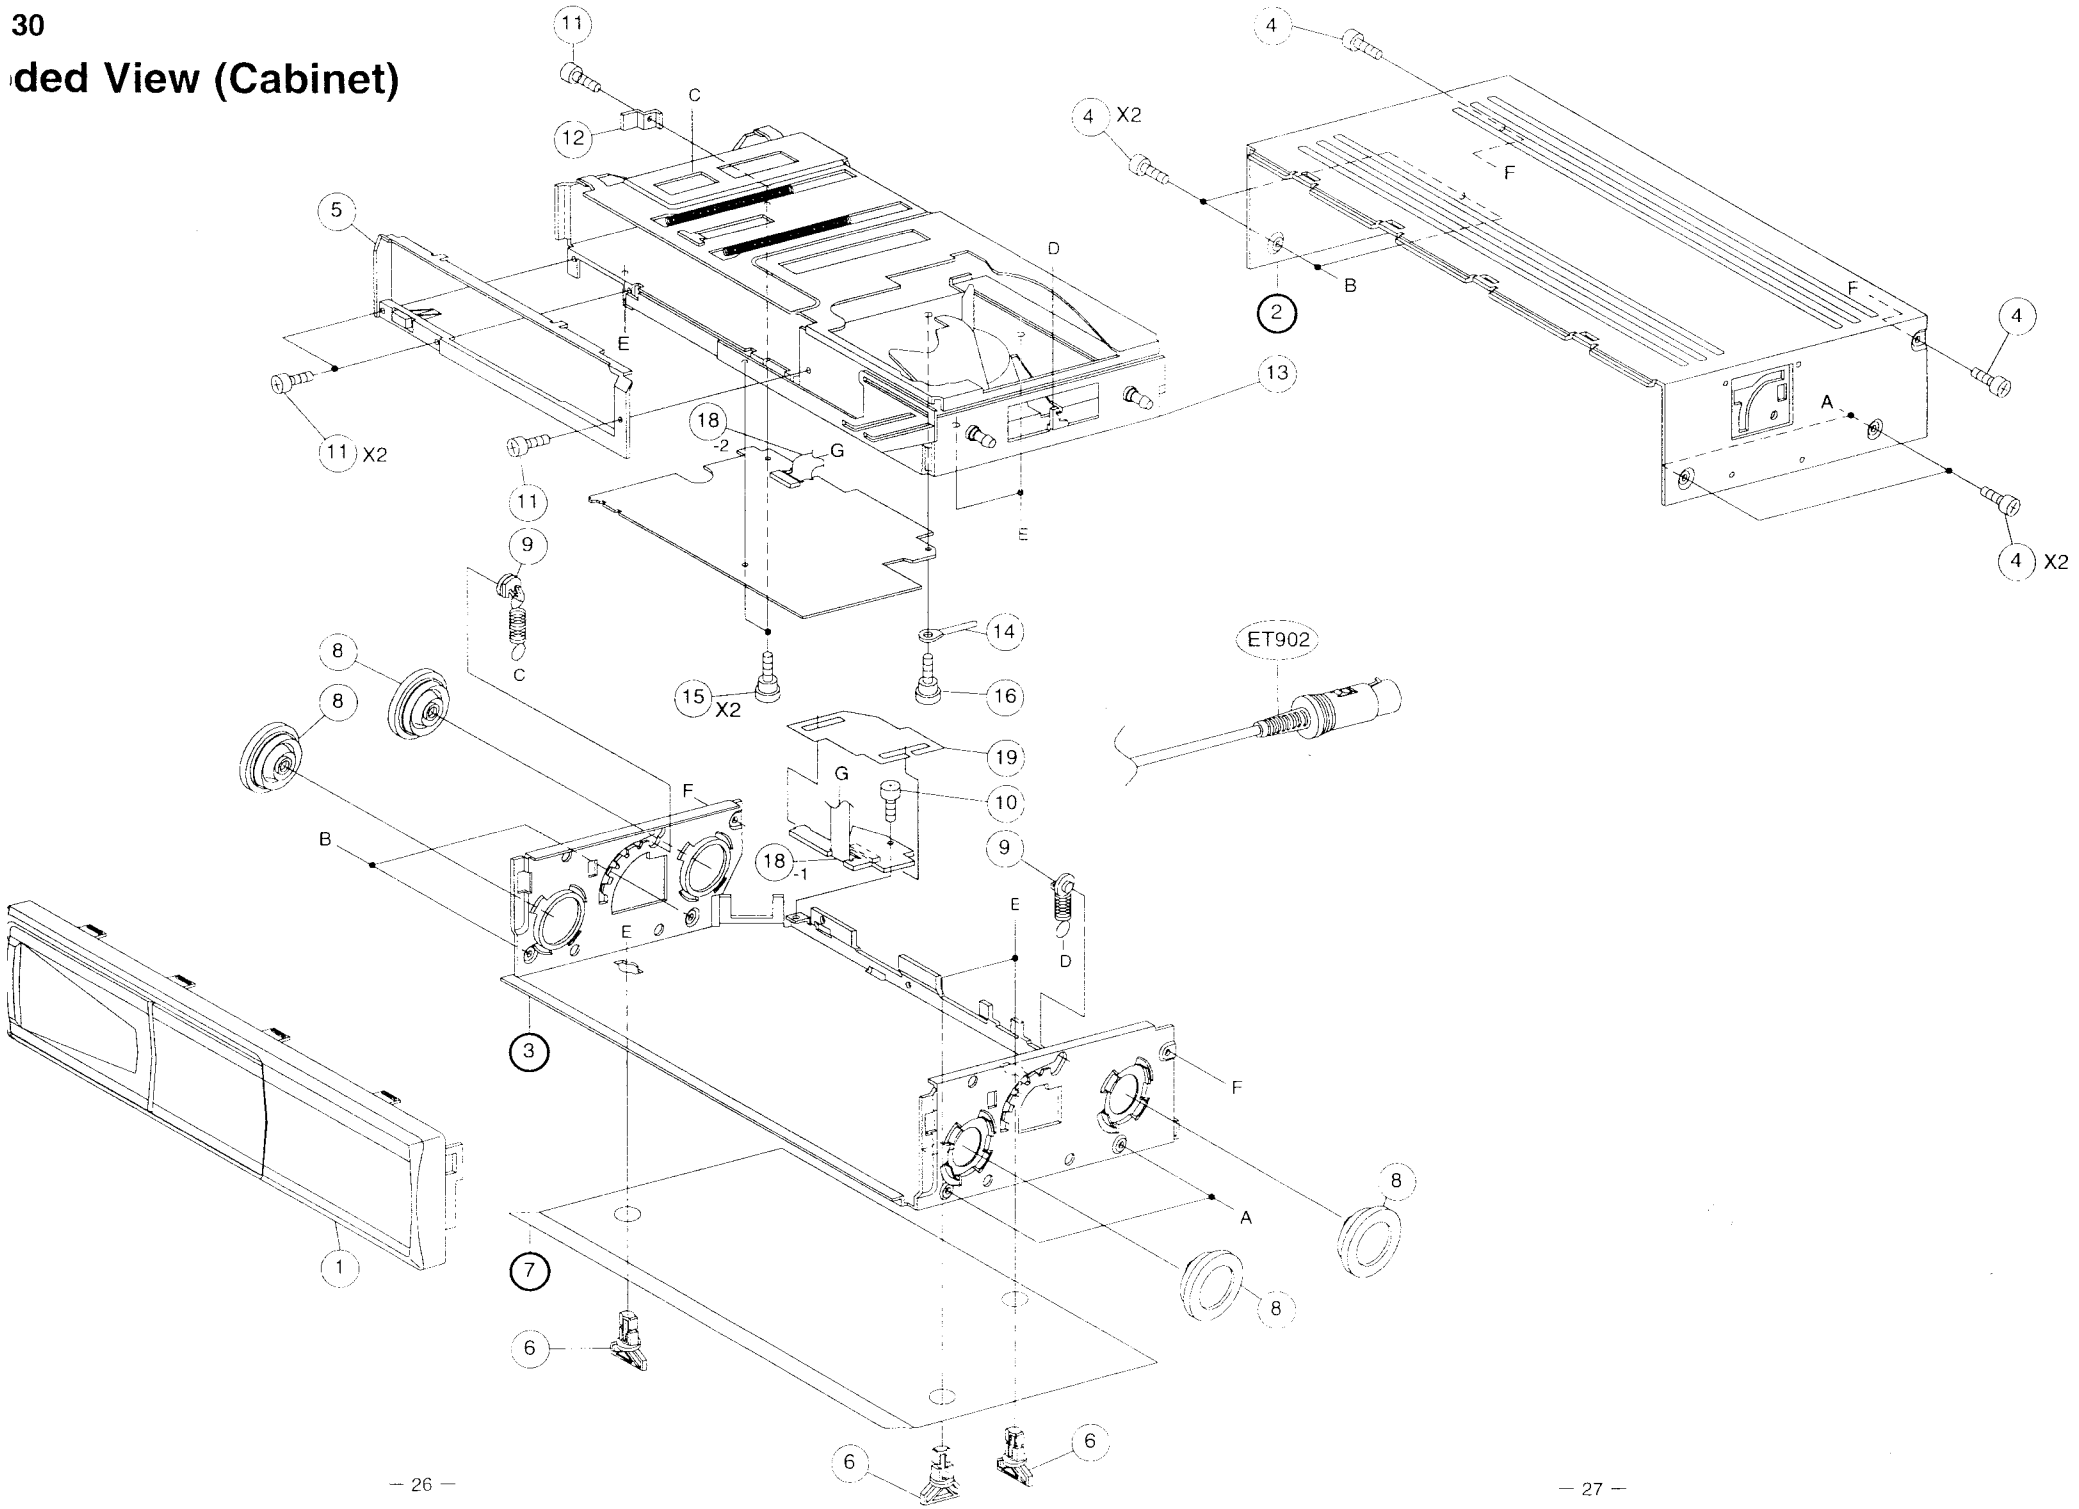

Cabinet Assembly Parts List

Symbol No.	Index	Part No.	Description
1		13C02202K02	FRONT, ESC ASSY
4		03A61184W04	SCR, M2.6X5 BLK3P01NT
5		64C01124K01	PLATE, INNER ASSY
6		55A01141K01	KEY, LOCK
8		75C10781Y01	DAMPER, DT(D)
9		07A01108K01	BKT, SPRING ASSY
10		03S38013W36	SCR, T-TITE M2.6X4
11		03S94385F48	SCR, NYLOK M2X4 BLK
12		07A01111K01	BKT, TR
13		81D11643Y01	DT23L060
14		29C41045P02	LUG WRAP AROUND
15		03A38056W01	SCR, T-TIME M2.6X6 DR
16		03A38056W02	SCR, T-TITE M2.6X6 DR
18		84T55292Y01	FPC, 11P DT-L
19		14A20715Y01	INSULATOR, PANEL

Symbol No.	Index	Part No.	Description

CHM-S630

CD Changer Mechanism Assembly Parts List

Symbol No.	Index	Part No.	Description
6		41B51993W01	SPRING, EXTENSION
7		47A51917W01	SHAFT, GUIDE
9		03S94385F19	SCR, NYLOK M2X2.5
10		04B41345P22	WASH, 2.6X6X0.35
11		44B51886W01	RACK, ELEVATOR
12		03S40014G07	SCR, MCH M2X4
13		44A60088W01	GEAR, RACK
14		44A60089W01	GEAR, WHEEL
15		04B41345P24	WASH, 2.1X5X0.35
16		15A51889W01	GUIDE, MAGAZINE
17		03A32052Y01	SHAFT SCR, DRIVE
18		45A51880W01	STOPPER, TRAY
19		41B51993W02	SPRING, EXTENSION
20		45A60160W01	SPACER, BKT MOTOR
21		03S40014G16	SCR, MCH M2X14
22		45A51874W01	SLIDE, MAG. SW
24		07A51882W01	BKT, SENSOR
25		03S94385F11	SCR, NYLOK M2X5 P2
27		44A52035W01	GEAR, DRIVE
30		41B51993W03	SPRING, EXTENSION
31		41B51993W04	SPRING, EXTENSION
32		41B51993W05	SPRING, EXTENSION
33		07B91155W01	STOPPER, SHAFT(B)
34		41A51996W01	SPRING, TORSION
37		01A51932W01	ASSY, RIV BKT PUSH P
38		45A51898W01	ARM, PUSH PULL
39		03S40014G61	SCR, MCH M2X5
40		15A51890W01	GUIDE, CHASSIS TRAY
41		07A51884W01	BKT, CORNER
43		44A52036W01	GEAR, CAM
44		04B41345P15	WASH, 1.2X3.5X0.35
45		44A51896W01	GEAR, DRIVEN
46		45A51894W01	ARM, TRAY A
47		04B41345P02	WASH, 1.7X3.5X0.25
48		01A51937W01	ASSY, RIV LEVER SLIDE
49		04B41345P12	WASH, L. 1.7X3.5X0.35
50		45A52034W01	LEVER, CAM
53		03S94385F01	SCR, NYLOK M1.7X2.3
54		45A51887W01	ARM, SW
55		15B51891W01	GUIDE, TRAY SIDE
56		47A60169W01	SHAFT, PICKUP
57		07B51879W01	BKT, CLAMPER
58		43B21796Y01	TABLE, CLAMPER-T
59		84T65057W01	FPC, SW/TRAY
60		41A51872W01	SPRING, CLAMPER
61		03S94385F07	SCR, NYLOK M2X2

Symbol No.	Index	Part No.	Description
62		41A51995W01	SPRING, COMPRESSION
63		41A51923W01	SPRING, ROD
66		46A60171W01	STUD, MIDDLE
67		43A60164W01	BUSH, SCREW (A)
68		01V61300W99	ASSY, SHAFT SCREW
69		43A60165W01	BUSH, SCREW (B)
71		03S94385F58	SCR, NYLOK M2X3.5
72		44A60162W01	GEAR, MIDDLE
73		84T15533Y01	FPC, DRIVE DTL
74		44A10811Y01	WORM, STD
75		44A60161W01	GEAR, MOTOR
77		03S94385F10	SCR, NYLOK M2X4 P2
78		04B41345P05	WASH, 3.5X8X0.25
79		75A80830W01	RUBBER, SLEEVE
85		03S40014G66	SCR, MACHINE M2X3.5
86		03S40014G84	SCREW, MACHINE M2X6.5
87		41A11040Y01	SPRING, SLED-HOE
88		03S72235F79	SCR, MCH M1.4X3
89		41A11099Y01	SPRING, NUT (A)
90		44A11101Y01	SPRING, NUT (B)
91		03S40014G75	SCR, MCH M2X9

ploded View (CD Changer Mechanism)

(DT23L060)

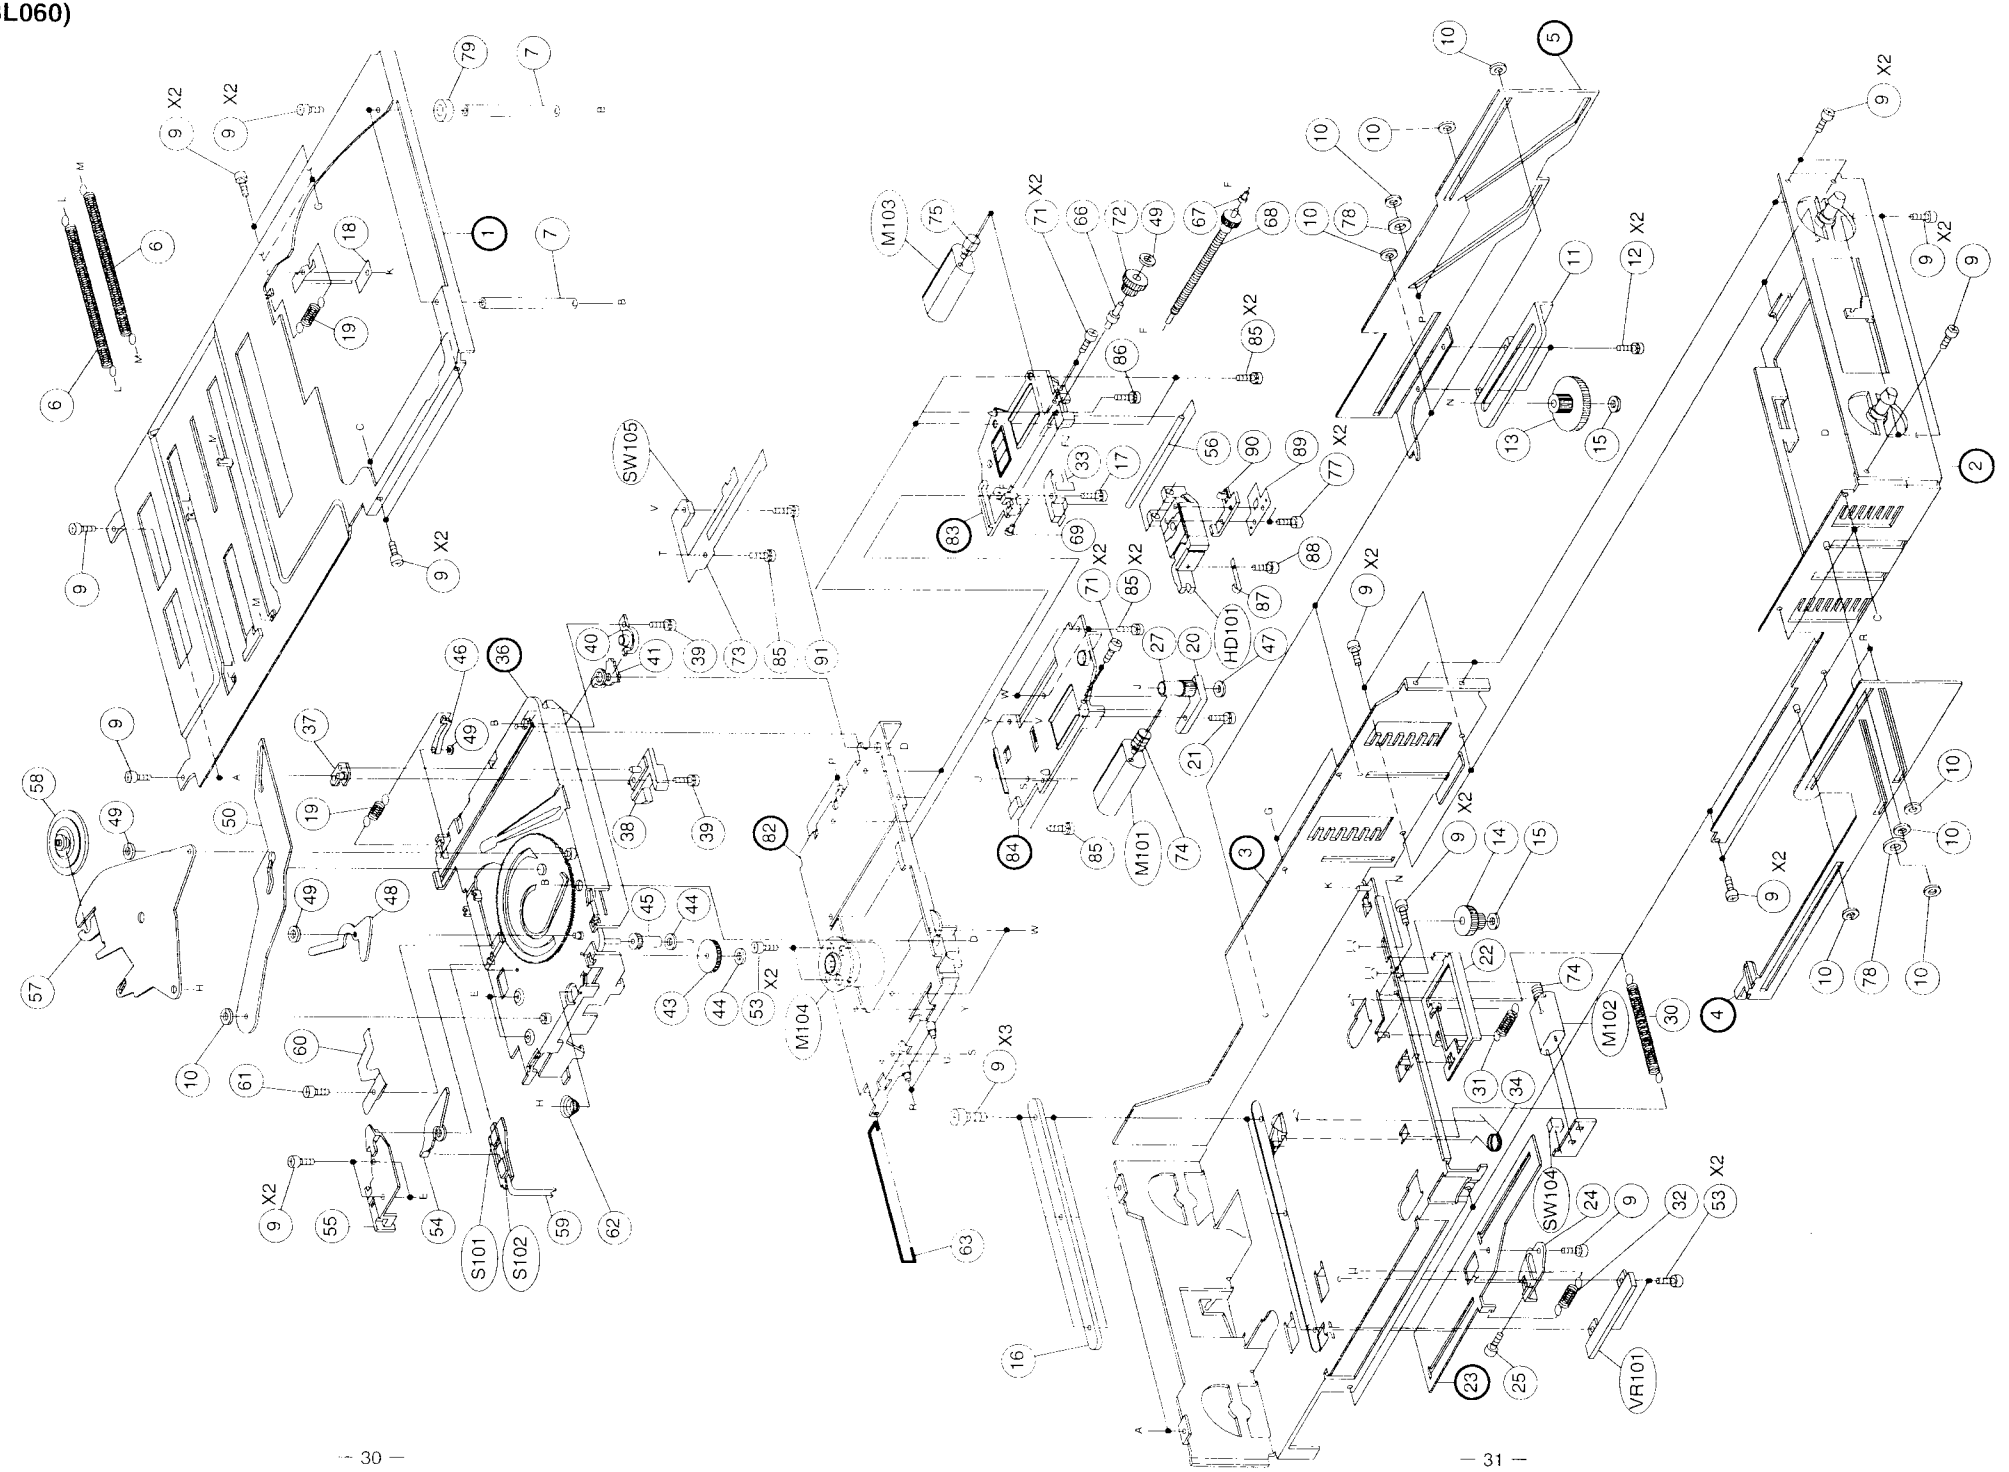

Electrical Parts List

Capacitor : μF=microfarads,pF=picofarads

Abbreviations

RES. = Resistor	CAP. = Capacitor
C.F. = Carbon Film	ELY. = Electrolytic
M.F. = Metal Film	CER. = Ceramic
M.O. = Metal OxideFilm	MYL. = Mylar
M.P. = Metal Plate	TAN. = Tantalum
TR. = Transistor	POLY. = Polystyrol
TRANS. = Transformer	PP. = Polypropylene
CP. = Chip	PLT. = Polyethylene
	PF. = Polyester Film

Symbol No.	Part No.	Description
Main P.W.Board		
IC's		
IC101	51T55223Y01	MN6627482WA -QT
IC102	51T45331Y01	AN22000A-E1 -SE9
IC103	51T15547Y02	BA5917AFP-E2 -SEA
IC104	51T95150W01	NJM78M05DLA-TE1 -NE5
IC105	51T16025W01	IC,NJM2100M-TE3-SE03
IC203	51T16025W01	IC,NJM2100M-TE3-SE03
IC501	51T55259Y01	IC,D78013FGC-XXX -QT
IC507	51T45571W02	IC ,LB1836M -SE05
IC508	51T85450W01	TDA3606 -SE2
Transistors		
Q101	48T84234F03	TR,2SB1238-Q-TV2 -RD
Q102	48T73888F08	TR ,CP.FMG1-99
Q105	48T62966F03	TR,DTA124EKA-T146-CP
Q106	48T62967F03	TR,DTC124EKA-T146-CP
Q211	48T63788F01	TR ,CP.2SD1328 -TX
Q212	48T63788F01	TR ,CP.2SD1328 -TX
Q213	48T73888F12	TR ,CP.FMC2-99
Q501	48T73888F12	TR ,CP.FMC2-99
Q502	48T62966F03	TR,DTA124EKA-T146-CP
Q505	48T62966F03	TR,DTA124EKA-T146-CP
Q506	48T63417F03	TR ,CP.C2412K-BR -96
Q509	48T73888F12	TR ,CP.FMC2-99
Q540	48T73888F08	TR ,CP.FMG1-99
Q542	48T62966F03	TR,DTA124EKA-T146-CP
Q802	48T65256W03	TR ,2SD2136-R -RD
Q803	48T73888F12	TR ,CP.FMC2-99
Diodes		
D211	48T81063F01	DIO,CP.MA159 / TX-CP
D301	48T25651W02	DIO,MA152WK-TX -CP
D501	48T68828F11	DIO,1SS133 -RH
D506	48T68828F11	DIO,1SS133 -RH
D540	48T25651W02	DIO,MA152WK-TX -CP
D598	48T81063F01	DIO,CP.MA159 / TX-CP
D599	48T81063F01	DIO,CP.MA159 / TX-CP
ZD501	48T25766W03	DIO,ZEN.HZS 6A3L -R5
ZD801	48T25766W20	DIO,ZEN.HZS 9A2L -R5
Crystals		
CL101	91T75576W08	OSC,CER EFOJM1695-E2
CL501	91T75576W01	OSC,CER EFOS4194E-E5
Coil		
L801	24T65097W02	CHOKE,EI-14 H10 -DB
Switch		
S401	40T55182W03	SW,TACT SKHVBB -H5(EJECT)
Thermistor		
TH501	48T15688Y01	TMT,SC20-3U104KT -CP
Capacitors		
C101	08S45676W73	CAP,CER.103K-B1H -CP
C102	08S45677W01	CAP,CER 0R5C-CH1H-CP
C106	08S45676W85	CAP,CER 104K-B1C -CP
C107	08S45677W32	CAP,CER.68RJ-CH1H-CP
C108	08S35350Y04	CAP,CER 105K-B1C -CP
C109	08S45676W86	CAP,CER 273K-B1E -CP
C110	08S45676W86	CAP,CER 273K-B1E -CP
C111	08S45676W72	CAP,CER 822K-B1H -CP
C112	08S45676W72	CAP,CER 822K-B1H -CP
C114	08S45676W85	CAP,CER 104K-B1C -CP
C115	08S45676W85	CAP,CER 104K-B1C -CP
C116	08S45677W40	CAP,CER.151J-CH1H-CP
C117	08S45677W32	CAP,CER.68RJ-CH1H-CP
C118	08S45676W85	CAP,CER 104K-B1C -CP
C119	08S45676W64	CAP,CER.182K-B1H -CP

CHM-S630

Symbol No.	Part No.	Description
C121	08S45676W85	CAP,CER 104K-B1C -CP
C122	08S45676W89	CAP,CER 473K-B1E -CP
C123	08S45676W85	CAP,CER 104K-B1C -CP
C124	08S45676W73	CAP,CER.103K-B1H -CP
C125	08S45677W54	CAP,CER 561J-CH1H-CP
C126	08S45676W80	CAP,CER 223K-B1E -CP
C127	08S45676W85	CAP,CER 104K-B1C -CP
C131	08S45676W80	CAP,CER 223K-B1E -CP
C132	08S45676W80	CAP,CER 223K-B1E -CP
C134	08S45677W36	CAP,CER.101J-CH1H-CP
C136	08S45676W85	CAP,CER 104K-B1C -CP
C137	08S45676W85	CAP,CER 104K-B1C -CP
C138	08S45676W85	CAP,CER 104K-B1C -CP
C139	08S45676W93	CAP,CER 224K-B1A -CP
C140	08S45676W85	CAP,CER 104K-B1C -CP
C141	08S45676W80	CAP,CER 223K-B1E -CP
C142	08S45676W80	CAP,CER 223K-B1E -CP
C143	08S45676W89	CAP,CER 473K-B1E -CP
C153	08S82122F63	CAP,CER 122J-CH1H-CP
C154	08S45677W40	CAP,CER.151J-CH1H-CP
C155	08S45676W80	CAP,CER 223K-B1E -CP
C156	08S45676W72	CAP,CER 822K-B1H -CP
C191	08S45676W80	CAP,CER 223K-B1E -CP
C192	08S45676W80	CAP,CER 223K-B1E -CP
C201	08S45677W40	CAP,CER.151J-CH1H-CP
C202	08S45677W40	CAP,CER.151J-CH1H-CP
C205	08S45677W46	CAP,CER 271J-CH1H-CP
C206	08S45677W46	CAP,CER 271J-CH1H-CP
C207	08S45677W58	CAP,CER 821J-CH1H-CP
C208	08S45677W58	CAP,CER 821J-CH1H-CP
C209	08S45676W80	CAP,CER 223K-B1E -CP
C233	08S45677W58	CAP,CER 821J-CH1H-CP
C234	08S45677W58	CAP,CER 821J-CH1H-CP
C501	08S45677W42	CAP,CER.181J-CH1H-CP
C502	08S45676W80	CAP,CER 223K-B1E -CP
C504	08S45676W80	CAP,CER 223K-B1E -CP
C507	08S45676W80	CAP,CER 223K-B1E -CP
C513	08S45677W42	CAP,CER.181J-CH1H-CP
C515	08S45676W80	CAP,CER 223K-B1E -CP
C522	08S45676W80	CAP,CER 223K-B1E -CP
C540	08S45677W48	CAP,CER.331J-CH1H-CP
C801	08S45676W80	CAP,CER 223K-B1E -CP
C805	08S45676W73	CAP,CER.103K-B1H -CP
E102	23S55311W35	CAP,TAN 10R-1C-B -CP
E103	23S55311W35	CAP,TAN 10R-1C-B -CP
E104	23S75372W02	CAP,ELY 101-1A -R2
E105	23S55311W42	CAP,TAN.4R7-1D-B -CP
E132	23S55311W42	CAP,TAN.4R7-1D-B -CP
E133	23S75372W01	CAP,ELY 331-0J -H2

Symbol No.	Part No.	Description
E151	23S75372W03	CAP,ELY 221-1A -H2
E152	23S75372W13	CAP,ELY R47-1H -R2
E191	23S75372W01	CAP,ELY 331-0J -H2
E201	23S75372W04	CAP,ELY 10R-1C -R2
E202	23S75372W04	CAP,ELY 10R-1C -R2
E203	23S75372W05	CAP,ELY 22R-1C -R2
E204	23S75372W05	CAP,ELY 22R-1C -R2
E205	23S75372W12	CAP,ELY R33-1H -R2
E501	23S75372W13	CAP,ELY R47-1H -R2
E502	23S75372W17	CAP,ELY 3R3-1H -R2
E503	23S75372W04	CAP,ELY 10R-1C -R2
E504	23S75372W15	CAP,ELY 1R0-1H -R2
E801	23T75427W01	CAP,ELY 471-1C -H5
E802	23S75372W03	CAP,ELY 221-1A -H2
E803	23S75372W06	CAP,ELY 33R-1C -R2
E804	23S75372W06	CAP,ELY 33R-1C -R2
E808	23S75372W01	CAP,ELY 331-0J -H2

Resistors

R101	06S45674W77	RES,RK 682J 1/10 -CP
R102	06S45674W71	RES,RK 392J 1/10 -CP
R103	06S45674W63	RES,RK 182J 1/10 -CP
R104	06S45675W43	RES,RK JUMPER1/10-CP
R105	06S45674W75	RES,RK 562J 1/10 -CP
R106	06S45675W14	RES,RK 224J 1/10 -CP
R107	06S45675W14	RES,RK 224J 1/10 -CP
R108	06S45674W99	RES,RK 563J 1/10 -CP
R109	06S45674W99	RES,RK 563J 1/10 -CP
R110	06S45675W10	RES,RK 154J 1/10 -CP
R111	06S45675W43	RES,RK JUMPER1/10-CP
R112	06S45674W81	RES,RK 103J 1/10 -CP
R113	06S45674W97	RES,RK 473J 1/10 -CP
R114	06S45675W14	RES,RK 224J 1/10 -CP
R115	06S45674W79	RES,RK 822J 1/10 -CP
R116	06S45675W43	RES,RK JUMPER1/10-CP
R117	06S45674W74	RES,RK 512J 1/10 -CP
R118	06S45674W81	RES,RK 103J 1/10 -CP
R120	06S95434W33	RES,RK 22RJ 1/4 -CP
R121	06S45675W43	RES,RK JUMPER1/10-CP
R122	06S45675W43	RES,RK JUMPER1/10-CP
R123	06S45674W81	RES,RK 103J 1/10 -CP
R124	06S45674W81	RES,RK 103J 1/10 -CP
R125	06S45674W73	RES,RK 472J 1/10 -CP
R131	06S45675W30	RES,RK 105J 1/10 -CP
R132	06S45675W06	RES,RK 104J 1/10 -CP
R134	06S45675W08	RES,RK 124J 1/10 -CP
R135	06S45674W49	RES,RK 471J 1/10 -CP

Symbol No.	Part No.	Description
R136	06S45675W43	RES. RK JUMPER1/10-CP
R137	06S45675W14	RES. RK 224J 1/10 -CP
R138	06S45674W67	RES. RK 272J 1/10 -CP
R139	06S45675W43	RES. RK JUMPER1/10-CP
R140	06S45674W29	RES. RK 68RJ 1/10 -CP
R141	06S45674W81	RES. RK 103J 1/10 -CP
R152	06S45674W54	RES. RK 751J 1/10 -CP
R155	06S45674W54	RES. RK 751J 1/10 -CP
R157	06S45675W43	RES. RK JUMPER1/10-CP
R158	06S45674W33	RES. RK 101J 1/10 -CP
R159	06S45674W81	RES. RK 103J 1/10 -CP
R160	06S45675W43	RES. RK JUMPER1/10-CP
R162	06S45674W89	RES. RK 223J 1/10 -CP
R163	06S45674W89	RES. RK 223J 1/10 -CP
R164	06S45675W43	RES. RK JUMPER1/10-CP
R166	06S95434W01	RES. RK 1R0J 1/4 -CP
R167	06S45674W93	RES. RK 333J 1/10 -CP
R168	06S45674W33	RES. RK 101J 1/10 -CP
R169	06T75431W66	RES. RK 202J 1/8 -CP
R171	06S45674W57	RES. RK 102J 1/10 -CP
R172	06S45674W99	RES. RK 563J 1/10 -CP
R173	06S45674W82	RES. RK 113J 1/10 -CP
R174	06S45675W08	RES. RK 124J 1/10 -CP
R175	06S45674W29	RES. RK 68RJ 1/10 -CP
R176	06S45675W10	RES. RK 154J 1/10 -CP
R178	06S45674W54	RES. RK 751J 1/10 -CP
R179	06S45674W54	RES. RK 751J 1/10 -CP
R180	06S45674W73	RES. RK 472J 1/10 -CP
R181	06T75431W94	RES. RK 303J 1/8 -CP
R182	06S45674W87	RES. RK 183J 1/10 -CP
R183	06S45675W43	RES. RK JUMPER1/10-CP
R184	06S45674W63	RES. RK 182J 1/10 -CP
R185	06S45674W98	RES. RK 513J 1/10 -CP
R191	06S45674W73	RES. RK 472J 1/10 -CP
R192	06S45674W73	RES. RK 472J 1/10 -CP
R193	06S45674W73	RES. RK 472J 1/10 -CP
R194	06S45674W97	RES. RK 473J 1/10 -CP
R201	06S45674W76	RES. RK 622J 1/10 -CP
R202	06S45674W76	RES. RK 622J 1/10 -CP
R203	06T75431W88	RES. RK 163J 1/8 -CP
R204	06T75431W88	RES. RK 163J 1/8 -CP
R207	06S45674W65	RES. RK 222J 1/10 -CP
R208	06S45674W65	RES. RK 222J 1/10 -CP
R209	06S45674W85	RES. RK 153J 1/10 -CP
R210	06S45674W85	RES. RK 153J 1/10 -CP
R213	06S45674W54	RES. RK 751J 1/10 -CP
R214	06S45674W54	RES. RK 751J 1/10 -CP
R225	06S45674W89	RES. RK 223J 1/10 -CP
R226	06S45674W89	RES. RK 223J 1/10 -CP

Symbol No.	Part No.	Description
R227	06S45674W25	RES. RK 47RJ 1/10 -CP
R228	06S45674W25	RES. RK 47RJ 1/10 -CP
R231	06S45674W81	RES. RK 103J 1/10 -CP
R232	06S45674W81	RES. RK 103J 1/10 -CP
R241	06T75432W17	RES. RK 244J 1/8 -CP
R242	06T75432W17	RES. RK 244J 1/8 -CP
R505	06S45674W97	RES. RK 473J 1/10 -CP
R506	06S45674W97	RES. RK 473J 1/10 -CP
R507	06S45674W97	RES. RK 473J 1/10 -CP
R508	06S45674W97	RES. RK 473J 1/10 -CP
R509	06S45674W97	RES. RK 473J 1/10 -CP
R511	06S45675W43	RES. RK JUMPER1/10-CP
R513	06T75432W05	RES. RK 753J 1/8 -CP
R514	06S45674W81	RES. RK 103J 1/10 -CP
R517	06S45674W97	RES. RK 473J 1/10 -CP
R518	06S45674W97	RES. RK 473J 1/10 -CP
R519	06S45674W97	RES. RK 473J 1/10 -CP
R520	06S45674W97	RES. RK 473J 1/10 -CP
R521	06S45674W97	RES. RK 473J 1/10 -CP
R535	06S45674W97	RES. RK 473J 1/10 -CP
R536	06S45674W97	RES. RK 473J 1/10 -CP
R540	06S45674W89	RES. RK 223J 1/10 -CP
R541	06T75433W81	RES. RK 223J 1/4 -CP
R542	06S95434W57	RES. RK 221J 1/4 -CP
R551	06S15594Y10	RES. RK 334F 1/10 -CP
R552	06S15593Y99	RES. RK 124F 1/10 -CP
R554	06S45674W97	RES. RK 473J 1/10 -CP
R556	06S45674W99	RES. RK 563J 1/10 -CP
R559	06S45674W57	RES. RK 102J 1/10 -CP
R603	06S45674W97	RES. RK 473J 1/10 -CP
R701	06S45675W43	RES. RK JUMPER1/10-CP
R801	06S45674W45	RES. RK 331J 1/10 -CP
R802	06S45674W45	RES. RK 331J 1/10 -CP
R803	06S45674W45	RES. RK 331J 1/10 -CP
R804	06S45674W45	RES. RK 331J 1/10 -CP

Connectors

CB501	09T90625F54	WTB. TXL-04PL -DS
CB502	09T45435W10	FFC. 52207-1090 -E9
CB503	09T45434W15	FFC. 52271-1590 -ED
CB801	09T45434W11	FFC. 52271-1190 -E9

Symbol No.	Part No.	Description
Connector P. W. Board		
Capacitor		
C910	08S45677W58	CAP, CER 821J-CH1H-CP
Resistors		
R920	06S95434W25	RES, RK 10RJ 1/4 -CP
R921	06S95434W25	RES, RK 10RJ 1/4 -CP
R922	06S95434W65	RES, RK 471J 1/4 -CP
Connectors		
CB901	09T45435W11	FFC, 52207-1190 -E9
CB902	09T55229W59	WTB, SC25-09WN -DS
Elevator P. W. Board		
Connector		
CH501	01T65226W01	ASSY, WIRE MOTOR 4P
Miscellaneous		
ET902	01T75325W01	DIN, 8P CORD
DT23L060		
HD101	81B31012Y01	PICKUP, EP21A62L
M101	59T65085W01	MOTOR, LOAD FF-050SK (7V-370mA/LOADING)
M102	59T65085W01	MOTOR, LOAD FF-050SK (7V-370mA/ELEVATOR)
M103	59T65085W01	MOTOR, LOAD FF-050SK (7V-370mA/SLED)
M104	01V83900W16	ASSY, MOTOR (2V-90mA/SPINDLE)
S101	40T35543W02	SW , DET, SPVC21 -E07 (UNLOAD)
S102	40T35543W02	SW , DET, SPVC21 -E07 (LOADING)
SW104	40T15222W01	SW , DETECTOR (MAGAZINE IN)
SW105	40T71025F03	SW, DETCT SPPB120 (LIMIT)

Symbol No.	Part No.	Description
VR101	18T55678W01	SLD, RS32111 103-BX1 (LPS)