EXPLODED VIEW

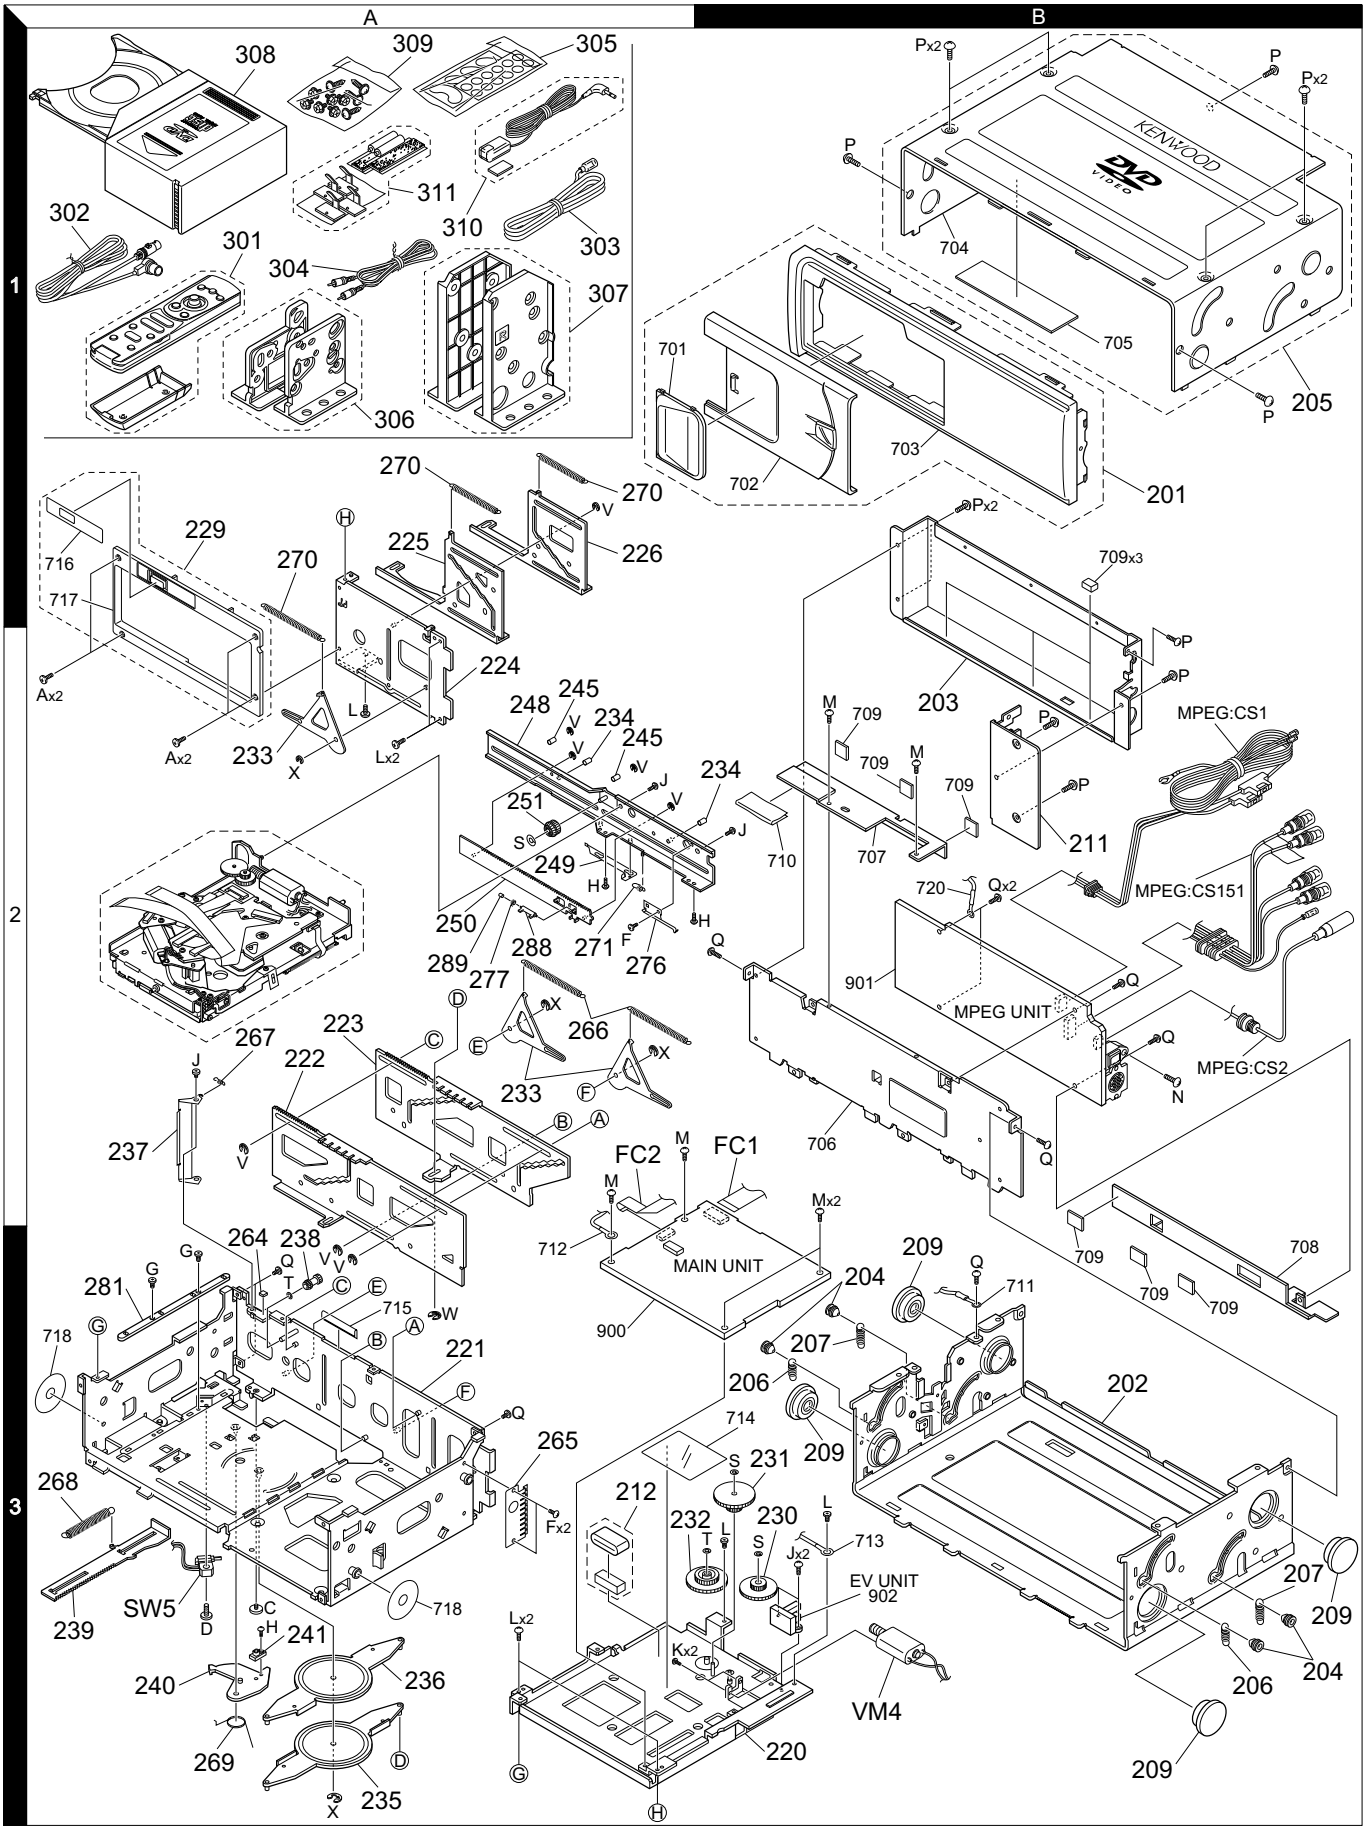

Parts with the exploded numbers larger than 700 are not supplied.

EXPLODED VIEW

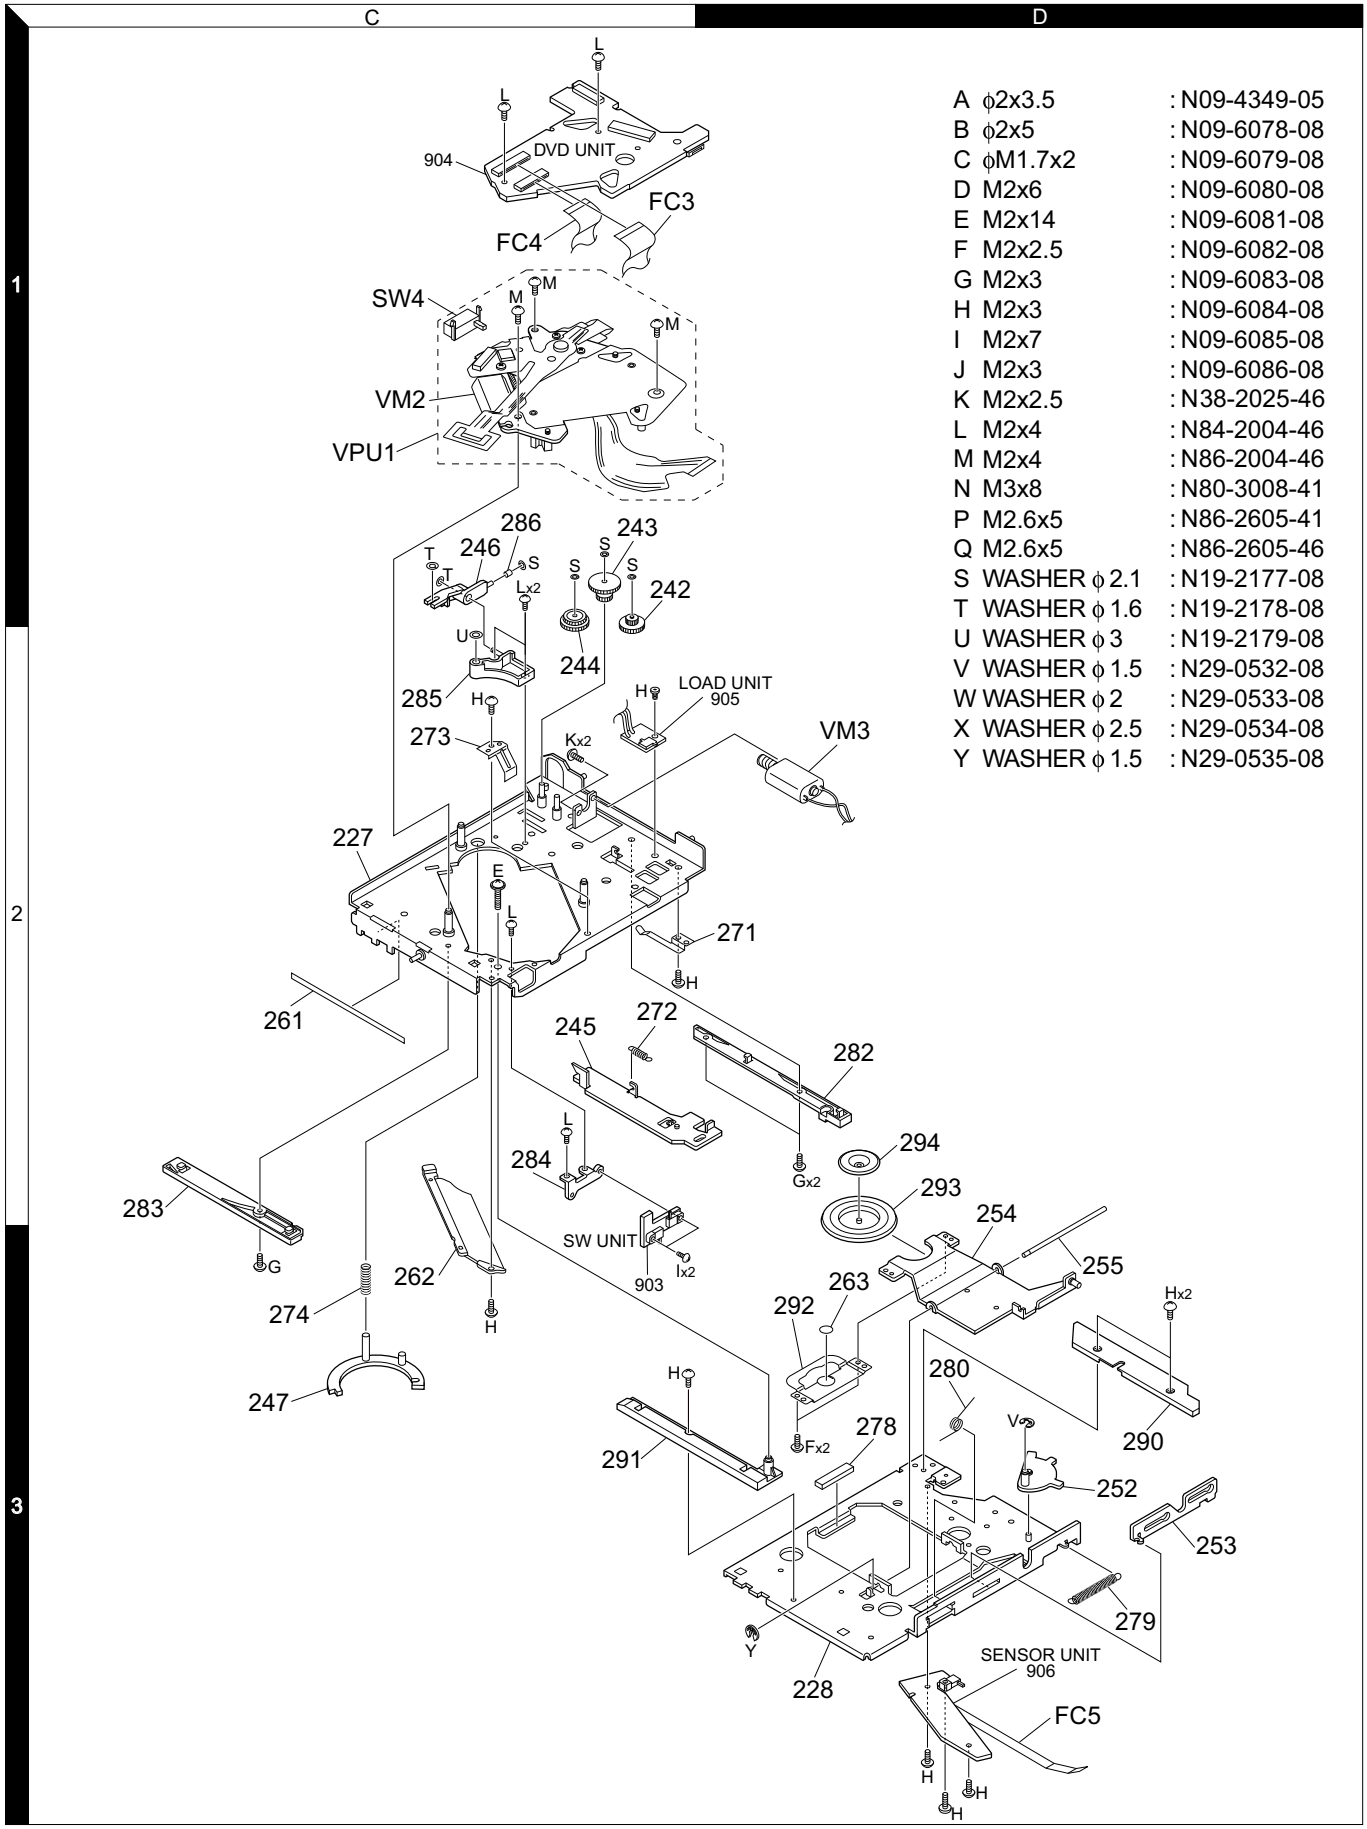

A	φ2x3.5	: N09-4349-05
B	φ2x5	: N09-6078-08
C	φM1.7x2	: N09-6079-08
D	M2x6	: N09-6080-08
E	M2x14	: N09-6081-08
F	M2x2.5	: N09-6082-08
G	M2x3	: N09-6083-08
H	M2x3	: N09-6084-08
I	M2x7	: N09-6085-08
J	M2x3	: N09-6086-08
K	M2x2.5	: N38-2025-46
L	M2x4	: N84-2004-46
M	M2x4	: N86-2004-46
N	M3x8	: N80-3008-41
P	M2.6x5	: N86-2605-41
Q	M2.6x5	: N86-2605-46
S	WASHER φ2.1	: N19-2177-08
T	WASHER φ1.6	: N19-2178-08
U	WASHER φ3	: N19-2179-08
V	WASHER φ1.5	: N29-0532-08
W	WASHER φ2	: N29-0533-08
X	WASHER φ2.5	: N29-0534-08
Y	WASHER φ1.5	: N29-0535-08

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
KDV-C810/C820/C830/C840/C860					
201	1B	✻	A64-2965-08	PANEL ASSY	K
201	1B	✻	A64-2966-08	PANEL ASSY	E
201	1B	✻	A64-2967-08	PANEL ASSY	M
201	1B	✻	A64-2968-08	PANEL ASSY	X
201	1B	✻	A64-2969-08	PANEL ASSY	C
202	3B	✻	A40-1313-08	BOTTOM PLATE ASS'Y	
203	1B	✻	A46-1780-08	REAR COVER ASS'Y	K
203	1B	✻	A46-1781-08	REAR COVER ASS'Y	E
203	1B	✻	A46-1782-08	REAR COVER ASS'Y	M
203	1B	✻	A46-1783-08	REAR COVER ASS'Y	X
203	1B	✻	A46-1784-08	REAR COVER ASS'Y	C
204	3B	✻	D21-2422-08	SHAFT	
205	1B	✻	F07-1119-08	COVER	
206	3B	✻	G01-3175-08	EXTENSION SPRING	
207	3B	✻	G01-3176-08	EXTENSION SPRING	
208	3B	✻	G11-3532-08	CUSHION	
209	3B	✻	J19-5213-08	SPIDER	
210	2B	✻	J21-9989-08	MOUNTING HARDWARE	
211	2B	✻	J21-9990-08	MOUNTING HARDWARE	
212	3A	✻	L92-0368-08	CORE	
301	1A	✻	A70-2038-08	REMOTE CONT ASS'Y (RC-DV300)	
302	1A	✻	E30-6124-05	CORD WITH PLUG (DIN 13P)	
303	1A	✻	E30-6148-08	DC CORD	
304	1A	✻	E30-6149-08	VIDEO CORD	
305	1A	✻	H21-1146-08	PROTECTION SHEET	
306	1A	✻	J19-5209-08	BRACKET	
307	1A	✻	J19-5210-08	BRACKET	
308	1A	✻	J19-5211-08	MAGAZINE PACK ASS'Y	
309	1A	✻	N99-1732-08	SCREW SET	
310	1A		T95-0235-05	REMOTE CONTOL SENSOR ASS'Y	
311	1A	✻	W09-0745-08	MOUNTING PARTS SET	
310	1A		T95-0235-05	REMOTE CONTOL SENSOR ASS'Y	
311	1A	✻	W09-0745-08	MOUNTING PARTS SET	
-			B46-0100-50	WARRANTY CARD	
-			B46-0182-14	ID CARD	E
-			B46-1514-04	CAUTION CARD (CLASS1)	EMXC
-		✻	B58-1391-04	CAUTION CARD	
-		✻	B58-1395-08	SHIPPING CAUTION CARD	
-		✻	B64-2291-00	INSTRUCTION MANUAL (ENG)	KEMXC
-		✻	B64-2292-00	INSTRUCTION MANUAL (FRE)	KE
-		✻	B64-2293-00	INSTRUCTION MANUAL (GER,DUT)	E
-		✻	B64-2294-00	INSTRUCTION MANUAL (ITA)	E
-		✻	B64-2295-00	INSTRUCTION MANUAL (SPA,POR)	EX
-		✻	B64-2296-00	INSTRUCTION MANUAL (T-CHI,KOR)	M
-		✻	B64-2297-00	INSTRUCTION MANUAL (S-CHI)	C

Ref. No.	Add	New	Parts No.	Description	Destination
-			F52-0004-05	FUSE (5A)	
-		✻	H10-4847-08	POLYSTYRENE FOAMED FIXTURE (BL)	
-		✻	H10-4848-08	POLYSTYRENE FOAMED FIXTURE (BR)	
-		✻	H10-4849-08	POLYSTYRENE FOAMED FIXTURE (UL)	
-		✻	H10-4850-08	POLYSTYRENE FOAMED FIXTURE (UR)	
-		✻	H12-2715-08	PACKING FIXTURE (ACCESSORY)	
-			H25-1163-08	PROTECTION BAG	
-		✻	H25-1182-08	PROTECTION BAG (FOR UNIT)	
-		✻	H30-0571-08	MAGIC TAPE	
-		✻	H30-0572-08	MAGIC TAPE	
-		✻	H54-2544-08	ITEM CARTON CASE (KDV-C810)	K
-		✻	H54-2545-08	ITEM CARTON CASE (KDV-C820)	E
-		✻	H54-2546-08	ITEM CARTON CASE (KDV-C830)	M
-		✻	H54-2547-08	ITEM CARTON CASE (KDV-C840)	X
-		✻	H54-2548-08	ITEM CARTON CASE (KDV-C860)	C
-		✻	J19-5212-08	SHIPPING SCREW	
-			J21-9966-08	MOUNTING HARDWARE	XC
-		✻	J30-1079-08	SPACER	XC
-		✻	W01-1603-08	CLEANING CLOTH	
220	3B	✻	A10-5053-08	CHASSIS ASS'Y	
221	3A	✻	A10-5054-08	CHASSIS ASS'Y	
222	2A	✻	A11-1624-08	SUB CHASSIS	
223	2A	✻	A11-1625-08	SUB CHASSIS	
224	2A	✻	A10-5055-08	CHASSIS	
225	1A	✻	A10-5056-08	CHASSIS	
226	1A	✻	A10-5057-08	CHASSIS	
227	2C	✻	A10-5058-08	CHASSIS ASS'Y	
228	3D	✻	A10-5059-08	CHASSIS	
229	2A	✻	A22-2987-08	SUB PANEL	
230	3A	✻	D13-2281-08	GEAR	
231	3B	✻	D13-2282-08	GEAR	
232	3A	✻	D13-2283-08	GEAR	
233	2A	✻	D10-4734-08	LEVER	
234	2A	✻	D14-0784-08	ROLLER	
235	3A	✻	D10-4735-08	ARM ASS'Y	
236	3A	✻	D10-4736-08	ARM ASS'Y	
237	2A	✻	D32-0650-08	STOPPER	
238	3A	✻	D13-2284-08	GEAR	
239	3A	✻	D10-4737-08	LEVER	
240	3A	✻	D10-4738-08	LEVER	
241	3A	✻	D32-0651-08	STOPPER	
242	1C	✻	D13-2285-08	GEAR	
243	3D	✻	D10-4746-08	LEVER	
243	1C	✻	D13-2286-08	GEAR	
244	1C	✻	D13-2287-08	GEAR	
245	2C	✻	D10-4739-08	LEVER	
246	1C	✻	D10-4740-08	LEVER	
247	3C	✻	D10-4741-08	ARM	
248	2A	✻	D10-4742-08	SLIDER	
249	2A	✻	D10-4743-08	LEVER	
250	2A	✻	D10-4744-08	LEVER	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
251	2A	✻	D13-2288-08	GEAR	
252	3D	✻	D10-4745-08	LEVER	
254	3D	✻	D10-4747-08	ARM	
255	3D	✻	D21-2423-08	SHAFT	
261	2C	✻	F09-1788-08	SHEET	
262	2C	✻	F19-1406-08	COVER	
263	3D	✻	F09-1789-08	SHEET	
264	3C	✻	G13-1260-08	CUSHION	
265	3A	✻	G02-1459-08	FLAT SPRING	
266	2A	✻	G01-3177-08	EXTENSION SPRING	
267	2A	✻	G01-3178-08	EXTENSION SPRING	
268	3A	✻	G01-3179-08	EXTENSION SPRING	
269	3A	✻	G01-3180-08	TORSION COIL SPRING	
270	1A	✻	G01-3187-08	EXTENSION SPRING	
271	2D	✻	G02-1460-08	FLAT SPRING	
272	2C	✻	G01-3181-08	EXTENSION SPRING	
273	2C	✻	G02-1461-08	FLAT SPRING	
274	3C	✻	G01-3182-08	COMPRESSION SPRING	
275	2A	✻	G01-3183-08	EXTENSION SPRING	
276	2A	✻	G02-1462-08	FLAT SPRING	
277	2A	✻	G01-3184-08	TORSION COIL SPRING	
278	3D	✻	G13-1261-08	CUSHION	
279	3D	✻	G01-3185-08	EXTENSION SPRING	
280	3D	✻	G01-3186-08	TORSION COIL SPRING	
281	3A	✻	J90-1059-08	GUIDE	
282	2D	✻	J90-1060-08	GUIDE	
283	2C	✻	J90-1061-08	GUIDE	
284	2C	✻	J21-9991-08	MOUNTING HARDWARE	
285	1C	✻	J19-5214-08	HOLDER	
286	1C	✻	J31-1053-08	COLLAR	
288	2A	✻	J19-5215-08	HOLDER	
289	2A	✻	J12-1227-08	PIN	
290	3D	✻	J90-1062-08	GUIDE	
291	3C	✻	J90-1063-08	GUIDE	
292	3D	✻	J19-5216-08	BRACKET	
293	2D	✻	J11-0652-08	CLAMPER	
294	2D	✻	J11-0653-08	CLAMPER	
295	2A	✻	J31-1054-08	COLLAR	
FC1	2B	✻	E39-0521-08	FLAT CABLE 40PIN	
FC2	2A		E39-0517-08	FLAT CABLE 20PIN	
FC3	1D		E39-0515-08	FLAT CABLE 30PIN	
FC4	1D		E39-0514-08	FLAT CABLE 25PIN	
FC5	3D	✻	E39-0518-08	FLAT CABLE 4PIN	
A	2A		N09-4349-05	TAPTITE SCREW	
B	3A	✻	N09-6078-08	SEMS (TAPTITE SCREW)	
C	3A	✻	N09-6079-08	TAPTITE SCREW	
D	3A	✻	N09-6080-08	TAPTITE SCREW	
E	2C	✻	N09-6081-08	TAPTITE SCREW	
F	3D	✻	N09-6082-08	TAPTITE SCREW	
G	2D	✻	N09-6083-08	TAPTITE SCREW	
H	3D	✻	N09-6084-08	TAPTITE SCREW	
I	2C	✻	N09-6085-08	TAPTITE SCREW	
J	2A	✻	N09-6086-08	TAPTITE SCREW	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

MECHANISM ASSY

Ref. No.	Add	New	Parts No.	Description	Destination
K	2C		N38-2025-46	PAN HEAD MACHIN SCREW	
L	3B		N84-2004-46	PAN HEAD TAPTITE SCREW	
M	1C		N86-2004-46	BINDING HEAD TAPTITE SCREW	
N	2B		N80-3008-41	PAN HEAD TAPTITE SCREW	
P	1B	✻	N86-2605-41	BINDING HEAD TAPTITE SCREW	
Q	3B		N86-2605-46	BINDING HEAD TAPTITE SCREW	
S	1C	✻	N19-2177-08	FLAT WASHER	
T	1C	✻	N19-2178-08	FLAT WASHER	
U	1C	✻	N19-2179-08	FLAT WASHER	
V	3A	✻	N29-0532-08	RETAINING RING	
W	3A	✻	N29-0533-08	RETAINING RING	
X	3A	✻	N29-0534-08	RETAINING RING	
Y	3D	✻	N29-0535-08	RETAINING RING	
SW4	1C	✻	S68-0878-08	INSIDE SW	
SW5	3A		S68-0858-08	MAGAZINE IN SW	
VM2	1C	✻	T42-1079-08	MOTOR ASS'Y FEED MOTOR	
VM3	2D	✻	T42-1080-08	MOTOR ASS'Y LOADING MOTOR	
VM4	3B	✻	T42-1078-08	MOTOR ASS'Y ELEVATOR MOTOR	
VPU1	1C	✻	T25-0227-08	PICKUP (WITH VM1,VN2,PHT2,SW4)	
SENSOR UNIT					
D1		✻	PS1191RA-32	PHOTO DIODE (DISC DET)	
SW1			S68-0858-08	PUSH SWITCH (LOAD OUT SW)	
SWITCH UNIT					
SW2 ,3			S68-0858-08	PUSH SWITCH (UP /DOWN SW)	
SW302		✻	S74-0820-08	MICRO SWITCH (CLAMP SW)	
EV UNIT					
PHT1		✻	T95-0256-08	OPT ISOLATOR (POSITION SENSOR)	
DVD UNIT					
C1 ,2			C93-1196-08	CHIP C 0.1UF 16WV	
C3			C92-1625-08	CHIP-TAN 33UF 10WV	
C4 -7			C93-1196-08	CHIP C 0.1UF 16WV	
CS2			E40-9619-05	FLAT CABLE CONNECTOR (20PIN)	
CS3			E40-5169-05	PIN ASS'Y (4PIN)	
CS4			E40-9403-05	FLAT CABLE CONNECTOR (4PIN)	
CS6			E40-9700-05	FLAT CABLE CONNECTOR (25PIN)	
CS7 ,8			E40-9353-05	FLAT CABLE CONNECTOR (30PIN)	
R1 ,2			RK73GB1J101J	CHIP R 100 J 1/16W	
R3		✻	R92-3403-08	CHIP R 0.56 J 1/16W	
R5			RK73GB1J331J	CHIP R 330 J 1/16W	
IC1		✻	BA6849FP-Y	ANALOGUE IC	
LED1		✻	AN1102W-3	PHOTO DIODE	
MAIN UNIT					
C100-102			C93-1196-08	CHIP C 0.1UF 16WV	
C103,104			C92-1625-08	CHIP-TAN 33UF 10WV	
C105			C92-1686-08	CHIP C 10UF 6.3WV	
C106,107			C93-1196-08	CHIP C 0.1UF 16WV	
C108,109			CK73GB1H102K	CHIP C 1000PF K	
C110			C93-1196-08	CHIP C 0.1UF 16WV	
C111			C92-1686-08	CHIP C 10UF 6.3WV	
C112,113			C93-1196-08	CHIP C 0.1UF 16WV	
C114,115			CK73GB1H102K	CHIP C 1000PF K	

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	Add	New	Parts No.	Description			Destination
C116			C93-1196-08	CHIP C	0.1UF	16WV	
C117			CK73GB1H103K	CHIP C	0.010UF	K	
C120,121			C93-1196-08	CHIP C	0.1UF	16WV	
C122-124			CC73GCH1H331J	CHIP C	330PF	J	
C126			C93-1196-08	CHIP C	0.1UF	16WV	
C127			C92-1627-08	CHIP-TAN	22UF	10WV	
C128			C93-1196-08	CHIP C	0.1UF	16WV	
C129			C92-1686-08	CHIP C	10UF	6.3WV	
C130			C93-1196-08	CHIP C	0.1UF	16WV	
C131,132			C92-1686-08	CHIP C	10UF	6.3WV	
C133			C93-1196-08	CHIP C	0.1UF	16WV	
C134			CK73GB1H102K	CHIP C	1000PF	K	
C135			C92-1624-08	CHIP-TAN	10UF	10WV	
C136			C93-1196-08	CHIP C	0.1UF	16WV	
C137			CK73GB1H103K	CHIP C	0.010UF	K	
C139,140			C92-1621-08	CHIP-TAN	33UF	4WV	
C141			C92-1625-08	CHIP-TAN	33UF	10WV	
C150			C92-1686-08	CHIP C	10UF	6.3WV	
C153,154			CK73GB1H103K	CHIP C	0.010UF	K	
C155-157			C93-1196-08	CHIP C	0.1UF	16WV	
C158			CC73GCH1H101J	CHIP C	100PF	J	
C159,160			C93-1196-08	CHIP C	0.1UF	16WV	
C161			CK73GB1H102K	CHIP C	1000PF	K	
C162			CC73GCH1H101J	CHIP C	100PF	J	
C163			CK73GB1H102K	CHIP C	1000PF	K	
C201			CK73GB1H682K	CHIP C	6800PF	K	
C202			CK73GB1H153K	CHIP C	0.015UF	K	
C203			C93-1196-08	CHIP C	0.1UF	16WV	
C204			CC73GCH1H101J	CHIP C	100PF	J	
C205			CC73GCH1H471J	CHIP C	470PF	J	
C206			CK73GB1H222K	CHIP C	2200PF	K	
C207			CC73GCH1H471J	CHIP C	470PF	J	
C208			C92-1624-08	CHIP-TAN	10UF	10WV	
C209			C93-1196-08	CHIP C	0.1UF	16WV	
C210			C92-1624-08	CHIP-TAN	10UF	10WV	
C211			C93-1196-08	CHIP C	0.1UF	16WV	
C212,213			CC73GCH1H331J	CHIP C	330PF	J	
C214-221			C93-1196-08	CHIP C	0.1UF	16WV	
C222			CK73GB1H222K	CHIP C	2200PF	K	
C223			CK73GB1H153K	CHIP C	0.015UF	K	
C224			CK73GB1H102K	CHIP C	1000PF	K	
C225			CC73GCH1H101J	CHIP C	100PF	J	
C236			CC73GCH1H151J	CHIP C	150PF	J	
C237,238			C93-1196-08	CHIP C	0.1UF	16WV	
C239			C92-1686-08	CHIP C	10UF	6.3WV	
C240			C93-1196-08	CHIP C	0.1UF	16WV	
C241			C92-1624-08	CHIP-TAN	10UF	10WV	
C242			C93-1196-08	CHIP C	0.1UF	16WV	
C243-245			C92-1686-08	CHIP C	10UF	6.3WV	
C248			C93-1196-08	CHIP C	0.1UF	16WV	
C250			C92-1686-08	CHIP C	10UF	6.3WV	
C251-256			C93-1196-08	CHIP C	0.1UF	16WV	
C257,258			CC73GCH1H050C	CHIP C	5.0PF	C	
C260			C93-1196-08	CHIP C	0.1UF	16WV	
C261			C92-1654-08	ELECTRO	100UF	6.3WV	

Ref. No.	Add	New	Parts No.	Description			Destination
C282			C93-1196-08	CHIP C	0.1UF	16WV	
C283			C92-1624-08	CHIP-TAN	10UF	10WV	
C284			C93-1196-08	CHIP C	0.1UF	16WV	
C301		✻	C92-1771-08	ELECTRO	22UF	16WV	
C302			C92-1341-05	ELECTRO	100UF	16WV	
C303			C93-1196-08	CHIP C	0.1UF	16WV	
C304		✻	C92-1771-08	ELECTRO	22UF	16WV	
C305		✻	C92-1772-08	ELECTRO	0.01F	16WV	
C306			C92-1341-05	ELECTRO	100UF	16WV	
C307			C92-1698-08	ELECTRO	4.7UF	25WV	
C308			C92-1351-05	ELECTRO	10UF	16WV	
C309			C93-1196-08	CHIP C	0.1UF	16WV	
C310			C92-1698-08	ELECTRO	4.7UF	25WV	
C311			C93-1196-08	CHIP C	0.1UF	16WV	
C312,313			C92-1341-05	ELECTRO	100UF	16WV	
C314,315			C93-1196-08	CHIP C	0.1UF	16WV	
C316			CK73GB1H103K	CHIP C	0.010UF	K	
C317,318			C93-1196-08	CHIP C	0.1UF	16WV	
C319			C92-1341-05	ELECTRO	100UF	16WV	
C320			C93-1196-08	CHIP C	0.1UF	16WV	
C322			CK73GB1E223K	CHIP C	0.022UF	K	
C323			CK73GB1H103K	CHIP C	0.010UF	K	
C324			C93-1196-08	CHIP C	0.1UF	16WV	
C325			CK73GB1H103K	CHIP C	0.010UF	K	
C326			C93-1196-08	CHIP C	0.1UF	16WV	
C328,329			C93-1196-08	CHIP C	0.1UF	16WV	
C330		✻	C92-1771-08	ELECTRO	22UF	16WV	
CS101			E40-9353-05	FLAT CABLE CONNECTOR (30PIN)			
CS102			E40-9700-05	FLAT CABLE CONNECTOR (25PIN)			
CS201		✻	E41-0371-08	FLAT CABLE CONNECTOR (40PIN)			
CS202		✻	E40-5175-05	PIN ASS'Y (10PIN)			
CS301			E40-9619-05	FLAT CABLE CONNECTOR (20PIN)			
CS302			E41-0207-08	PIN ASS'Y (5PIN)			
CS303			E40-5167-05	PIN ASS'Y (2PIN)			
CS304		✻	E41-0370-08	FLAT CABLE CONNECTOR (7PIN)			
BL301-304			L79-0970-08	LC FILTER			
L301-304			L92-0337-05	CHIP FERRITE			
X151			L78-0811-05	RESONATOR	16MHz		
X201		✻	L78-0874-08	RESONATOR	22.57MHz		
X250		✻	L78-0875-08	RESONATOR	50MHz		
X301			L78-0571-05	RESONATOR	8.38MHz		
R110			RK73GB1J472J	CHIP R	4.7K	J 1/16W	
R111			RK73GB1J103J	CHIP R	10K	J 1/16W	
R112,113			RK73GB1J472J	CHIP R	4.7K	J 1/16W	
R114			RK73GB1J123J	CHIP R	12K	J 1/16W	
R115			RK73GB1J103J	CHIP R	10K	J 1/16W	
R116			RK73GB1J101J	CHIP R	100	J 1/16W	
R118			RK73GB1J104J	CHIP R	100K	J 1/16W	
R119			RK73GB1J100J	CHIP R	10	J 1/16W	
R120			R92-3306-08	CHIP R	1K	J 1/16W	
R121			RK73GB1J100J	CHIP R	10	J 1/16W	
R122			R92-3306-08	CHIP R	1K	J 1/16W	
R131			RK73GB1J682J	CHIP R	6.8K	J 1/16W	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	Add	New	Parts No.	Description	Destination
R132			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R133			RK73GB1J273J	CHIP R 27K J 1/16W	
R134			RK73GB1J223J	CHIP R 22K J 1/16W	
R135			RK73GB1J333J	CHIP R 33K J 1/16W	
R151			RK73GB1J473J	CHIP R 47K J 1/16W	
R152			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R153			RK73GB1J473J	CHIP R 47K J 1/16W	
R155			RK73GB1J473J	CHIP R 47K J 1/16W	
R156			R92-3306-08	CHIP R 1K J 1/16W	
R157			RK73GB1J473J	CHIP R 47K J 1/16W	
R158			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R159			RK73GB1J103J	CHIP R 10K J 1/16W	
R201			RK73GB1J473J	CHIP R 47K J 1/16W	
R202			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R206,207			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R209			R92-3306-08	CHIP R 1K J 1/16W	
R210			RK73GB1J103J	CHIP R 10K J 1/16W	
R216			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R217			R92-3306-08	CHIP R 1K J 1/16W	
R220		✻	R92-3402-08	CHIP R 2.2M J 1/16W	
R221			RK73GB1J474J	CHIP R 470K J 1/16W	
R222			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R230		✻	R92-3400-08	CHIP R 56K J 1/16W	
R231		✻	R92-3399-08	CHIP R 27K J 1/16W	
R232		✻	R92-3400-08	CHIP R 56K J 1/16W	
R233		✻	R92-3399-08	CHIP R 27K J 1/16W	
R237		✻	R92-3401-08	CHIP R 560K J 1/16W	
R240			RK73GB1J101J	CHIP R 100 J 1/16W	
R241			RK73GB1J183J	CHIP R 18K J 1/16W	
R245,246			R92-3306-08	CHIP R 1K J 1/16W	
R249			RK73GB1J103J	CHIP R 10K J 1/16W	
R250			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R251,252			RK73GB1J561J	CHIP R 560 J 1/16W	
R253			RK73GB1J101J	CHIP R 100 J 1/16W	
R301			R92-3338-08	CHIP R 100 J 1/2W	
R302			RK73GB1J103J	CHIP R 10K J 1/16W	
R303			R92-3306-08	CHIP R 1K J 1/16W	
R304			R92-3303-08	CHIP R 1K J 1/2W	
R305			RK73GB1J473J	CHIP R 47K J 1/16W	
R306			RK73GB1J103J	CHIP R 10K J 1/16W	
R307			R92-3303-08	CHIP R 1K J 1/2W	
R308			R92-3338-08	CHIP R 100 J 1/2W	
R309			RK73GB1J103J	CHIP R 10K J 1/16W	
R310			RK73GB1J153J	CHIP R 15K J 1/16W	
R311			RK73GB1J104J	CHIP R 100K J 1/16W	
R312,313			RK73GB1J473J	CHIP R 47K J 1/16W	
R314			RK73GB1J561J	CHIP R 560 J 1/16W	
R315			RK73GB1J473J	CHIP R 47K J 1/16W	
R316			RK73GB1J104J	CHIP R 100K J 1/16W	
R317,318			RK73GB1J473J	CHIP R 47K J 1/16W	
R319			RK73GB1J681J	CHIP R 680 J 1/16W	
R320			RK73GB1J473J	CHIP R 47K J 1/16W	
R321			R92-3306-08	CHIP R 1K J 1/16W	
R322			RK73GB1J101J	CHIP R 100 J 1/16W	
R323			R92-3306-08	CHIP R 1K J 1/16W	
R324,325			RK73GB1J473J	CHIP R 47K J 1/16W	
R326			RK73GB1J391J	CHIP R 390 J 1/16W	
R327-329			RK73GB1J473J	CHIP R 47K J 1/16W	
R331,332			R92-1252-05	CHIP R 0 OHM J 1/16W	
R333			RK73GB1J473J	CHIP R 47K J 1/16W	
R334,335			RK73GB1J104J	CHIP R 100K J 1/16W	
R336			RK73GB1J103J	CHIP R 10K J 1/16W	
R337			RK73GB1J101J	CHIP R 100 J 1/16W	
R339			R92-1217-05	CHIP R 0 OHM	
R340			RK73GB1J391J	CHIP R 390 J 1/16W	
R341			RK73GB1J153J	CHIP R 15K J 1/16W	
R342			RK73GB1J103J	CHIP R 10K J 1/16W	
R343-345			RK73GB1J104J	CHIP R 100K J 1/16W	
R346			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R347			RK73GB1J220J	CHIP R 22 J 1/16W	
R348,349			RK73GB1J104J	CHIP R 100K J 1/16W	
R356			RK73GB1J220J	CHIP R 22 J 1/16W	
RA102			R90-0916-05	MULTI-COMP 47K X2	
RA103			R90-0918-05	MULTI-COMP 10K X2	
RA151			R90-1090-08	MULTI-COMP 1K X2	
RA152			R90-1084-08	MULTI-COMP 47K X4	
RA154,155			R90-1084-08	MULTI-COMP 47K X4	
RA157			R90-1084-08	MULTI-COMP 47K X4	
RA162			R90-1090-08	MULTI-COMP 1K X2	
RA201			R90-0918-05	MULTI-COMP 10K X2	
RA202			R90-1090-08	MULTI-COMP 1K X2	
RA203			R90-1083-08	MULTI-COMP 10K X4	
RA204,205			R90-0916-05	MULTI-COMP 47K X2	
RA250-264			R90-1064-08	MULTI-COMP 47 X2	
RA301			R90-1084-08	MULTI-COMP 47K X4	
RA302		✻	R90-1527-08	MULTI-COMP 22 X2	
RA303		✻	R90-1528-08	MULTI-COMP 22 X4	
RA304,305		✻	R90-1527-08	MULTI-COMP 22 X2	
RA306		✻	R90-1528-08	MULTI-COMP 22 X4	
RA307		✻	R90-1527-08	MULTI-COMP 22 X2	
SVR201			R32-0283-08	SEMI FIXED VARIABLE RESISTOR	
SW301		✻	S70-0900-08	EJECT SW	
D101,102			DAP202U	DIODE	
D105			DAN202U	DIODE	
D301			RB400D	DIODE	
D302			MA152K	DIODE	
D303			LFB01	DIODE	
D304			MA152K	DIODE	
IC101		✻	TA1293F	ANALOGUE IC	
IC102			BA5918FP-Y	ANALOGUE IC	
IC103		✻	RN5RG33AA	ANALOGUE IC	
IC104		✻	MMDF2P01HD	TRANSISTOR	
IC105			TC75S51F	ANALOGUE IC	
IC108		✻	LM50CIM3	ANALOGUE IC	
IC151		✻	HD64F3039TEBL1	MI-COM IC	
IC152			TC7ST08FU	MOS-IC	
IC153		✻	IC-PST597EN	MOS-IC	
IC154			TC7WU04FU	MOS-IC	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MAIN UNIT

Ref. No.	Add	New	Parts No.	Description			Destination
IC201		✻	TC9453AF	MOS-IC			
IC202		✻	LH61665AS-60E2	MEMORY IC			
IC250		✻	TC9469BF	MOS-IC			
IC251		✻	MSM514265C50TS	MEMORY IC			
IC301		✻	UPD78F0034AGK9	MI-COM IC			
IC302		✻	S-24C04BFJ	MEMORY IC			
IC303		✻	L78M05TL	ANALOGUE IC			
IC304,305		✻	BA6289F	ANALOGUE IC			
IC306			S-80732AN-DW	MOS-IC			
IC307			S-81250HG-RD	ANALOGUE IC			
IC308			S-80732AN-DW	MOS-IC			
Q101			2SB1424-R	TRANSISTOR			
Q102,103		✻	2SA1338-5	TRANSISTOR			
Q151			DTA114YUA	TRANSISTOR			
Q152		✻	2SA1338-5	TRANSISTOR			
Q301			2SB1424-R	TRANSISTOR			
Q302			DTC114YK	TRANSISTOR			
Q303			DTA114YK	TRANSISTOR			
Q304			2SC2412K-R	TRANSISTOR			
Q305			DTC124EK	TRANSISTOR			
Q307			2SC2412K-R	TRANSISTOR			
ZD301			02CZ8.2-Y	ZENER DIODE			
ZD303			02CZ6.2-Y	ZENER DIODE			
ZD305			02CZ6.2-Y	ZENER DIODE			

MPEG UNIT

C2		✻	C90-5386-05	ELECTRO	470UF	25WV	
C3			C93-1196-08	CHIP C	0.1UF	16WV	
C4			CK73GB1H102K	CHIP C	1000PF	K	
C5			C93-1208-08	CHIP C	120PF	50WV	
C6			CK73GB1H102K	CHIP C	1000PF	K	
C7			C93-1204-08	CHIP C	33PF	50WV	
C8			CC73GCH1H331J	CHIP C	330PF	J	
C9			C93-1204-08	CHIP C	33PF	50WV	
C10			CC73GCH1H331J	CHIP C	330PF	J	
C11			C93-1208-08	CHIP C	120PF	50WV	
C12			CK73GB1H102K	CHIP C	1000PF	K	
C13 ,14			C93-1196-08	CHIP C	0.1UF	16WV	
C15			C93-1161-08	CHIP C	1.0UF	Z	
C16			C93-1196-08	CHIP C	0.1UF	16WV	
C17		✻	C92-0525-05	CHIP-ELE	4.7UF	25WV	
C18			C93-1196-08	CHIP C	0.1UF	16WV	
C19 ,20			C92-1689-08	ELECTRO	82UF	6.3WV	
C21 ,22			CK73GB1H103K	CHIP C	0.010UF	K	
C53		✻	C90-5464-08	ELECTRO	2200UF	25WV	
C54		✻	C92-1773-08	ELECTRO	47UF	16WV	
C55 -58			CK73GB1H103K	CHIP C	0.010UF	K	
C61		✻	C92-1773-08	ELECTRO	47UF	16WV	
C62 -66			C93-1196-08	CHIP C	0.1UF	16WV	
C70 -73			C93-1196-08	CHIP C	0.1UF	16WV	
C81		✻	C92-1774-08	ELECTRO	47UF	6.3WV	
C82			C93-1196-08	CHIP C	0.1UF	16WV	
C83			C92-0523-05	CHIP-ELE	10UF	16WV	
C84			C93-1196-08	CHIP C	0.1UF	16WV	
C85			C92-0523-05	CHIP-ELE	10UF	16WV	
C101			C92-0523-05	CHIP-ELE	10UF	16WV	
C102,103			CC73GCH1H471J	CHIP C	470PF	J	
C104			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C105			C92-0523-05	CHIP-ELE	10UF	16WV	
C106			CK73GB1H152K	CHIP C	1500PF	K	
C108		✻	C92-1773-08	ELECTRO	47UF	16WV	
C111			C92-0523-05	CHIP-ELE	10UF	16WV	
C112,113			CC73GCH1H471J	CHIP C	470PF	J	
C114			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C115			C92-0523-05	CHIP-ELE	10UF	16WV	
C116			CK73GB1H152K	CHIP C	1500PF	K	
C118		✻	C92-1773-08	ELECTRO	47UF	16WV	
C119			C92-0523-05	CHIP-ELE	10UF	16WV	
C151			C92-0523-05	CHIP-ELE	10UF	16WV	
C152,153			CC73GCH1H471J	CHIP C	470PF	J	
C154			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C155			C92-0523-05	CHIP-ELE	10UF	16WV	
C156			CK73GB1H152K	CHIP C	1500PF	K	
C161			C92-0523-05	CHIP-ELE	10UF	16WV	
C162,163			CC73GCH1H471J	CHIP C	470PF	J	
C164			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C165			C92-0523-05	CHIP-ELE	10UF	16WV	
C166			CK73GB1H152K	CHIP C	1500PF	K	
C169			C92-0523-05	CHIP-ELE	10UF	16WV	
C170,171			C93-1196-08	CHIP C	0.1UF	16WV	
C181,182			CC73GCH1H100D	CHIP C	10PF	D	
C182			C93-1207-08	CHIP C	56PF	50WV	
C184,185			CK73EB1A475K	CHIP C	4.7UF	K	
C186		✻	C92-1774-08	ELECTRO	47UF	6.3WV	
C187			C92-1688-08	ELECTRO	330UF	6.3WV	
C188		✻	C92-1774-08	ELECTRO	47UF	6.3WV	
C189			C92-1688-08	ELECTRO	330UF	6.3WV	
C190-194			C93-1196-08	CHIP C	0.1UF	16WV	
C195			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C196,197			CC73GCH1H101J	CHIP C	100PF	J	
C501-506			C93-1196-08	CHIP C	0.1UF	16WV	
C507			CC73GCH1H151J	CHIP C	150PF	J	
C508-524			C93-1196-08	CHIP C	0.1UF	16WV	
C525			CK73GB1H102K	CHIP C	1000PF	K	
C526			C93-1196-08	CHIP C	0.1UF	16WV	
C528,529			C93-1196-08	CHIP C	0.1UF	16WV	
C531			CK73GB1H102K	CHIP C	1000PF	K	
C536-542			C93-1196-08	CHIP C	0.1UF	16WV	
C544-547			C93-1196-08	CHIP C	0.1UF	16WV	
C548			C92-0524-05	CHIP-ELE	22UF	6.3WV	
C551			C93-1196-08	CHIP C	0.1UF	16WV	
C561			C92-1688-08	ELECTRO	330UF	6.3WV	
C562,563			C92-0523-05	CHIP-ELE	10UF	16WV	
C564-567			C93-1196-08	CHIP C	0.1UF	16WV	
C568			CK73GB1H102K	CHIP C	1000PF	K	
C571			C92-1688-08	ELECTRO	330UF	6.3WV	
C572-575			C93-1196-08	CHIP C	0.1UF	16WV	
C576			C92-0523-05	CHIP-ELE	10UF	16WV	
C577			CK73GB1H102K	CHIP C	1000PF	K	
C578,579			C93-1196-08	CHIP C	0.1UF	16WV	
C581			C93-1196-08	CHIP C	0.1UF	16WV	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MPEG UNIT

Ref. No.	Add	New	Parts No.	Description	Destination
C583,584			C93-1196-08	CHIP C 0.1UF 16WV	
C591			C93-1196-08	CHIP C 0.1UF 16WV	
C911-922			C93-1196-08	CHIP C 0.1UF 16WV	
C924			C93-1196-08	CHIP C 0.1UF 16WV	
CT551		✻	C05-0520-08	TRIMMER C20PF	
CS1		✻	E30-6139-08	DC CORD	
CS2		✻	E30-6140-08	CORD WITH MINI PLUG CONNECTOR	
CS3			E06-1301-05	DIN COCKET (13PIN)	
CS151		✻	E30-6141-08	CORD WITH PINPLUG (AV OUTPUT)	
CS581		✻	E58-0956-08	DIGITAL OPTICAL OUTPUT	
CS901		✻	E41-0372-08	FLAT CABLE CONNECTOR (40PIN)	
CS911			E40-9619-05	FLAT CABLE CONNECTOR (20PIN)	
CS912		✻	E41-0373-08	PIN ASS'Y (10PIN)	
BL901-905			L79-0970-08	LC FILTER	
C51,52		✻	L79-0984-08	FILTER 0.2UF	
L2,3			L33-1185-08	SMALL FIXED INDUCTOR	
L51			L33-1824-08	SMALL FIXED INDUCTOR	
L52,53			L92-0179-05	CHIP FERRITE	
L54-57			L92-0337-05	CHIP FERRITE	
L59			L92-0337-05	CHIP FERRITE	
L65			L92-0343-08	CHIP FERRITE	
L71		✻	L92-0369-08	CHIP FERRITE	
L72			L92-0337-05	CHIP FERRITE	
L81-85			L92-0343-08	CHIP FERRITE	
L100			L92-0337-05	CHIP FERRITE	
L111		✻	L92-0369-08	CHIP FERRITE	
L151			L92-0337-05	CHIP FERRITE	
L171		✻	L92-0369-08	CHIP FERRITE	
L181		✻	L33-1901-08	SMALL FIXED INDUCTOR	
L182		✻	L92-0369-08	CHIP FERRITE	
L193			L92-0343-08	CHIP FERRITE	
L501-504		✻	L92-0369-08	CHIP FERRITE	
L511		✻	L92-0369-08	CHIP FERRITE	
L514,515		✻	L92-0369-08	CHIP FERRITE	
L551		✻	L92-0369-08	CHIP FERRITE	
L571,572		✻	L92-0369-08	CHIP FERRITE	
L581,582		✻	L92-0369-08	CHIP FERRITE	
L591		✻	L92-0369-08	CHIP FERRITE	
L901-908		✻	L92-0370-08	CHIP FERRITE	
L913,914			L92-0179-05	CHIP FERRITE	
X551		✻	L77-2834-08	CRYSTAL RESONATOR (27MHz)	
BR501,502		✻	R90-1530-08	MULTI-COMP 33 X2	
BR503-506		✻	R90-1531-08	MULTI-COMP 33 X4	
BR507-509		✻	R90-1530-08	MULTI-COMP 33 X2	
BR510			R90-1048-05	MULTI-COMP 4.7K X2	
BR511,512			R90-1087-08	MULTI-COMP 1K X4	
BR551		✻	R90-1530-08	MULTI-COMP 33 X2	
BR573			R90-1062-08	MULTI-COMP 100 X2	
BR591			R90-1048-05	MULTI-COMP 4.7K X2	
BR901		✻	R90-1530-08	MULTI-COMP 33 X2	
BR902		✻	R90-1531-08	MULTI-COMP 33 X4	
BR903		✻	R90-1529-08	MULTI-COMP 22 X2	
BR904-907		✻	R90-1531-08	MULTI-COMP 33 X4	
BR911-914		✻	R90-1531-08	MULTI-COMP 33 X4	

Ref. No.	Add	New	Parts No.	Description	Destination
R1		✻	R92-3408-08	CHIP R 120K J 1/16W	
R2		✻	R92-3406-08	CHIP R 22K J 1/16W	
R3,4			RK73GB1J153J	CHIP R 15K J 1/16W	
R5		✻	R92-3407-08	CHIP R 30K J 1/16W	
R6			R92-3305-08	CHIP R 100K J 1/16W	
R7			RK73FB2A100J	CHIP R 10 J 1/10W	
R8			RK73GB1J104J	CHIP R 100K J 1/16W	
R9			R92-3296-08	CHIP R 0.047 J 1/2W	
R10			R92-3251-08	CHIP R 0.024 J 1/2W	
R11-14			RK73GB1J220J	CHIP R 22 J 1/16W	
R51		✻	R92-3404-08	CHIP R 560 J 1/2W	
R54-56			R92-3306-08	CHIP R 1K J 1/16W	
R61			RK73GB1J103J	CHIP R 10K J 1/16W	
R71			RK73GB1J101J	CHIP R 100 J 1/16W	
R75			RK73GB1J330J	CHIP R 33 J 1/16W	
R81 -85			RK73GB1J330J	CHIP R 33 J 1/16W	
R86			RK73GB1J121J	CHIP R 120 J 1/16W	
R87			RK73GB1J151J	CHIP R 150 J 1/16W	
R101,102			RK73GB1J223J	CHIP R 22K J 1/16W	
R103,104			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R105			RK73GB1J103J	CHIP R 10K J 1/16W	
R106			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R107			RK73GB1J561J	CHIP R 560 J 1/16W	
R108			RK73GB1J104J	CHIP R 100K J 1/16W	
R111,112			RK73GB1J223J	CHIP R 22K J 1/16W	
R113,114			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R115			RK73GB1J103J	CHIP R 10K J 1/16W	
R116			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R117			RK73GB1J561J	CHIP R 560 J 1/16W	
R118			RK73GB1J104J	CHIP R 100K J 1/16W	
R151,152			RK73GB1J223J	CHIP R 22K J 1/16W	
R153,154			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R155			RK73GB1J103J	CHIP R 10K J 1/16W	
R156			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R157			RK73GB1J561J	CHIP R 560 J 1/16W	
R158			RK73GB1J104J	CHIP R 100K J 1/16W	
R161,162			RK73GB1J223J	CHIP R 22K J 1/16W	
R163,164			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R165			RK73GB1J103J	CHIP R 10K J 1/16W	
R166			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R167			RK73GB1J561J	CHIP R 560 J 1/16W	
R168			RK73GB1J104J	CHIP R 100K J 1/16W	
R181			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R182			RK73GB1J681J	CHIP R 680 J 1/16W	
R183			RK73GB1J473J	CHIP R 47K J 1/16W	
R184,185			RK73GB1J103J	CHIP R 10K J 1/16W	
R186,187			RK73GB1J750J	CHIP R 75 J 1/16W	
R188			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R189			RK73GB1J750J	CHIP R 75 J 1/16W	
R501			R92-3306-08	CHIP R 1K J 1/16W	
R502			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R504,505			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R506			RK73GB1J471J	CHIP R 470 J 1/16W	
R507			R92-1252-05	CHIP R 0 OHM J 1/16W	
R508			RK73GB1J330J	CHIP R 33 J 1/16W	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

MPEG UNIT

Ref. No.	Add	New	Parts No.	Description	Destination
R509			R92-3306-08	CHIP R 1K J 1/16W	
R512			R92-3306-08	CHIP R 1K J 1/16W	
R513			R92-1252-05	CHIP R 0 OHM J 1/16W	
R551			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R552			RK73GB1J561J	CHIP R 560 J 1/16W	
R561			R92-3306-08	CHIP R 1K J 1/16W	
R562			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R563			R92-1252-05	CHIP R 0 OHM J 1/16W	
R564			RK73GB1J470J	CHIP R 47 J 1/16W	
R571		✻	R92-3405-08	CHIP R 12K J 1/16W	
R573			R92-3306-08	CHIP R 1K J 1/16W	
R574			R92-1252-05	CHIP R 0 OHM J 1/16W	
R575,576			RK73GB1J391J	CHIP R 390 J 1/16W	
R581			RK73GB1J750J	CHIP R 75 J 1/16W	
R901			RK73GB1J103J	CHIP R 10K J 1/16W	
R903,904			RK73GB1J103J	CHIP R 10K J 1/16W	
R905			R92-3306-08	CHIP R 1K J 1/16W	
R906,907			RK73GB1J820J	CHIP R 82 J 1/16W	
R908			RK73GB1J330J	CHIP R 33 J 1/16W	
R911			RK73GB1J330J	CHIP R 33 J 1/16W	
R912			R92-3306-08	CHIP R 1K J 1/16W	
R915-918			R92-3306-08	CHIP R 1K J 1/16W	
SW901			S62-0868-08	PAL/NTSC SW	
D1,2			MA142K	DIODE	
D3,4			EP10QY03	DIODE	
D5,6			SB07-03C	DIODE	
D7			1SS355	DIODE	
D51			DSM10C	DIODE	
D171,172			DAN202U	DIODE	
D181			1SS355	DIODE	
DZ2			PTZ3.9B	ZENER DIODE	
DZ3			PTZ6.2B	ZENER DIODE	
DZ51			ZSH5MA27	ZENER DIODE	
DZ71			UDZS5.6B	ZENER DIODE	
DZ72			UDZS6.2B	ZENER DIODE	
DZ81-85			UDZS6.2B	ZENER DIODE	
IC1			LTC1628CG	MOS-IC	
IC61			PQ09DZ1U	ANALOGUE IC	
IC62			S-81250HG-RD	ANALOGUE IC	
IC71			S-81250HG-RD	ANALOGUE IC	
IC81		✻	LM1117IMPX-ADJ	ANALOGUE IC	
IC101			NJM4565M-B	ANALOGUE IC	
IC111			NJM4565M-B	ANALOGUE IC	
IC171		✻	NC7S04P5	MOS-IC	
IC181,182		✻	TK15405AM	ANALOGUE IC	
IC501		✻	ES4428S	MOS-IC	
IC511			HY57V641620HGT	MEMORY IC	
IC514		✻	MX29F800TTC-90	MEMORY IC	
IC515			TC7S32FU	MOS-IC	
IC516		✻	SN74AHC174PW-R	MOS-IC	
IC551			TC7WU04FU	MOS-IC	
IC561			PCM1716E	MOS-IC	
IC571		✻	AK8812	MOS-IC	

Ref. No.	Add	New	Parts No.	Description	Destination
IC581		✻	NC7ST08P5	MOS-IC	
IC591		✻	HN58X2408FPIZ	MEMORY IC	
Q1			2SA1622-6	TRANSISTOR	
Q2,3			FDS8936A	TRANSISTOR	
Q4			DTA113ZUA	TRANSISTOR	
Q51			DTC144EUA	TRANSISTOR	
Q52			DTA113ZUA	TRANSISTOR	
Q71			DTA114YUA	TRANSISTOR	
Q72			DTC144EUA	TRANSISTOR	
Q72			UMC2N	TRANSISTOR	
Q101			DTC323TU	TRANSISTOR	
Q111			DTC323TU	TRANSISTOR	
Q151			DTC323TU	TRANSISTOR	
Q161			DTC323TU	TRANSISTOR	
Q171,172			DTA113ZUA	TRANSISTOR	
Q181			DTC144EUA	TRANSISTOR	
Q182			2SB709A (R)	TRANSISTOR	

K : KDV-C810 (for North America) **E** : KDV-C820 (for Europe)
M : KDV-C830 (for Southeastern Asia)
X : KDV-C840 (for Australia) **C** : KDV-C860 (for China)

⚠ Indicates safety critical components.