


EXPLODED VIEW / PARTS LIST

PANEL section (NF47 66 9H0)

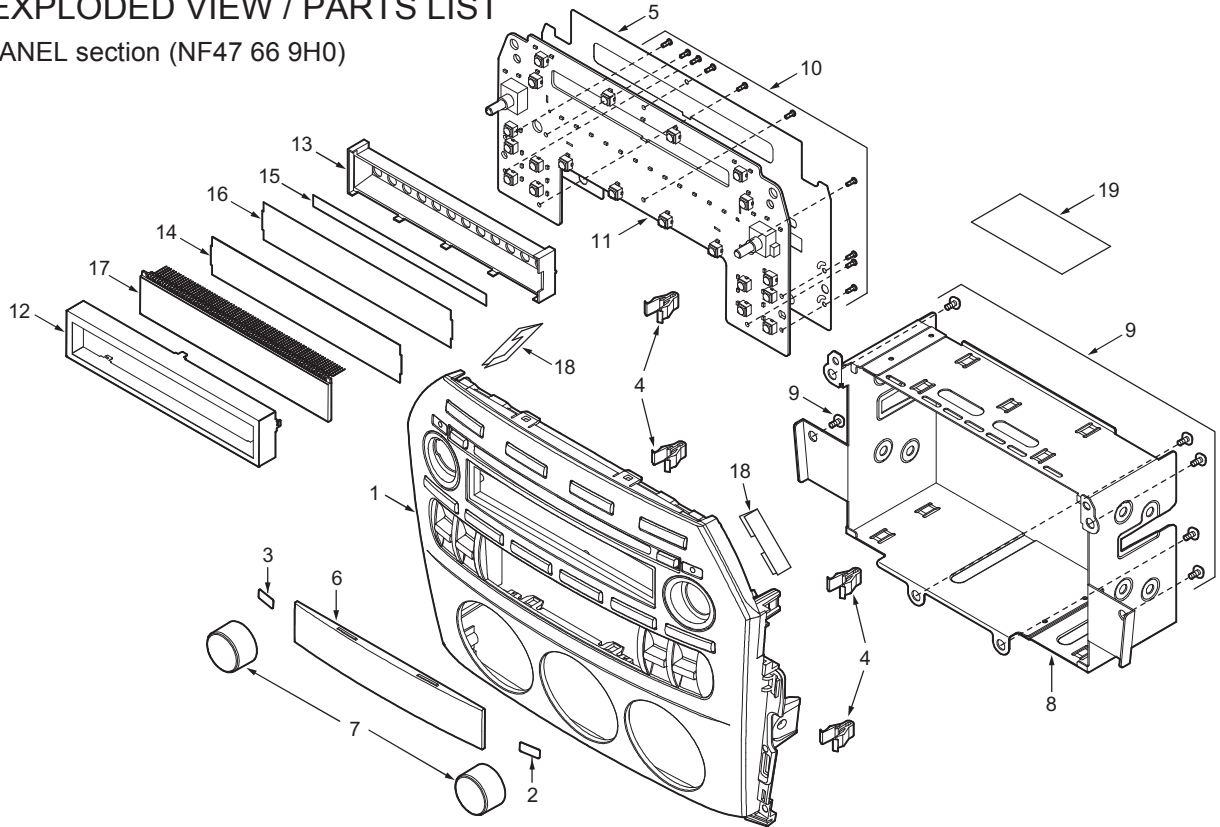

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8096-00	ESCUTCHEON-ASSY	1
2	335-7423-01	CAP(CD LOGO)	1
3	335-7423-10	CAP(R)	1
4	335-7583-01	CLIP	4
5	347-7616-00	PROTECTOR	1
6	373-1057-00	DIAL COVER	1
7	380-5622-00	KNOB	2
8	300-8049-01	MTG-BRKT	1
9	716-0778-10	WAVE SCREW(2x6)	10
10	716-3558-00	SPECIAL SCREW(M5x6)	6

NO.	PART NO.	DESCRIPTION	Q'TY
11	-----	SWITCH PWB	1
12	331-4014-00	LCD COVER	1
13	335-7429-01	LCD HOLDER	1
14	335-7430-00	COLOR FILTER	1
15	347-7749-00	DOT FILM	1
16	347-7750-00	FILTER	1
17	379-1336-50	LCD	1
18	347-7823-00	SPACER	2
19	286-6750-15 286-6750-16	SETPLATE(PT2678QA) SETPLATE(PT2678QB)	1

Note) No.19 SETPLATE depend on each model.

The model name is specified in the description.

BASE UNIT section (NE61 66 AR0)


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1
2	880-2091M	AM/FM TUNER	1
3	074-1259-00	OUTLET SOCKET(16P)	1
4	074-1260-00	OUTLET SOCKET(24P)	1
5	076-0642-50	PLUG(15P)	1
6	092-4000-51	ANT-RECEPT	1
7	313-1936-00	HEAT SINK	1
8	331-4012-00	REAR PLATE	1
9	331-4013-00	TR-HOLDER	1
10	331-4031-00	EARTH BRKT	1
11	345-5828-00	GASKET	1
12	347-6465-00	PROTECTOR	1
13	714-2606-81	MACHINE SCREW(M2.6x6)	3
14	714-3006-81	MACHINE SCREW(M3x6)	1
15	778-3006-00	TAP-SCREW(3x6)	4
16	305-0338-02	SIDE-CVR-L	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	305-0339-02	SIDE-CVR-R	1
18	309-0810-01	ES PLATE	1
19	310-1811-01	UPPER CASE	1
20	311-1903-01	LOWER CASE	1
21	313-1935-01	HEAT SINK	1
22	331-4010-01	MECH-BRKT-L	1
23	331-4011-01	MECH-BRKT-R	1
24	345-8494-00	REAR RUBBER	1
25	346-0178-01	LEATHER SHEET	1
26	347-7615-00	SHADE	1
27	347-7617-00	WIRE SUPPORT	1
28	816-4011-50	FLAT WIRE(26P)	1
29	929-0291-84	CD-MECHANISM	1
30	714-2603-80	MACHINE SCREW(M2.6x3)	9
31	714-2606-81	MACHINE SCREW(M2.6x6)	21
32	714-2612-89	MACHINE SCREW(M2.6x12)	3

NO.	PART NO.	DESCRIPTION	Q'TY
33	716-0821-03	IT SCREW(M3x5)	1
34	716-1494-00	IT SCREW(M2.6x6)	5
35	716-1888-01	REAR BOLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
36	331-4131-00	MECH-BRKT-C	1
37	286-6750-15 286-6750-16	SETPLATE(PT2678QA) SETPLATE(PT2678QB)	1

Note) No.30 SETPLATE depend on each model.
The model name is specified in the description.

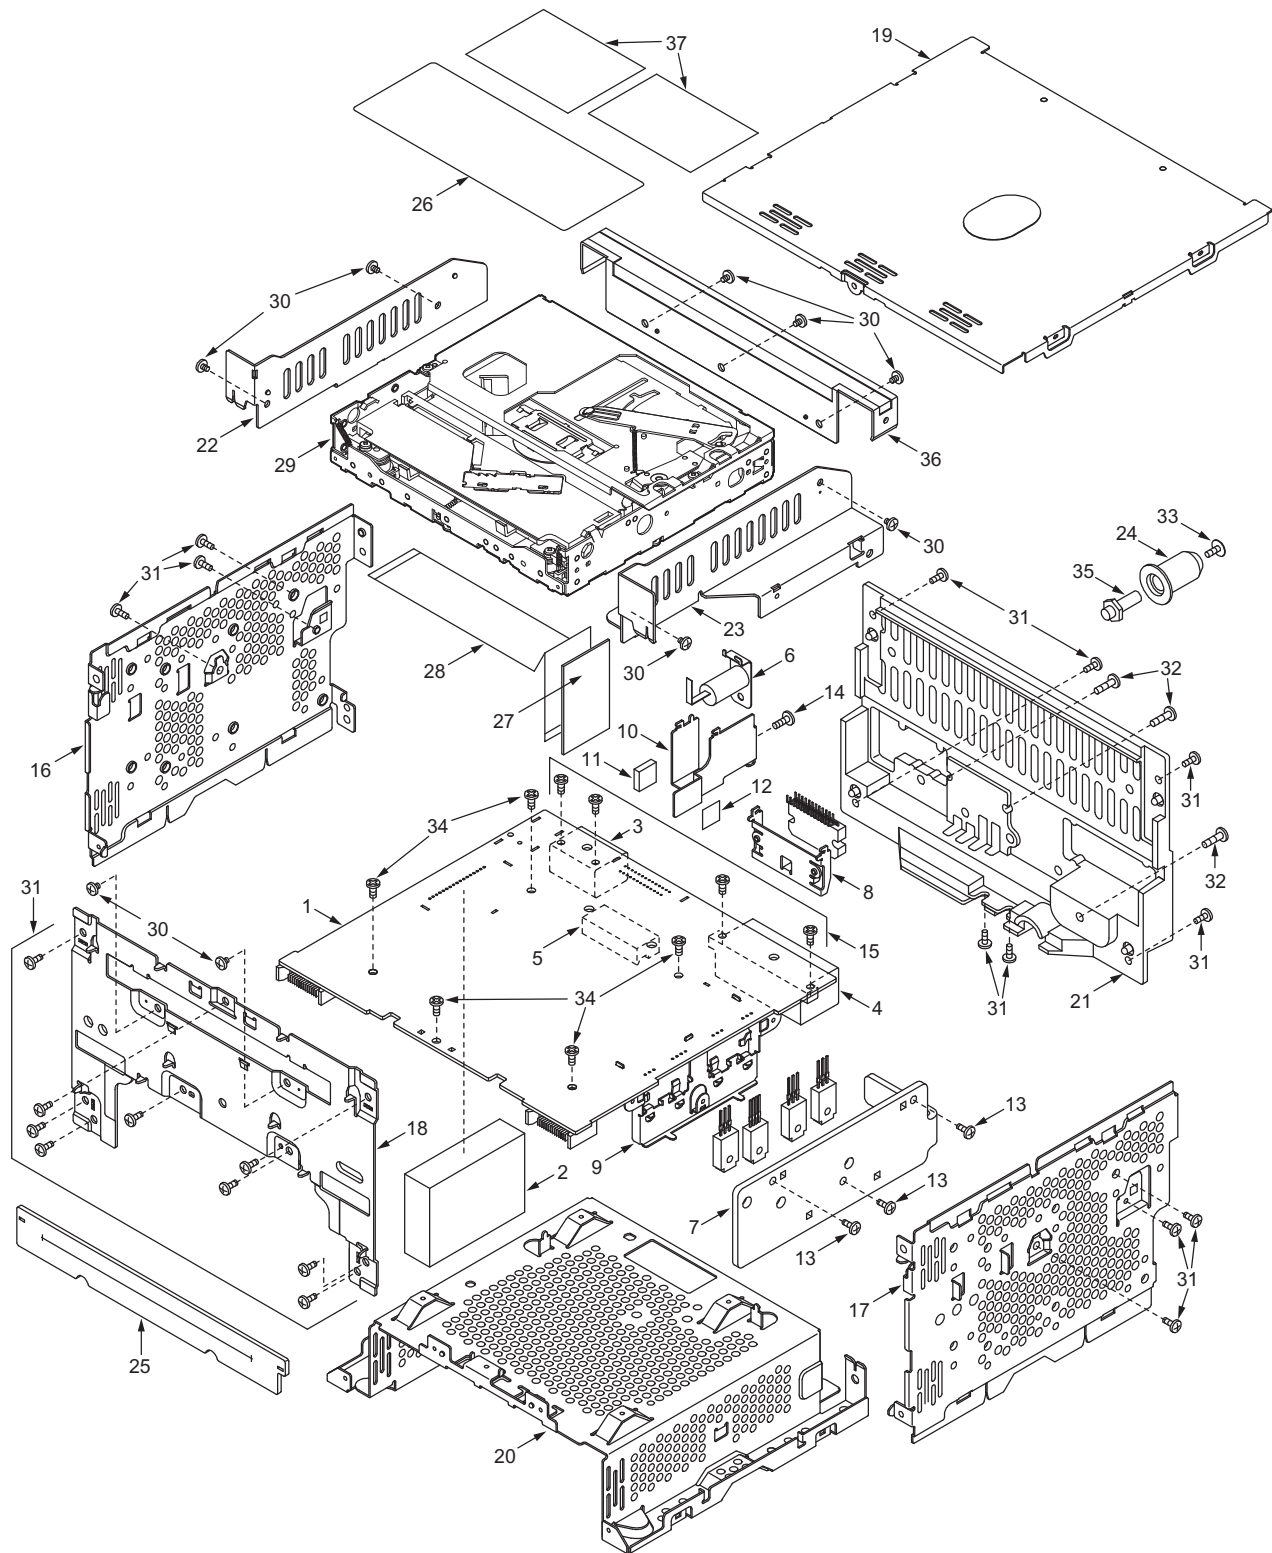

ELECTRICAL PARTS LIST

BASE UNIT : Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT101	092-4000-51	ANT-RECEPT

REF No.	PART No.	DESCRIPTION
BL101	880-2091M	AM/FM TUNER

REF No.	PART No.	DESCRIPTION
C101	166-1511-50	150pF CH

PT-2678Q

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C102	166-2201-50	22pF CH	C426	168-1022-55	1000pF K	C552	178-4742-78	0.47uf
C103	163-1073-35	16V100uF	C427	168-1042-78	16V 0.1uF	C553	178-4742-78	0.47uF
C104	168-1022-55	1000pF K	C428	163-4753-55	35V4.7uF	C601	168-1042-78	16V 0.1uF
C105	163-1073-35	16V100uF	C429	168-1042-78	16V 0.1uF	C603	163-4763-35	16V 47uF
C106	168-1022-55	1000pF K	C430	163-4753-55	35V4.7uF	C605	163-4763-35	16V 47uF
C107	168-1022-55	1000pF K	C434	168-2232-55	0.022uF K	C608	178-1052-78	1uF
C108	168-1022-55	1000pF K	C435	163-1073-15	6.3V100uF	C609	163-2273-25	10V 220uF
C109	168-1022-55	1000pF K	C437	168-4732-78	0.047uF K	C610	178-1042-78	0.1uF
C110	168-1022-55	1000pF K	C438	042-0423-94	10V 4.7uF	C611	178-1042-78	0.1uF
C111	168-1022-55	1000pF K	C439	163-2263-35	16V22uF	C612	163-1063-35	16V 10uF
C112	163-4763-15	6.3V47uF	C440	168-1022-55	1000pF K	C613	168-1042-78	16V 0.1uF
C113	168-1042-78	16V 0.1uF	C442	168-1042-78	16V 0.1uF	C614	042-0416-56	10V 22uF M TAN
C114	166-1801-50	18pF CH	C444	168-2232-55	0.022uF K	C615	178-1052-78	1uF
C201	168-1022-55	220pF K	C445	163-4763-15	6.3V47uF	C616	163-2273-25	10V 220uF
C202	163-1063-35	16V10uF	C446	163-1063-35	16V10uF	C619	178-1042-78	0.1uF
C203	168-1042-78	16V 0.1uF	C447	178-1052-78	1uF	C621	163-1063-35	16V 10uF
C204	168-1022-55	1000pF K	C449	168-3332-78	0.033uF K	C622	042-0406-93	16V 22uF TAN
C205	168-1022-55	1000pF K	C450	168-1022-55	1000pF K	C623	168-1042-78	16V 0.1uF
C206	166-1011-50	100pF CH	C451	168-1022-55	1000pF K	C624	178-1042-78	0.1uF
C208	168-1042-78	16V 0.1uF	C452	168-1022-55	1000pF K	C625	163-1073-35	16V 100uF
C209	163-2273-25	10V 220uF	C453	168-1022-55	1000pF K	C626	168-6822-55	6800pF K
C211	168-1042-78	16V 0.1uF	C454	168-2232-55	0.022uF K	C627	163-1063-35	16V 10uF
C212	163-2273-25	10V 220uF	C457	178-1052-78	1uF	C628	168-1042-78	16V 0.1uF
C213	168-1042-78	16V 0.1uF	C458	168-4712-55	470pF K	C701	166-4701-50	47pF CH
C301	168-2212-55	220pF K	C459	168-1022-55	1000pF K	C702	042-1698-00	16V 4700uF
C302	168-2212-55	220pF K	C460	163-2263-35	16V22uF	C703	172-1041-11	0.1uF
C303	168-2212-55	220pF K	C461	168-1042-78	16V 0.1uF	C704	178-1042-78	0.1uF
C304	168-2212-55	220pF K	C462	163-3373-15	6.3V330uF	C705	168-2212-55	220pF K
C305	168-2212-55	220pF K	C464	163-2273-25	10V 220uF	C706	163-1053-65	50V 1uF
C306	168-2212-55	220pF K	C465	168-1042-78	16V 0.1uF	C707	168-2245-79	0.22uF Z
C307	168-2212-55	220pF K	C466	168-1042-78	16V 0.1uF	C708	168-2222-55	2200pF K
C308	168-2212-55	220pF K	C468	168-1042-78	16V 0.1uF	C709	168-2222-55	2200pF K
C309	168-1032-55	0.01uF K	C469	168-1032-55	0.01uF K	C710	168-2222-55	2200pF K
C310	168-2212-55	220pF K	C470	168-5622-55	5600pF K	C711	168-2222-55	2200pF K
C311	168-2212-55	220pF K	C471	168-5622-55	5600pF K	C712	168-2222-55	2200pF K
C312	166-1011-50	100pF CH	C472	168-3322-55	3300pF K	C713	168-2222-55	2200pF K
C313	168-1042-78	16V 0.1uF	C473	168-3322-55	3300pF K	C714	168-2222-55	2200pF K
C314	168-1042-78	16V 0.1uF	C474	166-1011-50	100pF CH	C715	168-2222-55	2200pF K
C316	168-4732-78	0.047uF K	C475	166-1011-50	100pF CH	C716	168-2222-55	2200pF K
C318	166-1201-50	12pF CH	C501	168-1022-55	1000pF K	C717	168-2222-55	2200pF K
C319	168-2212-55	220pF K	C502	168-1022-55	1000pF K	C718	168-2222-55	2200pF K
C320	168-1042-78	16V 0.1uF	C503	168-1022-55	1000pF K	C719	168-2222-55	2200pF K
C321	163-4763-15	6.3V47uF	C504	168-1022-55	1000pF K	C720	178-1042-78	0.1uF
C322	166-1201-50	12pF CH	C505	178-2255-79	2.2uF	C721	163-1053-65	50V 1uF
C323	168-1042-78	16V 0.1uF	C506	178-2255-79	2.2uF	C722	166-3301-50	33pF CH
C324	178-1042-78	0.1uF	C507	178-2255-79	2.2uF	C723	168-2212-55	220pF K
C325	166-1011-50	100pF CH	C508	178-2255-79	2.2uF	D201	001-0580-90	1SS352
C326	166-1011-50	100pF CH	C509	168-1042-78	16V 0.1uF	D202	001-0580-90	1SS352
C327	166-1011-50	100pF CH	C510	166-5611-50	560pF CH	D301	001-0529-28	MA8051-L
C328	166-1011-50	100pF CH	C511	166-5611-50	560pF CH	D502	001-0516-90	MA111
C329	166-1011-50	100pF CH	C512	168-3912-55	390pF K	D516	001-0516-90	MA111
C330	168-1042-78	16V 0.1uF	C513	168-3912-55	390pF K	D601	001-0529-32	MA8056-M
C331	163-4763-15	6.3V47uF	C514	166-2201-50	22pF CH	D602	001-0580-90	1SS352
C332	168-1032-55	0.01uF K	C515	166-2201-50	22pF CH	D603	001-0529-47	MA8091-M
C401	178-2255-79	2.2uF	C516	166-2201-50	22pF CH	D604	001-0529-28	MA8051-L
C403	178-2255-79	2.2uF	C517	166-2201-50	22pF CH	D605	001-0580-90	1SS352
C404	178-2255-79	2.2uF	C518	166-5611-50	560pF CH	D606	001-0516-90	MA111
C405	178-2255-79	2.2uF	C519	166-5611-50	560pF CH	D607	001-0516-90	MA111
C406	178-2255-79	2.2uF	C520	168-3912-55	390pF K	D608	001-2614-90	1SR-154-400TE25
C407	178-2255-79	2.2uF	C521	168-3912-55	390pF K	D610	001-0580-90	1SS352
C408	168-1042-78	16V 0.1uF	C522	178-1052-78	1uF	D611	001-2614-90	1SR-154-400TE25
C409	166-1811-50	180pF CH	C523	178-1052-78	1uF	D614	001-2614-90	1SR-154-400TE25
C411	163-4753-55	35V4.7uF	C524	178-1052-78	1uF	D615	001-0584-24	MA8082
C412	166-1007-50	10pF CH	C525	178-1052-78	1uF	D617	001-2614-90	1SR-154-400TE25
C413	166-1007-50	10pF CH	C526	163-1063-35	16V 10uF	D618	001-2614-90	1SR-154-400TE25
C414	166-1011-50	100pF CH	C527	163-2263-35	16V 22uF	D619	001-2614-90	1SR-154-400TE25
C415	166-1011-50	100pF CH	C528	163-2253-65	50V 2.2uF	D620	001-2614-90	1SR-154-400TE25
C417	168-1022-55	1000pF K	C537	163-1073-15	6.3V 100uF	D622	001-2614-90	1SR-154-400TE25
C418	168-1022-55	1000pF K	C538	168-1042-78	16V 0.1uF	D623	001-2614-90	1SR-154-400TE25
C419	168-1022-55	1000pF K	C539	168-1042-78	16V 0.1uF	D624	001-0598-24	MA5180
C420	168-1022-55	1000pF K	C540	168-1042-78	16V 0.1uF	D625	001-2614-90	1SR-154-400TE25
C421	168-1022-55	1000pF K	C541	163-1063-35	16V 10uF	D626	001-0529-32	MA8056-M
C424	166-1011-50	100pF CH	C550	178-4742-78	0.47uF	D701	001-0516-90	MA111
C425	168-1022-55	1000pF K	C551	178-4742-78	0.47uF	D702	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D703	001-0580-90	1SS352	L711	010-3105-62	1k ohm/100MHz	R202	119-1031-15	1/10W 10k ohm
D704	001-0580-90	1SS352	L717	010-3105-62	1k ohm/100MHz	R204	119-1011-15	1/10W 100 ohm
D705	001-0580-90	1SS352	P201	076-3009-64	14P	R205	119-0000-05	1/10W 0 ohm JW
D706	001-0580-90	1SS352	P202	076-3009-64	14P	R301	119-1031-15	1/10W 10k ohm
D707	001-0529-31	MA8056-L	P701	076-0642-50	15P	R302	119-3931-15	1/10W 39k ohm
D709	001-0580-90	1SS352	Q301	125-2026-91	UN5211	R303	119-4731-15	1/10W 47k ohm
D710	001-0580-90	1SS352	Q401	125-7005-90	PHK04P02T	R304	116-5611-15	1/4W 560 ohm
D711	001-0529-34	MA8062-L	Q402	125-2026-91	UN5211	R305	119-1021-15	1/10W 1k ohm
D712	001-0529-31	MA8056-L	Q404	125-2026-91	UN5211	R306	119-1021-15	1/10W 1k ohm
D713	001-2015-00	RL253	Q406	125-2026-91	UN5211	R307	119-1021-15	1/10W 1k ohm
D715	001-0580-90	1SS352	Q407	125-2026-91	UN5211	R308	119-1021-15	1/10W 1k ohm
D716	001-0598-24	MA5180	Q408	125-2026-91	UN5211	R309	119-1021-15	1/10W 1k ohm
D717	001-0580-90	1SS352	Q409	125-2026-91	UN5211	R310	119-1011-15	1/10W 100 ohm
D718	001-0608-90	D1FS4	Q510	193-1306-00	2SD1306-DE-TL	R311	119-1021-15	1/10W 1k ohm
D719	001-0580-90	1SS352	Q511	193-1306-00	2SD1306-DE-TL	R312	119-1021-15	1/10W 1k ohm
D720	001-0580-90	1SS352	Q512	193-1306-00	2SD1306-DE-TL	R313	119-1021-15	1/10W 1k ohm
D721	001-0580-90	1SS352	Q513	193-1306-00	2SD1306-DE-TL	R314	119-4721-15	1/10W 4.7k ohm
D723	001-0580-90	1SS352	Q514	190-1298-00	2SA1298	R315	119-1011-15	1/10W 100 ohm
D724	001-0529-34	MA8062-L	Q515	125-2026-91	UN5211	R316	119-4721-15	1/10W 4.7k ohm
D725	001-0516-90	MA111	Q601	193-1758-00	2SD1758TK-P,Q,R	R317	119-1011-15	1/10W 100 ohm
IC101	051-6212-08	LC72191JM-TLM	Q602	125-0020-91	UN5111	R318	119-1011-15	1/10W 100 ohm
IC301	051-5440-08	S-80931ANMP-DDV	Q603	125-2026-91	UN5211	R319	119-1021-15	1/10W 1k ohm
IC302	051-9419-08	BR24L02FVM-WE2	Q604	190-1736-00	2SA1736	R320	119-4731-15	1/10W 47k ohm
IC303	052-3195-00	M30843MW-061GP	Q605	125-2026-91	UN5211	R321	119-1021-15	1/10W 1k ohm
IC401	051-6706-20	SAF7730HV/N217	Q606	133-1766-00	2SD1766	R322	119-4731-15	1/10W 47k ohm
IC501	051-3053-90	NJM2058V	Q607	125-2026-91	UN5211	R325	119-4731-15	1/10W 47k ohm
IC502	051-2055-00	TDA8593J/N3	Q608	192-2712-50	2SC2712Y.G.L	R326	119-4731-15	1/10W 47k ohm
IC602	051-3340-00	LD1085P	Q609	125-0020-91	UN5111	R329	119-4731-15	1/10W 47k ohm
IC603	051-3343-00	NJM2396F33	Q610	192-2712-50	2SC2712Y.G.L	R330	119-1021-15	1/10W 1k ohm
IC604	051-3340-00	LD1085P	Q611	101-1274-00	2SB1274	R331	119-1021-15	1/10W 1k ohm
IC606	051-3341-90	BD3931FP	Q612	191-1197-50	2SB1197K Q,R	R332	119-1021-15	1/10W 1k ohm
IC607	051-5441-08	BD4828G-TR	Q613	125-2026-91	UN5211	R334	119-1021-15	1/10W 1k ohm
J201	074-2003-76	26P	Q614	191-1205-65	2SB1205S,T	R335	119-1021-15	1/10W 1k ohm
J701	074-1260-00	24P	Q615	192-2712-50	2SC2712Y.G.L	R336	119-1021-15	1/10W 1k ohm
J702	074-1259-00	16P	Q616	192-2712-50	2SC2712Y.G.L	R337	119-1031-15	1/10W 10k ohm
L101	010-2003-04	30uH	Q617	191-1197-50	2SB1197K Q,R	R338	119-1031-15	1/10W 10k ohm
L102	010-4044-00	27uH	Q618	125-2026-91	UN5211	R339	119-2231-15	1/10W 22k ohm
L103	010-3105-62	1k ohm/100MHz	Q619	191-1205-65	2SB1205S,T	R340	119-1021-15	1/10W 1k ohm
L201	010-2198-59	4.7uH	Q620	192-2712-50	2SC2712Y.G.L	R341	119-4731-15	1/10W 47k ohm
L202	010-3406-66	22uH	Q621	190-1162-00	2SA1162	R342	119-4731-15	1/10W 47k ohm
L301	010-3406-66	22uH	Q622	125-2026-91	UN5211	R343	119-4731-15	1/10W 47k ohm
L302	010-3406-66	22uH	Q623	190-1736-00	2SA1736	R344	119-4731-15	1/10W 47k ohm
L401	010-3105-62	1k ohm/100MHz	Q624	125-2026-91	UN5211	R345	119-4731-15	1/10W 47k ohm
L402	010-3105-62	1k ohm/100MHz	Q625	190-1736-00	2SA1736	R346	119-1021-15	1/10W 1k ohm
L403	010-3105-62	1k ohm/100MHz	Q626	125-2026-91	UN5211	R347	119-4731-15	1/10W 47k ohm
L404	010-3105-62	1k ohm/100MHz	Q627	190-1736-00	2SA1736	R348	119-1021-15	1/10W 1k ohm
L405	010-3105-62	1k ohm/100MHz	Q628	125-2026-91	UN5211	R349	119-1021-15	1/10W 1k ohm
L406	010-3105-62	1k ohm/100MHz	Q629	125-0020-93	UN5113	R350	119-1021-15	1/10W 1k ohm
L407	010-3104-54	600 ohm/100MHz	Q631	193-1758-00	2SD1758TK-P,Q,R	R352	119-1021-15	1/10W 1k ohm
L409	010-3105-62	1k ohm/100MHz	Q632	191-0709-50	2SB709A	R354	119-1021-15	1/10W 1k ohm
L410	010-3105-62	1k ohm/100MHz	Q633	191-0709-50	2SB709A	R355	119-1011-15	1/10W 100 ohm
L411	010-3105-62	1k ohm/100MHz	Q635	191-0709-50	2SB709A	R356	119-1011-15	1/10W 100 ohm
L412	010-3105-62	1k ohm/100MHz	Q701	192-2712-50	2SC2712Y.G.L	R357	119-1011-15	1/10W 100 ohm
L413	010-3105-62	1k ohm/100MHz	Q702	125-2026-91	UN5211	R358	119-1011-15	1/10W 100 ohm
L414	010-3105-62	1k ohm/100MHz	Q703	192-2712-50	2SC2712Y.G.L	R359	119-1021-15	1/10W 1k ohm
L415	010-3105-62	1k ohm/100MHz	Q704	192-2712-50	2SC2712Y.G.L	R360	119-1021-15	1/10W 1k ohm
L416	010-3105-62	1k ohm/100MHz	Q705	192-2712-50	2SC2712Y.G.L	R361	119-1031-15	1/10W 10k ohm
L417	010-3105-62	1k ohm/100MHz	Q706	192-2712-50	2SC2712Y.G.L	R362	119-1031-15	1/10W 10k ohm
L418	010-3105-62	1k ohm/100MHz	Q707	192-2712-50	2SC2712Y.G.L	R363	119-4731-15	1/10W 47k ohm
L420	010-3105-62	1k ohm/100MHz	Q708	192-2712-50	2SC2712Y.G.L	R364	119-4731-15	1/10W 47k ohm
L421	010-3104-54	600 ohm/100MHz	Q709	192-2712-50	2SC2712Y.G.L	R365	119-4731-15	1/10W 47k ohm
L422	010-3105-62	1k ohm/100MHz	Q710	191-1197-50	2SB1197K Q,R	R366	119-4731-15	1/10W 47k ohm
L423	010-2198-51	0.22uH	R102	119-2741-15	1/10W 270k ohm	R367	119-2231-15	1/10W 22k ohm
L424	010-3105-62	1k ohm/100MHz	R103	119-1041-15	1/10W 100k ohm	R368	119-4731-15	1/10W 47k ohm
L505	010-3406-66	22uH	R104	119-1011-15	1/10W 100 ohm	R369	119-4731-15	1/10W 47k ohm
L702	010-3105-62	1k ohm/100MHz	R105	119-6821-15	1/10W 6.8k ohm	R370	119-4731-15	1/10W 47k ohm
L703	010-8026-00	210uH(TOROIDAL)	R106	119-6821-15	1/10W 6.8k ohm	R371	119-4721-15	1/10W 4.7k ohm
L704	010-3105-62	1k ohm/100MHz	R107	119-1011-15	1/10W 100 ohm	R372	119-4721-15	1/10W 4.7k ohm
L705	010-3105-62	1k ohm/100MHz	R108	119-1011-15	1/10W 100 ohm	R373	119-4721-15	1/10W 4.7k ohm
L706	010-3105-62	1k ohm/100MHz	R109	119-1011-15	1/10W 100 ohm	R374	119-1031-15	1/10W 10k ohm
L707	010-3105-62	1k ohm/100MHz	R110	119-1011-15	1/10W 100 ohm	R375	119-4721-15	1/10W 4.7k ohm
L708	010-3105-62	1k ohm/100MHz	R111	116-5691-15	1/4W 5.6 ohm	R376	119-4721-15	1/10W 4.7k ohm
L709	010-3105-62	1k ohm/100MHz	R112	119-4731-15	1/10W 47k ohm	R377	119-4731-15	1/10W 47k ohm
L710	010-3105-62	1k ohm/100MHz	R201	119-1031-15	1/10W 10k ohm	R401	032-0140-63	1/10W 2.7k ohm F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R402	032-0140-63	1/10W 2.7k ohm F	R544	117-3901-15	1/8W 390 ohm	R647	119-7531-15	1/10W 75k ohm
R403	119-2731-15	1/10W 27k ohm	R545	117-8201-15	1/8W 820 ohm	R648	116-1221-15	1/4W 1.2k ohm
R404	119-2731-15	1/10W 27k ohm	R546	117-8201-15	1/8W 820 ohm	R649	116-2291-15	1/4W 2.2 ohm
R405	119-8221-15	1/10W 8.2k ohm	R547	117-8201-15	1/8W 820 ohm	R650	116-2291-15	1/4W 2.2 ohm
R406	032-0140-50	1/10W 10k ohm F	R548	117-8201-15	1/8W 820 ohm	R651	116-2291-15	1/4W 2.2 ohm
R407	032-0140-50	1/10W 10k ohm F	R553	119-0000-05	1/10W 0 ohm JW	R655	116-4721-15	1/4W 4.7k ohm
R408	032-0140-50	1/10W 10k ohm F	R554	119-0000-05	1/10W 0 ohm JW	R656	116-1221-15	1/4W 1.2k ohm
R409	032-0140-50	1/10W 10k ohm F	R555	119-0000-05	1/10W 0 ohm JW	R657	116-4711-15	1/4W 470 ohm
R410	119-2201-15	1/10W 22 ohm	R556	119-0000-05	1/10W 0 ohm JW	R658	116-4711-15	1/4W 470 ohm
R412	119-0000-05	1/10W 0 ohm JW	R560	119-0000-05	1/10W 0 ohm JW	R659	119-1021-15	1/10W 1k ohm
R413	119-1031-15	1/10W 10k ohm	R561	119-0000-05	1/10W 0 ohm JW	R661	116-4791-15	1/4W4.7 ohm
R414	119-1021-15	1/10W 1k ohm	R562	119-0000-05	1/10W 0 ohm JW	R662	116-4791-15	1/4W4.7 ohm
R416	119-1031-15	1/10W 10k ohm	R563	119-0000-05	1/10W 0 ohm JW	R663	116-5691-15	1/4W 5.6 ohm
R417	119-0000-05	1/10W 0 ohm JW	R564	119-1011-15	1/10W 100 ohm	R664	116-5691-15	1/4W 5.6 ohm
R418	119-1031-15	1/10W 10k ohm	R565	119-1011-15	1/10W 100 ohm	R665	116-5691-15	1/4W 5.6 ohm
R419	119-0000-05	1/10W 0 ohm JW	R566	119-1011-15	1/10W 100 ohm	R666	116-5691-15	1/4W 5.6 ohm
R420	119-1031-15	1/10W 10k ohm	R567	119-1011-15	1/10W 100 ohm	R667	116-5691-15	1/4W 5.6 ohm
R421	119-1031-15	1/10W 10k ohm	R568	119-4731-15	1/10W 47k ohm	R701	119-2231-15	1/10W 22k ohm
R423	119-1001-15	1/10W 10 ohm	R569	119-4731-15	1/10W 47k ohm	R702	119-2231-15	1/10W 22k ohm
R425	119-0000-05	1/10W 0 ohm JW	R570	119-4731-15	1/10W 47k ohm	R703	119-2231-15	1/10W 22k ohm
R426	032-0140-50	1/10W 10k ohm F	R571	119-4731-15	1/10W 47k ohm	R704	119-2231-15	1/10W 22k ohm
R427	032-0140-50	1/10W 10k ohm F	R574	119-2231-15	1/10W 22k ohm	R705	119-2231-15	1/10W 22k ohm
R429	032-0140-50	1/10W 10k ohm F	R575	119-2231-15	1/10W 22k ohm	R706	119-2231-15	1/10W 22k ohm
R430	032-0140-50	1/10W 10k ohm F	R578	119-2231-15	1/10W 22k ohm	R707	119-4731-15	1/10W 47k ohm
R431	119-0000-05	1/10W 0 ohm JW	R579	119-2231-15	1/10W 22k ohm	R708	116-1021-15	1/4W 1k ohm
R435	119-0000-05	1/10W 0 ohm JW	R580	119-1031-15	1/10W 10k ohm	R709	119-2231-15	1/10W 22k ohm
R436	119-0000-05	1/10W 0 ohm JW	R581	119-1521-15	1/10W 1.5k ohm	R710	116-1021-15	1/4W 1k ohm
R440	119-1031-15	1/10W 10k ohm	R582	119-3331-15	1/10W 33k ohm	R711	119-2231-15	1/10W 22k ohm
R441	119-1031-15	1/10W 10k ohm	R583	119-7521-15	1/10W 7.5k ohm	R712	116-2211-15	1/4W 220 ohm
R442	119-1011-15	1/10W 100 ohm	R584	119-0000-05	1/10W 0 ohm JW	R713	119-2231-15	1/10W 22k ohm
R443	119-1011-15	1/10W 100 ohm	R601	119-3311-15	1/10W 330 ohm	R714	116-2211-15	1/4W 220 ohm
R446	119-1031-15	1/10W 10k ohm	R602	119-1031-15	1/10W 10k ohm	R715	116-1021-15	1/4W 1k ohm
R449	119-1031-15	1/10W 10k ohm	R605	119-1031-15	1/10W 10k ohm	R716	116-1021-15	1/4W 1k ohm
R452	119-1011-15	1/10W 100 ohm	R606	116-4711-15	1/4W 470 ohm	R717	119-1041-15	1/10W 100k ohm
R453	119-1001-15	1/10W 10 ohm	R607	119-1031-15	1/10W 10k ohm	R718	116-2211-15	1/4W 220 ohm
R457	119-0000-05	1/10W 0 ohm JW	R608	119-3311-15	1/10W 330 ohm	R719	116-2211-15	1/4W 220 ohm
R460	119-0000-05	1/10W 0 ohm JW	R609	032-0140-81	1/10W 3.9k ohm	R720	116-1021-15	1/4W 1k ohm
R501	119-1021-15	1/10W 1k ohm	R610	032-0140-68	1/10W 680 ohm F	R721	119-2231-15	1/10W 22k ohm
R502	119-1021-15	1/10W 1k ohm	R612	116-1011-15	1/4W 100 ohm	R722	119-1021-15	1/10W 1k ohm
R503	119-1021-15	1/10W 1k ohm	R613	117-1021-15	1/8W 1k ohm	R723	119-4721-15	1/10W 4.7k ohm
R504	119-1021-15	1/10W 1k ohm	R614	119-1031-15	1/10W 10k ohm	R725	119-1031-15	1/10W 10k ohm
R505	119-1031-15	1/10W 10k ohm	R615	116-1821-15	1/4W 1.8k ohm	R726	119-6821-15	1/10W 6.8k ohm
R506	119-1031-15	1/10W 10k ohm	R616	119-1531-15	1/10W 15k ohm	R727	119-5611-15	1/10W 560 ohm
R507	119-1031-15	1/10W 10k ohm	R617	116-1821-15	1/4W 1.8k ohm	R728	116-1011-15	1/4W 100 ohm
R508	119-1031-15	1/10W 10k ohm	R618	116-2291-15	1/4W 2.2 ohm	R729	116-1531-15	1/4W 15k ohm
R509	119-1031-15	1/10W 10k ohm	R619	119-1021-15	1/10W 1k ohm	R730	116-1021-15	1/4W 1k ohm
R510	119-1031-15	1/10W 10k ohm	R620	116-1821-15	1/4W 1.8k ohm	R731	116-1021-15	1/4W 1k ohm
R511	119-3321-15	1/10W 3.3k ohm	R621	119-1031-15	1/10W 10k ohm	R732	116-1011-15	1/4W 100 ohm
R512	119-3321-15	1/10W 3.3k ohm	R622	119-1031-15	1/10W 10k ohm	R733	116-1021-15	1/4W 1k ohm
R513	119-1031-15	1/10W 10k ohm	R623	116-1821-15	1/4W 1.8k ohm	R734	116-1021-15	1/4W 1k ohm
R514	119-1031-15	1/10W 10k ohm	R624	119-4721-15	1/10W 4.7k ohm	R735	119-5611-15	1/10W 560 ohm
R515	119-1051-15	1/10W 1M ohm	R625	119-1031-15	1/10W 10k ohm	R736	116-2291-15	1/4W 2.2 ohm
R516	119-1051-15	1/10W 1M ohm	R626	119-2221-15	1/10W 2.2k ohm	R737	119-1031-15	1/10W 10k ohm
R517	119-1051-15	1/10W 1M ohm	R627	119-1031-15	1/10W 10k ohm	R738	119-5621-15	1/10W 5.6k ohm
R518	119-1051-15	1/10W 1M ohm	R628	119-1031-15	1/10W 10k ohm	R739	116-1021-15	1/4W 1k ohm
R519	119-1031-15	1/10W 10k ohm	R629	119-4731-15	1/10W 47k ohm	R740	119-0000-05	1/10W 0 ohm JW
R520	119-1031-15	1/10W 10k ohm	R630	032-0140-93	1/10W 2k ohm F	R741	117-4721-15	1/8W 4.7k ohm
R521	119-3321-15	1/10W 3.3k ohm	R631	032-0140-98	1/10W 330 ohm F	R743	119-0000-05	1/10W 0 ohm JW
R522	119-3321-15	1/10W 3.3k ohm	R632	119-1031-15	1/10W 10k ohm	R744	119-0000-05	1/10W 0 ohm JW
R523	119-1031-15	1/10W 10k ohm	R633	116-2221-15	1/4W 2.2k ohm	R745	119-0000-05	1/10W 0 ohm JW
R524	119-1031-15	1/10W 10k ohm	R634	116-2221-15	1/4W 2.2k ohm	R746	119-0000-05	1/10W 0 ohm JW
R525	119-1021-15	1/10W 1k ohm	R635	116-2221-15	1/4W 2.2k ohm	R747	119-0000-05	1/10W 0 ohm JW
R528	119-4721-15	1/10W 4.7k ohm	R636	119-4731-15	1/10W 47k ohm	SUP101	060-0122-91	DSP-141N-A21F
R529	119-4721-15	1/10W 4.7k ohm	R637	119-1031-15	1/10W 10k ohm	TC101	004-1580-10	TZ03R300FR169
R535	119-1011-15	1/10W 100 ohm	R638	116-2221-15	1/4W 2.2k ohm	TM101	073-0762-90	TERMINAL
R536	119-1011-15	1/10W 100 ohm	R639	119-4721-15	1/10W 4.7k ohm	TM301	073-0762-90	TERMINAL
R537	117-3901-15	1/8W 390 ohm	R640	119-1031-15	1/10W 10k ohm	TM401	073-0762-90	TERMINAL
R538	117-3901-15	1/8W 390 ohm	R641	119-4721-15	1/10W 4.7k ohm	TM701	073-0762-90	TERMINAL
R539	117-3901-15	1/8W 390 ohm	R642	116-1221-15	1/4W 1.2k ohm	X101	061-3515-90	7.2MHz
R540	117-3901-15	1/8W 390 ohm	R643	116-4721-15	1/4W 4.7k ohm	X301	061-3541-90	10MHz
R541	117-3901-15	1/8W 390 ohm	R644	116-5691-15	1/4W 5.6 ohm	X401	061-3537-90	41.6MHz
R542	117-3901-15	1/8W 390 ohm	R645	116-4721-15	1/4W 4.7k ohm	PWB	039-2712-20	PWB(WITHOUT COMPONENT)
R543	117-3901-15	1/8W 390 ohm	R646	119-1241-15	1/10W 120k ohm			

PANEL : Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	168-1032-55	0.01uF K	D911	001-0529-38	MA8068-M	R850	119-4721-15	1/10W 4.7k ohm
C802	163-4763-35	16V47uF	D912	001-0529-38	MA8068-M	R851	119-4721-15	1/10W 4.7k ohm
C803	168-2212-55	220pF K	D913	001-0529-38	MA8068-M	R852	119-1041-15	1/10W 100k ohm
C804	168-1042-78	16V 0.1uF	D914	001-0529-38	MA8068-M	R853	119-1041-15	1/10W 100k ohm
C805	168-1032-55	0.01uF K	D915	001-0529-38	MA8068-M	R854	119-4731-15	1/10W 47k ohm
C810	168-1042-78	16V 0.1uF	D916	001-0529-38	MA8068-M	R855	119-4721-15	1/10W 4.7k ohm
C815	168-1042-78	16V 0.1uF	IC801	052-7077-00	MB89475PFV-G-115	R856	119-4721-15	1/10W 4.7k ohm
C911	168-1042-78	16V 0.1uF	IC911	051-6081-00	LC75810T	R857	119-1041-15	1/10W 100k ohm
C912	168-1042-78	16V 0.1uF	J301	076-6000-54	4P	R858	119-1041-15	1/10W 100k ohm
C913	168-1042-78	16V 0.1uF	J302	076-6000-54	4P	R859	119-4731-15	1/10W 47k ohm
C914	168-1042-78	16V 0.1uF	J801	074-3009-64	14P	R860	119-4731-15	1/10W 47k ohm
C915	168-1042-78	16V 0.1uF	J901	074-3009-64	14P	R861	119-1021-15	1/10W 1k ohm
C916	168-4712-55	470pF K	LCD901	379-1336-50	INDICATOR(LCD)	R862	119-1021-15	1/10W 1k ohm
C920	168-4722-55	4700pF K	Q801	190-1736-00	2SA1736	R863	119-4731-15	1/10W 47k ohm
D800	001-0529-32	MA8056-M	Q802	192-2712-50	2SC2712Y.G.L	R864	119-1021-15	1/10W 1k ohm
D801	001-7089-90	FV1112H-740-TR	Q803	190-1736-00	2SA1736	R865	119-1021-15	1/10W 1k ohm
D802	001-7089-90	FV1112H-740-TR	Q804	125-2004-92	RN1402	R866	119-4731-15	1/10W 47k ohm
D804	001-7089-90	FV1112H-740-TR	Q805	190-1736-00	2SA1736	R867	119-4731-15	1/10W 47k ohm
D805	001-7089-90	FV1112H-740-TR	Q806	125-2004-92	RN1402	R868	119-1021-15	1/10W 1k ohm
D806	001-7089-90	FV1112H-740-TR	Q807	125-2004-92	RN1402	R869	119-1021-15	1/10W 1k ohm
D807	001-7089-90	FV1112H-740-TR	Q808	192-2712-50	2SC2712Y.G.L	R871	119-1031-15	1/10W 10k ohm
D809	001-7089-90	FV1112H-740-TR	Q811	192-3265-00	2SC3265OY	R872	119-1031-15	1/10W 10k ohm
D810	001-7089-90	FV1112H-740-TR	Q812	192-2712-50	2SC2712Y.G.L	R873	119-4731-15	1/10W 47k ohm
D811	001-7089-90	FV1112H-740-TR	Q813	192-3265-00	2SC3265OY	R874	119-1031-15	1/10W 10k ohm
D812	001-7089-90	FV1112H-740-TR	Q815	192-2712-50	2SC2712Y.G.L	R876	119-1031-15	1/10W 10k ohm
D813	001-7089-90	FV1112H-740-TR	Q816	125-9003-92	IMD3	R878	119-1031-15	1/10W 10k ohm
D814	001-7089-90	FV1112H-740-TR	Q818	192-2712-50	2SC2712Y.G.L	R879	116-1231-15	1/4W 12k ohm
D815	001-7089-90	FV1112H-740-TR	R801	119-2231-15	1/10W 22k ohm	R880	119-4721-15	1/10W 4.7k ohm
D816	001-7089-90	FV1112H-740-TR	R802	119-2231-15	1/10W 22k ohm	R881	119-1031-15	1/10W 10k ohm
D817	001-7089-90	FV1112H-740-TR	R803	119-3331-15	1/10W 33k ohm	R883	119-4721-15	1/10W 4.7k ohm
D818	001-7089-90	FV1112H-740-TR	R804	119-3331-15	1/10W 33k ohm	R885	119-0000-05	1/10W 0 ohm JW
D819	001-7089-90	FV1112H-740-TR	R805	117-6811-15	1/8W 680 ohm	R901	119-1021-15	1/10W 1k ohm
D820	001-7089-90	FV1112H-740-TR	R806	119-2221-15	1/10W 2.2k ohm	R902	119-1021-15	1/10W 1k ohm
D821	001-7089-90	FV1112H-740-TR	R807	119-1031-15	1/10W 10k ohm	R903	119-1021-15	1/10W 1k ohm
D822	001-7089-90	FV1112H-740-TR	R808	116-5621-15	1/4W 5.6k ohm	R904	119-1021-15	1/10W 1k ohm
D823	001-7089-90	FV1112H-740-TR	R809	119-1031-15	1/10W 10k ohm	R905	119-1011-15	1/10W 100 ohm
D824	001-7089-90	FV1112H-740-TR	R810	116-2421-15	1/4W 2.4k ohm	R906	119-1011-15	1/10W 100 ohm
D825	001-7089-90	FV1112H-740-TR	R811	119-2221-15	1/10W 2.2k ohm	R907	119-4731-15	1/10W 47k ohm
D826	001-7089-90	FV1112H-740-TR	R812	116-5621-15	1/4W 5.6k ohm	R908	119-1031-15	1/10W 10k ohm
D827	001-7089-90	FV1112H-740-TR	R813	116-3921-15	1/4W 3.9k ohm	R909	119-1021-15	1/10W 1k ohm
D828	001-7089-90	FV1112H-740-TR	R814	116-2721-15	1/4W 2.7k ohm	R910	119-1021-15	1/10W 1k ohm
D829	001-7089-90	FV1112H-740-TR	R815	116-2221-15	1/4W 2.2k ohm	R911	119-1021-15	1/10W 1k ohm
D830	001-7089-90	FV1112H-740-TR	R816	119-1031-15	1/10W 10k ohm	R912	119-4721-15	1/10W 4.7k ohm
D831	001-7089-90	FV1112H-740-TR	R817	116-2221-15	1/4W 2.2k ohm	R913	119-4721-15	1/10W 4.7k ohm
D832	001-7089-90	FV1112H-740-TR	R818	116-2221-15	1/4W 2.2k ohm	R914	119-4721-15	1/10W 4.7k ohm
D833	001-7089-90	FV1112H-740-TR	R819	116-1821-15	1/4W 1.8k ohm	R915	119-4721-15	1/10W 4.7k ohm
D834	001-7089-90	FV1112H-740-TR	R820	116-3921-15	1/4W 3.9k ohm	R916	119-1021-15	1/10W 1k ohm
D837	001-7089-90	FV1112H-740-TR	R821	116-3321-15	1/4W 3.3k ohm	S801	013-6202-51	SKPMBJE010
D845	001-7089-90	FV1112H-740-TR	R822	116-3921-15	1/4W 3.9k ohm	S802	013-6202-51	SKPMBJE010
D846	001-7089-90	FV1112H-740-TR	R823	116-3921-15	1/4W 3.9k ohm	S803	013-6202-51	SKPMBJE010
D851	001-7089-90	FV1112H-740-TR	R824	116-3921-15	1/4W 3.9k ohm	S804	013-6202-51	SKPMBJE010
D852	001-7089-90	FV1112H-740-TR	R825	116-1031-15	1/4W 10k ohm	S805	013-6202-51	SKPMBJE010
D853	001-7089-90	FV1112H-740-TR	R826	116-3921-15	1/4W 3.9k ohm	S806	013-6205-50	SKPMAME010
D854	001-7089-90	FV1112H-740-TR	R827	116-1031-15	1/4W 10k ohm	S807	013-6205-50	SKPMAME010
D855	001-7089-90	FV1112H-740-TR	R828	116-3921-15	1/4W 3.9k ohm	S808	013-6202-51	SKPMBJE010
D856	001-7089-90	FV1112H-740-TR	R829	116-1231-15	1/4W 12k ohm	S809	013-6202-51	SKPMBJE010
D857	001-7089-90	FV1112H-740-TR	R830	116-6821-15	1/4W 6.8k ohm	S810	013-6202-51	SKPMBJE010
D858	001-7089-90	FV1112H-740-TR	R831	119-1031-15	1/10W 10k ohm	S811	013-6202-51	SKPMBJE010
D859	001-7089-90	FV1112H-740-TR	R832	119-4721-15	1/10W 4.7k ohm	S812	013-6202-51	SKPMBJE010
D860	001-7089-90	FV1112H-740-TR	R833	116-8221-15	1/4W 8.2k ohm	S813	013-6202-51	SKPMBJE010
D861	001-0516-90	MA111	R834	119-4721-15	1/10W 4.7k ohm	S814	013-6205-50	SKPMAME010
D862	001-0516-90	MA111	R835	119-2221-15	1/10W 2.2k ohm	S815	013-6205-50	SKPMAME010
D863	001-0516-90	MA111	R836	116-8221-15	1/4W 8.2k ohm	S816	013-6205-50	SKPMAME010
D864	001-0516-90	MA111	R837	116-3321-15	1/4W 3.3k ohm	S817	013-6205-50	SKPMAME010
D865	001-0516-90	MA111	R838	116-6821-15	1/4W 6.8k ohm	S818	013-6205-50	SKPMAME010
D867	001-0516-90	MA111	R839	119-1031-15	1/10W 10k ohm	S819	013-6205-50	SKPMAME010
D868	001-0516-90	MA111	R840	119-1031-15	1/10W 10k ohm	S820	013-6202-51	SKPMBJE010
D869	001-0516-90	MA111	R842	116-8221-15	1/4W 8.2k ohm	VR801	016-0014-05	VR W-SHAFT
D870	001-0516-90	MA111	R844	116-8221-15	1/4W 8.2k ohm	VR802	016-0014-05	VR W-SHAFT
D871	001-0516-90	MA111	R845	116-1031-15	1/4W 10k ohm	X801	060-1537-90	CSTCE12M5G52
D872	001-0516-90	MA111	R846	116-1031-15	1/4W 10k ohm	PWB	039-2687-20	PWB(WITHOUT COMPONENT)
D873	001-0516-90	MA111	R848	119-1021-15	1/10W 1k ohm			
D874	001-0516-90	MA111	R849	119-4731-15	1/10W 47k ohm			