


EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to  mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

PACKING

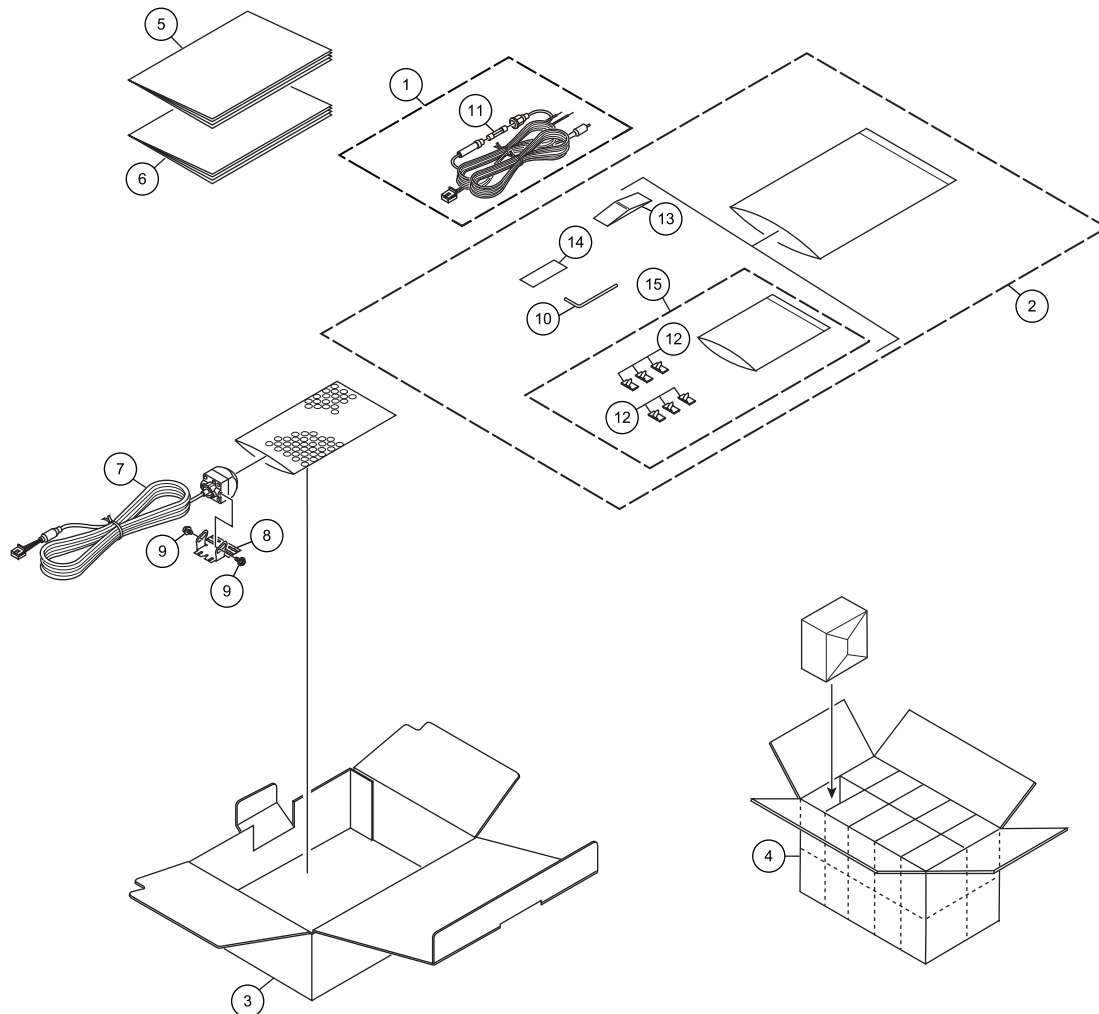

PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Cord Assy	CJ-E09S24R		11	Fuse(2 A)	CJ-E08S14R
	2	Accessory Assy	CJ-E09S02R	*	12	Clamper	CJ-E08S15R
	3	Unit Box	CJ-E09S06R		13	Packing	CJ-E08S13R
	4	Contain Box	CJ-E09S07R		14	Double Faced Tape	CJ-E08S03R
	5	Owner's Manual	CJ-E09S08R		15	Attachment Assy	CJ-E08S04R
	6	Owner's Manual	CJ-E09S09R				
	7	Camera Module	CJ-E09S10R				
	8	Strap	CJ-E08S11R				
	9	Screw	CJ-E08S12R				
*	10	Hexagon Wrench	CJ-E08S16R				

Owner's Manual

Part No.	Language
CJ-E09S08R	English, French, Italian ,Spanish(Espanol), German
CJ-E09S09R	Traditional Chinese, Russian, Portuguese(B), Arabic

4

A

- B

C



(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Attachment Assy	See Contrast table (2)	24-1	Quick Start Guide	See Contrast table (2)
2	Polyethylene Bag	CEG1160	24-2	Quick Start Guide	See Contrast table (2)
3	Screw	CBA2384			
4	Screw	See Contrast table (2)	24-3	Quick Start Guide	See Contrast table (2)
* 5	Lock Tie	CNW2429	24-4	Owner's Manual	See Contrast table (2)
			24-5	Owner's Manual	See Contrast table (2)
6	Cord Assy	See Contrast table (2)	24-6	Installation Manual	See Contrast table (2)
7	USB Extended Cable	See Contrast table (2)	* 24-7	Registration Card	See Contrast table (2)
8	Microphone Assy	CPM1109			
9	Holder	CZN7192	* 24-8	Warranty Card	See Contrast table (2)
10	Cushion	CZN7193	* 24-9	Tag	See Contrast table (2)
			* 24-10	Caution Card	See Contrast table (2)
11	Cable Assy	See Contrast table (2)	* 24-11	Service Network	See Contrast table (2)
12	GPS Antenna Assy	CXE5736	24-12	Quick Start Guide	See Contrast table (2)
13	GPS Antenna	CYX1095			
14	Card Remote Control Unit	See Contrast table (2)	24-13	Important Information for the User	See Contrast table (2)
15	IM CD-ROM	See Contrast table (2)	* 24-14	Caution Card	See Contrast table (2)
			* 24-15	Caution Card	See Contrast table (2)
16	Cover	See Contrast table (2)	* 24-16	Caution Card	CRP1510
17	Protector	See Contrast table (2)	* 24-17	Caution Card	CRP1514
18	Unit Box	See Contrast table (2)			
19	Contain Box	See Contrast table (2)	25	Protector(L)	See Contrast table (2)
20	Handle	See Contrast table (2)	26	Protector(R)	See Contrast table (2)
21	Cord	See Contrast table (2)	27	Rod Antenna	See Contrast table (2)
22	Microphone Assy	See Contrast table (2)	28	Double Side Tape	CYN1012
23	Panel	See Contrast table (2)	29	Sheet	CZN7151

(2) CONTRAST TABLE

AVIC-8200NEX/XNUC, AVIC-7200NEX/XNUC, AVIC-F88DAB/XNEU5, AVIC-F80DAB/XNEU5, AVIC-F80DAB/XNAU, AVIC-F80BT/XNID and AVIC-F80TV/XFBR are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVIC-8200 NEX/XNUC</u>	<u>AVIC-7200 NEX/XNUC</u>	<u>AVIC-F88 DAB/XNEU5</u>	<u>AVIC-F80 DAB/XNEU5</u>
	1	Attachment Assy	*CED6844	*CED6844	*CED6845	CEV1603
	4	Screw	CBA2383	CBA2383	CBA2383	CBA2383
	6	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x2)	CDP1587 (x2)
	11	Cable Assy	CDP1707	CDP1707	Not used	Not used
	14	Card Remote Control Unit	CXE5117	Not used	Not used	Not used
	15	IM CD-ROM	CPJ1510	CPJ1510	CPJ1512	CPJ1512
	16	Cover	CEG1359	CEG1359	CEG1356	CEG1356
	17	Protector	CHP4863	CHP4863	CHP4864	CHP4864
	18	Unit Box	CHG9229	CHG9226	CHG9231	CHG9228
	19	Contain Box	CHL9229	CHL9226	CHL9231	CHL9228
	20	Handle	Not used	Not used	CND6289	CND6289
	21	Cord	Not used	Not used	CDP1669	CDP1669
	22	Microphone Assy	Not used	Not used	Not used	Not used
	23	Panel	Not used	Not used	Not used	Not used
	24-1	Quick Start Guide	CRB4784	CRB4784	CRB4788	CRB4788
	24-2	Quick Start Guide	Not used	Not used	CRD4950	CRD4950
	24-3	Quick Start Guide	Not used	Not used	CRD4947	CRD4947
	24-4	Owner's Manual	CRD4948	CRD4948	CRD4949	CRD4949
	24-5	Owner's Manual	Not used	Not used	Not used	Not used
	24-6	Installation Manual	CRD4951	CRD4951	CRD4952	CRD4952
*	24-7	Registration Card	CRY1271	CRY1271	Not used	Not used
*	24-8	Warranty Card	QRY3001	QRY3001	CRY1376	CRY1376
*	24-9	Tag	Not used	Not used	CRW1881	CRW1881
*	24-10	Caution Card	Not used	Not used	CRP1481	CRP1481
	24-11	Service Network	Not used	Not used	Not used	Not used
	24-12	Quick Start Guide	Not used	Not used	Not used	Not used
	24-13	Important Information for the User	Not used	Not used	Not used	Not used
	24-14	Caution Card	CRP1502	CRP1502	CRP1502	CRP1502
*	24-15	Caution Card	Not used	Not used	CRP1509	CRP1509
	25	Protector(L)	Not used	Not used	Not used	Not used
	26	Protector(R)	Not used	Not used	Not used	Not used
	27	Rod Antenna	Not used	Not used	Not used	Not used

A

B

C


D

Mark	No.	Description	AVIC-F80 DAB/XNAU	AVIC-F80 BT/XNID	AVIC-F80 TV/XFBR
A	1	Attachment Assy	*CED6844	CEV5547	*CEC7757
	4	Screw	CBA2383	Not used	Not used
	6	Cord Assy	CDP1545	CDP1666	CDP1545
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)
	11	Cable Assy	CDP1707	Not used	Not used
	14	Card Remote Control Unit	CXE5117	CXE5117	CXE7089
	15	IM CD-ROM	CPJ1512	Not used	CPJ1513
	16	Cover	CEG1356	CEG1356	CEG1356
	17	Protector	CHP4863	CHP4863	Not used
	18	Unit Box	CHG9230	CHG9227	CHG9239
B	19	Contain Box	CHL9230	CHL9227	CHL8941
	20	Handle	Not used	Not used	Not used
	21	Cord	CDP1669	Not used	Not used
	22	Microphone Assy	Not used	CPM1086	Not used
	23	Panel	Not used	CNS9475	CNS9475
C	24-1	Quick Start Guide	CRB4785	CRB4786	Not used
	24-2	Quick Start Guide	Not used	Not used	Not used
	24-3	Quick Start Guide	Not used	Not used	Not used
	24-4	Owner's Manual	CRB4791	CRB4783	Not used
	24-5	Owner's Manual	Not used	CRB4792	Not used
	24-6	Installation Manual	CRB4794	CRB4795	CRB4798
	* 24-7	Registration Card	Not used	Not used	Not used
	* 24-8	Warranty Card	Not used	CRY1304	Not used
	* 24-9	Tag	Not used	Not used	Not used
	* 24-10	Caution Card	CRP1481	Not used	Not used
	* 24-11	Service Network	Not used	CRY1305	CRY1227
	24-12	Quick Start Guide	Not used	Not used	CRB4796
	24-13	Important Information for the User	Not used	Not used	CRB4797
	* 24-14	Caution Card	CRP1502	CRP1503	Not used
	* 24-15	Caution Card	Not used	Not used	Not used
D	25	Protector(L)	Not used	Not used	CHP4275
	26	Protector(R)	Not used	Not used	CHP4276
	27	Rod Antenna	Not used	Not used	CXE9491

E

F

9.2 EXTERIOR (1)

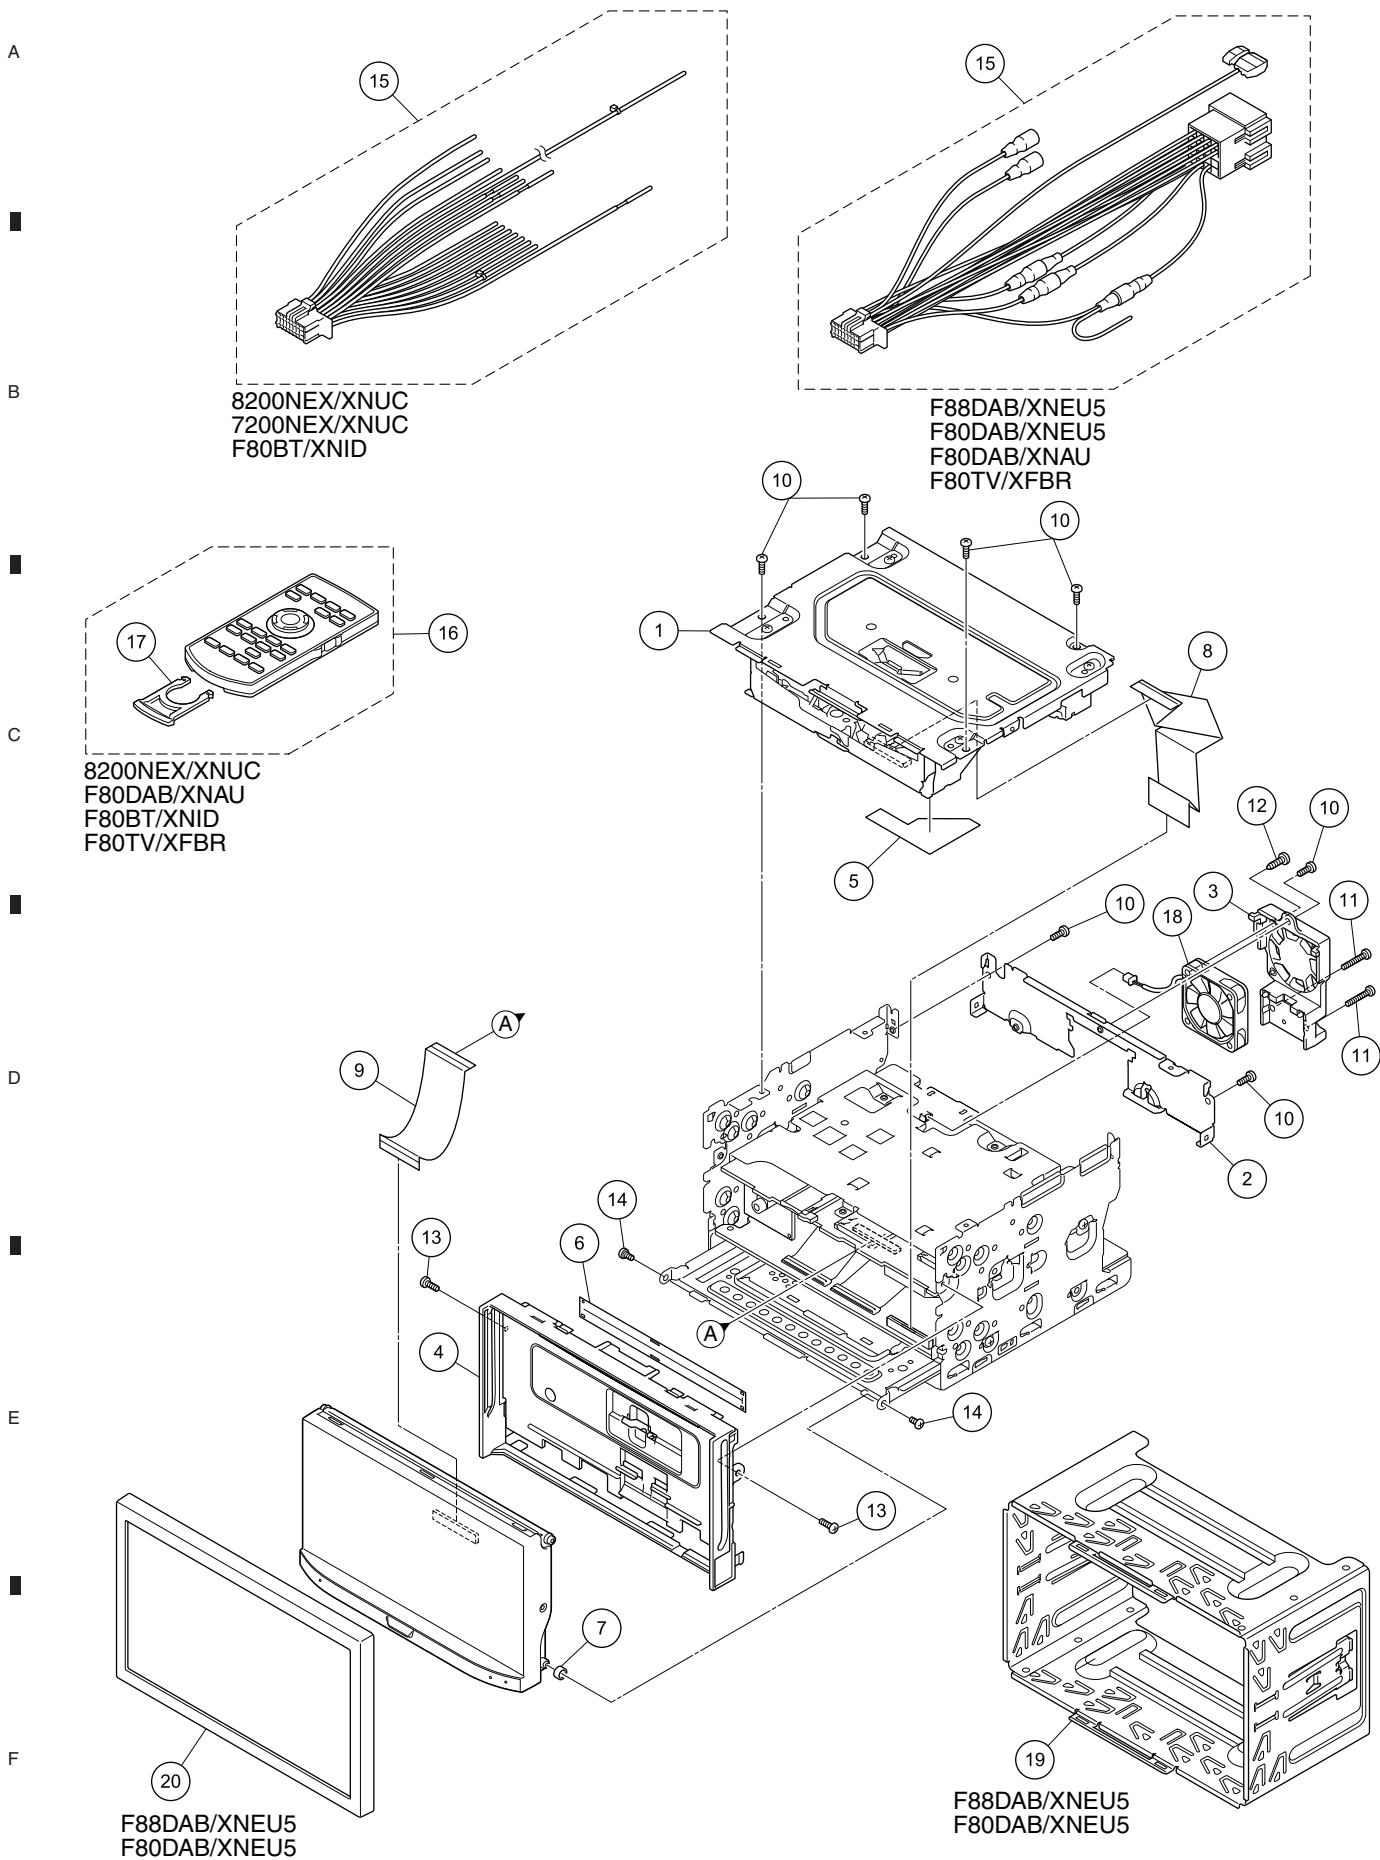

(1) EXTERIOR (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	DVD Mechanism Module (LS2.5)	CXK8102	11	Screw	BSZ26P120FTC
2	Holder	CND6989	12	Screw	BPZ30P080FTC
3	Heat Sink	CNR2165	13	Screw	ISS26P055FTC
4	Panel	See Contrast table (2)	14	Screw	CBA1735
5	Insulator	CNN4613	15	Cord Assy	See Contrast table (2)
6	Cover	CNN4866	16	Card Remote Control Unit	See Contrast table (2)
7	Collar	CNW2038	17	Battery Cover	See Contrast table (2)
8	FFC	CDD1033	18	Fan Motor	See Contrast table (2)
9	FFC	CDD1039	19	Holder	See Contrast table (2)
10	Screw	BSZ26P060FTC	20	Panel	See Contrast table (2)


(2) CONTRAST TABLE

AVIC-8200NEX/XNUC, AVIC-7200NEX/XNUC, AVIC-F88DAB/XNEU5, AVIC-F80DAB/XNEU5, AVIC-F80DAB/XNAU, AVIC-F80BT/XNID and AVIC-F80TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8200 NEX/XNUC	AVIC-7200 NEX/XNUC	AVIC-F88 DAB/XNEU5	AVIC-F80 DAB/XNEU5
	4	Panel	CNU3147	CNU3147	CNU3221	CNU3236
	15	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	16	Card Remote Control Unit	CXE5117	Not used	Not used	Not used
	17	Battery Cover	CNU1624	Not used	Not used	Not used
	18	Fan Motor	CXM1446	CXM1446	CXM1449	CXM1449
	19	Holder	Not used	Not used	CND7102	CND7102
	20	Panel	Not used	Not used	CNU2645	CNU2645

Mark	No.	Description	AVIC-F80 DAB/XNAU	AVIC-F80 BT/XNID	AVIC-F80 TV/XFBR
	4	Panel	CNU3221	CNU3220	CNU3222
	15	Cord Assy	CDP1545	CDP1666	CDP1545
	16	Card Remote Control Unit	CXE5117	CXE5117	CXE7089
	17	Battery Cover	CNU1624	CNU1624	10030-0069600
	18	Fan Motor	CXM1446	CXM1446	CXM1446
	19	Holder	Not used	Not used	Not used
	20	Panel	Not used	Not used	Not used

9.3 EXTERIOR (2)

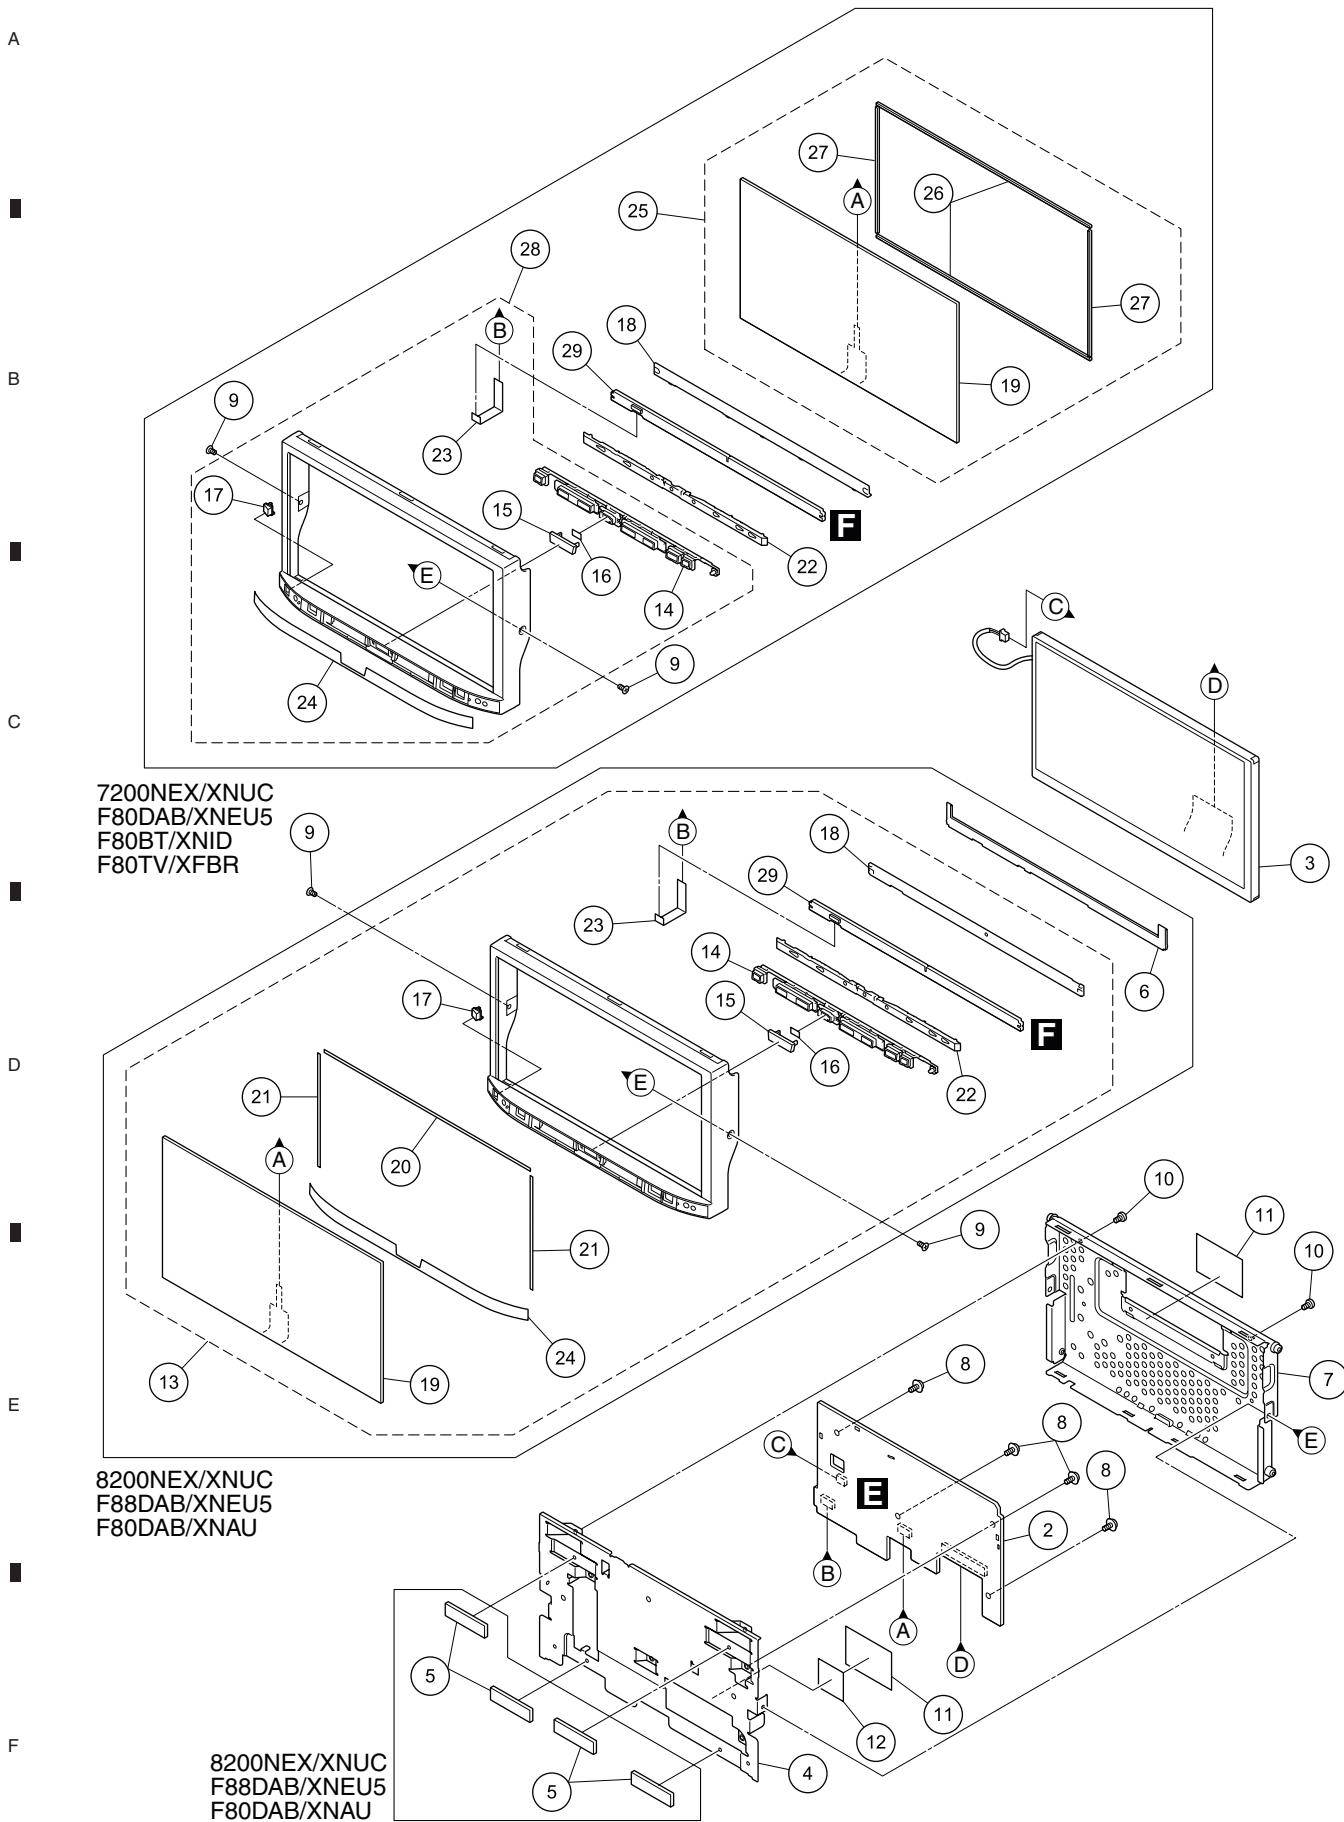

(1) EXTERIOR (2) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	•••••		16	Double Side Tape	CNN4681
2	Monitor Unit	See Contrast table (2)	17	Lighting Conductor	CNW3108
3	TFT LCD	CWX4781	18	Spacer	See Contrast table (2)
4	Holder	CND7007	19	Touch Panel	See Contrast table (2)
5	Cushion	See Contrast table (2)	20	Double Side Tape	See Contrast table (2)
6	Holder	See Contrast table (2)	21	Double Side Tape	See Contrast table (2)
7	Case Unit	CXE4761	22	Lighting Conductor	CNW3105
8	Screw	ASZ26P050FTC	23	FFC	CDD1038
9	Screw (M2 x 4)	CBA2265	24	Plate	See Contrast table (2)
10	Screw	BSZ26P050FTC	25	Touch Panel Unit	See Contrast table (2)
11	Sheet	CNN4232	26	Cushion	See Contrast table (2)
12	Sheet	CNN4869	27	Cushion	See Contrast table (2)
13	Grille Unit (Service)	See Contrast table (2)	28	Grille Assy	See Contrast table (2)
14	Button	CAI4322	29	Key Unit (Service)	CXX8723
15	Cap (HOME)	CNU2650			


(2) CONTRAST TABLE

AVIC-8200NEX/XNUC, AVIC-7200NEX/XNUC, AVIC-F88DAB/XNEU5, AVIC-F80DAB/XNEU5, AVIC-F80DAB/XNAU, AVIC-F80BT/XNID and AVIC-F80TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8200 NEX/XNUC	AVIC-7200 NEX/XNUC	AVIC-F88 DAB/XNEU5	AVIC-F80 DAB/XNEU5
	2	Monitor Unit	CWN9924	CWN9925	CWN9924	CWN9925
	5	Cushion	CNN4680	Not used	CNN4680	Not used
	6	Holder	CNW2507	Not used	CNW2507	Not used
	13	Grille Unit (Service)	CXX8741	Not used	CXX8740	Not used
	18	Spacer	CNW3107	CNW3104 (Holder)	CNW3107	CNW3104 (Holder)
	19	Touch Panel	CSX1213	CSX1241	CSX1213	CSX1241
	20	Double Side Tape	CNN5130	Not used	CNN5130	Not used
	21	Double Side Tape	CNN5131	Not used	CNN5131	Not used
	24	Plate	CNU3480	CNU3483	CNU3481	CNU3482
	25	Touch Panel Unit	Not used	CXE7770	Not used	CXE7770
	26	Cushion	Not used	CNN4271	Not used	CNN4271
	27	Cushion	Not used	CNN4272	Not used	CNN4272
	28	Grille Assy	Not used	CXE9139	Not used	CXE9140

Mark	No.	Description	AVIC-F80 DAB/XNAU	AVIC-F80 BT/XNID	AVIC-F80 TV/XFBR
	2	Monitor Unit	CWN9924	CWN9925	CWN9925
	5	Cushion	CNN4680	Not used	Not used
	6	Holder	CNW2507	Not used	Not used
	13	Grille Unit (Service)	CXX8742	Not used	Not used
	18	Spacer	CNW3107	CNW3104 (Holder)	CNW3104 (Holder)
	19	Touch Panel	CSX1213	CSX1241	CSX1241
	20	Double Side Tape	CNN5130	Not used	Not used
	21	Double Side Tape	CNN5131	Not used	Not used
	24	Plate	CNU3482	CNU3484	CNU3485
	25	Touch Panel Unit	Not used	CXE7770	CXE7770
	26	Cushion	Not used	CNN4271	CNN4271
	27	Cushion	Not used	CNN4272	CNN4272
	28	Grille Assy	Not used	CXE9141	CXE9142

9.4 EXTERIOR (3)

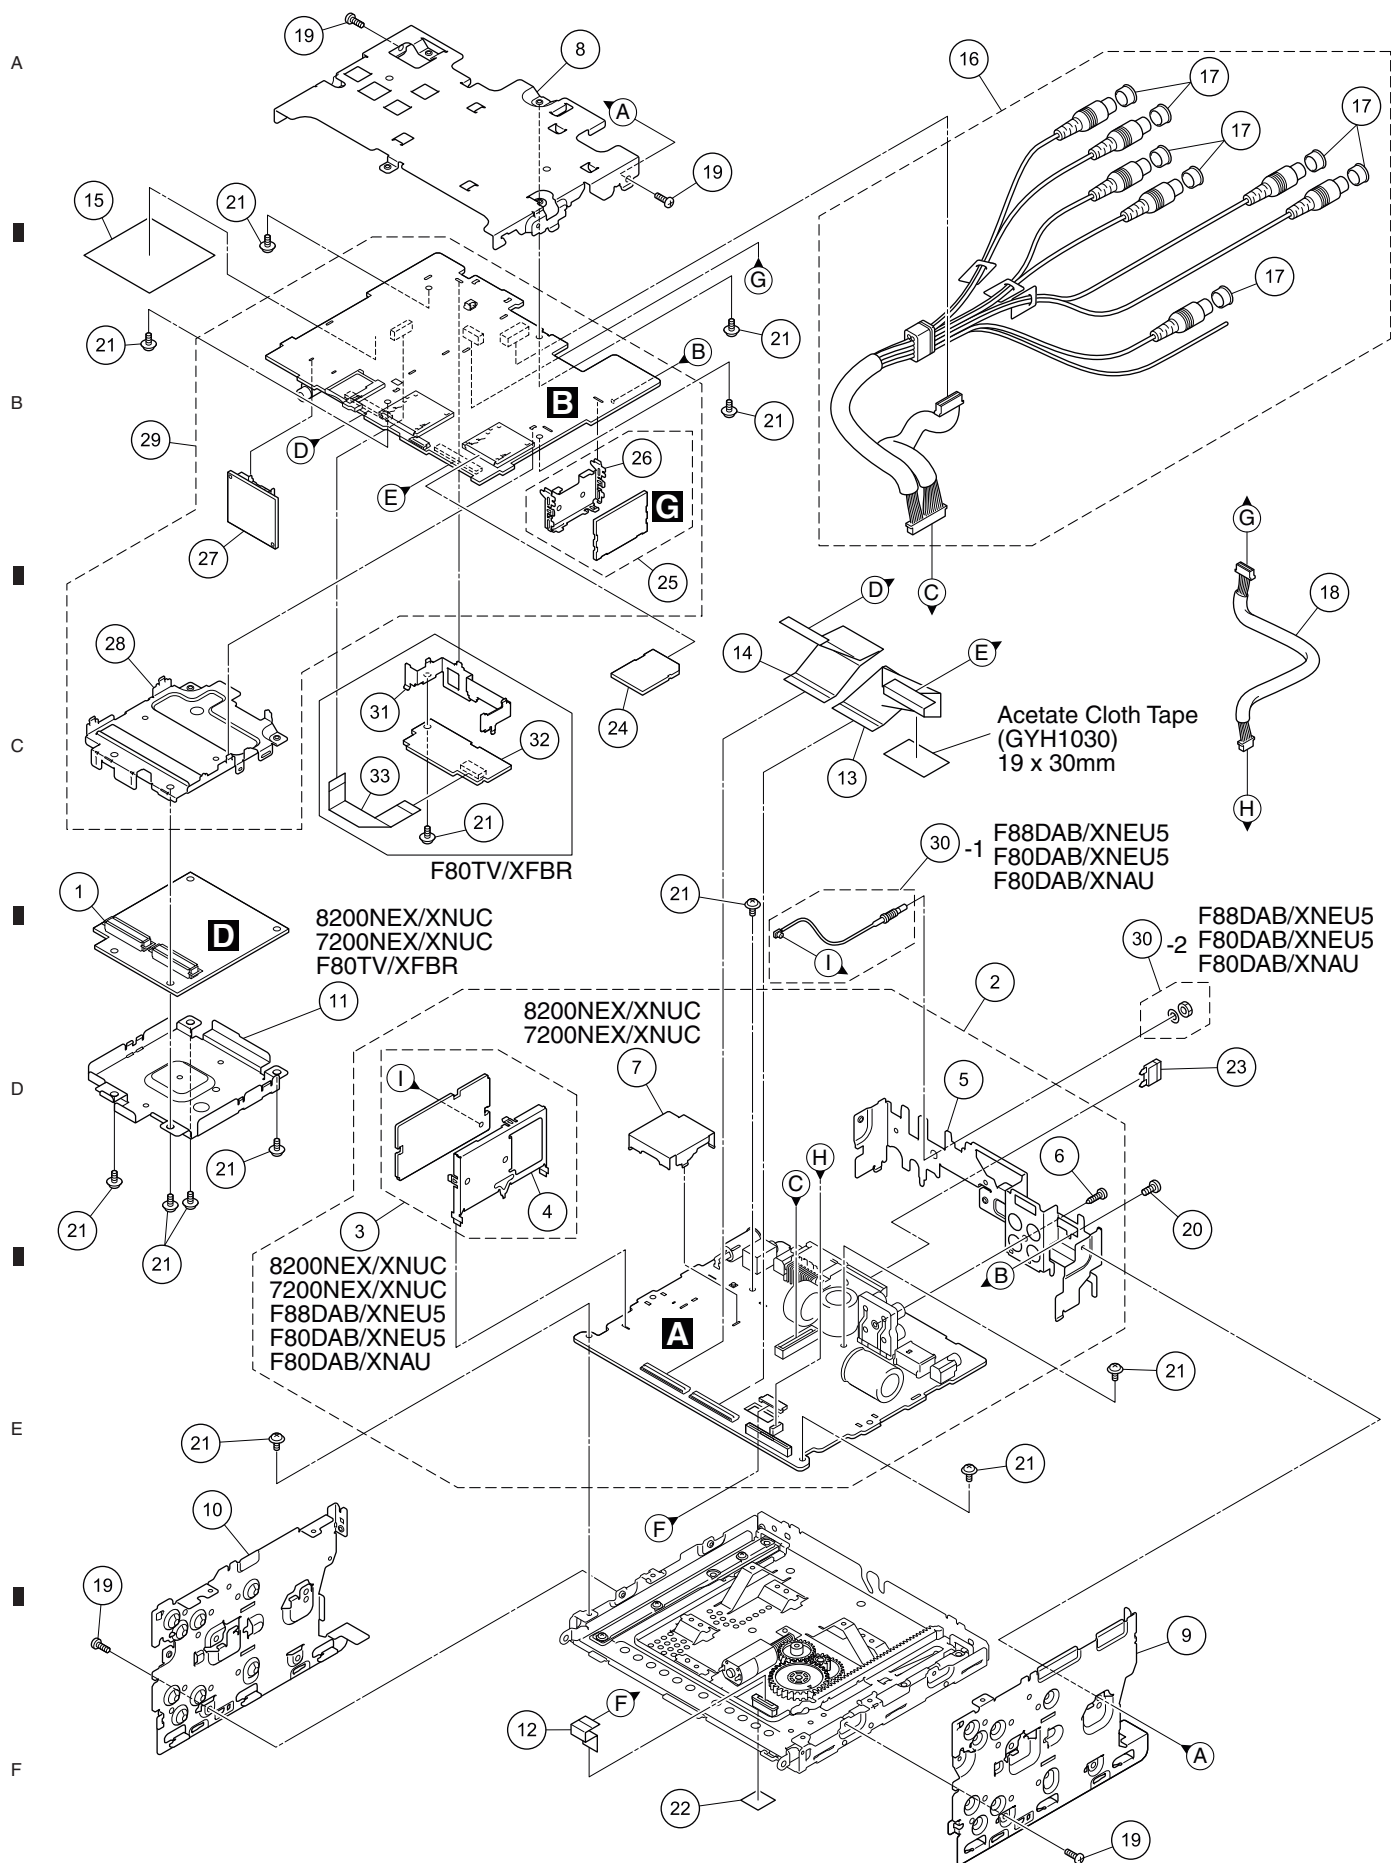

(1) EXTERIOR (3) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	SOC Dual Core Unit	CWN9870	16	Cable Assy	See Contrast table (2)
2	AV Unit	See Contrast table (2)	17	Cap	CNV6727
3	BE Core Unit (U1701)	See Contrast table (2)	18	Cable Assy	CDF1197
4	Holder	See Contrast table (2)	19	Screw	BSZ26P060FTC
5	Holder	See Contrast table (2)	20	Screw	BMZ30P060FTC
6	Screw	BPZ26P080FTC	21	Screw	ASZ26P050FTC
7	Shield Case	See Contrast table (2)	22	Label	CNN3533
8	Holder	CND6984	23	Fuse (10 A)	YEK5001
9	Bracket	CND6985	24	Service Strage SD Assy	See Contrast table (2)
10	Bracket	CND6986	25	Sensor Unit	CWX4712
11	Shield Case	See Contrast table (2)	26	Holder	CND6958
12	FFC	CDD1034	27	BT Module	CWX4710
13	FFC	CDD1035	28	Holder	CND6987
14	FFC	CDD1036	29	IF Unit (Service)	See Contrast table (2)
15	Sheet	CNN4830	30	Antenna Cable Assy	See Contrast table (2)
			31	Holder	See Contrast table (2)
			32	DTT Tuner	See Contrast table (2)
			33	FFC	See Contrast table (2)


(2) CONTRAST TABLE

AVIC-8200NEX/XNUC, AVIC-7200NEX/XNUC, AVIC-F88DAB/XNEU5, AVIC-F80DAB/XNEU5, AVIC-F80DAB/XNAU, AVIC-F80BT/XNID and AVIC-F80TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8200 NEX/XNUC	AVIC-7200 NEX/XNUC	AVIC-F88 DAB/XNEU5	AVIC-F80 DAB/XNEU5
	2	AV Unit	CWN9882	CWN9884	CWN9881	CWN9886
	3	BE Core Unit (U1701)	CWE2518	CWE2518	CWE2534 (WWR Tuner Unit)	CWE2534 (WWR Tuner Unit)
	4	Holder	CND7288	CND7288	CND7288	CND7288
	5	Holder	CND6992	CND6992	CND7002	CND7409
	7	Shield Case	CND7003	CND7003	Not used	Not used
	11	Shield Case	CND6988	CND6988	Not used	Not used
	16	Cable Assy	CDF1082	CDF1082	CDF1217	CDF1082
	24	Service Strage SD Assy	CXX8731	CXX8733	CXX8730	CXX8730
	29	IF Unit (Service)	CXX8705	CXX8707	CXX8704	CXX8709
	30	Antenna Cable Assy	Not used	Not used	QXA3732	QXA3732
	31	Holder	Not used	Not used	Not used	Not used
	32	DTT Tuner	Not used	Not used	Not used	Not used
	33	FFC	Not used	Not used	Not used	Not used

Mark	No.	Description	AVIC-F80 DAB/XNAU	AVIC-F80 BT/XNID	AVIC-F80 TV/XFBR
	2	AV Unit	CWN9883	CWN9885	CWN9887
	3	BE Core Unit (U1701)	CWE2534 (WWR Tuner Unit)	Not used	Not used
	4	Holder	CND7288	Not used	Not used
	5	Holder	CND7002	CND6993	CND7365
	7	Shield Case	Not used	Not used	Not used
	11	Shield Case	Not used	Not used	CND6988
	16	Cable Assy	CDF1082	CDF1082	CDF1082
	24	Service Strage SD Assy	CXX8732	CXX8734	CXX8735
	29	IF Unit (Service)	CXX8706	CXX8708	CXX8710
	30	Antenna Cable Assy	QXA3732	Not used	Not used
	31	Holder	Not used	Not used	CND7536
	32	DTT Tuner	Not used	Not used	CWE2519
	33	FFC	Not used	Not used	CDD1122

9.5 EXTERIOR (4)

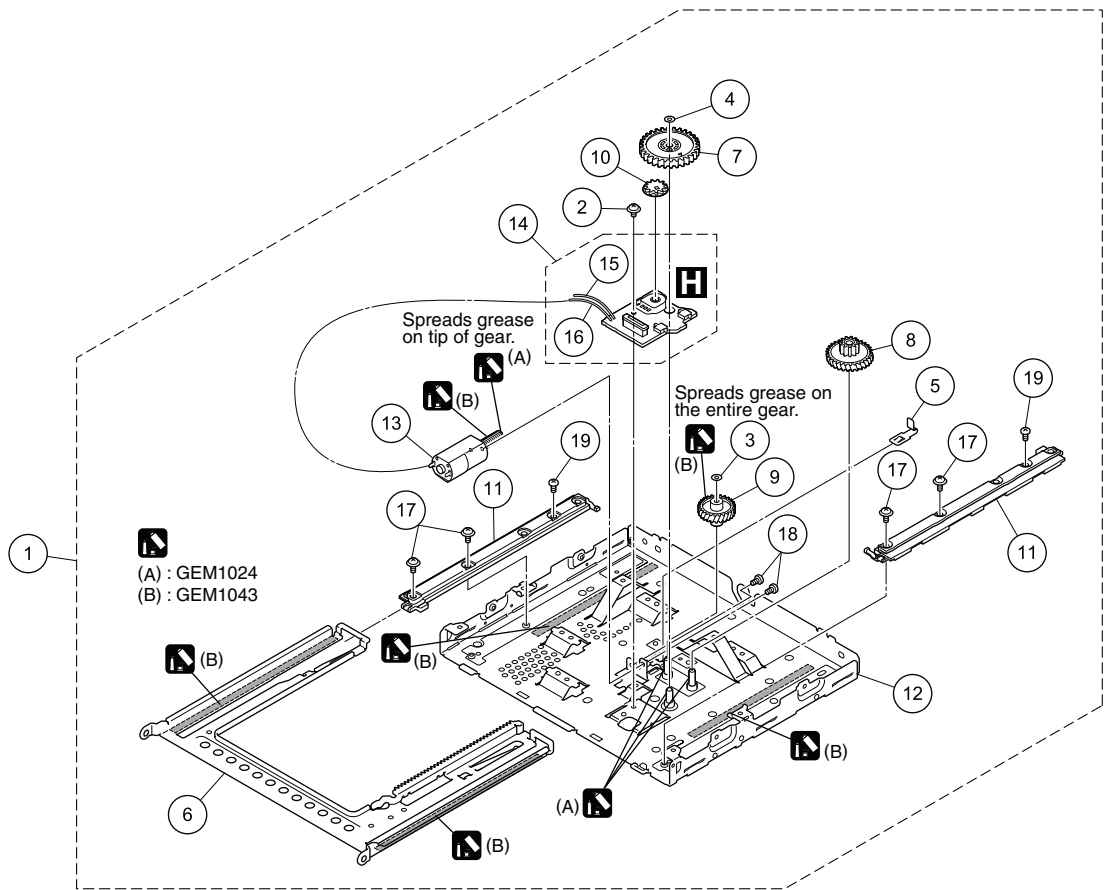


EXTERIOR (4) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Drive Mechanism Unit		
	AVIC-8200NEX/XNUC	CXE7000	A
	AVIC-7200NEX/XNUC	CXE7000	
	AVIC-F88DAB/XNEU5	CXE7000	
	AVIC-F80DAB/XNEU5	CXE7000	
	AVIC-F80DAB/XNAU	CXE7000	
	AVIC-F80BT/XNID	CXE7000	
	AVIC-F80TV/XFBR	CXE7765	
2	Screw	AMZ26P030FTC	
3	Washer	CBF1039	
4	Washer	CBF1064	
5	Spring	EBL1034	B
6	Frame	ENC2001	
7	Gear	ENV1630	
8	Gear	ENV1631	
9	Gear	ENV1632	
10	Gear	ENV1635	
11	Guide	ENV3001	
*	12 Chassis Unit	EXA4027	
	13 Motor Unit	EXA4003	
	14 PCB Assy (Service)	EXX2001	C
*	15 Cord (Green)	CDC1056	
*	16 Cord (White)	CDC1057	
	17 Screw	IMS26P060FTC	
	18 Screw	JFZ20P025FTC	
	19 Screw	EBA2002	

4

F



AVIC-8200NEX/XNUC

DVD MECHANISM MODULE (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BSZ20P040FTC	36	Gear	CNW1187	A
2	Screw	BSZ26P060FTC	37	Clamper	CNW1190	
3	Screw (M2 x 4)	CBA1835	38	Arm	CNW1192	
4	Washer	CBF1038	39	Holder	CNW1193	
5	Spring	CBH2855	40	Holder	CNW1194	
6	Spring	CBH2860	41	Damper	CNW2439	
7	Spring	CBH3010	42	Damper	CNW2440	
8	Spring	CBH3011	43	Arm	CNW1726	
9	Spring	CBH3014	44	Guide	CNW3489	
10	Spring	CBH3015	45	Arm	CNW2241	
11	Spring	CBH3016	46	Rack	CNW2265	B
12	Spring	CBH3017	47	Gear	CNW2287	
13	Spring	CBH3019	48	Motor Unit	CXC4026	
14	Spring	CBH3086	49	Screw Unit	CXC8894	
15	Spring	CBH3095	50	Chassis Unit	CXE8407	
16	Spring	CBH3096	51			
17	Plate Spring	CBL1824	* 52	Support Wheel	CNW2052	
18			* 53	Spindle Motor	EXM2002	
19	Case	CNB3928	54	Arm Assy	CXE7890	
20	Bracket	CND4553	55	Washer	CBF1037	
21	Lever	CND7225	56	Washer	CBF1038	
22	Bracket	CND5710	57	Arm	CND6779	
23	Bracket	CND6127	58	Roller	CNW2500	
24	Arm	CND7224	59	Collar	CNW2444	
25	Sheet	CNN3678	60	Gear Unit	CXE6225	
26	Roller	CNW1172	61	E Ring	YE15FTC	
27	Roller	CNW1175	62	Screw	JFZ20P025FTC	
28	Arm	CNW1177	63	Screw	JGZ17P020FTC	
29	Arm	CNW1178	64	Screw (M2 x 5)	EBA1028	
30	Gear	CNW1180	65	DVD Core Unit	CWX4717	
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.

Circuit Symbol and No.

Part No.

A:AVIC-8200NEX/XNUC

B:AVIC-7200NEX/XNUC

C:AVIC-F88DAB/XNEU5

D:AVIC-F80DAB/XNEU5

E:AVIC-F80DAB/XNAU

F:AVIC-F80BT/XNID

G:AVIC-F80TV/XFBR

Unit Number : CWN9882(A)

Unit Number : CWN9884(B)

Unit Number : CWN9881(C)

Unit Number : CWN9886(D)

Unit Number : CWN9883(E)

Unit Number : CWN9885(F)

Unit Number : CWN9887(G)

Unit Name : AV Unit

Unit Number : CXX8705(A)

Unit Number : CXX8707(B)

Unit Number : CXX8704(C)

Unit Number : CXX8709(D)

Unit Number : CXX8706(E)

Unit Number : CXX8708(F)

Unit Number : CXX8710(G)

Unit Name : IF Unit(Service)

Unit Number : CWX4717

Unit Name : DVD Core Unit

Unit Number : CWN9870

Circuit Symbol and No.

Part No.

Unit Name : SOC Dualcore Unit

Unit Number : CWN9924(A,C,E)

Unit Number : CWN9925(B,D,F,G)

Unit Name:Monitor Unit

Unit Number : CXX8723

Unit Name:Key Unit(Service)

Unit Number : CWX4712

Unit Name : Sensor Unit

Unit Number : EXX2001

Unit Name : PCB Assy (Service)

A

Unit Number : CWN9882(A)

Unit Number : CWN9884(B)

Unit Number : CWN9881(C)

Unit Number : CWN9886(D)

Unit Number : CWN9883(E)

Unit Number : CWN9885(F)

Unit Number : CWN9887(G)

Unit Name : AV Unit

MISCELLANEOUS

IC 101	(A,59,104)	IC	NJM12904V
IC 201	(A,98,136)	Power AMP IC	PA2032A
IC 302	(B,148,58)	Regulator IC	MM3411A33N
IC 303	(B,164,47)	DC/DC CONV IC	NJW4132U2-A
IC 304	(B,170,83)	Regulator	BA00CC0WFP
IC 305	(B,154,46)	Regulator IC	R1516S033B-AE
IC 501	(B,30,51)	Regulator IC(Except F,G)	MM3479A33P
IC 502	(B,33,58)	Regulator IC(Except F,G)	S-1172B12-E6
IC 503	(A,29,82)	Regulator IC(C,D,E)	MM3479A33P
IC 504	(B,46,50)	Regulator IC	MM3571A33P

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
IC 505	(B,42,43) Regulator IC(Except F,G)	MM3571A33P		Q 2203	(B,172,104) Chip Transistor	HN1C03FU	
IC 601	(A,68,46) ROM IC	CAT93C66VI		Q 2204	(B,131,93) Chip Transistor	HN1C03FU	
* IC602	(A,90,35) Flash Blank UC IC	UPD70F3925AGMA		Q 2301	(A,115,34) Chip Transistor(F,G)	RN4982	
IC 603	(B,118,17) Reset IC	PST8229N		Q 2302	(A,115,25) Chip Transistor(F,G)	RN4982	A
IC 801	(B,74,62) IC	AK4223VQ		Q 2303	(A,115,29) Chip Transistor(F,G)	RN4982	
IC 901	(B,51,29) IC	AK4223VQ		Q 2304	(B,87,29) Chip Transistor(F,G)	RN4982	
IC 1002	(B,148,75) Dual OP-AMP	NJM4565V		D 103	(B,71,110) Diode	UDZV6R2(B)	
IC 1003	(B,152,100) Dual OP-AMP	NJM4565V		D 105	(B,129,81) Diode	DZ2J200M0	
IC 1005	(B,154,87) IC	TC4052BFT		D 106	(B,129,76) Diode	UDZV7R5(B)	
IC 1101	(B,134,55) IC	AK7734XQ		D 107	(B,127,79) Rectifier Diode	DAN202UM	
IC 1201	(A,118,44) CONV IC	WM8761BGED		D 109	(B,64,112) Rectifier Diode	DA2J101	
IC 1202	(A,116,54) CONV IC	WM8761BGED		D 110	(B,79,136) Diode	D1F60-5053	
IC 1203	(A,115,64) CONV IC	WM8761BGED		D 111	(B,75,136) Diode	D1F60-5053	
IC 1301	(B,80,89) IC	PM9012A		D 112	(B,50,108) Diode	DZ2J056M0	
IC 1501	(A,45,64) Tuner IC(A,B)	TEF6688HN		D 113	(B,52,111) Diode	DZ2J180M0	B
IC 1501	(A,45,64) Tuner IC(C,D,E,F,G)	TEF6686HN		D 116	(B,61,107) Rectifier Diode	DA2J101	
IC 1601	(A,38,45) Tuner IC(Except F,G)	TEF6686HN		D 118	(B,56,106) Rectifier Diode	DA2J101	
Q 101	(B,68,106) Bipolar TR	LSCR523UB		D 120	(A,58,112) Rectifier Diode	DA2J101	
Q 102	(B,132,78) Chip Transistor	HN1C01FU		D 122	(A,53,110) Diode	D1F60-5053	
Q 104	(B,67,108) Resistor Built-IN TR	LTC014EEB		D 123	(B,90,95) Diode	RB080L-30	
Q 105	(B,52,104) Chip Transistor	HN1C01FU		D 124	(B,105,123) Diode	CRG03	
Q 107	(B,64,106) Bipolar TR	LSAR523UB		D 201	(B,94,114) Rectifier Diode	DA2J101	
Q 108	(B,58,106) Bipolar TR	LSAR523UB		D 202	(B,76,116) Rectifier Diode	DAN202UM	
Q 109	(A,52,106) Resistor Built-IN TR	LTC014EEB		D 203	(B,72,114) Rectifier Diode	DAN202UM	
Q 110	(A,53,115) Resistor Built-IN TR	LTC014EEB		D 205	(B,93,111) Diode	DZ2J082M0	C
Q 111	(B,61,104) Resistor Built-IN TR	LTC014EEB		D 206	(B,85,110) Rectifier Diode	DA2J101	
Q 201	(B,79,111) Transistor	RN4987		D 305	(A,151,30) Diode	DZ2J062M0	
Q 202	(B,74,109) Transistor	RN4987		D 311	(B,171,44) Schottky Diode	RB551VM-30	
Q 203	(B,77,112) Resistor Built-IN TR	LTA024EEB		D 501	(B,36,54) Diode(Except F,G)	CRG03	
Q 204	(B,85,113) Chip Transistor	RN1903		D 601	(B,115,19) Rectifier Diode	DA2J101	
Q 205	(B,89,111) Bipolar TR	LSCR523UB		D 602	(B,94,24) Schottky Diode	DB2J31400	
Q 301	(B,160,39) Resistor Built-IN TR	LTC014EEB		D 603	(B,94,31) Schottky Diode	DB2J31400	
Q 302	(B,163,38) Bipolar TR	LSAR523UB		D 604	(B,74,23) Schottky Diode(A,B)	DB2J31400	
Q 307	(A,146,29) Transistor	2SCR573DG		D 1401	(B,23,103) Diode	EZAEG2A50AX	
Q 308	(A,152,33) Resistor Built-IN TR	LTC014EEB		D 1402	(B,59,83) Diode(Except F,G)	DAN217UM	
Q 312	(A,152,46) Bipolar TR	LSCR523UB		D 1404	(B,44,89) Diode(Except F,G)	RN779F	D
Q 314	(B,125,38) Chip Transistor	2SB1689		D 1501	(A,43,82) Diode	EZAEG2A50AX	
Q 315	(B,124,35) Bipolar TR	LSCR523UB		D 1502	(A,36,75) Diode	EZAEG2A50AX	
Q 602	(A,67,39) Bipolar TR	LSCR523UB		D 1702	(B,35,78) Diode(C,D,E)	DZ2J160M0	
Q 1001	(B,155,82) Chip Transistor	RN1907		L 101	(A,85,103) Choke Coil 600 uH	CTH1221	
Q 1401	(A,50,90) Transistor(Except F,G)	2SC3357		L 303	(A,170,40) Choke Coil	CTH1561	
Q 1402	(B,51,89) Bipolar TR(Except F,G)	LSAR523UB		L 901	(B,47,41) Inductor	CTF1786	
Q 1403	(B,52,85) Bipolar TR(Except F,G)	LSCR523UB		L 902	(B,48,41) Inductor	CTF1786	
Q 1404	(B,60,90) Transistor(Except F,G)	2SC4083		L 1101	(A,130,54) Ferrite Bead	CTF1528	
Q 1405	(B,58,88) Transistor(Except F,G)	2SC4083		L 1102	(A,144,52) Ferrite Bead	CTF1528	
Q 1501	(A,31,58) Bipolar TR(A,B)	MMBT2369L		L 1201	(A,112,49) Inductor	CTF1786	
Q 1502	(A,31,55) Bipolar TR(A,B)	MMBT2369L		L 1202	(A,110,59) Inductor	CTF1786	E
Q 1503	(A,38,58) Bipolar TR(A,B)	MMBT2369L		L 1203	(A,114,70) Inductor	CTF1786	
Q 1504	(A,37,55) Bipolar TR(A,B)	MMBT2369L		L 1204	(B,141,51) Chip Beads	VTL1132	
Q 1701	(B,25,79) Resistor Built-IN TR(C,D,E)	LTC014EEB		L 1405	(A,47,93) Inductor(Except F,G)	CTF1794	
Q 1702	(B,27,88) Transistor(C,D,E)	2SAR293PGZE		L 1406	(A,42,93) Inductor(Except F,G)	ATL7054	
Q 1703	(B,33,84) Transistor(C,D,E)	2SAR293PGZE		L 1407	(A,46,87) Inductor(Except F,G)	LCYB47NJ1608	
Q 1801	(B,153,20) Chip Transistor	RN4982		L 1408	(A,54,91) Inductor(Except F,G)	LCYB22NJ1608	
Q 1802	(B,148,19) Chip Transistor	RN1910		L 1409	(A,54,78) Coil(Except F,G)	CTC1213	
Q 1804	(B,159,18) Transistor	2SB1260		L 1411	(A,63,83) Inductor(Except F,G)	CTF1786	
Q 1805	(B,155,16) Resistor Built-IN TR	LTC014EEB		L 1501	(A,53,54) Inductor	CTF1749	
Q 1806	(A,153,24) IC	RZQ050P01		L 1503	(A,37,73) Inductor	LCYC150K1608	F
Q 1807	(A,153,20) Bipolar TR	LSCR523UB		L 1504	(B,29,96) Inductor	CTF1389	
Q 2201	(A,81,81) Chip Transistor	HN1C03FU		L 1505	(A,45,82) Inductor	LCMAR27J1608	
Q 2202	(A,78,85) Chip Transistor	HN1C03FU		L 1601	(A,34,33) Inductor(Except F,G)	CTF1749	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	L 1603 (A,56,45) Inductor(Except F,G)	LCMAR27J1608	R 119 (B,53,106)	RS1/16SS104J
	L 2201 (A,94,72) Ferrite Bead	CTF1528		
	L 2202 (A,104,72) Ferrite Bead	CTF1528	R 120 (B,54,109)	RS1/16SS472J
	L 2203 (A,94,73) Ferrite Bead	CTF1528	R 122 (B,62,110)	RS1/16SS102J
	L 2204 (A,105,74) Ferrite Bead	CTF1528	R 123 (B,65,108)	RS1/16SS103J
			R 124 (B,65,104)	RS1/16SS223J
			R 125 (B,58,112)	RS1/16SS103J
	L 2205 (A,106,76) Ferrite Bead	CTF1528		
	L 2206 (A,94,76) Ferrite Bead	CTF1528		
	L 2207 (A,104,76) Ferrite Bead	CTF1528	R 126 (B,56,104)	RS1/16SS223J
	L 2208 (A,94,77) Ferrite Bead	CTF1528	R 127 (B,60,108)	RS1/16SS102J
	L 2209 (A,104,78) Ferrite Bead	CTF1528	R 128 (B,58,108)	RS1/16SS103J
			R 129 (B,55,113)	RS1/16SS103J
			R 130 (A,54,104)	RS1/16SS104J
	L 2210 (A,101,68) Ferrite Bead	CTF1528		
B	L 2211 (A,111,82) Chip Ferrite Bead	BTX1047		
	X 601 (A,110,31) Resonator 3.932 16 MHz	CSS1772	R 131 (A,53,104)	RS1/16SS473J
	X 1101 (B,136,65) Resonator 12.288 MHz	CSS1811	R 132 (A,54,103)	RS1/16SS563J
	X 1501 (A,54,60) Crystal Resonator 9.216 MHz	CSS1863	R 133 (A,58,107)	RS1/16SS513J
			R 134 (A,64,104)	RS1/16SS104J
			R 135 (A,65,104)	RS1/16SS513J
	X 1601 (A,39,37) Crystal Resonator 9.216 MHz(Except F,G)	CSS1863		
	△P301 (A,156,30) Fuse 1.5 A	CEK1282		
	P 1401 (B,24,103) Surge Absorber	IMSA-6803-01Y900	R 136 (A,64,103)	RS1/16SS513J
	P 1701 (B,72,100) Poly Switch(C,D,E)	FSMD075-24R	R 137 (A,60,110)	RS1/16SS102J
	P 2101 (A,127,105) Poly Switch	FSMD075-24R	R 138 (A,64,106)	RS1/16SS102J
			R 139 (A,66,107)	RS1/16SS564J
			R 140 (A,55,113)	RS1/16SS822J
	P 2201 (A,113,78) Poly Switch	FSMD075-24R		
	P 2202 (B,164,125) Poly Switch	FSMD075-24R		
C	P 2203 (B,134,99) Poly Switch	FSMD075-24R	R 141 (A,56,112)	RS1/16SS202J
	P 2206 (B,141,98) Poly Switch	FSMD075-24R	R 142 (A,56,114)	RS1/16SS203J
	△P2207 (A,94,101) Fuse 3.5 A	CEK1343	R 143 (A,55,112)	RS1/16SS333J
			R 144 (A,49,112)	RS1/10SR0R0J
	△P2208 (A,107,89) Fuse 5.0 A	CEK1346	R 145 (B,50,116)	RS1/4SA102J
	P 2209 (A,43,121) Poly Switch	FSMD075-24R		
	BZ601 (A,165,29) Buzzer	CPV1062	R 149 (A,54,119)	RS1/10SR0R0J
	CN1801 (A,153,8) Connector	VKN1620	R 150 (B,54,116)	RS1/10SR0R0J
	CN1802 (A,145,18) Connector	CKS6007	R 201 (B,83,110)	RS1/16SS683J
			R 202 (B,92,114)	RS1/16SS102J
			R 205 (B,86,120)	RS1/16SS0R0J
	CN1901 (A,129,35) Connector	CKS6095		
	CN2001 (A,108,11) Connector	CKS6646		
	CN2002 (A,71,11) Connector	CKS6646	R 207 (A,86,121)	RS1/16SS0R0J
	CN2101 (A,157,116) Connector	CKS4497	R 210 (A,109,126)	RS1/16SS0R0J
D	CN2201 (A,99,83) Connector	CKS6600	R 213 (B,87,109)	RS1/16SS683J
			R 214 (B,84,120)	RS1/16SS152J
	JA 101 (A,64,132) Connector	CKM1613	R 215 (B,85,120)	RS1/16SS101J
	JA 1401 (A,16,120) Jack	CKX1104		
	JA 2202 (A,174,119) Jack	CKS6437	R 217 (B,90,114)	RS1/16SS473J
	JA 2203 (A,131,113) RCA Jack(Except C)	CKB1111	R 218 (B,90,113)	RS1/16SS104J
	JA 2203 (A,131,113) RCA Jack(C)	CKB1116	R 219 (B,88,113)	RS1/16SS103J
			R 223 (B,105,58)	RS1/10SR0R0J
	JA 2204 (A,30,131) Jack	AKN1073	R 224 (B,86,121)	RS1/16SS473J
	JA 2205 (A,43,130) Jack	CKS6437		
	VL1501 (A,44,73) Variable Coil	CTC1216	R 225 (B,87,117)	RS1/16SS101J
	VL1601 (A,48,45) Variable Coil(Except F,G)	CTC1216	R 311 (B,163,41)	RS1/16SS222J
			R 312 (B,161,40)	RS1/16SS222J
			R 313 (B,161,35)	RS1/16SS473J
			R 314 (B,174,87)	RS1/16SS6800D
RESISTORS				
E	R 102 (B,128,87)	RS1/10SR224J		
	R 105 (B,70,107)	RS1/16SS473J	R 315 (B,174,86)	RS1/16SS3901D
	R 106 (B,70,108)	RS1/16SS473J	R 316 (B,174,88)	RS1/16SS2702D
	R 107 (B,69,111)	RS1/16SS432J	R 318 (B,167,95)	RS1/4SA0R0J
	R 108 (B,68,115) 1 kohm	CCN1326	R 320 (B,164,87)	RS1/10SR0R0J
			R 323 (A,151,52)	RS1/10SR102J
	R 109 (B,130,77)	RS1/16SS473J		
	R 110 (B,132,80)	RS1/16SS103J	R 324 (A,145,53)	RS1/10SR0R0J
	R 111 (B,130,79)	RS1/16SS103J	R 327 (A,152,29)	RS1/10SR121J
	R 113 (B,132,75)	RS1/16SS473J	R 328 (A,136,43)	RS1/16SS473J
F	R 114 (B,66,111)	RS1/16SS103J	R 329 (A,153,33)	RS1/16SS220J
			R 341 (A,150,48)	RS1/16SS471J
	R 115 (B,66,114)	RS1/16SS472J		
	R 116 (B,64,116)	RS1/4SA102J	R 342 (A,155,44)	RS1/16SS103J
	R 117 (B,54,104)	RS1/16SS473J	R 343 (A,152,44)	RS1/16SS682J
	R 118 (B,52,106)	RS1/16SS473J	R 346 (B,163,43)	RS1/16SS1303D
			R 347 (B,161,44)	RS1/16SS1002D

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 354	(A,169,47)	RS1/10SR0R0J		R 662	(A,91,51) (Except F,G)	RS1/16SS101J	
R 355	(B,162,57)	RS1/16SS0R0J		R 663	(A,102,53)	RS1/16SS0R0J	
R 358	(B,156,40)	RS1/10SR0R0J		R 664	(A,109,42)	RS1/16SS101J	A
R 359	(B,159,42)	RS1/10SR0R0J		R 665	(B,103,39)	RS1/16SS471J	
R 361	(B,156,52)	RS1/10SR0R0J		R 667	(A,72,38)	RS1/16SS101J	
R 362	(B,122,38)	RS1/10SR103J		R 668	(A,71,40) (G)	RS1/16SS101J	
R 363	(B,121,34)	RS1/10SR331J		R 669	(B,77,42) (G)	RS1/16SS0R0J	
R 364	(B,126,34)	RS1/16SS103J		R 670	(B,102,23)	RS1/16SS472J	
R 365	(B,127,36)	RS1/16SS103J		R 671	(A,96,50)	RS1/16SS681J	
R 366	(B,129,33)	RS1/16SS103J		R 673	(B,103,43) (Except G)	RS1/16SS221J	
R 504	(B,30,32) (F,G)	RS1/16SS102J		R 673	(B,103,43) (G)	RS1/16SS821J	
R 505	(B,27,51) (Except F,G)	RS1/16SS102J		R 675	(B,102,22)	RS1/16SS471J	
R 508	(A,25,82) (C,D,E)	RS1/16SS102J		R 677	(A,106,45)	RS1/16SS0R0J	
R 509	(B,35,62) (Except F,G)	RS1/16SS102J		R 678	(B,84,44)	RS1/16SS121J	B
R 511	(B,41,46) (Except F,G)	RS1/16SS102J		R 679	(B,105,46)	RS1/16SS101J	
R 513	(B,29,33) (Except F,G)	RS1/16SS102J		R 680	(B,102,45)	RS1/16SS101J	
R 518	(A,75,71)	RS1/8SQ0R0J		R 682	(A,106,41)	RS1/16SS680J	
R 602	(B,77,40) (G)	RS1/16SS471J		R 684	(B,99,14)	RS1/16SS102J	
R 604	(A,74,41) (G)	RS1/16SS473J		R 685	(A,103,50)	RS1/16SS102J	
R 605	(B,85,44)	RS1/16SS121J		R 686	(A,106,25)	RS1/16SS681J	
R 607	(B,113,16)	RS1/16SS104J		R 687	(A,107,24)	RS1/16SS0R0J	
R 608	(B,103,34)	RS1/16SS104J		R 688	(A,72,27)	RS1/16SS0R0J	
R 609	(B,103,35)	RS1/16SS104J		R 689	(B,105,22)	RS1/16SS101J	
R 610	(A,105,32)	RS1/16SS100J		R 690	(A,104,23)	RS1/16SS0R0J	
R 611	(B,99,28)	RS1/16SS104J		R 691	(B,102,28)	RS1/16SS0R0J	C
R 612	(B,113,17)	RS1/16SS102J		R 693	(B,118,15)	RS1/16SS102J	
R 613	(A,105,35)	RS1/16SS473J		R 694	(B,103,33)	RS1/16SS104J	
R 614	(A,99,54)	RS1/16SS681J		R 695	(B,103,36)	RS1/16SS104J	
R 615	(A,97,50)	RS1/16SS681J		R 697	(A,106,39)	RS1/16SS471J	
R 616	(B,102,26)	RS1/16SS101J		R 698	(A,107,42)	RS1/16SS473J	
R 617	(B,102,25)	RS1/16SS101J		R 699	(A,77,49)	RS1/16SS102J	
R 618	(A,105,46)	RS1/16SS473J		R 700	(A,72,50)	RS1/16SS472J	
R 620	(B,103,23)	RS1/16SS472J		R 701	(A,77,48)	RS1/16SS102J	
R 621	(B,103,22)	RS1/16SS471J		R 702	(A,66,41)	RS1/16SS473J	
R 622	(A,101,51)	RS1/16SS473J		R 703	(A,74,48)	RS1/16SS102J	
R 623	(A,100,51)	RS1/16SS473J		R 704	(A,73,47)	RS1/16SS473J	D
R 624	(A,99,51)	RS1/16SS473J		R 705	(A,74,49)	RS1/16SS473J	
R 625	(B,103,27)	RS1/16SS182J		R 706	(B,96,53)	RS1/16SS473J	
R 630	(B,94,20)	RS1/16SS102J		R 707	(A,95,50)	RS1/16SS101J	
R 632	(B,104,27)	RS1/16SS182J		R 708	(A,94,52)	RS1/16SS681J	
R 633	(B,102,41)	RS1/16SS0R0J		R 709	(B,92,41)	RS1/16SS222J	
R 634	(A,73,46)	RS1/16SS0R0J		R 710	(B,91,43)	RS1/16SS101J	
R 637	(B,92,16)	RS1/16SS101J		R 711	(A,92,52)	RS1/16SS101J	
R 639	(B,104,46)	RS1/16SS182J		R 712	(A,85,53)	RS1/16SS221J	
R 640	(A,88,51)	RS1/16SS0R0J		R 713	(A,83,54)	RS1/16SS182J	
R 641	(A,93,54)	RS1/16SS101J		R 714	(A,84,53)	RS1/16SS221J	
R 642	(A,86,51) (A,B)	RS1/16SS102J		R 715	(A,83,53)	RS1/16SS182J	E
R 645	(B,102,47)	RS1/16SS182J		R 716	(B,81,24) (B,D)	RS1/16SS104J	
R 646	(B,79,20)	RS1/16SS104J		R 717	(A,82,20) (A,C,E,F,G)	RS1/16SS104J	
R 647	(A,108,39)	RS1/16SS473J		R 720	(A,90,51) (Except F,G)	RS1/16SS101J	
R 648	(A,73,33)	RS1/16SS104J		R 722	(B,83,44)	RS1/16SS121J	
R 649	(A,75,33) (Except F,G)	RS1/16SS104J		R 723	(A,83,50) (Except F,G)	RS1/16SS104J	
R 651	(B,72,33)	RS1/16SS104J		R 724	(A,80,50) (Except F,G)	RS1/16SS102J	
R 654	(A,74,25)	RS1/16SS101J		R 725	(A,74,50)	RS1/16SS102J	
R 655	(A,73,25)	RS1/16SS101J		R 726	(A,74,45)	RS1/16SS471J	
R 656	(A,74,28)	RS1/16SS0R0J		R 727	(B,77,45)	RS1/16SS104J	
R 657	(B,98,42)	RS1/16SS103J		R 728	(A,73,44) (Except F,G)	RS1/16SS101J	F
R 659	(B,73,29)	RS1/16SS104J		R 729	(A,75,44) (Except F,G)	RS1/16SS101J	
R 660	(A,92,54)	RS1/16SS101J		R 730	(B,85,24) (A,B,F,G)	RS1/16SS104J	
R 661	(B,86,45) (Except F,G)	RS1/16SS681J		R 733	(B,86,23) (A,E,F,G)	RS1/16SS104J	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	R 738 (A,69,38)	RS1/16SS104J	R 850 (B,64,62)	RS1/16SS101J
	R 739 (A,69,40)	RS1/16SS473J	R 851 (B,65,60)	RS1/16SS101J
A	R 740 (B,92,23) (Except F,G)	RS1/16SS103J	R 852 (B,65,59)	RS1/16SS101J
	R 740 (B,92,23) (F,G)	RS1/16SS1002D	R 853 (B,63,57)	RS1/16SS101J
	R 741 (B,87,22) (B,C,D)	RS1/16SS104J	R 854 (B,65,55)	RS1/16SS101J
	R 746 (B,75,19) (A,B)	RS1/16SS0R0J	R 855 (B,65,54)	RS1/16SS101J
	R 748 (B,87,23) (C,D,E)	RS1/16SS104J	R 859 (B,82,56)	RS1/16SS75R0D
	R 750 (B,87,24)	RS1/16SS0R0J	R 901 (A,49,30)	RS1/16SS0R0J
	R 751 (B,85,33)	RS1/16SS0R0J	R 910 (B,58,31)	RS1/16SS104J
	R 752 (B,74,34)	RS1/16SS223J	R 920 (B,51,16) (A,B,G)	RS1/16SS101J
	R 754 (B,76,33)	RS1/16SS223J	R 921 (B,50,14) (A,B,G)	RS1/16SS101J
	R 755 (B,112,16)	RS1/16SS0R0J	R 922 (B,50,16) (A,B,G)	RS1/16SS101J
	R 757 (A,72,25)	RS1/16SS101J	R 923 (A,49,28)	RS1/16SS0R0J
B	R 758 (B,81,30)	RS1/16SS471J	R 944 (B,33,24)	RS1/10SR0R0J
	R 761 (A,75,23)	RS1/16SS101J	R 945 (B,56,14)	RS1/16SS0R0J
	R 762 (A,75,25)	RS1/16SS101J	R 946 (B,56,16)	RS1/16SS0R0J
	R 763 (A,77,22)	RS1/16SS101J	R 953 (B,38,11)	RS1/10SR0R0J
	R 767 (B,105,24)	RS1/16SS105J	R 954 (B,33,26)	RS1/10SR0R0J
	R 769 (B,100,43)	RS1/16SS104J	R 1007 (B,154,73)	RS1/16SS473J
	R 772 (A,84,20)	RS1/16SS471J	R 1008 (B,153,73)	RS1/16SS473J
	R 773 (A,85,20)	RS1/16SS471J	R 1009 (B,144,73)	RS1/16SS473J
	R 774 (B,85,23)	RS1/16SS104J	R 1010 (B,143,73)	RS1/16SS473J
	R 775 (A,71,40)	RS1/16SS473J	R 1011 (B,146,101)	RS1/16SS473J
	R 776 (B,80,23)	RS1/16SS104J	R 1012 (B,147,101)	RS1/16SS473J
C	R 777 (B,80,16)	RS1/16SS101J	R 1013 (B,157,101)	RS1/16SS473J
	R 779 (B,90,56)	RS1/16SS472J	R 1014 (B,158,101)	RS1/16SS473J
	R 780 (B,96,17) (C,D,E)	RS1/16SS0R0J	R 1015 (B,148,71)	RS1/16SS0R0J
	R 782 (B,93,34)	RS1/16SS1002D	R 1016 (B,152,103)	RS1/16SS0R0J
	R 787 (B,82,29)	RS1/16SS104J	R 1017 (B,145,71)	RS1/16SS473J
	R 789 (B,108,20)	RS1/16SS473J	R 1018 (B,154,103)	RS1/16SS473J
	R 790 (B,109,20)	RS1/16SS473J	R 1019 (B,152,71)	RS1/16SS473J
	R 792 (B,106,20)	RS1/16SS103J	R 1020 (B,150,103)	RS1/16SS473J
	R 793 (B,79,28)	RS1/16SS104J	R 1023 (B,143,75)	RS1/16SS473J
	R 796 (B,93,35)	RS1/16SS1001D	R 1024 (B,158,99)	RS1/16SS473J
	R 797 (B,95,26) (Except F,G)	RS1/16SS102J	R 1025 (B,154,75)	RS1/16SS473J
D	R 797 (B,95,26) (F,G)	RS1/16SS1001D	R 1026 (B,146,99)	RS1/16SS473J
	R 798 (A,108,61)	RS1/10SR0R0J	R 1027 (B,145,80)	RS1/16SS0R0J
	R 800 (B,100,46)	RS1/16SS101J	R 1028 (B,155,95)	RS1/16SS0R0J
	R 801 (A,73,63)	RS1/16SS0R0J	R 1040 (B,151,93)	RS1/16SS0R0J
	R 802 (A,75,63)	RS1/16SS0R0J	R 1044 (B,151,82)	RS1/16SS473J
	R 803 (B,78,70)	RS1/16SS101J	R 1047 (B,147,88)	RS1/16SS473J
	R 804 (B,78,71)	RS1/16SS101J	R 1048 (B,146,88)	RS1/16SS473J
	R 805 (B,81,67)	RS1/16SS101J	R 1057 (B,156,93)	RS1/16SS0R0J
	R 806 (B,83,66)	RS1/16SS101J	R 1058 (B,151,83)	RS1/16SS473J
	R 811 (B,64,56)	RS1/16SS223J	R 1061 (B,153,78)	RS1/10SR0R0J
E	R 812 (B,64,54)	RS1/16SS223J	R 1062 (B,143,78)	RS1/10SR0R0J
	R 813 (B,63,61)	RS1/16SS223J	R 1063 (B,147,96)	RS1/10SR0R0J
	R 814 (B,63,59)	RS1/16SS223J	R 1064 (B,157,96)	RS1/10SR0R0J
	R 817 (B,68,74)	RS1/16SS223J	R 1065 (B,154,68)	RS1/10SR0R0J
	R 818 (B,65,69)	RS1/16SS223J	R 1066 (B,144,67)	RS1/10SR0R0J
	R 821 (B,76,55) (C,D,E,F,G)	RS1/16SS470J	R 1067 (B,151,65)	RS1/10SR0R0J
	R 823 (B,73,54)	RS1/16SS104J	R 1068 (B,146,65)	RS1/10SR0R0J
	R 824 (B,81,69)	RS1/16SS75R0D	R 1101 (B,130,60)	RS1/16SS473J
	R 825 (B,82,67)	RS1/16SS75R0D	R 1102 (B,136,62)	RS1/16SS222J
	R 827 (B,83,58) (Except G)	RS1/16SS2200D	R 1103 (B,126,53)	RS1/16SS473J
	R 829 (B,77,55)	RS1/16SS750J	R 1104 (B,140,58)	RS1/16SS220J
F	R 831 (B,84,64)	RS1/16SS104J	R 1105 (B,139,47)	RS1/16SS101J
	R 844 (B,70,74)	RS1/16SS101J	R 1106 (B,138,47)	RS1/16SS470J
	R 845 (B,66,73)	RS1/16SS101J	R 1107 (B,144,56)	RS1/16SS101J
	R 846 (B,67,69)	RS1/16SS101J	R 1109 (B,136,43)	RS1/8SQ102J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 1110	(B,137,47)	RS1/8SQ102J		R 1445	(B,47,87) (Except F,G)	RS1/16SS473J	
R 1111	(B,135,47)	RS1/8SQ102J		R 1447	(B,55,90) (Except F,G)	RS1/16SS0R0J	A
R 1112	(B,141,58)	RS1/16SS220J		R 1448	(B,55,88) (Except F,G)	RS1/16SS132J	
R 1113	(B,144,58)	RS1/8SQ220J		R 1449	(B,53,91) (Except F,G)	RS1/16SS751J	
R 1115	(B,131,48)	RS1/16SS0R0J		R 1453	(B,60,86) (Except F,G)	RS1/16SS0R0J	
R 1119	(B,142,56)	RS1/16SS104J		R 1502	(A,51,68)	RS1/16SS0R0J	
R 1120	(B,128,61)	RS1/8SQ222J		R 1503	(A,40,70)	RS1/16SS0R0J	
R 1121	(B,126,61)	RS1/8SQ222J		R 1505	(A,50,62)	RS1/16SS103J	
R 1122	(B,125,58)	RS1/16SS472J		R 1507	(A,49,62)	RS1/16SS103J	
R 1123	(B,125,56)	RS1/16SS472J		R 1508	(A,49,58)	RS1/16SS472J	
R 1124	(A,122,59)	RS1/8SQ0R0J		R 1509	(A,48,56)	RS1/16SS472J	
R 1205	(A,135,47)	RS1/10SR470J		R 1510	(A,48,60)	RS1/16SS101J	
R 1206	(A,135,49)	RS1/10SR470J		R 1511	(A,47,60)	RS1/16SS101J	
R 1207	(B,142,49)	RS1/10SR820J		R 1512	(A,46,57)	RS1/16SS0R0J	B
R 1208	(B,143,52)	RS1/10SR470J		R 1513	(A,36,72)	RS1/16SS391J	
R 1209	(B,142,53)	RS1/10SR470J		R 1514	(B,29,102)	RS1/16SS105J	
R 1210	(A,135,50)	RS1/10SR470J		R 1515	(B,29,98)	RS1/16SS105J	
R 1212	(B,117,45)	RS1/8SQ821J		R 1516	(A,43,57) (Except F,G)	RS1/16SS0R0J	
R 1213	(B,121,47)	RS1/8SQ821J		R 1517	(A,43,59) (Except F,G)	RS1/16SS0R0J	
R 1214	(B,114,57)	RS1/10SR821J		R 1518	(A,42,57) (Except F,G)	RS1/16SS0R0J	
R 1215	(B,115,55)	RS1/10SR821J		R 1519	(A,41,59) (Except F,G)	RS1/16SS0R0J	
R 1217	(B,116,65)	RS1/10SR821J		R 1520	(A,49,66)	RS1/16SS0R0J	
R 1218	(A,125,49)	RS1/16SS0R0J		R 1522	(A,31,60) (A,B)	RS1/16SS182J	
R 1219	(A,125,48)	RS1/16SS0R0J		R 1523	(A,33,58) (A,B)	RS1/16SS332J	
R 1220	(B,115,50)	RS1/16SS0R0J		R 1524	(A,30,51) (A,B)	RS1/16SS121J	C
R 1221	(B,120,54)	RS1/16SS0R0J		R 1525	(A,33,56) (A,B)	RS1/16SS102J	
R 1222	(B,117,60)	RS1/16SS0R0J		R 1526	(A,40,63) (A,B)	RS1/16SS0R0J	
R 1301	(A,80,79)	RS1/10SR0R0J		R 1527	(A,38,61) (A,B)	RS1/16SS0R0J	
R 1305	(B,94,119)	RS1/8SQ362J		R 1528	(A,40,57) (A,B)	RS1/16SS182J	
R 1306	(B,91,118)	RS1/8SQ362J		R 1529	(A,35,57) (A,B)	RS1/16SS332J	
R 1307	(B,98,123)	RS1/8SQ362J		R 1530	(A,40,54) (A,B)	RS1/16SS121J	
R 1308	(B,88,118)	RS1/8SQ362J		R 1531	(A,34,56) (A,B)	RS1/16SS102J	
R 1309	(B,98,120)	RS1/16SS562J		R 1532	(A,35,63) (A,B)	RS1/16SS0R0J	
R 1310	(B,91,120)	RS1/16SS562J		R 1533	(A,35,60) (A,B)	RS1/16SS0R0J	
R 1311	(B,98,121)	RS1/16SS562J		R 1534	(A,33,63) (A,B)	RS1/16SS0R0J	
R 1312	(B,90,119)	RS1/16SS562J		R 1535	(A,33,62) (A,B)	RS1/16SS0R0J	D
R 1402	(B,32,100)	RS1/16SS0R0J		R 1536	(A,33,54) (A,B)	RS1/16SS0R0J	
R 1403	(A,46,92) (Except F,G)	RS1/16SS103J		R 1537	(A,34,54) (A,B)	RS1/16SS0R0J	
R 1404	(A,43,90) (Except F,G)	RS1/4SA181J		R 1538	(A,34,59) (A,B)	RS1/16SS0R0J	
R 1405	(A,44,87) (Except F,G)	RS1/10SR0R0J		R 1539	(A,40,59) (A,B)	RS1/16SS0R0J	
R 1406	(A,54,93) (Except F,G)	RS1/10SR220J		R 1540	(A,45,52)	RS1/10SR0R0J	
R 1407	(A,54,74) (Except F,G)	RS1/16SS101J		R 1542	(A,43,52)	RS1/10SR0R0J	
R 1408	(A,43,84) (Except F,G)	RS1/16SS0R0J		R 1543	(A,33,67)	RS1/10SR0R0J	
R 1409	(A,55,73) (Except F,G)	RS1/16SS0R0J		R 1545	(A,48,58)	RS1/16SS0R0J	
R 1410	(A,40,83) (F,G)	RS1/16SS0R0J		R 1546	(A,47,58)	RS1/16SS0R0J	
R 1413	(B,37,91) (F,G)	RS1/16SS0R0J		R 1547	(A,51,56)	RS1/8SQ0R0J	
R 1415	(B,26,103)	RS1/16SS0R0J		R 1548	(A,34,67)	RS1/10SR0R0J	E
R 1417	(B,51,87) (Except F,G)	RS1/16SS472J		R 1549	(B,52,63)	RS1/16SS0R0J	
R 1418	(B,53,84) (Except F,G)	RS1/16SS271J		R 1550	(A,45,69)	RS1/16SS0R0J	
R 1420	(B,53,88) (Except F,G)	RS1/16SS220J		R 1551	(A,44,69)	RS1/16SS0R0J	
R 1421	(B,53,90) (Except F,G)	RS1/16SS472J		R 1552	(A,26,50) (A,B)	RS1/16SS0R0J	
R 1422	(B,55,86) (Except F,G)	RS1/16SS223J		R 1602	(A,42,38) (Except F,G)	RS1/16SS0R0J	
R 1423	(B,54,84) (Except F,G)	RS1/16SS474J		R 1603	(A,44,49) (Except F,G)	RS1/16SS0R0J	
R 1425	(B,59,87) (Except F,G)	RS1/16SS681J		R 1604	(A,35,38) (Except F,G)	RS1/16SS103J	
R 1426	(B,62,92) (Except F,G)	RS1/16SS271J		R 1606	(A,33,40) (Except F,G)	RS1/16SS103J	
R 1427	(B,60,92) (Except F,G)	RS1/16SS561J		R 1608	(A,32,39) (Except F,G)	RS1/16SS472J	
R 1437	(B,39,91) (Except F,G)	RS1/16SS0R0J		R 1609	(A,31,40) (Except F,G)	RS1/16SS472J	F
R 1439	(A,54,83) (Except F,G)	RS1/16SS0R0J		R 1610	(A,34,41) (Except F,G)	RS1/16SS101J	
R 1441	(B,55,92) (Except F,G)	RS1/16SS471J		R 1611	(A,33,42) (Except F,G)	RS1/16SS101J	
R 1444	(B,48,88) (Except F,G)	RS1/10SR821J		R 1612	(A,30,40) (Except F,G)	RS1/16SS0R0J	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	R 1613 (A,40,41) (Except F,G)	RS1/16SS0R0J	R 2111 (A,163,106)	RS1/16SS0R0J
A	R 1615 (A,32,41) (Except F,G)	RS1/16SS0R0J	R 2112 (A,164,104)	RS1/16SS0R0J
	R 1616 (A,32,43) (Except F,G)	RS1/16SS0R0J	R 2113 (A,163,102)	RS1/16SS0R0J
	R 1617 (A,37,30) (Except F,G)	RS1/8SQ0R0J	R 2201 (A,79,81)	RS1/16SS820J
	R 1701 (B,25,92) (C,D,E)	RS1/16SS103J	R 2202 (A,85,83)	RS1/16SS820J
	R 1702 (B,27,84) (C,D,E)	RS1/4SA471J	R 2203 (A,80,87)	RS1/16SS820J
	R 1703 (B,28,81) (C,D,E)	RS1/4SA471J	R 2204 (A,84,87)	RS1/16SS820J
	R 1704 (B,26,82) (C,D,E)	RS1/16SS1003D	R 2205 (A,76,82)	RS1/16SS223J
	R 1705 (B,24,82) (C,D,E)	RS1/16SS1802D	R 2206 (A,85,82)	RS1/16SS223J
	R 1706 (A,25,79) (C,D,E)	RS1/16SS221J	R 2207 (A,80,86)	RS1/16SS223J
	R 1709 (A,25,54) (A,B)	RAB4CQ221J	R 2208 (A,83,86)	RS1/16SS223J
B	R 1715 (A,25,40) (A,B)	RAB4CQ0R0J	R 2209 (A,79,83)	RS1/16SS472J
	R 1716 (B,25,82) (C,D,E)	RS1/16SS0R0J	R 2210 (A,77,83)	RS1/16SS472J
	R 1717 (B,35,81) (C,D,E)	RS1/16SS911J	R 2211 (A,83,84)	RS1/16SS472J
	R 1724 (A,13,83)	RS1/10SR0R0J	R 2212 (A,82,84)	RS1/16SS472J
	R 1725 (A,15,83)	RS1/10SR0R0J	R 2213 (B,170,105)	RS1/16SS821J
	R 1729 (A,26,24) (A,B)	RAB4CQ0R0J	R 2214 (B,172,101)	RS1/16SS472J
	R 1730 (A,27,26) (A,B,F,G)	RS1/16SS103J	R 2215 (B,170,106)	RS1/16SS223J
	R 1732 (A,46,113)	RS1/10SR0R0J	R 2216 (B,172,102)	RS1/16SS472J
	R 1733 (A,45,113)	RS1/10SR0R0J	R 2217 (B,173,106)	RS1/16SS223J
	R 1734 (A,18,24)	RS1/10SR0R0J	R 2218 (B,175,107)	RS1/16SS821J
C	R 1735 (A,20,24)	RS1/10SR0R0J	R 2225 (B,26,108)	RS1/10SR0R0J
	R 1736 (B,39,65)	RS1/10SR0R0J	R 2226 (B,32,109)	RS1/10SR0R0J
	R 1737 (B,40,64)	RS1/10SR0R0J	R 2227 (B,33,129)	RS1/16SS0R0J
	R 1746 (B,22,13)	RS1/10SR0R0J	R 2228 (B,35,129)	RS1/16SS0R0J
	R 1747 (B,24,13)	RS1/10SR0R0J	R 2229 (B,29,130)	RS1/16SS0R0J
	R 1760 (B,60,31)	RS1/10SR0R0J	R 2230 (B,46,117)	RS1/10SR0R0J
	R 1761 (B,62,31)	RS1/10SR0R0J	R 2231 (B,42,117)	RS1/10SR0R0J
	R 1765 (A,25,76) (C,D,E)	RS1/16SS221J	R 2232 (B,129,90)	RS1/16SS820J
	R 1766 (A,25,77) (C,D,E)	RS1/16SS221J	R 2233 (B,134,95)	RS1/16SS820J
	R 1767 (A,25,78) (C,D,E)	RS1/16SS221J	R 2234 (B,131,91)	RS1/16SS223J
D	R 1801 (B,155,22)	RS1/16SS102J	R 2235 (B,131,95)	RS1/16SS223J
	R 1802 (A,153,12)	RS1/16SS0R0J	R 2236 (B,134,93)	RS1/16SS472J
	R 1803 (A,151,12)	RS1/16SS0R0J	R 2237 (B,128,96)	RS1/16SS472J
	R 1804 (A,149,12)	RS1/16SS0R0J	R 2265 (A,111,89)	RS1/4SA0R0J
	R 1805 (B,159,13)	RS1/16SS471J	R 2266 (A,94,96)	RS1/4SA0R0J
	R 1806 (A,159,13)	RS1/16SS221J	R 2304 (B,150,122) (A,C,E)	RS1/16SS0R0J
	R 1807 (A,158,12)	RS1/16SS221J	R 2305 (B,152,122) (B,D,F,G)	RS1/16SS0R0J
	R 1808 (A,157,15)	RS1/16SS221J	R 2308 (B,120,132) (A,B)	RS1/16SS0R0J
	R 1809 (B,155,10)	RS1/16SS221J	R 2309 (B,121,132) (C,D)	RS1/16SS471J
	R 1810 (A,155,12)	RS1/16SS221J	R 2310 (B,122,132) (E)	RS1/16SS0R0J
E	R 1811 (A,147,12)	RS1/16SS0R0J	R 2316 (B,128,132) (G)	RS1/16SS0R0J
	R 1814 (B,163,18)	RS1/10SR0R0J	R 2317 (B,129,132) (F)	RS1/16SS471J
	R 1815 (A,165,20)	RS1/4SA0R0J	R 2320 (A,105,28) (G)	RS1/16SS0R0J
	R 1816 (B,144,14)	RS1/16SS0R0J	R 2321 (A,75,40) (G)	RS1/16SS104J
	R 1822 (B,155,18)	RS1/16SS473J	R 2333 (B,86,27) (F,G)	RS1/16SS6800D
	R 1823 (B,157,15)	RS1/8SQ561J	R 2335 (B,94,38) (F,G)	RS1/16SS6800D
	R 1826 (B,139,16)	RS1/16SS0R0J	R 2336 (A,105,37) (F,G)	RS1/16SS0R0J
	R 1827 (A,156,22)	RS1/10SR103J	R 2338 (B,95,38) (F,G)	RS1/16SS8201D
	R 1828 (A,151,18)	RS1/16SS683J	R 2339 (A,114,32) (F,G)	RS1/16SS8201D
	R 1829 (A,151,20)	RS1/16SS683J	R 2341 (B,99,38)	RS1/16SS101J
	R 1838 (B,143,27) (G)	RS1/16SS0R0J	R 2342 (B,100,38)	RS1/16SS101J
	R 1839 (B,142,25) (G)	RS1/16SS0R0J	R 2343 (B,101,37)	RS1/16SS101J
	R 1901 (A,131,41)	RS1/16SS303J	R 2344 (B,106,45)	RS1/16SS101J
	R 1904 (B,133,36)	RS1/16SS471J	R 2347 (A,81,20)	RS1/16SS101J
	R 1905 (B,131,38)	RS1/16SS681J		
F	R 1906 (B,127,44)	RS1/10SR103J	CAPACITORS	
	R 2105 (A,154,106)	RS1/10SR102J	C 101 (B,129,87)	CKSRYB104K50
	R 2107 (B,149,111)	RS1/16SS103J	C 104 (A,119,89) 15 000 uF/16 V	CCH1980
	R 2110 (A,164,107)	RS1/16SS0R0J		

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 106	(B,66,110)	CKSRYB105K10		C 606	(A,105,25)	CKSSYB104K10		
C 108	(B,52,109)	CKSSYB102K50		C 607	(B,103,29)	CKSSYB104K10		
C 110	(B,103,119)	CKSSYB104K16		C 608	(B,98,32)	CCG1331		
C 113	(A,59,108)	CKSSYB104K10		C 611	(B,87,25)	CKSSYB104K10		A
C 114	(A,63,104)	CKSSYB102K50		C 612	(A,88,50)	CKSSYB104K10		
C 115	(A,59,112)	CKSSYB104K16		C 613	(A,75,29)	CKSSYB104K10		
C 116	(A,59,113)	CKSSYB123K16		C 615	(A,105,52)	CKSSYB104K10		
C 117	(A,56,115)	CKSRYB823K16		C 616	(A,105,54) 10 uF	CCG1192		
C 201	(B,95,122)	CKSQYB105K25		C 618	(B,103,41)	CCSSCH101J50		
C 202	(B,93,122)	CKSQYB105K25		C 620	(A,70,42)	CKSSYB104K10		
C 203	(B,101,122)	CKSQYB105K25		C 625	(B,117,13)	CKSSYB102K50		
C 204	(B,90,123)	CKSQYB105K25		C 633	(B,94,29)	CKSSYB104K10		
C 205	(A,104,125) 4.7 uF	CCG1331		C 639	(B,94,28)	CKSSYB104K10		
C 206	(A,92,122)	XCEVW100M16		C 801	(B,81,58)	CKSSYB104K10		
C 207	(B,119,127)	CKSRYB104K16		C 802	(B,80,55)	CKSSYB104K10		B
C 212	(B,82,113) 4.7 uF	CCG1201		C 803	(A,71,67)	CKSRYB105K10		
C 216	(A,103,111) 4 700 uF/16 V	CCH2085		C 804	(B,70,70)	CKSRYB105K10		
C 217	(A,69,112)	XCEVW101M16		C 805	(B,71,70)	CKSRYB105K10		
C 218	(A,110,125)	CKSRYB104K50		C 806	(B,73,70)	CKSRYB105K10		
C 219	(B,89,115) 10 uF	CCG1192		C 807	(B,77,53) (Except A,B)	CCSSCH271J50		
C 220	(A,90,126) 0.1 uF	CCG1357		C 810	(A,72,66)	CKSSYB104K10		
C 312	(A,171,85)	XCEVW101M16		C 811	(B,70,67)	CKSRYB105K10		
C 313	(B,169,90)	CKSRYB105K16		C 812	(B,80,68)	CKSSYB104K10		
C 314	(B,161,36)	CKSSYB104K10		C 813	(B,66,71)	CKSRYB105K10		
C 317	(B,145,61)	CKSQYB104K25		C 814	(B,81,66)	CKSSYB104K10		C
C 318	(B,150,56)	CKSQYB104K25		C 815	(B,67,70)	CKSRYB105K10		
C 320	(A,150,56)	XCEVW101M16		C 816	(B,81,65)	CKSSYB104K10		
C 321	(A,154,29)	CKSSYB102K50		C 817	(B,66,67)	CKSQYB105K16		
C 322	(A,137,43)	CKSRYB105K10		C 818	(B,81,64)	CKSSYB104K10		
C 323	(A,143,40)	XCEVW101M16		C 819	(B,66,66)	CKSQYB105K16		
C 324	(A,152,32)	CKSSYB104K10		C 820	(B,81,63)	CKSSYB104K10		
C 327	(A,149,45)	CKSSYB104K16		C 821	(B,66,64)	CKSQYB105K16		
C 328	(A,152,48) 0.1 uF	CCG1266		C 822	(B,82,62)	CKSSYB104K10		
C 329	(A,155,45)	CKSSYB102K50		C 823	(B,67,62)	CKSRYB105K10		
C 335	(B,164,43)	CCSSCH101J50		C 824	(B,82,61)	CKSSYB104K10		
C 336	(B,171,46) 10 uF	CCG1236		C 825	(B,67,61)	CKSRYB105K10		D
C 337	(B,167,54) 10 uF	CCG1236		C 826	(B,82,60)	CKSSYB104K10		
C 339	(B,171,48) 10 uF	CCG1236		C 827	(B,67,59)	CKSRYB105K10		
C 342	(B,156,42)	CKSSYB104K16		C 828	(B,82,59)	CKSSYB104K10		
C 343	(B,154,51)	CKSRYB104K50		C 829	(B,67,58)	CKSRYB105K10		
C 344	(B,147,61)	CKSRYB105K10		C 830	(B,67,57)	CKSRYB105K10		
C 345	(B,152,56)	CKSRYB105K10		C 831	(B,68,55)	CKSRYB105K10		
C 347	(B,127,35)	CKSSYB104K10		C 832	(B,79,57)	CKSSYB104K10		
C 349	(A,152,40)	XCEVW470M16		C 833	(A,76,58) 10 uF	CCG1192		
C 502	(B,30,46) (Except F,G)	CKSRYB105K10		C 834	(B,74,54)	CKSSYB104K10		
C 503	(B,29,57) 4.7 uF(Except F,G)	CCG1201		C 835	(A,76,56)	CKSSYB104K10		
C 504	(B,31,47) (Except F,G)	CKSRYB105K10		C 836	(A,73,61)	CKSQYB104K25		E
C 505	(B,38,57) 4.7 uF(Except F,G)	CCG1201		C 837	(A,78,61)	CKSQYB104K25		
C 506	(A,33,82) (C,D,E)	CKSRYB105K10		C 838	(A,73,58) 10 uF	CCG1192		
C 507	(A,26,82) (C,D,E)	CKSSYB104K16		C 839	(A,78,60) 10 uF	CCG1192		
C 508	(A,28,86) (C,D,E)	CKSRYB105K10		C 840	(B,78,68)	CKSSYB104K10		
C 510	(B,42,51)	CKSRYB105K10		C 841	(B,74,70)	CKSRYB105K10		
C 511	(B,51,51)	CKSRYB105K10		C 842	(B,75,70)	CKSRYB105K10		
C 513	(B,43,46) (Except F,G)	CKSRYB105K10		C 843	(B,77,70)	CKSRYB105K10		
C 514	(B,43,38) (Except F,G)	CKSRYB105K10		C 901	(A,47,27)	CKSRYB105K10		
C 516	(B,31,55) (Except F,G)	CKSSYB104K16		C 902	(B,43,27)	CKSRYB105K10		
C 602	(B,116,22)	CKSRYB105K10		C 903	(B,40,28)	CKSRYB105K10		
C 603	(A,106,31)	CCSRCH220J50		C 904	(B,43,28)	CKSRYB105K10		F
C 604	(A,105,30)	CCSSCH220J50		C 905	(B,40,29) (Except D,G)	CKSRYB105K10		
C 605	(A,106,44)	CKSSYB104K10		C 906	(B,43,30) (Except D,G)	CKSRYB105K10		

1

Circuit Symbol and No.

C 907 (B,40,31) (Except D,G)
 C 908 (A,48,27)
 C 909 (B,47,21)

2

Part No.

CKSRYB105K10
 CKSSYB104K10
 CKSRYB105K10

3

Circuit Symbol and No.

C 1115 (A,129,57) 10 uF
 C 1116 (A,142,53) 10 uF
 C 1117 (B,127,56) 10 uF

4

Part No.

CCG1192
 CCG1192
 CCG1192

A

C 910 (B,48,18)
 C 911 (B,49,21)
 C 912 (B,50,18) (A,B,G)
 C 913 (B,50,21) (A,B,G)
 C 914 (B,51,18) (A,B,G)

CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10

C 1118 (B,128,64) 10 uF
 C 1119 (B,126,64) 10 uF
 C 1120 (A,140,53)
 C 1123 (B,139,60)
 C 1125 (B,140,61)

CCG1192
 CCG1192
 CKSQYB104K25
 CCSSCH121J50
 CCSSCH121J50

C 915 (A,56,32) 10 uF
 C 916 (B,57,31)
 C 917 (A,55,31)
 C 918 (A,53,27)
 C 919 (A,53,30)

CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CKSQYB104K25
 CKSQYB104K25

C 1126 (B,140,63)
 C 1201 (A,123,46)
 C 1202 (A,124,46) 10 uF
 C 1205 (B,116,49) 10 uF
 C 1207 (B,141,49)

CCSSCH121J50
 CKSSYB104K16
 CCG1192
 CCG1192
 CCSSCH470J50

B

C 920 (A,51,27) 10 uF
 C 921 (A,51,30) 10 uF
 C 927 (B,54,18)
 C 928 (B,55,21)
 C 939 (B,52,21)

CCG1192
 CCG1192
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10

C 1208 (B,146,52)
 C 1209 (B,144,53)
 C 1210 (A,121,57)
 C 1211 (A,123,57) 10 uF
 C 1216 (A,120,66)

CCSSCH121J50
 CCSSCH121J50
 CKSSYB104K16
 CCG1192
 CKSSYB104K16

C 940 (B,53,18)
 C 941 (B,53,21)
 C 1003 (B,152,68)
 C 1004 (B,150,68)
 C 1005 (B,147,68)

CKSRYB105K10
 CKSRYB105K10
 CKSQYB105K16
 CKSQYB105K16
 CKSQYB105K16

C 1217 (A,121,67) 10 uF
 C 1222 (B,119,46)
 C 1223 (B,121,49)
 C 1224 (B,109,58)
 C 1225 (B,113,55)

CCG1192
 CKSRYB182K50
 CKSRYB182K50
 CKSRYB182K50
 CKSRYB182K50

C

C 1006 (B,145,68)
 C 1007 (B,149,106)
 C 1008 (B,151,106)
 C 1009 (B,153,106)
 C 1010 (B,155,106)

CKSQYB105K16
 CKSQYB105K16
 CKSQYB105K16
 CKSQYB105K16
 CKSQYB105K16

C 1227 (B,117,68)
 C 1229 (A,115,49)
 C 1230 (A,111,57) 10 uF
 C 1231 (A,112,59)
 C 1232 (A,110,65) 10 uF

CKSRYB182K50
 CKSSYB104K16
 CCG1192
 CKSSYB104K16
 CCG1192

C 1011 (B,145,72)
 C 1012 (B,154,102)
 C 1013 (B,152,72)
 C 1014 (B,150,102)
 C 1015 (B,144,75)

CCSSCH330J50
 CCSSCH330J50
 CCSSCH330J50
 CCSSCH330J50
 CCSSCH330J50

C 1233 (A,114,69)
 C 1301 (B,86,90) 2.2 uF
 C 1302 (B,86,88) 2.2 uF
 C 1303 (B,93,82) 10 uF
 C 1304 (B,87,81) 10 uF

CKSSYB104K16
 CCG1218
 CCG1218
 CCG1192
 CCG1192

D

C 1016 (B,157,99)
 C 1017 (B,153,75)
 C 1018 (B,147,99)
 C 1019 (B,145,78)
 C 1020 (B,155,96)

CCSSCH330J50
 CCSSCH330J50
 CCSSCH330J50
 CKSRYB105K16
 CKSRYB105K16

C 1305 (B,85,93)
 C 1306 (B,86,91)
 C 1307 (B,73,93)
 C 1308 (B,73,92)
 C 1314 (A,73,99)

CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 XCEVW100M16

C 1021 (B,145,77)
 C 1022 (B,155,98)
 C 1028 (B,151,90)
 C 1039 (B,156,90) 10 uF
 C 1040 (B,150,81) 10 uF

CKSSYB104K16
 CKSSYB104K16
 CKSSYB104K16
 CCG1234
 CCG1192

C 1315 (B,73,90) 2.2 uF
 C 1317 (A,73,92)
 C 1319 (B,89,81)
 C 1321 (B,85,81)
 C 1322 (A,85,76)

CCG1218
 XCEVW100M16
 CKSQYB104K25
 CKSQYB104K25
 XCEVW470M16

E

C 1041 (B,158,92) 10 uF
 C 1042 (B,157,94)
 C 1043 (B,149,90)
 C 1101 (B,134,62)
 C 1102 (B,138,63)

CCG1192
 CKSRYB105K10
 CKSRYB105K10
 CCSSCH120J50
 CCSSCH120J50

C 1323 (A,74,77)
 C 1410 (A,55,92) (Except F,G)
 C 1412 (A,50,87) (Except F,G)
 C 1413 (A,41,88) (Except F,G)
 C 1424 (B,42,93) (Except F,G)

XCEVW470M16
 CKSSYB103K16
 CCSSCH270J50
 CKSSYB103K16
 CKSSYB103K16

C 1103 (B,129,50)
 C 1104 (B,130,59)
 C 1105 (A,132,59)
 C 1106 (A,130,59)
 C 1107 (B,130,50)

CKSRYB105K16
 CKSSYB123K16
 CKSSYB104K16
 CKSQYB225K10
 CKSRYB105K16

C 1428 (B,55,84) (Except F,G)
 C 1430 (B,57,84) (Except F,G)
 C 1431 (B,61,85) (Except F,G)
 C 1432 (B,61,92) (Except F,G)
 C 1435 (B,59,86) (Except F,G)

CKSRYB105K16
 CKSSYB222K50
 CCSSCH220J50
 CKSSYB102K50
 CKSSYB103K25

F

C 1108 (A,138,56)
 C 1109 (A,135,53)
 C 1110 (A,133,55)
 C 1111 (B,141,56)
 C 1112 (A,131,57)

CKSQYB104K25
 CKSQYB104K25
 CKSQYB104K25
 CKSSYB103K16
 CKSQYB104K25

C 1443 (B,46,87) (Except F,G)
 C 1444 (B,44,92) (Except F,G)
 C 1445 (B,55,91) (Except F,G)
 C 1447 (B,32,103) (Except F,G)
 C 1447 (B,32,103) (F,G)

CKSSYB472K25
 CKSSYB391K50
 CCSSCH220J50
 CCSSCH150J50
 CKSSYB103K16

C 1113 (A,136,59)
 C 1114 (B,127,58) 10 uF

CKSQYB104K25
 CCG1192

C 1501 (A,54,54)
 C 1502 (A,54,56)

CKSSYB104K16
 CKSSYB104K16

1

2

3

4

5			6		7			8	
Circuit Symbol and No.			Part No.		Circuit Symbol and No.			Part No.	
C 1503	(A,56,55)	10 uF	CCG1192		C 2228	(A,108,75)		CCSSCH270J50	
C 1504	(A,46,55)	10 uF	CCG1192		C 2231	(B,170,107)		CCSRCH101J50	
C 1505	(A,48,67)		CKSSYB104K16		C 2232	(B,173,107)		CCSRCH101J50	
					C 2233	(A,172,103)		CCSRCH121J50	
C 1507	(A,47,68)		CKSSYB224K6R3		B Unit Number : CXX8705(A) Unit Number : CXX8707(B) Unit Number : CXX8704(C) Unit Number : CXX8709(D) Unit Number : CXX8706(E) Unit Number : CXX8708(F) Unit Number : CXX8710(G) Unit Name : IF Unit(Service)				
C 1508	(A,47,69)		CKSSYB102K50						
C 1509	(A,42,67)		CKSSYB104K16						
C 1511	(A,47,79)		CCSSCH220J50						
C 1512	(A,42,79)		CCSSCH271J50						
C 1515	(A,45,60)		CKSSYB104K16						
C 1518	(A,37,70)		CCSSCH102J50		MISCELLANEOUS				
C 1519	(B,28,101)		CCSSCH471J50						
C 1523	(A,40,65)		CKSSYB152K50						
C 1533	(A,41,83)	(Except F,G)	CCSSCH220J50						
C 1533	(A,41,83)	(F,G)	CCSSCH100D50						
C 1601	(A,36,32)	(Except F,G)	CKSSYB104K16						
C 1602	(A,36,34)	(Except F,G)	CKSSYB104K16		IC 7004	(A,12,34) Regulator IC		MM3479A18P	
C 1603	(A,38,33)	10 uF(Except F,G)	CCG1192		IC 7008	(A,118,47) Regulator IC(Except D,G)		MM3479A12P	
C 1604	(A,30,37)	10 uF(Except F,G)	CCG1192		IC 7009	(B,140,74) Regulator IC		MM3479A33P	
C 1605	(A,41,41)	(Except F,G)	CKSSYB104K16		IC 7010	(A,82,44) Regulator IC		MM3411A15N	
C 1607	(A,42,43)	(Except F,G)	CKSSYB224K6R3		IC 7011	(B,26,78) IC		AN33012UA	
C 1608	(A,43,43)	(Except F,G)	CKSSYB102K50		IC 7012	(A,32,91) IC		NJM2886DL3-05	
C 1609	(A,41,47)	(Except F,G)	CKSSYB104K16		IC 7101	(B,52,70) DC/DC CONV IC		LTC3858EGN-1	
C 1611	(A,53,43)	(Except F,G)	CCSSCH220J50		IC 7202	(A,97,107) DC/DC CONV IC		AN33014UA	
C 1612	(A,53,48)	(Except F,G)	CCSSCH820J50		IC 7203	(A,91,86) DC/DC CONV IC		AN33014UA	
C 1613	(A,34,45)	(Except F,G)	CKSSYB104K16		IC 7601	(B,162,29) CONV IC		WM8761BGED	
C 1617	(A,57,47)	(Except F,G)	CCSSCH100D50		IC 7602	(B,140,25) CONV IC		WM8761BGED	
C 1703	(A,25,86)	(C,D,E)	CKSSYB104K10		IC 7603	(B,138,54) CONV IC		WM8761BGED	
C 1705	(A,26,57)	10 uF(Except F,G)	CCG1192		IC 7701	(B,32,51) IC		NJM2740V	
C 1706	(A,25,57)	(Except F,G)	CKSSYB104K10		IC 7703	(B,143,65) AD Convtr IC		AK5357VT	
C 1707	(A,26,46)	10 uF(Except F,G)	CCG1192		IC 7704	(A,22,35) IC		TC4066BFT	
C 1708	(A,25,46)	(Except F,G)	CKSSYB104K10		IC 7705	(A,7,105) IC		NJU7043V	
C 1710	(B,35,80)	(C,D,E)	CKSSYB104K16		IC 7706	(A,43,41) IC		AK7738VQ	
C 1711	(B,20,16)	(Except F,G)	CKSSYB104K16		IC 7709	(B,45,49) IC		NJM2740V	
C 1801	(B,162,13)		CKSSYB104K10		IC 7851	(A,66,8) IC(G)		NJM2235V	
C 1804	(B,166,16)		CKSSYB104K16		IC 7901	(B,63,43) V AMP IC		BH7673G	
C 1805	(A,166,13)		CKSSYB104K16		IC 7902	(B,67,43) V AMP IC		BH7673G	
C 1806	(B,157,10)		CCSSCH101J50		IC 7903	(A,65,43) V AMP IC		BH7673G	
C 1813	(B,158,11)		CCSSCH101J50		IC 7904	(A,61,44) V AMP IC		BH7673G	
C 1814	(B,162,8)		CCSSCH270J50		IC 7905	(A,81,61) IC		ML86V7675TBZA3A	
C 1815	(B,145,11)		CCSSCH270J50		IC 7906	(A,94,59) IC		TC74LCX541FK	
C 1824	(B,91,83)		CKSQYB104K25		IC 7907	(A,94,66) IC		TC7SZ125FUS1	
C 1901	(B,131,41)		CKSSYB104K10		IC 7908	(B,74,87) V AMP IC		BH7673G	
C 2101	(B,157,109)		CCSRCH101J50		IC 7911	(B,70,80) V AMP IC		BH7673G	
C 2102	(B,156,111)		CCSRCH101J50		IC 7912	(B,68,68) V AMP IC		BH7673G	
C 2103	(B,159,113)		CCG1192		IC 8001	(B,113,64) IC(Except D,G)		MN864779KT	
C 2201	(A,76,88)	10 uF	CCG1192		IC 8003	(A,124,66) IC(Except D,G)		WM8761BGED	
C 2202	(A,85,84)	10 uF	CCG1192		IC 8103	(A,146,77) IC		NJM2115V	
C 2203	(A,81,88)	10 uF	CCG1192		IC 8202	(B,48,24) IC(A,B)		TC7WZ34FK	
C 2204	(A,86,88)	10 uF	CCG1192		IC 8501	(A,13,89) IC(Except F,G)		TC7SH08FUS1	
C 2205	(B,163,127)		CCSSCH101J50		IC 8502	(B,140,92) IC		MAX14644ETA	
C 2208	(B,26,110)		CKSRYB104K50		IC 8504	(A,7,89) L-MOS And Gate(Except F,G)		TC7SET08FUS1	
C 2209	(B,30,110)		CKSRYB104K50		IC 8505	(A,42,109) L-MOS And Gate(A,B)		TC7SET08FUS1	
C 2210	(B,128,94)	10 uF	CCG1192		IC 8506	(A,34,109) IC(A,B)		TC7SH08FUS1	
C 2211	(B,136,93)	10 uF	CCG1192		IC 8507	(A,38,109) L-MOS And Gate(A,B)		TC7SET08FUS1	
C 2217	(A,109,76)		CKSRYB104K50		IC 8601	(A,20,8) IC		NJM4565V	
C 2220	(B,170,103)	4.7 uF	CCG1201						
C 2221	(B,175,104)	4.7 uF	CCG1201						
C 2225	(B,24,113)		CCSSCH270J50						
C 2226	(B,31,132)		CCSSCH270J50						
C 2227	(B,113,79)		CCSSCH270J50						

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 7002 (A,70,101) Resistor Built-IN TR LTC014EEB
 Q 7011 (A,107,46) IC RZQ050P01
 Q 7012 (A,113,47) Transistor LSCR523UB
 Q 7013 (A,21,66) Transistor ATP112-H

D 8508 (B,143,102) Diode EZAEG2A50AX
 D 8509 (B,141,103) Diode EZAEG2A50AX
 D 8601 (A,45,13) Diode DZ2S068C
 D 8602 (A,32,10) Diode DZ2S068C

Q 7014 (A,12,74) Chip Transistor 2SB1689
 Q 7015 (A,8,78) Transistor LSCR523UB
 Q 7016 (A,63,85) IC RZQ050P01
 Q 7017 (A,66,88) Transistor LSCR523UB
 Q 7101 (A,41,78) FET FK8V03040

L 7003 (A,30,62) SMD SPL Inductor CTH1544
 L 7101 (A,50,60) Inductor CTH1482
 L 7102 (A,50,81) Choke Coil 3.6 uH CTH1479
 L 7103 (B,34,76) Inductor CTF1738
 L 7201 (B,109,109) SMD SPL Inductor CTH1524

Q 7102 (A,41,62) FET FK8V03040
 Q 7103 (A,38,78) FET FK8V03050
 Q 7104 (A,38,62) FET FK8V03050
 Q 7201 (A,139,71) Resistor Built-IN TR LTC014EEB
 Q 7202 (A,144,68) Bipolar TR LSAR523UB

L 7202 (B,103,89) SMD SPL Inductor CTH1524
 L 7203 (B,102,112) Inductor CTF1793
 L 7204 (B,96,92) Inductor CTF1793
 L 7301 (B,83,44) Inductor CTF1868
 L 7302 (B,88,44) Inductor CTF1870

Q 7203 (A,141,73) Resistor Built-IN TR LTC014EEB
 Q 7204 (A,146,72) Bipolar TR LSAR523UB
 Q 7703 (B,27,36) Bipolar TR LSCR523UB
 Q 7704 (A,29,30) Resistor Built-IN TR LTC044EEB
 Q 7705 (A,29,35) Resistor Built-IN TR LTC044EEB

L 7303 (B,143,33) Inductor(A,B,G) CTF1795
 L 7304 (B,145,32) Inductor(A,B,G) CTF1795
 L 7305 (B,148,30) Inductor CTF1795
 L 7306 (B,150,30) Inductor CTF1795
 L 7307 (B,152,31) Inductor CTF1795

Q 7851 (A,74,94) Bipolar TR(G) LSCR523UB
 Q 7852 (A,54,10) Bipolar TR(G) LSCR523UB
 Q 7901 (B,63,49) Bipolar TR LSCR523UB
 Q 7902 (B,67,49) Bipolar TR LSCR523UB
 Q 7903 (A,65,49) Bipolar TR LSCR523UB

L 7308 (B,150,31) Inductor CTF1795
 L 7309 (B,138,44) Inductor CTF1795
 L 7310 (B,94,43) Inductor CTF1795
 L 7311 (B,95,45) Inductor CTF1795
 L 7312 (B,96,47) Inductor CTF1795

Q 7904 (A,61,50) Bipolar TR LSCR523UB
 Q 7905 (B,59,53) Bipolar TR LSCR523UB
 Q 7906 (A,72,72) Bipolar TR LSCR523UB
 Q 7907 (B,74,77) Bipolar TR LSCR523UB
 Q 7908 (B,67,64) Bipolar TR LSCR523UB

L 7313 (B,96,44) Inductor CTF1795
 L 7314 (B,97,46) Inductor CTF1795
 L 7315 (B,97,47) Inductor CTF1795
 L 7501 (A,101,39) Inductor CTF1736
 L 7502 (A,151,49) Inductor CTF1736

Q 8001 (A,119,91)Resistor Built-IN TR(Except D,G) LTC023EEB
 Q 8002 (A,117,95) Bipolar TR(Except D,G) LSAR523UB
 Q 8003 (A,117,73) Chip Transistor(Except D,G) RN4982
 Q 8101 (A,147,84) Transistor 2SAR293PGZE
 Q 8501 (A,138,97) Bipolar TR LSAR523UB

L 7601 (B,166,21) Inductor CTF1786
 L 7602 (B,136,19) Inductor CTF1786
 L 7603 (B,147,49) Inductor CTF1786
 L 7703 (B,29,33) Ferrite Bead CTF1528
 L 7704 (B,152,64) Inductor CTF1558

Q 8601 (A,28,12) Chip Transistor RN4983
 D 7006 (A,26,71) Diode RB080L-30
 D 7101 (B,45,67) Diode DB2J41100
 D 7102 (B,45,65) Diode DB2J41100
 D 7201 (B,98,112) Diode RB060M-30

L 7705 (B,149,60) Inductor CTF1558
 L 7707 (B,28,25) Inductor CTF1869
 L 7902 (A,69,65) Inductor CTF1869
 L 7903 (A,79,74) Inductor CTF1869
 L 7904 (A,86,47) Inductor CTF1869

D 7202 (B,92,91) Diode RB060M-30
 D 7501 (B,127,29) Diode RB501VM-40
 D 7502 (A,127,25) Diode RB501VM-40
 D 7512 (B,89,26) Diode DZ2J039M0
 D 8001 (B,131,100) Diode(Except D,G) EZAEG2A50AX

L 7905 (A,78,41) Inductor CTF1869
 L 7906 (A,97,69) Inductor CTF1869
 L 7907 (A,96,63) Inductor CTF1869
 L 7909 (A,96,65) Chip Beads VTL1126
 L 7915 (A,85,52) Inductor CTF1787

D 8002 (B,129,100) Diode(Except D,G) EZAEG2A50AX
 D 8003 (B,129,98) Diode(Except D,G) EZAEG2A50AX
 D 8004 (B,127,98) Diode(Except D,G) EZAEG2A50AX
 D 8005 (B,127,100) Diode(Except D,G) EZAEG2A50AX
 D 8006 (B,125,100) Diode(Except D,G) EZAEG2A50AX

L 7916 (A,82,51) Inductor CTF1787
 L 7917 (A,90,65) Inductor CTF1787
 L 7918 (A,91,62) Inductor CTF1787
 L 7919 (A,80,52) Inductor CTF1787
 L 7920 (A,79,52) Inductor CTF1787

D 8007 (B,124,98) Diode(Except D,G) EZAEG2A50AX
 D 8008 (B,123,98) Diode(Except D,G) EZAEG2A50AX
 D 8011 (B,116,98) Diode(Except D,G) EZAEG2A50AX
 D 8012 (B,115,100) Diode(Except D,G) EZAEG2A50AX
 D 8013 (A,113,76)Rectifier Diode(Except D,G) DA2J101

L 7921 (A,76,52) Inductor CTF1787
 L 7922 (A,81,72) Inductor CTF1787
 L 7923 (A,83,71) Inductor CTF1787
 L 7930 (A,102,60) Chip Beads VTL1127
 L 7931 (A,101,60) Chip Beads VTL1127

D 8014 (B,122,101) Diode(Except D,G) EZAEG2A50AX
 D 8015 (A,123,78) Diode(Except D,G) DAN202UM
 D 8016 (B,119,102) Diode(Except D,G) EZAEG2A50AX
 D 8501 (A,10,86) Rectifier Diode(Except F,G) DA2J101
 D 8506 (B,143,100) Diode EZAEG2A50AX

L 7932 (A,102,59) Chip Beads VTL1127
 L 7933 (A,101,58) Chip Beads VTL1127
 L 7934 (A,102,58) Chip Beads VTL1127
 L 7935 (A,101,57) Chip Beads VTL1127
 L 7936 (A,102,56) Chip Beads VTL1127

D 8507 (B,141,104) Diode EZAEG2A50AX

L 7937 (A,101,56) Chip Beads VTL1127

1

2

3

4

5				6				7				8			
<u>Circuit Symbol and No.</u>				<u>Part No.</u>				<u>Circuit Symbol and No.</u>				<u>Part No.</u>			
L 8001	(B,130,96)	Noise Filter(Except D,G)	CTF1834					R 7008	(A,70,104)			RS1/16SS473J			
L 8002	(B,123,96)	Noise Filter(Except D,G)	CTF1834					R 7011	(A,71,103)			RS1/16SS2401D			
L 8003	(B,126,96)	Noise Filter(Except D,G)	CTF1834					R 7017	(A,72,104)			RS1/16SS8201D			
L 8004	(B,128,96)	Noise Filter(Except D,G)	CTF1834					R 7018	(A,72,101)			RS1/16SS2201D			A
L 8005	(B,110,73)	Ferrite Bead(Except D,G)	CTF1528					R 7025	(A,36,87)			RS1/16SS0R0J			
L 8006	(B,120,67)	Chip Beads(Except D,G)	VTL1127					R 7026	(A,41,87)			RS1/10SR0R0J			
L 8007	(B,120,65)	Chip Beads(Except D,G)	VTL1127					R 7029	(A,16,32)			RS1/16SS102J			
L 8008	(B,120,64)	Chip Beads(Except D,G)	VTL1127					R 7032	(A,13,38)			RS1/8SQ0R0J			
L 8009	(B,120,62)	Chip Beads(Except D,G)	VTL1126					R 7035	(B,136,71)			RS1/16SS102J			
L 8011	(A,123,74)	Inductor(Except D,G)	CTF1786					R 7041	(A,113,44)			RS1/16SS683J			
L 8012	(A,109,79)	Inductor(Except D,G)	CTF1795					R 7049	(A,107,49)			RS1/10SR103J			
L 8101	(A,157,83)	Inductor	LCYC1R0K2125					R 7050	(A,111,46)			RS1/16SS683J			
L 8102	(A,152,84)	Chip Ferrite Bead	OTL8019					R 7056	(A,99,47)			RS1/8SQ0R0J			
L 8103	(B,152,75)	Inductor	CTF1547					R 7057	(A,102,45)			RS1/10SR331J			
L 8104	(B,152,77)	Inductor	CTF1547					R 7066	(B,28,69)			RS1/16SS2702D			B
L 8201	(B,55,18)	Ferrite Bead	CTF1528					R 7067	(B,28,70)			RS1/16SS1101D			
L 8202	(B,54,18)	Ferrite Bead	CTF1528					R 7068	(B,29,71)			RS1/16SS2701D			
L 8203	(B,53,18)	Ferrite Bead	CTF1528					R 7071	(A,18,77) 0.011 ohm			CCN1341			
L 8204	(B,132,15)	Ferrite Bead	CTF1528					R 7077	(B,30,72)			RS1/16SS1103D			
L 8205	(B,69,22)	Ferrite Bead	CTF1528					R 7078	(B,26,69)			RS1/16SS562J			
L 8401	(B,104,30)	Coil(A,B,C,D)	CTH1554					R 7079	(B,28,68)			RS1/16SS0R0J			
L 8401	(B,104,30)	Coil(E,F,G)	CTF1731					R 7082	(B,30,69)			RS1/16SS0R0J			
L 8402	(B,102,30)	Coil(A,B,C,D)	CTH1554					R 7086	(A,9,74)			RS1/16SS102J			
L 8402	(B,102,30)	Coil(E,F,G)	CTF1731					R 7087	(A,8,75)			RS1/16SS102J			
L 8403	(B,101,30)	Coil(A,B,C,D)	CTH1554					R 7088	(A,10,81)			RS1/16SS103J			C
L 8403	(B,101,30)	Coil(E,F,G)	CTF1731					R 7091	(B,24,72)			RS1/16SS0R0J			
L 8404	(B,99,30)	Coil(A,B,C,D)	CTH1554					R 7092	(A,70,85)			RS1/16SS683J			
L 8404	(B,99,30)	Coil(E,F,G)	CTF1731					R 7093	(A,69,88)			RS1/16SS683J			
L 8405	(B,97,30)	Coil	CTH1554					R 7094	(A,63,87)			RS1/10SR103J			
L 8501	(B,140,97)	Choke Coil 90 ohm	CTH1319					R 7098	(A,8,80)			RS1/16SS103J			
L 8502	(B,137,97)	Choke Coil 90 ohm	CTH1319					R 7099	(B,61,115) (A,B)			RS1/4SA0R0J			
X 7701	(A,34,42)	Resonator 12.288 MHz	CSS1811					R 7101	(B,49,55)			RS1/16SS0R0J			
X 7901	(A,86,74)	Resonator 32.000 MHz	CSS1818					R 7102	(B,53,55)			RS1/16SS0R0J			
X 8001	(B,104,73)	Resonator 27.000 MHz(Except D,G)	CSS1768					R 7103	(B,56,76)			RS1/16SS0R0J			
P 7001	(B,62,121)	Poly Switch(A,B)	MINISMDC150F/24					R 7104	(B,57,78)			RS1/16SS1502D			
CN7001	(A,51,114)	Connector	CKS4977					R 7105	(B,58,77)			RS1/16SS4303D			D
CN7301	(B,99,38)	B TO B Connector	CKS6547					R 7106	(B,58,75)			RS1/16SS8202D			
CN7302	(B,136,38)	B TO B Connector	CKS6549					R 7107	(B,56,55)			RS1/16SS104J			
CN7701	(B,20,20)	B TO B Connector	CKS6346					R 7109	(B,56,65)			RS1/16SS0R0J			
CN7851	(B,39,94)	Connector(G)	CKS5856					R 7110	(B,57,64)			RS1/16SS1802D			
CN8101	(B,161,81)	Connector	CKS6599					R 7111	(B,58,64)			RS1/16SS4703D			
CN8201	(B,65,11)	FFC/FPC Connector	CKS6646					R 7112	(B,58,66)			RS1/16SS1503D			
CN8202	(B,83,117)	Plug	CKM1599					R 7113	(B,60,75)			RS1/16SS562J			
CN8203	(B,147,9)	FFC/FPC Connector	CKS6646					R 7114	(B,56,56)			RS1/16SS0R0J			
CN8204	(B,66,94)	Connector	CKS6007					R 7115	(B,59,72)			RS1/10SR0R0J			
CN8401	(B,109,14)	FFC/FPC Connector	CKS6646					R 7116	(B,60,66)			RS1/16SS392J			
CN8502	(B,58,127)	Connector(Except F,G)	CKS6603					R 7117	(B,59,74)			RS1/10SR0R0J			E
JA7501	(A,103,21)	Connector	CKS6282					R 7118	(B,58,69)			RS1/10SR0R0J			
JA7502	(A,155,32)	Connector	CKS6438					R 7119	(B,58,68)			RS1/10SR0R0J			
JA8001	(B,125,109)	Connector(Except D,G)	CKS6560					R 7120	(B,55,57)			RS1/10SR334J			
JA8102	(B,164,123)	Connector	CKS5702					R 7121	(B,58,57)			RS1/10SR274J			
JA8501	(B,147,116)	Connector	DKN1417					R 7122	(B,57,71)			RS1/16SS104J			
JA8502	(B,41,127)	Connector(A,B)	CKS6495					R 7123	(B,45,75)			RS1/10SR120J			
JA8503	(B,10,127)	Jack	CKN1040					R 7124	(B,46,63)			RS1/10SR100J			
JA8601	(B,38,10)	Connector	CKS6437					R 7125	(B,44,74)			RS1/10SR2R2J			
	BT Module		CWX4710					R 7128	(A,58,78) 15 mohm			CCN1328			
								R 7129	(A,59,78) 15 mohm			CCN1328			
								R 7130	(A,59,62) 12 mohm			CCN1321			F
								R 7131	(A,58,62) 12 mohm			CCN1321			
								R 7132	(A,61,72)			RS1/4SA0R0J			
RESISTORS															
R 7001	(A,66,111) (A,B)		RS1/4SA0R0J												

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	R 7133 (A,61,69)	RS1/4SA0R0J	R 7338 (B,130,29)	RS1/16SS0R0J
	R 7134 (B,56,64)	RS1/16SS0R0J	R 7340 (B,130,26)	RS1/16SS0R0J
	R 7135 (B,49,65)	RS1/16SS6R8J	R 7341 (B,136,45)	RS1/16SS0R0J
	R 7136 (B,48,76)	RS1/16SS6R8J	R 7342 (B,131,27)	RS1/16SS0R0J
	R 7202 (A,142,69)	RS1/16SS222J	R 7343 (B,137,44)	RS1/16SS0R0J
	R 7203 (A,141,70)	RS1/16SS222J	R 7344 (B,133,31)	RS1/16SS0R0J
	R 7206 (A,143,71)	RS1/16SS222J	R 7345 (B,137,45)	RS1/16SS0R0J
	R 7207 (A,143,73)	RS1/16SS222J	R 7350 (B,129,27)	RS1/16SS0R0J
	R 7211 (B,86,92)	RS1/8SQ0R0J	R 7356 (B,95,32)	RS1/16SS0R0J
	R 7212 (B,91,111)	RS1/8SQ0R0J	R 7357 (B,129,29)	RS1/16SS0R0J
	R 7213 (A,102,99)	RS1/16SS102J	R 7362 (B,110,30) (Except F,G)	RS1/16SS0R0J
	R 7214 (A,94,78)	RS1/16SS102J	R 7364 (B,109,32) (Except F,G)	RS1/16SS0R0J
	R 7215 (A,102,98)	RS1/16SS102J	R 7376 (B,117,43)	RS1/10SR0R0J
	R 7216 (A,94,77)	RS1/16SS102J	R 7385 (B,112,27)	RS1/16SS0R0J
B	R 7217 (A,102,97)	RS1/16SS102J	R 7386 (B,83,32)	RS1/16SS0R0J
	R 7218 (A,93,101)	RS1/16SS152J	R 7387 (B,106,32)	RS1/16SS0R0J
	R 7219 (A,94,76)	RS1/16SS102J	R 7388 (B,86,32)	RS1/16SS0R0J
	R 7220 (A,87,80)	RS1/16SS152J	R 7389 (B,109,29)	RS1/16SS0R0J
	R 7221 (A,102,96)	RS1/16SS102J	R 7390 (B,84,31)	RS1/16SS0R0J
	R 7222 (A,94,75)	RS1/16SS102J	R 7391 (B,107,32)	RS1/16SS0R0J
	R 7224 (A,93,102)	RS1/16SS3002D	R 7392 (B,87,31)	RS1/16SS101J
	R 7225 (A,91,102)	RS1/16SS2701D	R 7393 (B,93,45)	RS1/16SS0R0J
	R 7227 (A,88,104)	RS1/16SS8201D	R 7394 (B,86,30)	RS1/16SS0R0J
	R 7229 (A,87,81)	RS1/16SS3002D	R 7397 (B,128,32)	RS1/16SS0R0J
C	R 7230 (A,85,81)	RS1/16SS2701D	R 7398 (B,92,31)	RS1/16SS0R0J
	R 7232 (A,83,84)	RS1/16SS8201D	R 7399 (B,129,32)	RS1/16SS0R0J
	R 7233 (A,94,113)	RS1/16SS0R0J	R 7400 (B,91,31)	RS1/16SS0R0J
	R 7234 (A,88,92)	RS1/16SS0R0J	R 7401 (B,90,31)	RS1/16SS0R0J
	R 7235 (A,90,103)	RS1/16SS752J	R 7403 (B,91,43)	RS1/16SS0R0J
	R 7236 (A,84,82)	RS1/16SS103J	R 7405 (B,92,45)	RS1/16SS0R0J
	R 7237 (B,107,103) 0.047 ohm	CCN1167	R 7407 (B,130,32)	RS1/16SS0R0J
	R 7238 (B,101,83) 0.047 ohm	CCN1167	R 7408 (B,93,43)	RS1/16SS0R0J
	R 7245 (A,103,104)	RS1/16SS1001D	R 7415 (B,93,32) (Except F,G)	RS1/16SS0R0J
	R 7246 (A,97,84)	RS1/16SS0R0J	R 7416 (B,94,32) (Except F,G)	RS1/16SS0R0J
D	R 7247 (A,102,101)	RS1/16SS224J	R 7419 (B,140,47)	RS1/16SS0R0J
	R 7248 (A,96,81)	RS1/16SS224J	R 7420 (B,139,44)	RS1/16SS0R0J
	R 7249 (A,104,104)	RS1/16SS1202D	R 7425 (B,141,44) (A,B)	RS1/16SS221J
	R 7250 (A,98,84)	RS1/16SS2202D	R 7426 (B,142,44) (A,B)	RS1/16SS221J
	R 7251 (A,104,103)	RS1/16SS104J	R 7428 (B,143,43) (A,B)	RS1/16SS0R0J
	R 7252 (A,98,82)	RS1/16SS104J	R 7430 (B,143,45) (A,B)	RS1/16SS221J
	R 7253 (A,111,103)	RS1/16SS0R0J	R 7433 (B,145,45)	RS1/16SS0R0J
	R 7254 (A,105,83)	RS1/16SS0R0J	R 7435 (B,146,46)	RS1/16SS0R0J
	R 7302 (A,126,43)	RS1/10SR0R0J	R 7437 (B,148,46)	CTF1645
	R 7303 (A,123,42)	RS1/10SR0R0J	R 7439 (B,118,31)	RS1/16SS103J
E	R 7306 (B,125,43)	RS1/16SS0R0J	R 7440 (B,150,44)	RS1/16SS0R0J
	R 7307 (B,90,48)	RS1/10SR0R0J	R 7441 (B,150,43)	RS1/16SS0R0J
	R 7308 (B,126,45)	RS1/16SS0R0J	R 7442 (B,119,32)	RS1/16SS0R0J
	R 7309 (B,91,45)	RS1/16SS0R0J	R 7443 (B,126,31)	RS1/16SS0R0J
	R 7310 (B,126,43)	RS1/16SS0R0J	R 7444 (B,125,30)	RS1/16SS0R0J
	R 7311 (B,127,45)	RS1/16SS0R0J	R 7445 (B,124,30)	RS1/16SS0R0J
	R 7315 (B,128,45)	RS1/16SS0R0J	R 7446 (B,123,30)	RS1/16SS0R0J
	R 7317 (B,129,43)	RS1/16SS0R0J	R 7447 (B,121,30)	RS1/16SS0R0J
	R 7323 (B,129,45) (Except D,G)	RS1/16SS0R0J	R 7448 (B,121,31)	RS1/16SS0R0J
	R 7325 (B,130,43) (Except D,G)	RS1/16SS0R0J	R 7449 (B,120,30)	RS1/16SS0R0J
F	R 7327 (B,131,47) (Except D,G)	RS1/16SS0R0J	R 7456 (B,82,29)	RS1/16SS103J
	R 7329 (B,131,43) (Except D,G)	RS1/16SS0R0J	R 7457 (B,112,29)	RS1/16SS103J
	R 7330 (B,131,45) (Except D,G)	RS1/16SS0R0J	R 7458 (B,113,30)	RS1/16SS103J
	R 7331 (B,133,43)	RS1/16SS0R0J	R 7459 (B,114,30)	RS1/16SS103J
	R 7333 (B,132,43)	RS1/16SS0R0J	R 7460 (B,115,31)	RS1/16SS103J
	R 7335 (B,132,32)	RS1/16SS0R0J	R 7461 (B,116,31)	RS1/16SS103J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 7463	(B,149,45)	RS1/16SS0R0J		R 7623	(B,143,19)	RS1/16SS821J	
R 7470	(B,111,31)	RS1/16SS0R0J		R 7624	(B,147,19)	RS1/16SS821J	
R 7480	(B,55,112) (G)	RS1/16SS0R0J		R 7625	(B,149,51)	RS1/16SS821J	
R 7481	(B,53,110) (G)	RS1/16SS0R0J		R 7626	(B,149,56)	RS1/16SS821J	A
R 7482	(B,53,113) (A,B)	RS1/16SS0R0J		R 7628	(B,161,22)	RS1/16SS0R0J	
R 7483	(B,53,111) (A,B)	RS1/16SS0R0J		R 7631	(B,144,18)	RS1/16SS0R0J	
R 7484	(B,127,24)	RS1/16SS104J		R 7634	(B,150,54)	RS1/16SS0R0J	
R 7485	(B,94,29) (Except F,G)	RS1/16SS473J		R 7639	(B,136,31)	RS1/16SS0R0J	
R 7487	(A,137,29) (G)	RS1/16SS473J		R 7640	(B,157,21)	RS1/16SS0R0J	
R 7503	(B,125,27)	RS1/16SS103J		R 7702	(B,28,51)	RS1/16SS103J	
R 7504	(B,124,27)	RS1/16SS103J		R 7703	(B,27,50)	RS1/16SS103J	
R 7505	(B,121,27)	RS1/16SS103J		R 7704	(A,36,40)	RS1/16SS222J	
R 7506	(B,120,27)	RS1/16SS103J		R 7707	(A,5,114)	RS1/16SS0R0J	
R 7507	(B,119,27)	RS1/16SS103J		R 7708	(B,28,22)	RS1/16SS101J	
R 7515	(A,119,32)	RS1/16SS0R0J		R 7709	(B,21,28)	RS1/10SR0R0J	B
R 7516	(A,120,30)	RS1/16SS0R0J		R 7710	(B,29,25)	RS1/16SS101J	
R 7517	(A,121,30)	RS1/16SS0R0J		R 7712	(B,16,25)	RS1/16SS0R0J	
R 7518	(A,123,30)	RS1/16SS0R0J		R 7713	(B,17,25)	RS1/16SS0R0J	
R 7519	(A,124,30)	RS1/16SS0R0J		R 7714	(B,26,40)	RS1/16SS102J	
R 7520	(A,125,30)	RS1/16SS0R0J		R 7715	(B,26,33)	RS1/16SS0R0J	
R 7521	(A,126,29)	RS1/16SS0R0J		R 7716	(B,49,33)	RS1/16SS103J	
R 7522	(A,114,39)	RS1/16SS680J		R 7717	(B,13,14)	RS1/16SS102J	
R 7523	(A,95,39)	RS1/16SS680J		R 7718	(B,12,14)	RS1/16SS102J	
R 7524	(A,91,39)	RS1/16SS330J		R 7719	(B,49,40)	RS1/16SS103J	
R 7525	(B,163,46)	RS1/16SS680J		R 7724	(B,49,39)	RS1/16SS103J	C
R 7526	(B,158,46)	RS1/16SS680J		R 7728	(A,33,38)	RS1/16SS0R0J	
R 7527	(A,146,48)	RS1/16SS680J		R 7729	(B,13,23)	RS1/16SS0R0J	
R 7528	(B,90,10)	RS1/16SS221J		R 7730	(B,52,42)	RS1/16SS222J	
R 7530	(B,89,14)	RS1/16SS330J		R 7734	(A,26,35)	RS1/16SS223J	
R 7531	(A,114,38)	RS1/16SS680J		R 7735	(A,26,36)	RS1/16SS223J	
R 7532	(A,107,39)	RS1/16SS680J		R 7737	(B,25,35)	RS1/16SS222J	
R 7533	(A,93,39)	RS1/16SS680J		R 7738	(B,23,35)	RS1/16SS332J	
R 7534	(B,161,46)	RS1/16SS680J		R 7739	(B,46,41)	RS1/16SS0R0J	
R 7535	(A,144,48)	RS1/16SS680J		R 7744	(A,26,33)	RS1/16SS223J	
R 7537	(B,162,47)	RS1/16SS103J		R 7745	(B,38,51)	RS1/16SS333J	
R 7538	(B,160,47)	RS1/16SS103J		R 7746	(B,37,50)	RS1/16SS473J	D
R 7539	(B,157,47)	RS1/16SS103J		R 7749	(B,28,48)	RS1/16SS101J	
R 7540	(A,145,50)	RS1/16SS103J		R 7756	(B,139,70)	RS1/16SS103J	
R 7541	(A,144,50)	RS1/16SS103J		R 7757	(B,137,64)	RS1/16SS220J	
R 7544	(A,141,50)	RS1/16SS0R0J		R 7758	(B,141,61)	RS1/16SS220J	
R 7545	(A,88,41)	RS1/16SS0R0J		R 7759	(A,34,35)	RS1/16SS0R0J	
R 7601	(B,153,27)	RS1/16SS221J		R 7760	(A,48,31)	RS1/16SS0R0J	
R 7603	(B,157,26)	RS1/16SS0R0J		R 7761	(A,55,41)	RS1/16SS0R0J	
R 7604	(B,152,28)	RS1/16SS102J		R 7762	(B,30,22)	RS1/16SS222J	
R 7605	(B,154,28)	RS1/16SS102J		R 7763	(A,51,31)	RS1/16SS0R0J	
R 7606	(B,150,28)	RS1/16SS102J		R 7764	(A,37,50)	RS1/16SS0R0J	
R 7607	(B,160,34)	RS1/16SS103J		R 7765	(A,50,36)	RS1/16SS101J	E
R 7609	(B,136,29)	RS1/16SS0R0J		R 7766	(B,52,39)	RS1/16SS471J	
R 7610	(B,141,30)	RS1/16SS330J		R 7767	(B,52,40)	RS1/16SS470J	
R 7611	(B,138,32)	RS1/16SS330J		R 7768	(B,52,37)	RS1/16SS470J	
R 7612	(B,145,28)	RS1/16SS330J		R 7769	(B,52,38)	RS1/16SS471J	
R 7613	(B,140,49)	RS1/16SS221J		R 7770	(B,52,41)	RS1/16SS470J	
R 7614	(B,135,48)	RS1/16SS0R0J		R 7774	(A,5,96)	RS1/16SS0R0J	
R 7615	(B,132,54)	RS1/16SS330J		R 7775	(B,26,43)	RS1/16SS0R0J	
R 7616	(B,132,52)	RS1/16SS330J		R 7776	(B,30,37)	RS1/16SS0R0J	
R 7617	(B,133,50)	RS1/16SS330J		R 7777	(A,27,37)	RS1/16SS0R0J	
R 7618	(B,138,31)	RS1/16SS103J		R 7778	(B,45,45)	RS1/16SS0R0J	F
R 7619	(B,135,59)	RS1/16SS103J		R 7780	(B,40,49)	RS1/16SS223J	
R 7621	(B,160,23)	RS1/16SS821J		R 7781	(B,50,47)	RS1/16SS223J	
R 7622	(B,163,23)	RS1/16SS821J		R 7782	(B,49,46)	RS1/16SS0R0J	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	R 7783 (B,52,50)	RS1/16SS472J	R 7881 (B,60,19) (Except G)	RS1/16SS0R0J
	R 7784 (B,50,49)	RS1/16SS163J	R 7882 (B,59,17) (Except G)	RS1/16SS0R0J
	R 7785 (A,49,50)	RS1/16SS101J	R 7885 (A,43,100) (G)	RS1/16SS473J
	R 7786 (B,42,51)	RS1/16SS0R0J	R 7886 (A,55,99) (G)	RS1/16SS0R0J
	R 7787 (A,7,110)	RS1/16SS333J	R 7894 (B,39,102) (G)	RS1/16SS473J
	R 7789 (A,4,103)	RS1/16SS103J	R 7895 (A,47,99) (G)	RS1/16SS0R0J
	R 7791 (A,4,100)	RS1/16SS824J	R 7901 (B,76,73)	RS1/16SS151J
	R 7792 (A,7,100)	RS1/16SS563J	R 7902 (B,74,71)	RS1/16SS151J
	R 7793 (A,21,44)	RS1/16SS0R0J	R 7903 (B,73,64)	RS1/16SS151J
	R 7794 (A,11,105)	RS1/16SS0R0J	R 7907 (B,63,54)	RS1/16SS151J
B	R 7795 (A,8,113)	RS1/16SS472J	R 7908 (B,65,54)	RS1/16SS151J
	R 7797 (B,42,47)	RS1/16SS153J	R 7909 (B,66,54)	RS1/16SS151J
	R 7798 (A,27,29)	RS1/16SS223J	R 7910 (A,66,56)	RS1/16SS151J
	R 7804 (A,26,31)	RS1/16SS0R0J	R 7911 (B,81,63)	RS1/4SA0R0J
	R 7805 (A,12,109)	RS1/16SS102J	R 7912 (B,81,61)	RS1/4SA0R0J
	R 7806 (A,11,113)	RS1/16SS102J	R 7913 (B,81,59)	RS1/4SA0R0J
	R 7811 (B,9,25)	RS1/16SS0R0J	R 7916 (B,79,73)	RS1/16SS1500D
	R 7814 (B,44,39)	RS1/16SS0R0J	R 7917 (B,76,69) (G)	RS1/16SS271J
	R 7820 (A,14,28)	RS1/16SS0R0J	R 7918 (B,75,83)	RS1/16SS0R0J
	R 7821 (A,45,53)	RS1/16SS0R0J	R 7919 (B,79,67)	RS1/16SS1500D
	R 7822 (B,26,41)	RS1/16SS0R0J	R 7920 (B,82,69)	RS1/16SS472J
	R 7823 (B,38,48)	RS1/16SS273J	R 7921 (B,82,55)	RS1/16SS473J
	R 7826 (B,34,48)	RS1/16SS0R0J	R 7923 (B,82,67)	RS1/16SS101J
	R 7827 (A,41,53)	RS1/16SS0R0J	R 7924 (B,83,67)	RS1/16SS101J
	R 7832 (A,48,22)	RS1/10SR0R0J	R 7925 (A,84,71)	RS1/16SS821J
C	R 7833 (A,45,29)	RS1/10SR0R0J	R 7926 (A,84,69)	RS1/16SS105J
	R 7834 (B,40,47)	RS1/16SS223J	R 7927 (B,74,95)	RS1/16SS104J
	R 7835 (A,58,7) (G)	RS1/16SS271J	R 7928 (B,73,79)	RS1/10SR0R0J
	R 7836 (B,14,26)	RS1/16SS0R0J	R 7929 (B,70,90)	RS1/16SS104J
	R 7838 (B,11,25)	RS1/10SR0R0J	R 7930 (A,92,68)	RS1/16SS221J
	R 7839 (B,11,22)	RS1/10SR0R0J	R 7932 (B,70,65)	RS1/16SS0R0J
	R 7847 (B,29,96) (G)	RS1/16SS750J	R 7933 (B,72,74)	RS1/16SS104J
	R 7849 (B,56,27) (G)	RS1/16SS0R0J	R 7942 (B,58,51)	RS1/16SS273J
	R 7850 (B,56,26) (G)	RS1/16SS0R0J	R 7943 (B,58,50)	RS1/16SS273J
	R 7851 (A,73,96) (G)	RS1/16SS273J	R 7945 (A,90,69)	RS1/16SS103J
D	R 7852 (A,73,94) (G)	RS1/16SS273J	R 7951 (A,90,71)	RS1/16SS101J
	R 7853 (A,60,91) (G)	RS1/16SS0R0J	R 7955 (A,98,62)	RS1/16SS104J
	R 7854 (A,54,8) (G)	RS1/16SS273J	R 7956 (A,99,59)	RAB4CQ151J
	R 7855 (A,56,8) (G)	RS1/16SS273J	R 7957 (A,99,57)	RAB4CQ151J
	R 7856 (B,41,102) (G)	RS1/16SS0R0J	R 7958 (A,90,60)	RAB4CQ391J
	R 7857 (B,39,105) (G)	RS1/16SS0R0J	R 7959 (A,90,57)	RAB4CQ391J
	R 7858 (A,44,100) (G)	RS1/16SS0R0J	R 7968 (A,98,61)	RS1/16SS221J
	R 7859 (A,46,99) (G)	RS1/16SS471J	R 7977 (A,98,65)	RS1/16SS151J
	R 7861 (B,31,95) (G)	RS1/16SS0R0J	R 7982 (B,62,46)	RS1/16SS101J
	R 7862 (A,30,96) (G)	RS1/16SS0R0J	R 7983 (B,66,46)	RS1/16SS101J
E	R 7863 (B,43,110) (G)	RS1/16SS0R0J	R 7984 (A,66,47)	RS1/16SS101J
	R 7864 (B,44,110) (G)	RS1/16SS0R0J	R 7985 (A,62,47)	RS1/16SS101J
	R 7865 (B,45,110) (G)	RS1/16SS0R0J	R 7986 (B,63,34)	RS1/16SS75R0D
	R 7866 (A,60,27) (G)	RS1/16SS2200D	R 7987 (B,66,34)	RS1/16SS75R0D
	R 7867 (A,57,6) (G)	RS1/16SS0R0J	R 7988 (A,65,35)	RS1/16SS75R0D
	R 7868 (B,57,86) (G)	RS1/10SR0R0J	R 7989 (A,61,35)	RS1/16SS75R0D
	R 7869 (B,48,88) (G)	RS1/16SS121J	R 7991 (B,57,25)	RS1/16SS0R0J
	R 7870 (A,60,94) (G)	RS1/16SS0R0J	R 7992 (B,57,46)	RS1/16SS0R0J
	R 7871 (A,46,92) (G)	RS1/10SR0R0J	R 7993 (B,78,72) (G)	RS1/16SS0R0J
	R 7873 (A,61,6) (G)	RS1/16SS0R0J	R 7994 (B,76,68) (Except G)	RS1/16SS0R0J
F	R 7874 (A,65,12) (G)	RS1/16SS0R0J	R 7995 (A,89,66)	RS1/16SS270J
	R 7875 (A,65,11) (G)	RS1/16SS473J	R 8001 (B,116,103) (Except D,G)	RS1/16SS0R0J
	R 7877 (A,60,10) (G)	RS1/16SS0R0J	R 8002 (B,118,103) (Except D,G)	RS1/16SS0R0J
	R 7878 (A,60,13) (G)	RS1/16SS0R0J	R 8003 (B,119,101) (Except D,G)	RS1/16SS151J
	R 7879 (A,60,12) (G)	RS1/16SS0R0J	R 8004 (B,117,100) (Except D,G)	RS1/16SS151J

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
R 8006	(A,117,93)	(Except D,G)	RS1/16SS103J			R 8136	(A,151,76)		RS1/16SS3302D		
R 8007	(A,117,92)	(Except D,G)	RS1/16SS102J			R 8137	(A,155,80)		RS1/16SS102J		
R 8008	(B,115,103)	(Except D,G)	RS1/16SS102J			R 8138	(B,145,86)		RS1/16SS103J		
R 8009	(B,114,98)	(Except D,G)	RS1/16SS473J			R 8139	(A,151,78)		RS1/16SS103J		A
R 8010	(B,114,99)	(Except D,G)	RS1/16SS473J			R 8140	(A,150,80)		RS1/10SR0R0J		
R 8011	(A,108,81)	(Except D,G)	RS1/16SS223J			R 8141	(A,155,79)		RS1/16SS102J		
R 8012	(A,108,79)	(Except D,G)	RS1/16SS433J			R 8142	(A,159,83)		RS1/16SS0R0J		
R 8013	(A,121,57)	(Except D,G)	RS1/16SS0R0J			R 8143	(A,166,79)		RS1/16SS473J		
R 8014	(A,116,56)	(Except D,G)	RS1/16SS0R0J			R 8144	(A,166,78)		RS1/16SS473J		
R 8015	(B,120,70)	(Except D,G)	RS1/16SS0R0J			R 8145	(A,166,77)		RS1/16SS473J		
R 8016	(A,121,53)	(Except D,G)	RS1/16SS0R0J			R 8146	(B,148,75)		RS1/10SR0R0J		
R 8017	(A,113,79)	(Except D,G)	RS1/16SS273J			R 8148	(A,155,81)		RS1/16SS102J		
R 8018	(B,106,70)	(Except D,G)	RS1/16SS102J			R 8149	(A,155,78)		RS1/16SS102J		
R 8019	(B,120,69)	(Except D,G)	RS1/16SS271J			R 8150	(B,151,85)		RS1/16SS0R0J		
R 8021	(B,120,68)	(Except D,G)	RS1/16SS0R0J			R 8201	(B,75,22)		RS1/16SS0R0J		B
R 8022	(B,106,68)	(Except D,G)	RS1/16SS105J			R 8202	(B,140,15)		RS1/16SS0R0J		
R 8024	(A,118,67)	(Except D,G)	RS1/16SS333J			R 8203	(B,74,23)		RS1/16SS0R0J		
R 8025	(A,119,67)	(Except D,G)	RS1/16SS333J			R 8205	(B,73,22)		RS1/16SS0R0J		
R 8026	(B,122,67)	(Except D,G)	RS1/16SS330J			R 8209	(B,88,125)		RS1/10SR0R0J		
R 8027	(A,117,62)	(Except D,G)	RS1/16SS333J			R 8210	(B,77,123)		RS1/10SR0R0J		
R 8028	(A,118,64)	(Except D,G)	RS1/16SS333J			R 8216	(B,72,16)		RS1/16SS0R0J		
R 8029	(B,122,65)	(Except D,G)	RS1/16SS330J			R 8218	(B,71,19)		RS1/16SS0R0J		
R 8031	(A,108,60)	(Except D,G)	RS1/16SS103J			R 8220	(B,70,16)		RS1/16SS0R0J		
R 8032	(A,107,62)	(Except D,G)	RS1/16SS0R0J			R 8222	(B,68,19)		RS1/16SS0R0J		
R 8033	(B,122,64)	(Except D,G)	RS1/16SS330J			R 8223	(B,68,17)		RS1/16SS0R0J		C
R 8035	(B,120,63)	(Except D,G)	RS1/16SS0R0J			R 8227	(B,66,16)		RS1/16SS0R0J		
R 8036	(A,105,62)	(Except D,G)	RS1/16SS472J			R 8228	(B,65,18)		RS1/16SS0R0J		
R 8037	(B,122,62)	(Except D,G)	RS1/16SS101J			R 8229	(B,65,16)		RS1/16SS0R0J		
R 8038	(A,124,52)	(Except D,G)	RS1/16SS473J			R 8231	(B,64,18)		RS1/16SS0R0J		
R 8040	(A,123,52)	(Except D,G)	RS1/16SS473J			R 8232	(B,64,16)		RS1/16SS0R0J		
R 8041	(A,125,52)	(Except D,G)	RS1/16SS473J			R 8233	(B,63,18)		RS1/16SS0R0J		
R 8042	(B,106,62)	(Except D,G)	RAB4CQ220J			R 8235	(B,62,16)		RS1/16SS0R0J		
R 8043	(B,106,59)	(Except D,G)	RAB4CQ220J			R 8236	(B,62,18)		RS1/16SS0R0J		
R 8044	(B,111,57)	(Except D,G)	RAB4CQ220J			R 8237	(B,61,16)		RS1/16SS0R0J		
R 8045	(B,114,57)	(Except D,G)	RAB4CQ220J			R 8241	(B,59,19)		RS1/16SS0R0J		
R 8046	(A,121,75)	(Except D,G)	RS1/16SS472J			R 8242	(B,58,17)		RS1/16SS0R0J		D
R 8052	(B,104,65)	(Except D,G)	RS1/16SS100J			R 8243	(B,57,20) (Except D,G)		RS1/16SS0R0J		
R 8057	(A,128,74)	(Except D,G)	RS1/16SS821J			R 8244	(B,56,18) (Except D,G)		RS1/16SS0R0J		
R 8058	(A,128,73)	(Except D,G)	RS1/16SS0R0J			R 8245	(B,56,20) (Except D)		RS1/16SS0R0J		
R 8059	(A,128,71)	(Except D,G)	RS1/16SS821J			R 8249	(B,53,22) (A,B,G)		RS1/16SS0R0J		
R 8061	(B,121,58)	(Except D,G)	RAB4CQ221J			R 8250	(B,52,20) (A,B,G)		RS1/16SS0R0J		
R 8065	(B,123,72)	(Except D,G)	RS1/16SS0R0J			R 8251	(B,51,22) (A,B,G)		RS1/16SS0R0J		
R 8066	(B,127,68)	(Except D,G)	RS1/16SS0R0J			R 8254	(B,50,19) (A,B)		RS1/16SS0R0J		
R 8070	(A,117,71)	(Except D,G)	RS1/16SS222J			R 8255	(B,49,19) (A,B)		RS1/16SS0R0J		
R 8071	(A,112,79)	(Except D,G)	RS1/16SS0R0J			R 8304	(B,156,15)		RS1/16SS471J		
R 8114	(A,143,86)		RS1/16SS10R0D			R 8305	(B,155,17)		RS1/16SS471J		
R 8115	(A,140,80)		RS1/16SS1501D			R 8306	(B,155,15)		RS1/16SS0R0J		E
R 8116	(A,140,78)		RS1/16SS2402D			R 8307	(B,164,18)		RS1/16SS0R0J		
R 8117	(A,140,76)		RS1/16SS3302D			R 8308	(B,163,18)		RS1/16SS0R0J		
R 8119	(B,143,81)		RS1/16SS4702D			R 8309	(B,161,17)		RS1/16SS0R0J		
R 8120	(A,141,76)		RS1/16SS4702D			R 8310	(B,160,17)		RS1/16SS0R0J		
R 8121	(A,141,80)		RS1/16SS432J			R 8311	(B,159,18)		RS1/16SS0R0J		
R 8127	(B,152,79)		RS1/16SS471J			R 8312	(B,158,18)		RS1/16SS0R0J		
R 8128	(B,152,80)		RS1/16SS0R0J			R 8313	(B,158,17)		RS1/16SS0R0J		
R 8129	(B,155,82)		RS1/16SS0R0J			R 8314	(B,157,17)		RS1/16SS0R0J		
R 8130	(B,155,83)		RS1/16SS0R0J			R 8315	(B,154,18)		RS1/16SS102J		
R 8132	(A,156,76)		RS1/16SS0R0J			R 8316	(B,153,17)		RS1/16SS102J		
R 8133	(A,155,76)		RS1/16SS0R0J			R 8317	(B,153,15)		RS1/16SS102J		F
R 8134	(A,154,76)		RS1/16SS1002D			R 8322	(B,151,17)		RS1/16SS0R0J		
R 8135	(A,152,77)		RS1/16SS2202D			R 8323	(B,150,15)		RS1/16SS0R0J		

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

R 8326 (B,149,14) (Except F,G)
 R 8333 (B,146,16)
 R 8334 (B,145,16)
 R 8336 (B,144,15)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8548 (B,48,118) (A,B)
 R 8549 (B,33,118) (A,B)
 R 8550 (B,47,118) (A,B)
 R 8551 (B,42,118) (A,B)

VTL1133
 VTL1133
 VTL1133
 VTL1133

R 8337 (B,143,16)
 R 8340 (B,141,16)
 R 8341 (B,138,16)
 R 8342 (B,69,98)
 R 8343 (B,68,98)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8552 (B,40,118) (A,B)
 R 8553 (B,37,118) (A,B)
 R 8565 (A,6,116)
 R 8566 (A,10,116)
 R 8581 (A,140,90)

VTL1133
 VTL1133
 VTL1134
 RS1/16SS0R0J
 RS1/16SS103J

R 8344 (B,67,98)
 R 8345 (B,66,98)
 R 8346 (B,65,98)
 R 8347 (B,64,98)
 R 8360 (B,130,13)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8582 (A,142,94)
 R 8585 (B,54,123) (Except F,G)
 R 8586 (B,57,123) (Except F,G)
 R 8603 (A,10,5)
 R 8604 (A,32,13)

RS1/16SS103J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8401 (B,128,15)
 R 8402 (B,130,16)
 R 8403 (B,129,14)
 R 8404 (B,122,20)
 R 8408 (B,122,22)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8608 (A,16,8)
 R 8613 (A,16,10)
 R 8614 (A,21,5)
 R 8616 (A,28,7)
 R 8617 (A,28,6)

RS1/16SS273J
 RS1/16SS473J
 RS1/16SS621J
 RS1/16SS222J
 RS1/16SS0R0J

R 8414 (B,118,25)
 R 8415 (B,117,23)
 R 8416 (B,117,28)
 R 8417 (B,116,20)
 R 8418 (B,116,23)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8618 (A,25,9)
 R 8619 (A,15,11)
 R 8620 (A,47,15)
 R 8626 (A,31,8)
 R 8627 (A,31,20)

RS1/16SS104J
 RS1/16SS104J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8419 (B,115,25)
 R 8420 (B,114,20)
 R 8421 (B,114,22)
 R 8422 (B,114,24)
 R 8423 (B,113,25)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8702 (A,127,93) (A,C,E)
 R 8703 (A,127,91) (B,D,F,G)
 R 8709 (A,135,95) (A,B)
 R 8710 (A,135,93) (C,D)
 R 8711 (A,135,91) (E)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8446 (B,100,22)
 R 8447 (B,99,23)
 R 8449 (B,98,24) (A,C,E)
 R 8451 (B,97,23)
 R 8452 (B,96,23)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 8802 (B,22,124) (G)
 R 8803 (A,87,78)

RS1/4SA0R0J
 RS1/10SR0R0J

CAPACITORS

C 7006 (A,72,108)
 C 7013 (B,70,117)
 C 7014 (B,51,118) (A,B)
 C 7017 (B,144,74) 4.7 uF
 C 7018 (A,8,35)

CKSQYB334K50
 CEVW220M16
 CKSRYB104K50
 CCG1212
 CKSRYB105K10

C 7021 (A,121,47) 4.7 uF(Except D,G)
 C 7022 (B,142,78)
 C 7023 (A,7,33) 4.7 uF
 C 7029 (A,117,51) 4.7 uF(Except D,G)
 C 7032 (A,85,44)

CCG1212
 CKSRYB105K10
 CCG1212
 CCG1212
 CKSRYB105K10

C 7033 (A,80,44)
 C 7036 (A,111,44)
 C 7039 (A,111,45)
 C 7042 (A,16,35)
 C 7043 (A,119,44) (Except D,G)

CKSRYB105K10
 CKSRYB105K10
 CKSSYB473K16
 CKSSYB104K10
 CKSSYB104K10

C 7045 (B,27,69)
 C 7046 (A,31,71) 10 uF/16 V
 C 7047 (A,31,72) 10 uF/16 V
 C 7048 (A,31,74) 10 uF/16 V
 C 7049 (A,31,76)

CCSSCH561J50
 DCH1263
 DCH1263
 DCH1263
 CKSSYB104K16

C 7052 (B,28,85)
 C 7053 (A,22,78) 10 uF
 C 7055 (B,25,72)
 C 7056 (B,26,71)
 C 7057 (B,31,72)

CKSSYB104K16
 CCG1236
 CKSSYB103K16
 CCSSCH8R0D50
 CKSSYB103K16

C 7058 (B,25,71)

CKSSYB152K50

R 8533 (A,33,106) (A,B)
 R 8534 (A,43,114) (A,B)
 R 8535 (A,47,112) (A,B)
 R 8541 (A,35,113) (A,B)
 R 8542 (A,40,112) (A,B)
 R 8547 (A,53,119) (A,B)

RS1/16SS331J
 RS1/16SS181J
 RS1/16SS181J
 RS1/10SR102J
 RS1/10SR102J
 RS1/10SR0R0J

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
C 7059 (B,26,72)	CKSBRYB105K16	C 7301 (B,79,44) 22 uF	DCH1256
C 7060 (A,22,76) 10 uF	CCG1236	C 7303 (A,124,38)	CKSSBYB104K10
C 7061 (A,22,74) 10 uF	CCG1236	C 7305 (B,85,47) 22 uF	DCH1256
C 7074 (A,70,88)	CKSBRYB105K10	C 7306 (A,127,40)	CKSSBYB104K10
C 7078 (A,40,93) 2.2 uF	CCG1218	C 7501 (B,127,26)	CKSSBYB104K10
C 7081 (A,40,90)	CCG1320	C 7502 (B,86,13)	CKSSBYB104K10
C 7085 (B,136,75)	CKSSBYB104K10	C 7503 (A,103,38) 10 uF	CCG1192
C 7086 (A,67,85) 10 uF	CCG1192	C 7504 (A,155,49) 10 uF	CCG1192
C 7101 (B,57,76)	CCSSCH150J50	C 7505 (A,103,37)	CKSSBYB104K10
C 7102 (B,59,75)	CCSSCH220J50	C 7506 (A,155,48)	CKSSBYB104K10
C 7103 (B,60,77)	CKSSBYB152K50	C 7601 (B,164,35) 10 uF	CCG1192
C 7104 (B,57,65)	CCSSCH150J50	C 7602 (B,146,23) 10 uF	CCG1192
C 7105 (B,59,66)	CCSSCH220J50	C 7603 (B,141,59) 10 uF	CCG1192
C 7106 (B,56,73)	CCSSCH102J50	C 7604 (B,164,33)	CKSSBYB104K10
C 7107 (B,60,65)	CKSSBYB472K50	C 7605 (B,145,23)	CKSSBYB104K10
C 7108 (B,56,68)	CCSSCH102J50	C 7606 (B,140,58)	CKSSBYB104K10
C 7109 (B,58,56)	CKSSBYB103K16	C 7607 (B,166,24)	CKSSBYB104K10
C 7110 (B,51,76)	CKSSBYB222K50	C 7608 (B,137,20)	CKSSBYB104K10
C 7111 (B,54,65)	CKSSBYB153K16	C 7609 (B,142,49)	CKSSBYB104K10
C 7112 (B,47,71)	CKSBRYB104K50	C 7610 (B,166,23) 10 uF	CCG1192
C 7113 (B,45,77)	CKSBRYB104K50	C 7611 (B,138,18) 10 uF	CCG1192
C 7114 (B,46,62)	CKSBRYB104K50	C 7612 (B,144,50) 10 uF	CCG1192
C 7115 (B,45,70) 4.7 uF	CCG1201	C 7613 (B,160,22)	CKSSBYB102K50
C 7116 (A,39,75) 10 uF	CCG1236	C 7614 (B,163,22)	CKSSBYB102K50
C 7117 (A,40,66) 10 uF	CCG1236	C 7615 (B,143,18)	CKSSBYB102K50
C 7121 (A,56,75) 47 uF	CCG1229	C 7616 (B,146,18)	CKSSBYB102K50
C 7122 (A,56,69) 47 uF	CCG1229	C 7617 (B,149,53)	CKSSBYB102K50
C 7124 (A,56,72) 47 uF	CCG1229	C 7618 (B,149,55)	CKSSBYB102K50
C 7125 (A,56,66) 47 uF	CCG1229	C 7701 (B,28,50)	CKSSBYB471K50
C 7201 (A,142,66)	CKSSBYB104K10	C 7705 (B,25,26) 10 uF	CCG1192
C 7202 (A,145,66)	CKSSBYB104K10	C 7707 (A,23,41)	CCG1393
C 7204 (A,146,70)	CKSSBYB104K10	C 7708 (B,22,26) 10 uF	CCG1192
C 7207 (B,88,87) 10 uF	CCG1236	C 7710 (B,23,24)	CKSSBYB104K10
C 7208 (B,88,89) 10 uF	CCG1236	C 7711 (B,27,22)	CKSSBYB104K10
C 7209 (B,94,109) 10 uF	CCG1236	C 7712 (A,35,38)	CKSSBYB104K10
C 7210 (B,94,107) 10 uF	CCG1236	C 7713 (A,36,36)	CKSSBYB104K10
C 7211 (A,91,101)	CCSSCH471J50	C 7714 (A,19,28)	CKSBRYB105K10
C 7212 (A,85,80)	CCSSCH471J50	C 7715 (A,13,24)	CKSBRYB105K10
C 7213 (B,102,99)	CEVW101M16	C 7717 (A,46,34)	CKSSBYB104K10
C 7214 (B,94,78)	CEVW101M16	C 7723 (B,49,42) 2.2 uF	CCG1218
C 7215 (A,91,103)	CCSSCH270J50	C 7724 (B,23,37) 10 uF	CCG1192
C 7216 (A,86,83)	CCSSCH270J50	C 7727 (B,25,34)	CKSSBYB104K10
C 7217 (B,105,103)	CKSSBYB104K10	C 7728 (B,26,39)	CKSBRYB105K10
C 7218 (B,99,82)	CKSSBYB104K10	C 7730 (A,44,50)	CCG1393
C 7219 (A,90,104)	CKSSBYB222K50	C 7732 (B,38,49)	CKSSBYB561K50
C 7220 (A,84,83)	CCSSCH821J50	C 7733 (B,37,51)	CCSSCH680J50
C 7221 (A,95,112)	CKSBRYB104K50	C 7736 (B,148,69)	CKSQYB225K16
C 7222 (A,89,91)	CKSBRYB104K50	C 7737 (B,149,66) 4.7 uF	CCG1201
C 7223 (A,90,106)	CKSBRYB105K10	C 7738 (B,147,65)	CKSSBYB104K10
C 7224 (A,84,85)	CKSBRYB105K10	C 7739 (B,149,63) 10 uF	CCG1192
C 7225 (B,103,104) 22 uF	CCG1254	C 7740 (B,26,32)	CKSSBYB104K10
C 7226 (B,97,84) 22 uF	CCG1254	C 7741 (B,146,61) 10 uF	CCG1192
C 7229 (A,103,109)	CKSSBYB104K16	C 7742 (B,153,66)	CKSSBYB104K10
C 7230 (A,103,106)	CKSSBYB104K16	C 7743 (B,146,60)	CKSSBYB104K10
C 7231 (A,103,101)	CKSSBYB102K50	C 7747 (A,43,48)	CKSSBYB104K10
C 7232 (A,101,101)	CKSSBYB472K50	C 7748 (A,42,49) 2.2 uF	CCG1218
C 7233 (A,97,89)	CKSSBYB104K16	C 7749 (A,40,48)	CKSSBYB104K10
C 7234 (A,97,86)	CKSSBYB104K16	C 7751 (A,38,52) 10 uF	CCG1192
C 7235 (A,97,81)	CKSSBYB102K50	C 7752 (A,51,42)	CKSSBYB104K10
C 7236 (A,95,81)	CKSSBYB472K50	C 7753 (B,41,49)	CCSSCH120J50

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 7758 (A,36,42)	CCSSCH120J50	C 7932 (B,73,56)	CKSRYB105K16
	C 7759 (A,35,39)	CCSSCH120J50	C 7933 (A,72,58)	CKSSYB104K10
	C 7761 (A,38,49)	CCG1393	C 7934 (A,73,58)	CCSSCH102J50
	C 7762 (A,46,49)	CCG1393	C 7935 (A,67,58)	CKSRYB105K16
	C 7765 (B,51,46)	CKSRYB474K10	C 7936 (A,71,66) 10 uF	CCG1192
	C 7766 (B,51,48)	CCSSCH101J50	C 7937 (A,73,61)	CKSSYB474K6R3
	C 7767 (B,51,49)	CCSSCH680J50	C 7939 (A,77,69)	CKSSYB104K10
	C 7768 (B,41,51)	CKSSYB104K10	C 7940 (A,77,68)	CCSSCH102J50
	C 7769 (A,7,111)	CCSSCH101J50	C 7941 (A,77,54)	CKSSYB104K10
	C 7770 (A,8,112)	CCG1393	C 7942 (A,79,54)	CKSSYB104K10
	C 7771 (A,4,105)	CCG1393	C 7944 (B,80,70)	CKSRYB105K16
	C 7772 (A,4,101)	CCSSCH6R0D50	C 7945 (A,78,72) 10 uF	CCG1192
	C 7773 (A,6,100)	CCSSCH220J50	C 7946 (A,80,69)	CKSSYB104K10
	C 7774 (A,10,104)	CKSSYB104K10	C 7947 (A,81,54)	CKSSYB104K10
	C 7775 (A,19,29)	CKSRYB105K10	C 7948 (A,81,70)	CKSSYB104K10
B	C 7779 (A,25,31)	CKSSYB104K10	C 7949 (A,83,48) 10 uF	CCG1192
	C 7780 (A,11,108) 22 uF	DCH1256	C 7950 (A,82,68)	CKSSYB104K10
	C 7782 (A,48,48)	CCG1393	C 7951 (A,83,53)	CKSSYB104K10
	C 7783 (B,33,48)	CKSSYB104K10	C 7952 (A,84,53)	CKSSYB104K10
	C 7785 (B,135,63)	CCSSCH101J50	C 7953 (A,77,43) 10 uF	CCG1192
	C 7786 (B,21,24)	CKSSYB104K10	C 7954 (A,86,71)	CCSSCH5R0C50
	C 7789 (B,41,45) 2.2 uF	CCG1218	C 7955 (A,85,71)	CCSSCH6R0D50
	C 7791 (A,4,107)	CKSSYB102K50	C 7956 (A,88,64)	CKSSYB104K10
	C 7793 (A,5,102)	CCSSCH6R0D50	C 7957 (A,89,63)	CKSSYB104K10
	C 7854 (A,75,96) (G)	CKSSYB104K10	C 7958 (A,90,68)	CKSSYB103K16
C	C 7855 (A,71,93) 10 uF(G)	CCG1192	C 7963 (A,94,63) 1 uF	DCH1246
	C 7856 (A,52,9) (G)	CKSSYB104K10	C 7965 (A,94,62)	CKSSYB103K16
	C 7857 (A,54,7) 10 uF(G)	CCG1192	C 7967 (A,91,66)	CCSSCH470J50
	C 7862 (B,49,89) (G)	CKSSYB104K10	C 7968 (A,100,66)	CCSSCH150J50
	C 7865 (A,60,8) (G)	CKSRYB105K10	C 7970 (B,64,50)	CKSSYB104K10
	C 7866 (A,60,9) (G)	CKSRYB105K10	C 7971 (B,67,50)	CKSSYB104K10
	C 7867 (A,71,8) (G)	CKSRYB104K16	C 7972 (A,64,51)	CKSSYB104K10
	C 7868 (A,73,8) 10 uF(G)	CCG1192	C 7973 (A,60,52)	CKSSYB104K10
	C 7943 (B,78,68) (G)	CKSRYB105K16	C 7974 (A,95,69) 1 uF	DCH1246
	C 7897 (B,71,67)	CKSRYB105K10	C 7975 (A,95,68)	CKSSYB103K16
D	C 7898 (B,66,68)	CKSSYB104K10	C 7979 (B,61,55)	CKSSYB104K10
	C 7899 (B,66,66)	CKSSYB104K10	C 7980 (B,56,48) 10 uF	CCG1192
	C 7909 (B,64,39)	CKSRYB105K10	C 7988 (B,73,91)	CKSRYB105K10
	C 7910 (B,62,39)	CKSRYB105K10	C 7989 (B,74,91)	CKSRYB105K10
	C 7911 (B,67,39)	CKSRYB105K10	C 7990 (B,73,85)	CKSSYB104K10
	C 7912 (B,66,39)	CKSRYB105K10	C 7991 (A,71,74)	CKSSYB104K10
	C 7913 (A,64,40)	CKSRYB105K10	C 7994 (B,69,84)	CKSRYB105K10
	C 7914 (A,66,40)	CKSRYB105K10	C 7995 (B,70,84)	CKSRYB105K10
	C 7915 (A,60,41)	CKSRYB105K10	C 7996 (B,69,78)	CKSSYB104K10
	C 7916 (A,62,40)	CKSRYB105K10	C 7997 (B,71,77)	CKSSYB104K10
E	C 7917 (A,64,57) 10 uF	CCG1192	C 8000 (B,71,70)	CKSRYB105K10
	C 7918 (B,75,71)	CKSRYB105K16	C 8004 (B,109,71) 10 uF(Except D,G)	CCG1192
	C 7919 (B,73,67)	CKSRYB105K16	C 8007 (B,116,101) (Except D,G)	CCSSCH270J50
	C 7920 (B,74,61)	CKSRYB105K16	C 8008 (B,110,70) (Except D,G)	CKSSYB104K10
	C 7921 (B,64,45)	CKSSYB104K10	C 8009 (B,116,97) (Except D,G)	CCSSCH270J50
	C 7922 (B,67,45)	CKSSYB104K10	C 8012 (A,112,66) (Except D,G)	CKSSYB104K10
	C 7923 (A,65,46)	CKSSYB104K10	C 8013 (A,114,66) (Except D,G)	CKSSYB104K10
	C 7924 (A,61,47)	CKSSYB104K10	C 8014 (A,116,65) (Except D,G)	CKSSYB104K10
	C 7925 (B,71,60)	CKSRYB105K16	C 8016 (B,105,70) (Except D,G)	CCSSCH120J50
	C 7926 (A,73,64)	CCSSCH102J50	C 8017 (B,104,70) (Except D,G)	CCSSCH150J50
F	C 7927 (A,72,64)	CKSSYB104K10	C 8019 (A,111,65) (Except D,G)	CKSSYB104K10
	C 7928 (B,72,58)	CKSRYB105K16	C 8023 (B,125,62) (Except D,G)	CCSSCH470J50
	C 7929 (A,72,62)	CKSSYB103K16	C 8024 (A,111,62) (Except D,G)	CKSSYB104K10
	C 7930 (A,72,61)	CKSSYB474K6R3	C 8025 (A,114,61) (Except D,G)	CKSSYB104K10
	C 7931 (A,72,60)	CKSSYB474K6R3	C 8026 (A,116,63) (Except D,G)	CKSSYB104K10

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
C 8028 (A,130,68) 10 uF(Except D,G)	CCG1192	IC 1002 (B,15,13) Regulator IC	MM1886A50P
C 8029 (A,129,68) (Except D,G)	CKSSYB104K10	IC 1003 (B,40,14) IC	S-1200B50-M5
C 8031 (A,124,71) (Except D,G)	CKSSYB104K10	IC 1004 (B,64,28) IC	NJM2855DL1-33
C 8032 (A,124,72) 10 uF(Except D,G)	CCG1192	IC 1251 (A,12,41) IC	BA5839FP
		IC 1401 (B,28,40) Flash ROM Unit	CWW8811
C 8033 (A,130,74) (Except D,G)	CKSSYB102K50		
C 8034 (A,130,72) (Except D,G)	CKSSYB102K50	IC 1402 (B,46,28) Flash ROM Unit	CWW8812
C 8101 (A,156,85)	CKSSYB102K50	IC 1480 (A,65,30) RAM IC	M12L64164A-5TG2Y
C 8102 (A,155,85)	CKSSYB103K16	IC 1501 (A,39,33) IC	MN2DS0018MA
C 8103 (A,144,86)	CKSSYB104K10	IC 1801 (B,46,10) D/A Converter	PCM1753DBQ
		IC 1953 (B,57,17) IC	S-1135D12-A6
C 8104 (A,154,85)	CKSSYB104K10		
C 8105 (A,151,85)	CKSSYB103K16	Q 1101 (B,13,59) Bipolar Transistor	LSCR523UB
C 8108 (A,141,78)	CCSSCH101J50	Q 1102 (B,14,56) Bipolar Transistor	LSCR523UB
C 8109 (A,147,80)	CKSSYB104K10	Q 1103 (B,10,62) Transistor	2SB1132
C 8110 (A,147,79)	CKSSYB104K10	Q 1104 (B,22,54) Transistor	2SB1132
		L 1501 (A,54,30) Inductor	CTF1743
C 8111 (B,157,75)	CKSRYB104K16		
C 8112 (B,157,77)	CKSRYB104K16	L 1511 (A,48,17) Chip Beads	VTL1126
C 8113 (A,159,86)	CKSRYB104K16	L 1902 (A,18,17) Inductor	CTF1487
C 8205 (A,80,115) 10 uF	CCG1236	L 1903 (B,64,16) Inductor	CTF1558
C 8208 (B,50,27) (A,B)	CKSSYB104K10	L 1904 (A,68,18) Resistor	RS1/16SS0R0J
		X 1501 (B,48,18) Crystal Resonator	CSS1823
C 8501 (A,16,90) (Except F,G)	CKSSYB104K10		
C 8503 (B,141,91)	CKSSYB104K10	F 1001 (A,14,19) Chip EMI Filter	DTF1106
C 8505 (A,5,90) (Except F,G)	CKSSYB104K10	F 1002 (B,64,18) Chip EMI Filter	DTL1106
C 8506 (A,41,107)	CKSSYB104K10	S 1 (A,47,55) Lever Switch(HOME)	CSN1090
C 8507 (A,36,110)	CKSSYB104K10	S 3 (B,26,13) Lever Switch(12EJ)	CSN1089
		VR1101 (A,7,63) Semi-fixed 6.8 kohm(B)	CCP1447
C 8508 (A,34,107)	CKSSYB104K10		
C 8512 (B,43,116) (A,B)	CCSRCH220J50	VR1102 (A,7,59) Semi-fixed 15 kohm(B)	CCP1449
C 8517 (A,53,121) (A,B)	CKSRYB104K50	CN1101 (A,21,63) Connector	CKS6631
C 8520 (B,36,116) (A,B)	CCSRCH220J50	CN1952 (A,42,11) Connector	CKS6025
C 8521 (B,39,116) (A,B)	CCSRCH220J50		
		RESISTORS	
C 8522 (B,46,116) (A,B)	CCSRCH220J50	R 1004 (B,12,20)	RS1/16SS4702F
C 8523 (B,35,116) (A,B)	CCSRCH220J50	R 1007 (B,12,21)	RS1/16SS6801F
C 8524 (B,48,114) (A,B)	CCSRCH220J50	R 1019 (B,34,7)	RS1/16SS101J
C 8525 (A,5,119)	CCSRCH470J50	R 1025 (B,36,6)	RS1/16SS101J
C 8601 (A,14,8)	CCSSCH100D50	R 1027 (A,40,18)	RS1/16SS101J
C 8602 (A,17,6)	CKSSYB104K16		
C 8604 (A,26,6) 2.2 uF	CCG1218	R 1101 (B,15,57)	RS1/16SS104J
C 8606 (A,28,9)	CKSSYB104K10	R 1102 (B,11,56)	RS1/16SS104J
C 8607 (A,29,14)	CKSSYB104K10	R 1103 (B,14,61)	RS1/16SS4300F
C 8608 (A,13,9) 10 uF	CCG1192	R 1104 (B,11,58)	RS1/16SS5100F
		R 1105 (B,17,54)	RS1/16SS4300F
C 8801 (B,107,121)	CCSRCH331J50		
C 8813 (A,91,74)	CKSRYB102K50	R 1106 (B,10,57)	RS1/16SS5600F
C 8814 (A,95,70) 4.7 uF	CCG1201	R 1109 (B,6,57)	RS1/16SS3R3J
C 8815 (A,113,52)	CCSSCH9R0D50	R 1110 (B,16,54)	RS1/16SS3R3J
C 8816 (A,112,52)	CCSSCH9R0D50	R 1111 (B,6,63)	RS1/10SR3R3J
		R 1112 (B,5,58)	RS1/10SR3R3J
C 8817 (A,110,52)	CCSSCH9R0D50		
C 8818 (A,109,52)	CCSSCH9R0D50	R 1113 (B,15,59)	RS1/10SR3R9J
C 8819 (A,108,52)	CCSSCH9R0D50	R 1114 (B,19,57)	RS1/10SR3R3J
C 8820 (A,106,52)	CCSSCH9R0D50	R 1115 (B,6,61)	RS1/10SR2R7J
C 8821 (A,105,52)	CCSSCH9R0D50	R 1116 (B,6,62)	RS1/10SR2R7J
		R 1117 (B,18,59)	RS1/10SR3R9J
C 8822 (A,104,52)	CCSSCH9R0D50		
C 8823 (A,78,76)	CCSRCH121J50	R 1118 (B,16,59)	RS1/10SR3R9J
C 8824 (A,69,31)	CCSRCH121J50	R 1223 (A,42,50)	RS1/16SS561J
C 8825 (A,56,30)	CCSRCH121J50	R 1225 (B,29,7)	RS1/16SS471J
		R 1251 (A,6,48)	RS1/16SS333J
		R 1252 (A,6,47)	RS1/16SS473J
		R 1253 (A,6,46)	RS1/16SS333J
		R 1254 (A,6,45)	RS1/16SS473J
		R 1255 (A,22,48)	RS1/16SS183J
		R 1256 (A,21,45)	RS1/16SS153J
		R 1257 (B,8,37)	RS1/16SS221J



Unit Number : CWX4717

Unit Name : DVD Core Unit

MISCELLANEOUS

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 1258	(A,19,39)	RS1/16SS221J	R 1672	(A,39,18)	RS1/16SS2000D
	R 1401	(B,34,28)	RS1/16SS221J	R 1674	(A,38,17)	RS1/16SS3002D
	R 1402	(B,35,47)	RS1/16SS104J	R 1801	(B,51,8)	RS1/16SS104J
	R 1405	(B,55,35)	RS1/16SS104J	R 1802	(B,53,8)	RS1/16SS104J
	R 1406	(B,39,45)	RS1/16SS472J	R 1803	(B,51,14)	RS1/16SS821J
■	R 1480	(A,73,24)	RAB4CQ560J	R 1804	(B,53,14)	RS1/16SS821J
	R 1481	(A,73,28)	RAB4CQ560J	R 1982	(A,10,62)	RS1/16SS822J
	R 1482	(A,73,32)	RAB4CQ560J	R 1983	(B,41,19)	RS1/16SS1000D
	R 1483	(A,73,35)	RAB4CQ560J	R 1987	(B,43,20)	RS1/16SS0R0J
	R 1484	(A,73,39)	RAB4CQ560J	R 1990	(B,35,19)	RS1/16SS2000D
B	R 1485	(A,55,22)	RAB4CQ560J	R 1991	(B,31,16)	RS1/16SS101J
	R 1486	(A,56,27)	RAB4CQ560J	R 1996	(B,36,13)	RS1/16SS2000D
	R 1487	(A,56,37)	RAB4CQ560J	R 1997	(B,36,10)	RS1/16SS101J
	R 1488	(A,56,40)	RAB4CQ560J	R 2002	(B,43,10)	RS1/16SS2000D
	R 1489	(A,54,29)	RS1/16SS560J	R 2003	(B,43,8)	RS1/16SS101J
■	R 1490	(A,73,21)	RS1/16SS560J	CAPACITORS		
	R 1501	(B,49,20)	RS1/16SS122J	C 1001	(B,43,13)	CKSRYB105K10
	R 1503	(B,47,20)	RS1/16SS105J	C 1002	(B,13,17)	CKSSYB104K16
	R 1504	(A,50,17)	RS1/16SS121J	C 1003	(B,16,18)	CKSSYB104K16
	R 1505	(A,46,18)	RS1/16SS101J	C 1004	(B,15,17) 4.7 uF	CCG1201
C	R 1506	(B,46,15)	RS1/16SS101J	C 1005	(B,41,11)	CKSRYB105K16
	R 1507	(B,44,17)	RS1/16SS101J	C 1010	(B,60,23)	CKSQYB225K10
	R 1508	(B,43,17)	RS1/16SS221J	C 1011	(B,64,22)	CKSRYB105K10
	R 1509	(A,21,34)	RS1/16SS102J	C 1015	(A,26,7)	CKSSYB102K50
	R 1510	(A,11,29)	RS1/16SS102J	C 1016	(B,64,15)	CKSSYB102K50
■	R 1512	(A,55,31)	RS1/16SS470J	C 1018	(B,14,21)	CKSSYB104K10
	R 1513	(A,23,38)	RS1/16SS203J	C 1040	(B,59,12)	CCSRCH821J50
	R 1514	(A,25,40)	RS1/16SS183J	C 1041	(B,19,12)	CCSRCH271J50
	R 1516	(A,25,36)	RS1/16SS104J	C 1101	(B,15,53) 10 uF	CCG1192
	R 1517	(B,58,22)	RS1/16SS103J	C 1104	(B,8,57)	CKSSYB104K10
D	R 1518	(B,34,31)	RS1/16SS103J	C 1105	(B,18,54)	CKSSYB104K10
	R 1519	(A,25,43)	RS1/16SS102J	C 1106	(B,8,66)	CKSSYB103K16
	R 1522	(A,21,37)	RS1/16SS104J	C 1107	(B,26,53)	CKSSYB103K16
	R 1523	(A,23,37)	RS1/16SS221J	C 1108	(A,20,56)	CKSSYB103K16
	R 1524	(B,29,33)	RS1/16SS472J	C 1109	(A,7,57)	CKSRYB224K16
■	R 1525	(A,25,44)	RS1/16SS103J	C 1110	(A,18,58)	CKSSYB103K16
	R 1526	(A,23,40)	RS1/16SS103J	C 1111	(A,9,66)	CKSRYB224K16
	R 1527	(A,35,48)	RS1/16SS682J	C 1112	(B,17,52) 22 uF	DCH1256
	R 1528	(B,20,33)	RS1/16SS103J	C 1113	(B,9,58) 22 uF	DCH1256
	R 1529	(B,35,21)	RS1/16SS103J	C 1210	(B,77,33)	CKSSYB104K16
E	R 1530	(B,18,33)	RS1/16SS103J	C 1251	(B,13,41)	CEVW101M16
	R 1531	(B,34,30)	RS1/16SS103J	C 1252	(B,8,41) 4.7 uF	CCG1222
	R 1533	(A,29,48)	RS1/16SS104J	C 1253	(B,8,39)	CKSSYB104K16
	R 1534	(B,29,48)	RS1/16SS221J	C 1254	(A,6,37)	CKSSYB104K16
	R 1535	(A,22,44)	RS1/16SS104J	C 1255	(A,19,37)	CKSSYB104K16
■	R 1536	(B,32,48)	RS1/16SS104J	C 1401	(B,34,27)	CKSSYB104K16
	R 1537	(A,25,46)	RS1/16SS104J	C 1403	(B,39,40)	CKSSYB104K10
	R 1538	(A,56,35)	RS1/16SS104J	C 1408	(B,58,27)	CKSSYB104K10
	R 1539	(B,34,48)	RS1/16SS104J	C 1410	(B,34,29)	CKSSYB104K16
	R 1540	(A,26,46)	RS1/16SS221J	C 1480	(A,71,19)	CKSSYB104K10
F	R 1541	(A,26,45)	RS1/16SS221J	C 1481	(A,73,22)	CKSSYB104K10
	R 1542	(B,27,34)	RS1/16SS103J	C 1482	(A,72,26)	CKSSYB104K10
	R 1546	(A,33,48)	RS1/16SS682J	C 1484	(A,73,30)	CKSSYB104K10
	R 1601	(A,32,17)	RS1/16SS123J	C 1485	(A,73,41)	CKSSYB104K10
	R 1602	(A,32,18)	RS1/16SS123J	C 1487	(A,58,29)	CKSSYB104K10
■	R 1603	(B,31,20)	RS1/16SS1002D	C 1488	(A,57,25)	CKSSYB104K10
	R 1604	(A,24,21)	RS1/16SS105J	C 1489	(A,65,17) 10 uF	CCG1192
	R 1605	(A,22,23)	RS1/16SS105J	C 1490	(A,66,18)	CKSSYB102K50
	R 1670	(B,40,19)	RS1/16SS1002D			
	R 1671	(B,43,19)	RS1/16SS2402D			

1

2

3

4

5			6		7			8	
Circuit Symbol and No.			Part No.		Circuit Symbol and No.			Part No.	
C 1501	(B,62,20)	10 uF	CCG1192		C 1953	(B,60,17)		CKSRYB105K10	
C 1502	(B,55,19)	10 uF	CCG1192		C 1954	(B,55,17)		CKSRYB105K10	
C 1503	(A,54,33)		CKSSYB104K10		C 1955	(B,77,40)		CKSSYB104K16	
					C 1962	(B,40,20)		CKSRYB105K10	
C 1504	(A,54,24)		CKSSYB104K10		D Unit Number : CWN9870 Unit Name : SOC Dual Core Unit				
C 1505	(A,54,27)		CKSSYB104K10						
C 1506	(B,53,34)		CKSSYB104K10						
C 1507	(A,54,36)		CKSSYB104K10		MISCELLANEOUS				
C 1508	(A,54,38)		CKSSYB104K10						
C 1509	(A,54,42)		CKSSYB104K10						
C 1510	(B,51,18)		CCSSCH120J50		IC 4001	(A,43,43) IC		MCIMX6U6AVM08ACS1	
C 1511	(A,49,18)		CKSSYB104K10		IC 4301	(A,54,72) RAM IC		H5TQ4G63CFR-RDC	
C 1512	(B,46,18)		CCSSCH120J50		IC 4302	(A,35,72) RAM IC		H5TQ4G63CFR-RDC	
C 1513	(A,48,47)		CKSSYB104K10		IC 4401	(A,10,60) IC		CWJ2605	
C 1514	(B,45,20)		CKSSYB104K10		IC 4402	(B,21,65) IC		PE1038A	
C 1515	(A,44,19)		CKSSYB104K10		IC 4403	(B,24,56) IC		TC7WU04FU	
C 1516	(A,44,47)		CKSSYB104K10		IC 4501	(B,11,39) IC		AK8814VQ	
C 1517	(A,42,47)		CKSSYB104K10		IC 4701	(B,69,62) IC		LTC3612EUDC	
C 1518	(A,38,47)		CKSSYB104K10		IC 4721	(B,68,35) IC		LTC3612EUDC	
C 1519	(A,34,47)		CKSSYB104K10		IC 4741	(B,68,50) IC		LTC3612EUDC	
C 1520	(A,27,47)		CKSSYB104K10		IC 4766	(A,30,17) Regulator IC		MM3479A30P	
C 1521	(A,25,33)		CKSSYB104K10		IC 4791	(A,47,23) IC		TC7SH08FUS1	
C 1522	(A,25,38)		CKSSYB104K10		IC 4792	(A,47,18) IC		PST8429N	
C 1523	(A,20,45)		CKSSYB104K10		IC 4793	(A,45,15) IC		TC7SH08FUS1	
C 1524	(A,21,48)		CKSSYB473K16		IC 4794	(A,42,20) IC		TC7SH08FUS1	
C 1526	(A,25,37)		CKSSYB103K16		IC 4796	(A,23,59) Regulator IC		MM3479A12P	
C 1528	(B,30,48)		CCSSCH471J50		IC 4901	(A,68,26) IC		337S3959	
C 1601	(A,32,19)		CKSSYB103K16		IC 4903	(A,29,25) IC		TC7WBL3306CFK	
C 1602	(A,34,17)		CCSSCH101J50		Q 4776	(A,63,23) Chip Transistor		2SB1689	
C 1603	(A,34,18)		CCSSCH101J50		Q 4777	(A,62,29) Resistor Built-IN TR		LTC044EEB	
C 1604	(A,30,17)		CCSSCH680J50		Q 4778	(A,27,23) Resistor Built-IN TR		LTC044EEB	
C 1605	(A,30,18)		CCSSCH680J50		L 4501	(B,6,49) Inductor		LCYA2R7J2016	
C 1606	(A,35,19)		CKSSYB104K10		L 4502	(B,8,30) Inductor		LCYA2R7J2016	
C 1607	(A,20,24)	10 uF	CCG1192		L 4701	(A,70,59) SMD SPL Inductor		CTH1500	
C 1608	(A,28,18)	4.7 uF	CCG1201		L 4721	(A,64,34) SMD SPL Inductor		CTH1499	
C 1609	(A,26,22)		CKSSYB104K10		L 4741	(A,69,47) SMD SPL Inductor		CTH1499	
C 1612	(A,24,24)		CKSSYB104K10		L 4901	(B,57,42) Ferrite Bead		CTF1528	
C 1613	(A,25,25)		CKSSYB104K10		L 4909	(A,56,38) Inductor		CTF1787	
C 1614	(A,23,24)		CKSSYB104K10		L 5001	(A,71,22) Inductor		CTF1868	
C 1615	(A,23,26)		CKSSYB104K10		L 5002	(A,67,19) Inductor		CTF1870	
C 1616	(A,25,27)		CKSSYB104K10		TH4381	(A,25,72) Thermistor		CCX1084	
C 1617	(B,27,28)		CKSSYB104K10		X 4001	(A,49,28) Resonator 24 MHz		CSS1773	
C 1618	(A,23,29)		CCSSCH101J50		X 4002	(A,44,28) Resonator 32.768 kHz		CSS1807	
C 1619	(A,23,30)		CKSSYB562K25		X 4401	(B,30,55) Crystal Resonator 14.745 6 MHz		CSS1835	
C 1620	(B,27,30)		CKSSYB224K6R3		X 4901	(B,60,43) VCXO 11.289 6MHz		CWX4566	
C 1621	(A,23,31)		CKSSYB224K6R3		CN5001	(B,57,20) B TO B Connector		CKS6499	
C 1622	(A,25,31)		CKSSYB333K16		CN5002	(B,20,20) B TO B Connector		CKS6556	
C 1623	(A,27,20)		CKSRYB105K10		RESISTORS				
C 1624	(A,25,32)		CKSSYB104K10						
C 1625	(A,25,29)		CKSSYB104K10						
C 1671	(A,42,19)		CKSSYB104K10		R 4001	(A,27,54)		RAB4CQ470J	
C 1673	(A,37,17)		CKSSYB104K10		R 4002	(A,27,51)		RAB4CQ470J	
C 1674	(B,42,20)		CKSSYB104K10		R 4003	(A,27,48)		RAB4CQ470J	
C 1676	(B,38,20)		CKSRYB105K10		R 4004	(A,27,46)		RAB4CQ470J	
C 1801	(B,51,10)	4.7 uF	CCG1201		R 4005	(A,27,43)		RAB4CQ470J	
C 1802	(B,53,10)	4.7 uF	CCG1201		R 4006	(A,27,41)		RS1/16SS470J	
C 1803	(B,50,12)		CCSRCH182J50		R 4007	(A,50,31)		RS1/16SS470J	
C 1804	(B,53,12)		CCSRCH182J50		R 4008	(A,4,23)		RS1/16SS0R0J	
C 1805	(B,47,14)		CKSSYB104K10		R 4010	(A,34,58)		RS1/16SS0R0J	
C 1806	(B,56,8)	10 uF	CCG1192		R 4011	(A,24,46)		RS1/16SS103J	
C 1809	(B,40,17)		CKSSYB102K50						

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	R 4012 (A,25,52)	RS1/16SS103J	R 4262 (B,62,9)	RS1/16SS103J
	R 4015 (A,45,31)	RS1/16SS102J	R 4263 (B,24,30)	RS1/16SS103J
	R 4017 (A,24,55)	RS1/16SS103J	R 4264 (B,12,27)	RS1/16SS103J
	R 4018 (B,50,41)	RS1/16SS0R0J	R 4265 (A,13,19)	RS1/16SS103J
	R 4022 (B,18,43)	RS1/16SS330J	R 4266 (A,14,19)	RS1/16SS103J
■	R 4029 (B,64,11)	RS1/16SS472J	R 4268 (B,23,30)	RS1/16SS103J
	R 4054 (A,24,52)	RS1/16SS103J	R 4270 (B,50,32)	RS1/16SS103J
	R 4055 (A,24,41)	RS1/16SS103J	R 4271 (B,50,31)	RS1/16SS103J
	R 4056 (A,25,41)	RS1/16SS103J	R 4272 (A,27,40)	RS1/16SS470J
	R 4057 (A,23,44)	RS1/16SS103J	R 4273 (A,38,56)	RS1/16SS2400F
B	R 4058 (A,24,44)	RS1/16SS103J	R 4274 (B,56,55)	RS1/16SS1001D
	R 4059 (A,24,44)	RS1/16SS103J	R 4275 (B,54,55)	RS1/16SS1001D
	R 4060 (A,25,44)	RS1/16SS103J	R 4276 (B,33,10)	RS1/16SS103J
	R 4063 (A,23,49)	RS1/16SS103J	R 4277 (B,54,47)	RS1/16SS103J
	R 4064 (A,24,49)	RS1/16SS103J	R 4278 (B,63,29)	RS1/16SS103J
■	R 4066 (A,25,49)	RS1/16SS103J	R 4279 (B,24,11)	RS1/16SS103J
	R 4067 (A,23,52)	RS1/16SS103J	R 4280 (B,30,30)	RS1/16SS103J
	R 4068 (A,24,52)	RS1/16SS103J	R 4281 (B,32,11)	RS1/16SS103J
	R 4070 (A,23,55)	RS1/16SS103J	R 4282 (B,26,10)	RS1/16SS103J
	R 4073 (A,24,46)	RS1/16SS103J	R 4283 (B,29,30)	RS1/16SS103J
C	R 4074 (A,25,46)	RS1/16SS103J	R 4284 (B,46,11)	RS1/16SS103J
	R 4081 (A,4,35)	RS1/10SR0R0J	R 4285 (B,60,13)	RS1/16SS103J
	R 4084 (A,4,29)	RS1/16SS102J	R 4286 (A,43,56)	RS1/16SS0R0J
	R 4091 (A,47,28)	RS1/16SS225J	R 4287 (A,42,56)	RS1/16SS0R0J
	R 4095 (A,43,24)	RS1/16SS0R0J	R 4288 (B,65,27)	RS1/16SS103J
■	R 4100 (B,20,42)	RS1/16SS470J	R 4289 (B,41,7)	RS1/16SS103J
	R 4101 (B,53,41)	RS1/16SS0R0J	R 4290 (B,51,43)	RS1/16SS0R0J
	R 4103 (B,13,68)	RS1/16SS220J	R 4291 (A,41,56)	RS1/16SS0R0J
	R 4105 (A,25,55)	RS1/16SS103J	R 4292 (A,40,56)	RS1/16SS0R0J
	R 4111 (B,15,65)	RS1/16SS472J	R 4293 (B,44,10)	RS1/16SS104J
D	R 4141 (B,57,83)	RS1/16SS103J	R 4295 (B,26,13)	RS1/16SS103J
	R 4151 (A,28,28)	RS1/16SS0R0J	R 4296 (B,64,9)	RS1/16SS222J
	R 4154 (B,66,27)	RS1/16SS0R0J	R 4297 (B,63,9)	RS1/16SS103J
	R 4155 (B,67,27)	RS1/16SS0R0J	R 4300 (B,24,13)	RS1/16SS103J
	R 4157 (A,30,28)	RS1/16SS0R0J	R 4302 (B,46,10)	RS1/16SS104J
■	R 4158 (B,30,38)	RAB4CQ471J	R 4303 (A,21,52)	RS1/16SS101J
	R 4159 (B,30,41)	RAB4CQ471J	R 4307 (B,54,73)	RS1/16SS1200D
	R 4160 (B,31,43)	RAB4CQ471J	R 4308 (B,35,73)	RS1/16SS1200D
	R 4162 (B,31,46)	RAB4CQ471J	R 4309 (B,51,73)	RS1/16SS2400F
	R 4163 (A,30,40)	RS1/16SS470J	R 4310 (B,32,73)	RS1/16SS2400F
■	R 4164 (B,20,43)	RS1/16SS470J	R 4314 (B,57,82)	RS1/16SS102J
	R 4165 (A,29,40)	RS1/16SS470J	R 4315 (B,39,82)	RS1/16SS102J
	R 4186 (A,26,39)	RS1/16SS101J	R 4317 (B,19,4)	RS1/16SS0R0J
	R 4209 (A,24,55)	RS1/16SS103J	R 4381 (A,25,73)	RS1/16SS1802J
	R 4213 (A,24,49)	RS1/16SS103J	R 4401 (A,7,47)	RS1/16SS102J
E	R 4216 (A,23,46)	RS1/16SS103J	R 4402 (A,11,72)	RS1/16SS0R0J
	R 4220 (A,21,41)	RS1/16SS103J	R 4403 (A,10,48)	RS1/16SS0R0J
	R 4222 (A,23,41)	RS1/16SS103J	R 4404 (B,28,57)	RS1/16SS102J
	R 4224 (A,21,39)	RS1/16SS103J	R 4405 (B,28,55)	RS1/16SS105J
	R 4226 (A,24,41)	RS1/16SS103J	R 4407 (B,15,63)	RS1/16SS471J
■	R 4228 (A,22,41)	RS1/16SS103J	R 4411 (B,20,57)	RS1/16SS220J
	R 4230 (A,20,39)	RS1/16SS222J	R 4412 (B,24,58)	RS1/16SS102J
	R 4232 (A,20,39)	RS1/16SS222J	R 4413 (A,15,72)	RS1/16SS0R0J
	R 4236 (B,24,39)	RS1/16SS103J	R 4415 (A,26,62)	RS1/16SS0R0J
	R 4237 (B,22,44)	RS1/16SS103J	R 4416 (A,17,57)	RS1/16SS0R0J
F	R 4238 (A,56,40)	RS1/16SS0R0J	R 4417 (A,16,73)	RS1/16SS472J
	R 4242 (A,4,25)	RS1/16SS101J	R 4418 (A,16,74)	RS1/16SS472J
	R 4244 (A,20,41)	RS1/16SS103J	R 4419 (A,16,75)	RS1/16SS472J
	R 4260 (B,51,13)	RS1/16SS103J	R 4420 (A,20,67)	RS1/16SS101J
	R 4261 (B,53,13)	RS1/16SS103J	R 4421 (A,21,63)	RS1/16SS101J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 4445	(B,18,46)	RAB4CQ101J		R 4705	(B,69,59)	RS1/16SS220J	A
R 4446	(B,18,49)	RAB4CQ101J		R 4706	(B,65,59)	RS1/16SS105J	
R 4447	(B,13,70)	RS1/16SS103J		R 4707	(B,64,59)	RS1/16SS105J	
R 4448	(A,24,69)	RS1/16SS0R0J		R 4708	(B,64,61)	RS1/16SS2201D	
R 4449	(B,6,69)	RS1/16SS0R0J		R 4709	(B,67,65)	RS1/16SS0R0J	
R 4450	(B,5,66)	RS1/16SS330J		R 4710	(B,64,63)	RS1/16SS1003D	B
R 4451	(B,15,64)	RS1/16SS0R0J		R 4711	(B,65,63)	RS1/16SS183J	
R 4452	(B,13,64)	RS1/16SS561J		R 4713	(B,67,66)	RS1/16SS1002D	
R 4453	(B,5,63)	RS1/16SS561J		R 4714	(B,65,66)	RS1/16SS1503D	
R 4454	(B,5,65)	RS1/16SS561J		R 4715	(B,65,62)	RS1/16SS1503D	
R 4455	(B,13,57)	RS1/16SS220J		R 4716	(A,64,62)	RS1/16SS0R0J	C
R 4456	(B,5,55)	RS1/16SS220J		R 4717	(B,67,59)	RS1/16SS0R0J	
R 4457	(B,11,51)	RS1/16SS220J		R 4721	(A,66,39)	RS1/8SQ0R0J	
R 4458	(B,12,51)	RS1/16SS220J		R 4722	(A,70,30)	RS1/8SQ0R0J	
R 4459	(B,14,55)	RS1/16SS220J		R 4723	(A,64,39)	RS1/8SQ0R0J	
R 4460	(B,14,54)	RS1/16SS220J		R 4724	(B,64,35)	RS1/16SS220J	D
R 4461	(B,14,52)	RS1/16SS220J		R 4725	(B,65,39)	RS1/16SS105J	
R 4462	(B,13,52)	RS1/16SS220J		R 4726	(B,65,41)	RS1/16SS105J	
R 4463	(B,27,49)	RS1/16SS0R0J		R 4727	(B,66,40)	RS1/16SS2702D	
R 4464	(B,27,48)	RS1/16SS0R0J		R 4728	(B,71,37)	RS1/16SS105J	
R 4465	(B,27,48)	RS1/16SS0R0J		R 4729	(B,70,41)	RS1/16SS1503D	E
R 4466	(B,27,47)	RS1/16SS0R0J		R 4730	(B,72,37)	RS1/16SS1002D	
R 4467	(B,26,46)	RS1/16SS0R0J		R 4731	(B,72,39)	RS1/16SS1503D	
R 4468	(B,26,45)	RS1/16SS0R0J		R 4732	(B,67,39)	RS1/16SS1203D	
R 4469	(B,26,44)	RS1/16SS0R0J		R 4733	(A,68,40)	RS1/16SS0R0J	
R 4470	(B,26,43)	RS1/16SS0R0J		R 4734	(B,69,39)	RS1/16SS223J	F
R 4473	(B,24,70)	RS1/16SS0R0J		R 4735	(A,71,40)	RS1/10SR102J	
R 4474	(B,22,70)	RS1/16SS0R0J		R 4736	(B,64,37)	RS1/16SS0R0J	
R 4475	(B,28,62)	RS1/16SS0R0J		R 4737	(B,68,40)	RS1/16SS4703D	
R 4476	(B,28,61)	RS1/16SS0R0J		R 4738	(B,62,27)	RS1/16SS103J	
R 4477	(B,20,70)	RS1/16SS0R0J		R 4739	(B,70,44)	RS1/16SS0R0J	A
R 4479	(B,17,70)	RS1/16SS181J		R 4741	(A,63,49)	RS1/8SQ0R0J	
R 4480	(B,21,72)	RS1/16SS0R0J		R 4742	(A,72,52)	RS1/8SQ0R0J	
R 4481	(B,16,62)	RS1/16SS0R0J		R 4743	(A,63,47)	RS1/8SQ0R0J	
R 4482	(B,16,64)	RS1/16SS472J		R 4744	(B,68,46)	RS1/16SS220J	
R 4502	(B,16,42)	RS1/16SS103J		R 4745	(B,63,47)	RS1/16SS105J	B
R 4503	(B,22,34)	RS1/16SS101J		R 4746	(B,62,47)	RS1/16SS105J	
R 4504	(B,21,34)	RS1/16SS101J		R 4747	(B,62,48)	RS1/16SS2702D	
R 4505	(B,17,41)	RS1/16SS103J		R 4749	(B,61,52)	RS1/16SS1503D	
R 4507	(B,17,39)	RS1/16SS221J		R 4750	(B,66,54)	RS1/16SS1002D	
R 4508	(B,17,37)	RS1/16SS221J		R 4751	(B,64,54)	RS1/16SS1503D	C
R 4510	(B,11,32)	RS1/16SS6801D		R 4752	(B,64,49)	RS1/16SS1203D	
R 4511	(B,20,40)	RS1/16SS101J		R 4753	(A,63,51)	RS1/16SS0R0J	
R 4512	(B,5,42)	RS1/16SS103J		R 4754	(B,64,51)	RS1/16SS223J	
R 4513	(B,16,34)	RS1/10SR0R0J		R 4755	(A,62,53)	RS1/10SR102J	
R 4514	(B,16,30)	RS1/10SR0R0J		R 4756	(B,65,47)	RS1/16SS0R0J	D
R 4515	(B,16,33)	RS1/10SR0R0J		R 4757	(B,62,50)	RS1/16SS4703D	
R 4525	(B,5,67)	RS1/16SS0R0J		R 4758	(B,71,39)	RS1/16SS0R0J	
R 4529	(B,5,46)	RS1/16SS0R0J		R 4759	(B,60,52)	RS1/16SS0R0J	
R 4540	(B,6,68)	RS1/16SS220J		R 4767	(A,37,17)	RS1/10SR0R0J	
R 4543	(A,14,33)	RS1/16SS101J		R 4768	(B,36,10)	RS1/10SR0R0J	E
R 4544	(A,13,33)	RS1/16SS101J		R 4769	(A,25,16)	RS1/16SS0R0J	
R 4545	(A,12,33)	RS1/16SS101J		R 4772	(A,40,12)	RS1/16SS103J	
R 4546	(A,11,33)	RS1/16SS101J		R 4773	(A,32,6)	RS1/10SR0R0J	
R 4547	(A,8,37)	RS1/16SS101J		R 4775	(A,39,13)	RS1/16SS0R0J	
R 4548	(A,8,36)	RS1/16SS101J		R 4776	(A,63,27)	RS1/10SR332J	F
R 4549	(A,8,36)	RS1/16SS101J		R 4777	(A,63,26)	RS1/10SR332J	
R 4550	(A,8,35)	RS1/16SS101J		R 4778	(A,26,18)	RS1/16SS103J	
R 4702	(A,74,64)	RS1/8SQ0R0J		R 4779	(A,27,27)	RS1/16SS103J	
R 4704	(A,65,60)	RS1/8SQ0R0J		R 4780	(A,27,26)	RS1/16SS101J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 4790	(A,50,23)	RS1/16SS101J	R 5029	(A,16,46)	RS1/16SS102J
	R 4791	(A,46,25)	RS1/16SS101J	R 5030	(A,17,52)	RS1/16SS102J
	R 4792	(A,49,17)	RS1/16SS0R0J	R 5031	(A,16,46)	RS1/16SS102J
	R 4793	(A,41,16)	RS1/16SS0R0J	R 5032	(B,15,13)	RS1/16SS560J
	R 4794	(A,49,15)	RS1/16SS103J	R 5033	(B,17,13)	RS1/16SS221J
■	R 4795	(A,46,21)	RS1/16SS683J	R 5034	(B,59,13)	RS1/16SS681J
	R 4798	(A,42,17)	RS1/16SS104J	R 5036	(B,48,13)	RS1/16SS101J
	R 4799	(A,44,21)	RS1/16SS0R0J	R 5037	(B,13,27)	RS1/16SS101J
	R 4800	(A,44,20)	RS1/16SS0R0J	R 5040	(A,10,21)	RS1/16SS0R0J
	R 4801	(A,43,13)	RS1/16SS0R0J	R 5041	(A,11,21)	RS1/16SS681J
B	R 4802	(A,43,23)	RS1/16SS0R0J	R 5042	(A,9,21)	RS1/16SS471J
	R 4803	(A,51,25)	RS1/16SS101J	R 5043	(A,8,21)	RS1/16SS0R0J
	R 4804	(A,50,24)	RS1/16SS103J	R 5044	(A,7,21)	RS1/16SS471J
	R 4805	(A,44,25)	RS1/16SS103J	R 5045	(A,65,20)	RS1/16SS0R0J
	R 4845	(A,65,59)	RS1/8SQ0R0J	R 5046	(B,55,13)	RS1/16SS0R0J
■	R 4901	(A,39,31)	RS1/16SS103J	R 5047	(B,57,13)	RS1/16SS680J
	R 4902	(A,71,26)	RS1/16SS222J	R 5048	(B,52,46)	RS1/16SS331J
	R 4903	(A,37,31)	RS1/16SS470J	R 5049	(B,54,46)	RS1/16SS331J
	R 4904	(A,65,28)	RS1/16SS222J	R 5053	(B,8,27)	RS1/16SS560J
	R 4905	(A,65,27)	RS1/16SS221J	R 5054	(B,7,27)	RS1/16SS560J
C	R 4906	(A,65,26)	RS1/16SS103J	R 5055	(B,11,27)	RS1/16SS560J
	R 4907	(A,65,24)	RS1/16SS0R0J	R 5056	(B,10,27)	RS1/16SS560J
	R 4911	(A,56,37)	RS1/16SS151J	R 5057	(B,9,27)	RS1/16SS560J
	R 4912	(B,62,41)	RS1/16SS0R0J	R 5059	(B,31,13)	RS1/16SS560J
	R 4913	(B,60,41)	RS1/16SS0R0J	R 5060	(B,32,13)	RS1/16SS560J
■	R 4914	(A,36,31)	RS1/16SS470J	R 5061	(B,28,13)	RS1/16SS560J
	R 4915	(A,40,24)	RS1/16SS0R0J	R 5062	(B,29,13)	RS1/16SS560J
	R 4916	(B,35,6)	RS1/16SS0R0J	R 5063	(B,25,11)	RS1/16SS0R0J
	R 4918	(A,32,25)	RS1/16SS0R0J	R 5064	(B,32,13)	RS1/16SS0R0J
	R 4934	(B,32,49)	RS1/16SS0R0J	R 5065	(B,30,13)	RS1/16SS560J
D	R 4937	(A,24,12)	RS1/16SS103J	R 5090	(B,57,27)	RS1/16SS0R0J
	R 4938	(A,23,12)	RS1/16SS103J	R 5099	(B,17,28)	RS1/16SS0R0J
	R 4939	(A,22,12)	RS1/16SS103J	R 5100	(B,53,47)	RS1/16SS331J
	R 4941	(B,54,40)	RS1/16SS431J	R 5101	(A,55,43)	RS1/16SS680J
	R 4942	(B,53,44)	RS1/16SS102J	R 5102	(A,18,50)	RS1/16SS680J
■	R 4945	(B,24,37)	RS1/16SS103J	R 5103	(B,21,28)	RS1/16SS560J
	R 4946	(A,27,12)	RS1/16SS102J	R 5104	(A,20,48)	RS1/16SS680J
	R 4954	(A,27,21)	RS1/16SS0R0J	R 5105	(A,20,49)	RS1/16SS680J
	R 4955	(A,29,22)	RS1/16SS0R0J	R 5106	(A,19,50)	RS1/16SS680J
	R 5003	(B,63,27)	RS1/16SS0R0J	R 5107	(B,19,10)	RS1/16SS101J
E	R 5004	(B,64,27)	RS1/16SS0R0J	R 5114	(B,27,28)	RS1/16SS101J
	R 5006	(B,22,13)	RS1/16SS0R0J	R 5115	(B,27,30)	RS1/16SS101J
	R 5007	(B,14,13)	RS1/16SS471J	R 5116	(B,30,28)	RS1/16SS0R0J
	R 5008	(B,27,13)	RS1/16SS151J	R 5117	(B,30,28)	RS1/16SS0R0J
	R 5009	(B,12,13)	RS1/16SS471J	R 5119	(B,24,13)	RS1/16SS101J
■	R 5012	(B,42,13)	RS1/16SS0R0J	R 5121	(B,34,28)	RS1/10SR0R0J
	R 5013	(B,43,13)	RS1/16SS0R0J	R 5122	(B,34,29)	RS1/10SR0R0J
	R 5014	(B,44,13)	RS1/16SS0R0J	R 5125	(A,65,22)	RS1/16SS222J
	R 5015	(B,44,13)	RS1/16SS0R0J	R 5126	(A,65,21)	RS1/16SS222J
	R 5016	(B,45,13)	RS1/16SS0R0J	R 5127	(B,62,11)	RS1/16SS182J
F	R 5017	(A,41,31)	RS1/16SS0R0J	R 5128	(B,63,11)	RS1/16SS182J
	R 5020	(B,23,13)	RS1/16SS560J	R 5129	(B,21,11)	RS1/16SS101J
	R 5021	(B,23,28)	RS1/16SS0R0J	R 5130	(B,36,31)	RS1/16SS103J
	R 5022	(B,24,28)	RS1/16SS0R0J	R 5131	(B,37,28)	RS1/16SS103J
	R 5023	(B,24,28)	RS1/16SS101J	R 5132	(A,10,19)	RS1/16SS0R0J
■	R 5024	(B,24,30)	RS1/16SS121J	R 5315	(A,16,82)	RS1/16SS0R0J
	R 5025	(B,26,28)	RS1/16SS121J	R 5316	(A,16,83)	RS1/16SS0R0J
	R 5026	(B,63,13)	RS1/16SS121J	R 5317	(A,16,84)	RS1/16SS0R0J
	R 5027	(B,62,13)	RS1/16SS680J	R 5318	(A,16,85)	RS1/16SS0R0J
	R 5028	(B,64,13)	RS1/16SS121J	R 5326	(A,64,84)	RS1/16SS0R0J

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 5327 (A,64,84)	RS1/16SS0R0J	C 4044 (B,40,46)	CKSSYB104K10	
R 5328 (A,64,83)	RS1/16SS0R0J	C 4045 (B,39,47)	CKSSYB104K10	
R 5329 (A,64,82)	RS1/16SS0R0J	C 4047 (B,49,48)	CKSSYB104K10	A
R 5351 (A,4,15)	RS1/16SS0R0J	C 4048 (B,44,48)	CKSSYB104K10	
R 5352 (A,5,15)	RS1/16SS0R0J	C 4050 (B,41,48)	CKSSYB104K10	
		C 4051 (B,44,42) 22 uF	DCH1256	
R 5353 (A,6,15)	RS1/16SS0R0J	C 4052 (B,43,46) 22 uF	CCG1254	
R 5354 (A,7,15)	RS1/16SS0R0J			
R 5355 (A,8,15)	RS1/16SS0R0J	C 4053 (B,36,36) 22 uF	CCG1254	
R 5356 (A,9,15)	RS1/16SS0R0J	C 4054 (B,52,33) 10 uF	CCG1192	
R 5357 (A,10,15)	RS1/16SS0R0J	C 4055 (B,50,35)	CKSSYB104K10	
		C 4056 (A,36,14) 10 uF	CCG1192	
R 5358 (A,11,15)	RS1/16SS0R0J	C 4057 (B,35,49) 10 uF	CCG1192	
R 5359 (A,11,15)	RS1/16SS0R0J			
R 5360 (A,12,15)	RS1/16SS0R0J	C 4058 (B,38,46)	CKSSYB104K10	
R 5361 (A,13,15)	RS1/16SS0R0J	C 4059 (B,47,48)	CKSSYB104K10	B
R 5362 (A,14,15)	RS1/16SS0R0J	C 4062 (B,56,54)	CKSSYB104K10	
		C 4063 (B,54,54)	CKSSYB104K10	
R 5376 (A,59,15)	RS1/16SS0R0J	C 4064 (B,44,36) 10 uF	CCG1192	
R 5377 (A,58,15)	RS1/16SS0R0J			
R 5378 (A,57,15)	RS1/16SS0R0J	C 4065 (B,37,39)	CKSSYB104K10	
R 5379 (A,56,15)	RS1/16SS0R0J	C 4066 (B,48,40)	CKSSYB104K10	
		C 4067 (B,48,38)	CKSSYB104K10	
		C 4068 (B,40,39)	CKSSYB104K10	
		C 4069 (B,41,42) 1 uF	DCH1246	
CAPACITORS				
C 4001 (A,51,28)	CCSSCJ3R0C50	C 4070 (B,45,37)	CKSSYB104K10	
C 4002 (A,47,30)	CCSSCH4R0C50	C 4071 (B,46,34)	CKSSYB104K10	
C 4003 (A,43,30)	CCSSCH180J50	C 4072 (B,39,32) 10 uF	CCG1192	C
C 4004 (A,43,28)	CCSSCH8R0D50	C 4073 (B,44,31) 10 uF	CCG1192	
C 4005 (B,52,36) 10 uF	CCG1192	C 4075 (B,41,36)	CKSSYB104K10	
C 4006 (B,50,37)	CKSSYB104K10	C 4076 (B,35,41) 10 uF	CCG1192	
C 4007 (B,52,38) 2.2 uF	CCG1218	C 4077 (B,53,49) 10 uF	CCG1192	
C 4008 (B,50,38)	CKSSYB104K10	C 4078 (B,48,36)	CKSSYB104K10	
C 4009 (B,40,36)	CKSSYB104K10	C 4079 (A,43,25)	CCSSCH101J50	
C 4010 (B,34,31) 10 uF	CCG1192	C 4080 (B,52,51)	CKSSYB104K10	
C 4011 (B,38,36)	CKSSYB104K10	C 4087 (B,43,38) 22 uF	DCH1256	
C 4012 (B,37,36)	CKSSYB104K10	C 4301 (B,59,66)	CKSSYB104K10	
C 4013 (B,44,33) 10 uF	CCG1192	C 4302 (A,59,66)	CKSSYB104K10	
C 4014 (B,45,34)	CKSSYB104K10	C 4303 (B,51,63)	CKSSYB104K10	D
C 4015 (B,45,38)	CKSSYB104K10	C 4304 (B,51,65)	CKSSYB104K10	
C 4016 (B,46,40)	CKSSYB104K10	C 4305 (B,50,67)	CKSSYB104K10	
C 4017 (B,46,43)	CKSSYB104K10	C 4306 (A,49,67)	CKSSYB104K10	
C 4018 (B,46,44)	CKSSYB104K10	C 4307 (A,49,69)	CKSSYB104K10	
C 4019 (B,44,39)	CKSSYB104K10	C 4308 (A,49,71)	CKSSYB104K10	
C 4020 (B,42,41)	CKSSYB104K10	C 4309 (B,52,67) 4.7 uF	CCG1201	
C 4021 (B,42,42)	CKSSYB104K10	C 4310 (B,52,70)	CKSSYB104K10	
C 4022 (B,42,43)	CKSSYB104K10	C 4311 (A,59,68)	CKSSYB104K10	
C 4023 (B,38,38)	CKSSYB104K10	C 4312 (B,58,70)	CKSSYB104K10	
C 4024 (B,37,41)	CKSSYB104K10	C 4313 (B,56,71)	CKSSYB104K10	
C 4025 (B,38,44)	CKSSYB104K10	C 4314 (A,59,75)	CKSSYB104K10	E
C 4026 (B,49,38)	CKSSYB104K10	C 4315 (A,59,77)	CKSSYB104K10	
C 4027 (B,49,40)	CKSSYB104K10	C 4316 (B,59,77)	CKSSYB104K10	
C 4029 (B,40,41)	CKSSYB104K10	C 4317 (B,58,77) 4.7 uF	CCG1201	
C 4030 (B,47,42) 1 uF	DCH1246	C 4318 (A,49,75)	CKSSYB104K10	
C 4031 (B,40,45)	CKSSYB104K10	C 4319 (B,50,75)	CKSSYB104K10	
C 4034 (B,48,43)	CKSSYB104K10	C 4320 (A,49,78)	CKSSYB104K10	
C 4037 (B,40,38)	CKSSYB104K10	C 4321 (B,59,68)	CKSSYB104K10	
C 4038 (B,39,43) 1 uF	DCH1246	C 4322 (B,59,70)	CKSSYB104K10	
C 4039 (B,36,46)	CKSSYB104K10	C 4323 (B,56,73)	CKSSYB104K10	
C 4040 (B,44,46)	CKSSYB104K10	C 4324 (B,59,75)	CKSSYB104K10	F
C 4041 (B,36,44)	CKSSYB104K10	C 4325 (A,41,66)	CKSSYB104K10	
C 4042 (B,48,46)	CKSSYB104K10	C 4326 (B,40,66)	CKSSYB104K10	
C 4043 (B,46,46)	CKSSYB104K10	C 4327 (B,33,63)	CKSSYB104K10	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 4328 (B,33,64)
C 4329 (A,30,67)

CKSSYB104K10
CKSSYB104K10

C 4429 (A,26,63) 1 uF
C 4430 (A,26,64)

DCH1246
CKSSYB104K10

A

C 4330 (B,30,67)
C 4331 (A,30,69)
C 4332 (A,30,71)
C 4333 (B,28,69) 4.7 uF
C 4334 (B,33,71)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1201
CKSSYB104K10

C 4431 (A,17,60)
C 4432 (A,26,65)
C 4433 (B,26,58)
C 4435 (A,22,67)
C 4436 (A,23,67) 10 uF

CKSSYB103K16
CKSSYB103K16
CKSSYB471K50
CKSSYB104K10
CCG1192

C 4335 (A,41,68)
C 4336 (A,41,70)
C 4337 (B,38,71)
C 4338 (B,50,69)
C 4339 (B,50,71)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4437 (A,22,63)
C 4438 (A,24,63) 10 uF
C 4439 (B,26,59)
C 4501 (B,11,45)
C 4502 (B,5,40)

CKSSYB104K10
CCG1192
CKSSYB103K16
CKSSYB104K10
CKSSYB104K10

B

C 4340 (A,43,71)
C 4341 (B,52,75)
C 4342 (B,50,78)
C 4343 (B,40,68)
C 4344 (B,39,70)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4503 (B,4,38)
C 4504 (B,11,33)
C 4505 (B,14,33)
C 4506 (B,13,31) 10 uF
C 4507 (B,13,32)

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CCG1192
CKSSYB103K16

C 4345 (B,33,75)
C 4346 (B,30,75)
C 4347 (A,30,75)
C 4348 (A,30,77)
C 4349 (A,41,75)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4508 (B,18,37)
C 4509 (B,8,32) 10 uF
C 4510 (B,15,44)
C 4511 (B,6,44) 10 uF
C 4516 (B,17,40)

CKSSYB103K16
CCG1192
CKSSYB102K50
CCG1192
CCSSCH101J50

C

C 4350 (A,41,77)
C 4351 (B,40,77)
C 4352 (B,38,76) 4.7 uF
C 4353 (A,61,71)
C 4354 (B,40,75)

CKSSYB104K10
CKSSYB104K10
CCG1201
CKSSYB104K10
CKSSYB104K10

C 4704 (B,67,58)
C 4706 (B,65,64)
C 4707 (B,64,64)
C 4708 (A,71,64) 47 uF
C 4709 (A,68,64) 100 uF

CKSRYB105K10
CCSSCH470J50
CKSSYB471K50
CCG1229
CCG1232

C 4355 (B,30,69)
C 4356 (B,51,75)
C 4357 (B,39,81)
C 4358 (B,57,81)
C 4361 (B,30,71)

CKSSYB104K10
CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10

C 4711 (B,64,62)
C 4712 (B,73,63)
C 4722 (B,63,37)
C 4723 (B,71,39)
C 4724 (B,70,39)

CCSSCH220J50
CKSSYB103K16
CKSRYB105K10
CKSSYB103K16
CCSSCH470J50

D

C 4362 (B,33,72)
C 4363 (B,30,77)
C 4364 (B,38,73)
C 4381 (A,26,73)
C 4382 (A,25,71)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4725 (B,70,40)
C 4726 (A,69,33) 47 uF
C 4727 (A,70,36) 100 uF
C 4729 (B,67,40)
C 4730 (B,68,31)

CKSSYB471K50
CCG1229
CCG1232
CCSSCH220J50
CKSSYB103K16

C 4401 (A,9,48)
C 4402 (A,5,71)
C 4403 (A,9,71)
C 4404 (B,30,52)
C 4405 (B,29,57)

CKSSYB471K50
CKSSYB104K10
CKSSYB103K16
CCSSCH8R0D50
CCSSCH8R0D50

C 4742 (B,65,46)
C 4744 (B,64,52)
C 4745 (B,62,52)
C 4746 (A,70,52) 47 uF
C 4747 (A,67,52) 100 uF

CKSRYB105K10
CCSSCH470J50
CKSSYB471K50
CCG1229
CCG1232

E

C 4406 (B,22,58)
C 4412 (A,22,65)
C 4413 (A,19,68)
C 4414 (A,19,65)
C 4415 (A,20,64)

CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16

C 4749 (B,62,49)
C 4750 (B,71,51)
C 4766 (A,35,17) 4.7 uF
C 4767 (A,33,17) 4.7 uF
C 4768 (A,26,16)

CCSSCH220J50
CKSSYB103K16
CCG1201
CCG1201
CKSSYB473K16

C 4416 (A,20,67)
C 4417 (A,19,63)
C 4418 (A,17,63)
C 4419 (A,17,64)
C 4420 (A,17,65)

CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16

C 4776 (A,65,23)
C 4778 (A,27,25)
C 4790 (A,47,22)
C 4791 (A,45,23)
C 4792 (A,44,18)

CKSSYB104K10
CKSSYB473K16
CCSSCH101J50
CKSSYB104K10
CKSSYB104K10

F

C 4421 (A,17,66)
C 4422 (A,19,67)
C 4423 (A,26,65)
C 4424 (B,26,65)
C 4425 (A,25,67)

CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16

C 4793 (A,49,19)
C 4794 (A,42,15)
C 4796 (A,19,59) 4.7 uF
C 4797 (A,20,56) 4.7 uF
C 4798 (A,43,22)

CKSSYB222K50
CKSSYB104K10
CCG1201
CCG1201
CKSSYB104K10

C 4426 (A,18,67)
C 4427 (A,17,60)
C 4428 (A,17,59) 1 uF

CKSSYB103K16
CKSSYB104K10
DCH1246

C 4799 (A,49,25)
C 4800 (A,27,60)
C 4901 (A,40,23) 1 uF

CCSSCH101J50
CKSSYB473K16
DCH1246

1

2

3

4

5		6	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 4902	(B,58,43)	CKSSYB104K10	
C 4903	(A,67,24)	CKSSYB104K10	
C 4904	(A,65,25)	CKSSYB102K50	
C 4914	(B,59,45)	CKSSYB103K16	
C 4915	(A,31,25)	CKSSYB104K10	
C 4933	(A,56,35)	CCSSCH101J50	
C 5001	(A,73,21) 22 uF	DCH1256	
C 5003	(A,67,16) 22 uF	DCH1256	
C 5007	(B,40,11)	CKSRYB102K50	



Unit Number : CWN9924(A,C,E)

Unit Number : CWN9925(B,D,F,G)

Unit Name : Monitor Unit

MISCELLANEOUS

IC 2701	(A,102,46)	Interface IC(B,D,F,G)	AK4187VN
IC 2801	(B,36,69)	Regulator IC	MM3411A15N
IC 2802	(B,36,75)	Regulator IC	MM3411A25N
IC 2803	(B,68,48)	Interface IC	BU90R104
IC 2804	(B,57,74)	Regulator IC(A,C,E)	MM3411A33N
IC 3001	(A,32,51)	Display IC	TC90193ASBG
IC 3101	(A,107,72)	Driver IC	BD81A04EFV-M
IC 3201	(A,105,17)	DC/DC Converter IC	R1290K103A
Q 2701	(B,110,47)	Chip Transistor	HN1C01FU
Q 2702	(B,113,52)	Bipolar Transistor	LSCR523UB
Q 3001	(B,19,41)	Bipolar Transistor	LSAR523UB
Q 3002	(A,18,39)	Bipolar Transistor	LSCR523UB
Q 3201	(A,108,26)	Transistor	2SAR502UB
Q 3202	(A,111,13)	Transistor	LTC024EEB
Q 3301	(A,58,16)	Bipolar Transistor	LSAR523UB
D 3101	(A,107,60)	Diode	RB060M-30
D 3201	(B,107,16)	Schottky Diode	DB3S308F0
D 3202	(B,102,23)	Schottky Diode	DB3S308F0
D 3203	(B,104,23)	Schottky Diode	DB3S308F0
D 3204	(A,96,22)	Schottky Diode	RB162M-40
L 2801	(B,68,37)	Chip Beads	VTL1127
L 2802	(B,67,37)	Chip Beads	VTL1127
L 2803	(B,65,36)	Chip Beads	VTL1127
L 2804	(B,63,36)	Chip Beads	VTL1127
L 2805	(B,65,37)	Chip Beads	VTL1127
L 2806	(B,63,38)	Chip Beads	VTL1127
L 2807	(B,61,41)	Chip Beads	VTL1127
L 2808	(B,65,40)	Chip Beads	VTL1127
L 2809	(B,60,43)	Chip Beads	VTL1127
L 2810	(B,60,44)	Chip Beads	VTL1127
L 2811	(B,60,45)	Chip Beads	VTL1127
L 2812	(B,60,46)	Chip Beads	VTL1127
L 2813	(B,58,48)	Chip Beads	VTL1127
L 2814	(B,58,49)	Chip Beads	VTL1127
L 2815	(B,58,50)	Chip Beads	VTL1127
L 2816	(B,58,51)	Chip Beads	VTL1127
L 2817	(B,58,52)	Chip Beads	VTL1127
L 2818	(B,58,53)	Chip Beads	VTL1127
L 2819	(B,58,54)	Chip Beads	VTL1127
L 2820	(B,58,55)	Chip Beads	VTL1127
L 2821	(B,58,56)	Chip Beads	VTL1127
L 2822	(A,73,53)	Chip Solid Inductor	XTL3010

7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
L 2823	(A,67,51)	Chip Solid Inductor	XTL3010
L 2829	(A,73,56)	Chip Ferrite Bead	BTX1047
L 2830	(B,73,41)	Chip Beads	VTL1127
L 2831	(B,72,41)	Chip Beads	VTL1127
L 2832	(B,72,35)	Chip Beads	VTL1127
L 2833	(B,71,37)	Chip Beads	VTL1127
L 2834	(B,70,37)	Chip Beads	VTL1127
L 2835	(B,69,38)	Chip Beads	VTL1127
L 3001	(A,41,45)	Inductor	CTF1734
L 3002	(A,42,45)	Inductor	CTF1734
L 3003	(A,41,46)	Inductor	CTF1734
L 3004	(A,41,48)	Inductor	CTF1734
L 3005	(A,42,50)	Inductor	CTF1734
L 3006	(A,41,50)	Inductor	CTF1734
L 3007	(A,47,45)	Inductor	CTF1734
L 3008	(A,48,44)	Inductor	CTF1734
L 3009	(A,48,49)	Inductor	CTF1734
L 3010	(A,49,47)	Inductor	CTF1734
L 3011	(A,49,49)	Inductor	CTF1734
L 3012	(A,41,55)	Inductor	CTF1734
L 3013	(A,42,44)	Inductor	CTF1734
L 3014	(A,42,43)	Inductor	CTF1734
L 3015	(A,41,41)	Inductor	CTF1734
L 3016	(A,40,41)	Inductor	CTF1734
L 3017	(A,39,41)	Inductor	CTF1734
L 3018	(A,37,42)	Inductor	CTF1734
L 3019	(A,36,42)	Inductor	CTF1734
L 3020	(A,35,42)	Inductor	CTF1734
L 3021	(A,31,43)	Inductor	CTF1740
L 3022	(A,30,43)	Inductor	CTF1734
L 3023	(A,29,41)	Inductor	CTF1734
L 3024	(A,28,41)	Inductor	CTF1734
L 3025	(B,11,44)	Inductor	CTF1545
L 3104	(A,106,65)	Inductor	CTF1545
L 3105	(A,100,62)	SMD Inductor	CTH1558
L 3201	(A,103,23)	Choke Coil 22 uH	CTH1426
L 3301	(A,69,19)	Inductor	ATL7054
L 3302	(B,43,35)	Inductor	CTF1635
TH3301	(A,132,20)	Thermistor	CCX1084
X 3001	(A,18,48)	Resonator 27.000 MHz	CSS1768
CN2704	(A,59,68)	Connector	CKS6646
CN2705	(A,123,17)	Connector(B,D,F,G)	CKS6625
CN2706	(A,82,25)	Connector(A,C,E)	CKS6589
CN2707	(A,141,16)	Connector	CKS6635
CN3301	(A,35,31)	Connector	CKS6602
CN3302	(A,121,41)	Connector	DKN1361

RESISTORS

R 2704	(A,99,55)	RS1/16SS471J
R 2705	(A,99,56)	RS1/16SS471J
R 2706	(A,99,57)	RS1/16SS471J
R 2715	(A,101,40) (B,D,F,G)	RS1/16SS0R0J
R 2716	(A,102,40) (B,D,F,G)	RS1/16SS0R0J
R 2717	(A,101,42) (B,D,F,G)	RS1/16SS621J
R 2718	(A,102,42) (B,D,F,G)	RS1/16SS181J
R 2719	(A,100,43) (B,D,F,G)	RS1/16SS201J
R 2720	(A,104,43) (B,D,F,G)	RS1/16SS620J
R 2724	(A,99,48) (B,D,F,G)	RS1/16SS121J
R 2725	(A,103,50) (B,D,F,G)	RS1/16SS0R0J

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 2726 (A,105,49) (B,D,F,G)
 R 2727 (A,77,29) (A,C,E)
 R 2728 (A,90,25) (A,C,E)
 R 2729 (A,86,30) (A,C,E)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS121J

R 3001 (A,44,43)
 R 3002 (A,44,45)
 R 3003 (A,44,46)
 R 3004 (A,45,46)

RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J

R 2730 (A,88,26) (A,C,E)
 R 2731 (A,85,29) (A,C,E)
 R 2733 (B,115,52)
 R 2734 (B,116,52)
 R 2735 (B,117,52)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS180J
 RS1/16SS180J
 RS1/16SS220J

R 3005 (A,44,49)
 R 3006 (A,44,50)
 R 3007 (A,46,43)
 R 3008 (A,47,42)
 R 3009 (A,48,47)

RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J

R 2736 (B,111,44)
 R 2737 (B,112,44)
 R 2739 (B,109,50)
 R 2740 (B,108,50)
 R 2741 (B,108,48)

RS1/16SS620J
 RS1/16SS620J
 RS1/16SS150J
 RS1/16SS150J
 RS1/16SS180J

R 3010 (A,48,42)
 R 3011 (A,49,45)
 R 3012 (A,43,55)
 R 3017 (A,42,57)
 R 3018 (A,41,58)

RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS472J
 RS1/16SS472J

R 2785 (A,117,52)
 R 2786 (A,117,51)
 R 2787 (A,117,50)
 R 2788 (A,117,49)
 R 2791 (A,115,59)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J

R 3019 (A,41,60)
 R 3022 (A,43,43)
 R 3023 (A,42,41)
 R 3024 (A,41,40)
 R 3025 (A,40,40)

RS1/16SS472J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J

R 2801 (B,67,36)
 R 2802 (B,59,36)
 R 2803 (B,61,36)
 R 2804 (B,60,37)
 R 2805 (B,62,37)

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

R 3026 (A,39,40)
 R 3028 (A,37,40)
 R 3029 (A,36,40)
 R 3031 (A,35,40)
 R 3038 (A,31,41)

RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS151J
 RS1/16SS680J

R 2806 (B,60,38)
 R 2807 (B,59,42)
 R 2808 (B,62,40)
 R 2809 (B,59,43)
 R 2810 (B,58,44)

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

R 3040 (A,30,37)
 R 3041 (A,29,39)
 R 3042 (B,13,56)
 R 3043 (A,28,39)
 R 3044 (B,21,57)

RS1/16SS470J
 RS1/16SS470J
 RS1/16SS0R0J
 RS1/16SS151J
 RS1/16SS472J

R 2811 (B,58,45)
 R 2812 (B,57,46)
 R 2813 (B,56,48)
 R 2814 (B,56,49)
 R 2815 (B,56,50)

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

R 3047 (B,15,41)
 R 3048 (B,23,60)
 R 3049 (B,15,42)
 R 3050 (B,17,40)
 R 3051 (B,16,42)

RS1/16SS912J
 RS1/16SS472J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS391J

R 2816 (B,56,51)
 R 2817 (B,56,52)
 R 2818 (B,56,53)
 R 2819 (B,56,54)
 R 2820 (B,56,55)

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

R 3053 (A,23,62)
 R 3054 (A,25,62)
 R 3055 (A,24,62)
 R 3056 (A,17,52)
 R 3057 (A,17,53)

RS1/16SS472J
 RS1/16SS472J
 RS1/16SS472J
 RS1/16SS472J
 RS1/16SS472J

R 2821 (B,56,56)
 R 2822 (B,76,49)
 R 2824 (B,69,56)
 R 2825 (B,67,57)
 R 2826 (B,66,56)

RS1/16SS221J
 RS1/16SS103J
 RS1/16SS1000D
 RS1/16SS1000D
 RS1/16SS1000D

R 3058 (B,20,55)
 R 3059 (A,17,54)
 R 3060 (A,22,62)
 R 3061 (A,19,59)
 R 3064 (A,21,49)

RS1/16SS472J
 RS1/16SS472J
 RS1/16SS472J
 RS1/16SS472J
 RS1/16SS105J

R 2827 (B,64,57)
 R 2828 (B,63,56)
 R 2834 (B,73,39)
 R 2835 (B,72,39)
 R 2836 (B,70,34)

RS1/16SS1000D
 RS1/16SS1000D
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

R 3065 (A,19,51)
 R 3073 (B,27,48)
 R 3074 (A,22,42)
 R 3077 (A,17,55)
 R 3078 (A,17,58)

RS1/16SS471J
 RS1/16SS0R0J
 RS1/16SS152J
 RS1/16SS470J
 RS1/16SS273J

R 2837 (B,70,35)
 R 2838 (B,69,35)
 R 2839 (B,68,36)
 R 2857 (B,77,49)
 R 2858 (B,80,48)

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS103J
 RS1/16SS103J

R 3079 (A,18,57)
 R 3080 (A,20,62)
 R 3081 (A,21,62)
 R 3083 (A,17,42)
 R 3089 (B,14,47)

RS1/16SS470J
 RS1/16SS470J
 RS1/16SS470J
 RS1/16SS122J
 RS1/10SR0R0J

R 2859 (B,76,52)
 R 2861 (B,63,75) (B,D,F,G)
 R 2862 (B,66,75) (A,C,E)
 R 2863 (B,62,73) (A,C,E)
 R 2864 (B,53,71) (A,C,E)

RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J
 RS1/10SR0R0J

R 3091 (A,18,59)
 R 3094 (A,19,56)
 R 3095 (A,16,59)
 R 3100 (B,27,70)
 R 3103 (B,108,67)

RS1/16SS472J
 RS1/16SS472J
 RS1/16SS273J
 RS1/16SS0R0J
 RS1/16SS104J

R 2865 (B,80,49)

RS1/16SS221J

R 3104 (B,107,67)

RS1/16SS154J

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
R 3105 (A,109,77)	RS1/16SS273J	C 2705 (A,97,45) 10 uF(B,D,F,G)	DCH1201
R 3106 (A,110,77)	RS1/16SS511J	C 2706 (A,99,45) (B,D,F,G)	CKSSYB104K10
R 3108 (B,99,68)	RS1/16SS1203D	C 2707 (A,101,49) (B,D,F,G)	CKSSYB104K10
R 3110 (B,97,68)	RS1/16SS1003D	C 2708 (A,100,50) 10 uF(B,D,F,G)	DCH1201
		C 2709 (B,82,29) (A,C,E)	CKSSYB104K10
R 3116 (A,123,63)	RS1/16SS3603D		
R 3117 (A,123,65)	RS1/16SS2402D	C 2803 (A,58,47)	CKSSYB104K10
R 3120 (A,123,73)	RS1/16SS0R0J	C 2804 (B,58,47)	CKSSYB103K16
R 3121 (A,123,74)	RS1/16SS0R0J	C 2805 (B,60,54)	CKSSYB103K16
R 3202 (A,102,15)	RS1/16SS103J	C 2806 (A,62,53)	CKSSYB104K10
		C 2807 (B,73,56)	CKSSYB103K16
R 3203 (B,104,16)	RS1/10SR9102D		
R 3204 (B,104,19)	RS1/10SR1802D	C 2808 (B,74,56)	CKSSYB104K10
R 3205 (B,103,14)	RS1/16SS203J	C 2809 (A,64,53)	CKSSYB104K10
R 3206 (B,102,14)	RS1/16SS104J	C 2810 (A,64,52)	CKSSYB103K16
R 3207 (A,106,24)	RS1/16SS103J	C 2814 (A,66,53)	CKSSYB103K16
		C 2816 (A,71,53) 10 uF	DCH1201
R 3208 (A,107,12)	RS1/16SS472J		
R 3209 (B,106,24)	RS1/10SR1003D	C 2819 (B,40,70)	CKSRYB105K10
R 3210 (B,107,28)	RS1/10SR9101D	C 2820 (B,40,76)	CKSRYB105K10
R 3211 (A,108,13)	RS1/16SS6800D	C 2821 (B,33,75)	CKSRYB105K10
R 3212 (A,109,13)	RS1/16SS1502D	C 2822 (B,33,70)	CKSRYB105K10
		C 2823 (B,68,39)	CKSSYB104K10
R 3213 (A,110,14)	RS1/16SS8201D		
R 3214 (A,99,23)	RS1/10SR2R2J	C 2824 (B,68,40)	CKSSYB103K16
R 3216 (A,100,13)	RS1/10SR1203D	C 2825 (B,78,48)	CKSSYB103K16
R 3217 (A,103,13)	RS1/10SR3001D	C 2826 (B,77,48)	CKSSYB104K10
R 3218 (A,103,10)	RS1/10SR1502D	C 2828 (B,54,73) (A,B,E)	CKSSYB104K10
		C 2829 (B,60,74) (A,B,E)	CKSRYB474K10
R 3219 (A,100,12)	RS1/10SR472J		
R 3301 (A,56,28)	RS1/10SR4R7J	C 2830 (B,80,50)	CKSQYB225K10
R 3302 (A,54,33)	RS1/10SR56R0D	C 3002 (A,41,47)	CKSSYB104K10
R 3303 (A,56,35)	RS1/10SR1800D	C 3003 (A,41,49)	CKSSYB104K10
R 3304 (A,59,34)	RS1/10SR2R2J	C 3004 (A,41,52)	CKSSYB104K10
		C 3005 (A,41,53)	CKSSYB104K10
R 3305 (A,60,28)	RS1/10SR47R0D		
R 3306 (A,61,31)	RS1/10SR0R0J	C 3006 (A,42,56)	CKSSYB104K10
R 3307 (A,64,28)	RS1/10SR39R0D	C 3007 (A,38,42)	CKSSYB104K10
R 3308 (A,64,31)	RS1/10SR4R7J	C 3008 (A,36,61)	CKSSYB104K10
R 3309 (A,67,28)	RS1/10SR1000D	C 3010 (A,34,43)	CKSSYB104K10
		C 3011 (A,33,60)	CKSSYB104K10
R 3310 (A,68,31)	RS1/10SR8R2J		
R 3311 (A,71,28)	RS1/10SR1300D	C 3013 (A,33,42)	CKSSYB104K10
R 3312 (A,71,31)	RS1/10SR0R0J	C 3014 (A,32,60)	CKSSYB104K10
R 3313 (A,69,25)	RS1/10SR1000D	C 3015 (A,30,40)	CCSSCH470J50
R 3314 (A,68,23)	RS1/10SR8R2J	C 3019 (B,13,42) 10 uF	CCG1192
		C 3021 (A,28,43)	CKSSYB104K10
R 3315 (A,66,25)	RS1/10SR39R0D		
R 3316 (A,65,23)	RS1/10SR4R7J	C 3022 (A,29,60)	CKSSYB104K10
R 3317 (A,62,25)	RS1/10SR47R0D	C 3023 (B,17,44)	CKSSYB104K10
R 3318 (A,61,23)	RS1/10SR0R0J	C 3024 (A,24,40)	CKSSYB104K10
R 3319 (A,59,25)	RS1/10SR1800D	C 3025 (A,22,40)	CKSRYB474K10
		C 3026 (A,24,41)	CKSSYB104K10
R 3320 (A,58,23)	RS1/10SR2R2J		
R 3321 (A,56,23)	RS1/10SR33R0D	C 3027 (A,23,52)	CKSSYB104K10
R 3322 (A,56,26)	RS1/10SR2R4J	C 3028 (A,22,54)	CKSSYB104K10
R 3323 (B,32,31)	RS1/16SS473J	C 3029 (A,23,57)	CKSSYB104K10
R 3324 (A,24,37)	RS1/16SS473J	C 3030 (A,20,44)	CKSSYB152K50
		C 3031 (A,25,42)	CKSSYB104K10
R 3327 (A,28,37)	RS1/16SS473J		
R 3328 (A,29,37)	RS1/16SS473J	C 3032 (A,23,43)	CKSSYB104K10
R 3330 (A,55,20)	RS1/16SS472J	C 3033 (A,23,46)	CKSSYB104K10
R 3332 (A,56,17)	RS1/16SS105J	C 3037 (A,21,47)	CCSSCH120J50
R 3333 (A,60,19)	RS1/16SS682J	C 3038 (A,23,47)	CKSSYB103K16
		C 3040 (A,19,42)	CCSSCH4R0C50
R 3334 (A,60,18)	RS1/16SS0R0J		
R 3336 (A,62,15)	RS1/16SS101J	C 3041 (A,18,51)	CCSSCH120J50
R 3339 (A,62,16)	RS1/16SS0R0J	C 3042 (A,26,73) 4.7 uF	CCG1201
R 3344 (A,133,16)	RS1/16SS183J	C 3043 (A,22,48)	CKSSYB104K10
		C 3044 (A,17,59)	CKSSYB103K16
		C 3046 (B,11,45)	CKSSYB104K10

CAPACITORS

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

S 3553	(A,133,5) Push Switch	CSG1196
S 3554	(A,142,5) Push Switch	CSG1196
S 3555	(A,30,5) Push Switch	CSG1196
S 3556	(A,50,5) Push Switch	CSG1196
S 3557	(A,67,5) Push Switch	CSG1196
S 3558	(A,82,5) Push Switch	CSG1196
S 3559	(A,158,5) Push Switch	CSG1196
U 3551	(A,8,5) Remote Receiver Unit	RS-470
CN3551	(A,22,6) Connector	CKS6421

RESISTORS

R 3551	(A,94,4)	RS1/16SS182J
R 3552	(A,111,5)	RS1/16SS222J
R 3553	(A,128,4)	RS1/16SS472J
R 3554	(A,138,3)	RS1/16SS123J
R 3555	(A,45,4)	RS1/16SS182J
R 3556	(A,63,4)	RS1/16SS222J
R 3557	(A,77,4)	RS1/16SS472J
R 3558	(A,138,6)	RS1/16SS390J
R 3559	(A,33,6)	RS1/16SS390J
R 3560	(A,35,6)	RS1/16SS150J
R 3561	(A,36,6)	RS1/16SS620J
R 3562	(A,136,4)	RS1/16SS150J
R 3563	(A,137,5)	RS1/16SS620J
R 3565	(A,16,8)	RS1/16SS470J

CAPACITORS

C 3557	(A,12,7)	CKSSYB104K10
--------	----------	--------------

**Unit Number : CWX4712****Unit Name : Sensor Unit****MISCELLANEOUS**

IC 401	(A,21,17) IC	UBX-G6010-ST
IC 402	(A,36,16) Sensor	S-5851AAA-I6U
IC 403	(B,23,15) IC	R5S726A0D216FP
IC 404	(A,7,18) Flash ROM Unit	CWW9799
IC 405	(B,6,7) IC	S-80827CNMC-B8M
IC 406	(A,6,7) Regulator IC	S-1206B1C-I6U
D 402	(B,7,22) Diode	DA2J101
L 401	(A,25,11) Inductor	LCYB10NJ1005
L 402	(A,16,12) SMD Ferrite Bead	CTF1806
L 403	(A,32,21) Chip Ferrite Bead	OTL8019
L 404	(A,38,14) Chip Ferrite Bead	OTL8019
L 405	(A,39,13) Chip Ferrite Bead	OTL8019
L 406	(A,10,8) Chip Ferrite Bead	OTL8019
L 407	(A,15,9) Chip Ferrite Bead	OTL8019
X 401	(A,13,13) Crystal Oscillator 26 MHz	CWX4552

X 402	(A,29,18) Resonator 32.768 kHz	CSS1807
X 403	(B,8,17) Crystal Resonator 10 MHz	CSS1799
F 401	(A,29,14) Filter	CTF1830
GY401	(A,34,10) Sensor(Gyro Sensor)	CSX1209
GY402	(A,35,21) Sensor(G Sensor)	CSX1210

CN401	(A,20,5) Connector	CKS5204
-------	--------------------	---------

RESISTORS

A

C 3101	(A,115,72) 10 uF	CCG1236
C 3102	(A,113,74)	CKSSYB104K16
C 3103	(A,110,79)	CKSSYB104K10
C 3104	(A,111,77)	CKSSYB104K10
C 3107	(A,109,67) 2.2 uF	CCG1218

C 3109	(A,111,63) 10 uF	CCG1236
C 3110	(A,114,63) 10 uF	CCG1236
C 3111	(A,116,63) 10 uF	CCG1236
C 3201	(A,102,17)	CKSSYB102K50
C 3202	(B,105,16)	CKSRYB105K16

B

C 3203	(B,102,17) 1 uF	DCH1246
C 3205	(B,103,29)	CKSQYB105K25
C 3206	(B,106,29)	CKSQYB105K25
C 3208	(B,109,16)	CKSRYB104K50
C 3209	(B,103,21)	CKSRYB104K50

C 3210	(B,104,21)	CKSRYB104K50
C 3211	(A,109,9)	CKSSYB224K6R3
C 3212	(A,108,9)	CKSSYB224K6R3
C 3214	(A,107,9) 1 uF	DCH1246
C 3215	(A,112,21)	CKSYB475K16

C

C 3216	(A,106,10)	CKSRYB682K50
C 3217	(A,100,26) 4.7 uF	CCG1201
C 3218	(B,106,26)	CCSRCH561J50
C 3219	(A,110,15)	CCSSCH101J50
C 3220	(A,97,24)	CKSRYB222K50

C 3221	(A,111,18)	CKSRYB224K16
C 3222	(A,97,20)	CKSYB475K16
C 3223	(A,97,17)	CKSYB475K16
C 3224	(A,103,12)	CCSRCH471J50
C 3309	(A,69,30)	CKSSYB102K50

D

C 3310	(A,69,31)	CKSSYB104K10
C 3311	(A,70,24)	CKSSYB102K50
C 3312	(A,70,23)	CKSSYB104K10
C 3321	(B,33,34)	CKSSYB102K50
C 3322	(B,34,34)	CKSSYB104K16

C 3323	(B,37,35) 10 uF/16 V	DCH1263
C 3326	(B,48,35)	CKSSYB102K50
C 3328	(B,30,33)	CKSSYB102K50
C 3329	(B,30,34)	CKSSYB104K10
C 3330	(B,30,37) 10 uF	DCH1201

C 3333	(B,25,34)	CKSSYB104K16
C 3334	(B,28,34) 4.7 uF	CCG1201
C 3336	(B,28,30)	CKSQYB225K16
C 3338	(B,18,31)	CKSQYB334K50
C 3342	(A,19,36)	CKSSYB104K10

E

C 3343	(A,57,17)	CKSSYB104K10
C 3344	(A,66,18) 10 uF	CCG1236
C 3345	(A,132,16)	CKSSYB104K10
C 3346	(A,132,18)	CKSSYB104K10

**Unit Number : CXX8723****Unit Name : Key Unit(Service)****MISCELLANEOUS**

F

D 3551	(A,14,5) LED	SMLVN6RGB2UK(B)
D 3552	(A,152,5) LED	SMLVN6RGB2UK(B)
S 3551	(A,99,5) Push Switch	CSG1196
S 3552	(A,115,5) Push Switch	CSG1196

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 401 (A,14,16)	RS1/16SS0R0J	C 410 (A,23,11) 1 uF	DCH1246	
R 404 (A,37,18)	RS1/16SS221J	C 411 (A,23,10) 1 uF	DCH1246	
R 405 (A,33,24)	RS1/16SS101J	C 412 (A,34,5)	CKSSYB104K10	A
R 407 (A,34,16)	RS1/16SS221J	C 413 (A,33,19) 1 uF	DCH1246	
R 408 (A,38,10)	RS1/16SS101J	C 414 (A,35,5) 1 uF	DCH1246	
R 409 (A,26,12)	RS1/16SS473J	C 415 (A,36,14)	CKSSYB104K10	
R 410 (A,15,16)	RS1/16SS101J	C 416 (A,36,6)	CKSSYB104K10	
R 411 (A,27,16)	RS1/16SS105J	C 417 (A,38,19)	CKSSYB104K10	
R 412 (A,20,23)	RS1/16SS0R0J	C 418 (A,16,13) 1 uF	DCH1246	
R 413 (A,29,22)	RS1/10SR101J	C 419 (A,27,15)	CKSSYB104K10	
R 414 (A,19,24)	RS1/16SS103J	C 420 (A,31,17)	CCSSCH120J50	
R 415 (A,21,23)	RS1/16SS0R0J	C 421 (A,31,19)	CCSSCH100D50	
R 416 (A,22,23)	RS1/16SS101J	C 422 (A,27,18) 1 uF	DCH1246	
R 417 (B,36,19)	RS1/16SS103J	C 423 (A,15,18) 2.2 uF	CCG1205	B
R 418 (B,35,18)	RS1/16SS103J	C 424 (A,15,19) 1 uF	DCH1246	
R 420 (B,34,21)	RS1/16SS101J	C 425 (A,16,21) 1 uF	DCH1246	
R 421 (B,34,20)	RS1/16SS151J	C 426 (A,17,22) 1 uF	DCH1246	
R 422 (B,32,3)	RS1/16SS101J	C 427 (A,19,23) 1 uF	DCH1246	
R 423 (A,10,24)	RS1/16SS473J	C 428 (A,24,23) 2.2 uF	CCG1205	
R 424 (A,8,24)	RS1/16SS473J	C 429 (A,26,21) 1 uF	DCH1246	
R 425 (A,6,24)	RS1/16SS473J	C 431 (B,34,17)	CKSSYB104K10	
R 426 (A,8,11)	RS1/16SS101J	C 432 (B,34,13)	CKSSYB104K10	
R 427 (B,24,3)	RS1/16SS101J	C 433 (B,34,11)	CKSSYB104K10	
R 428 (B,25,3)	RS1/16SS103J	C 434 (B,30,4)	CKSSYB104K10	
R 429 (B,7,24)	RS1/16SS101J	C 435 (B,28,25)	CKSSYB104K10	C
R 430 (B,8,25)	RS1/16SS101J	C 436 (B,26,25)	CKSSYB104K10	
R 431 (A,27,10)	RS1/16SS103J	C 437 (B,25,4)	CKSSYB104K10	
R 432 (A,5,11)	RS1/16SS101J	C 438 (B,24,25)	CKSSYB104K10	
R 433 (B,11,25)	RS1/16SS101J	C 439 (B,22,4)	CKSSYB104K10	
R 434 (A,20,10)	RS1/16SS101J	C 440 (B,21,3)	CKSSYB104K10	
R 435 (B,21,25)	RS1/16SS101J	C 441 (B,19,25)	CKSSYB104K10	
R 436 (B,16,3)	RS1/16SS103J	C 442 (B,16,4)	CKSSYB104K10	
R 437 (A,29,10)	RAB4CQ473J	C 443 (A,6,12)	CCSSCJ3R0C50	
R 438 (A,4,12)	RS1/16SS473J	C 444 (A,10,13)	CKSSYB104K10	
R 439 (A,8,12)	RS1/16SS473J	C 445 (B,12,23)	CKSSYB104K10	
R 441 (B,15,25)	RS1/16SS473J	C 446 (B,12,21)	CKSSYB104K10	D
R 444 (B,11,21)	RS1/16SS473J	C 447 (B,12,13)	CKSSYB104K10	
R 445 (B,12,15)	RS1/16SS392J	C 448 (B,12,12)	CKSSYB104K10	
R 446 (B,11,9)	RS1/16SS104J	C 449 (B,13,10)	CKSSYB104K10	
R 449 (B,37,21)	RS1/16SS473J	C 450 (B,12,16)	CKSSYB104K10	
R 450 (B,34,22)	RS1/16SS473J	C 452 (B,9,9) 1 uF	DCH1246	
R 451 (B,9,11)	RS1/16SS0R0J	C 453 (B,8,19)	CCSSCH120J50	
R 452 (B,8,13)	RS1/16SS473J	C 454 (B,8,15)	CCSSCH120J50	
R 453 (B,12,19)	RS1/16SS473J	C 455 (A,8,7) 1 uF	DCH1246	
R 454 (B,36,14)	RS1/16SS101J	C 456 (A,4,8) 1 uF	DCH1246	
R 455 (B,36,12)	RS1/16SS101J	C 457 (A,27,12)	CCSSCH101J50	E
R 456 (B,12,4)	RS1/16SS101J			
R 458 (B,12,6)	RS1/16SS101J			

CAPACITORS

C 401 (A,13,15) 1 uF	DCH1246
C 402 (A,25,9)	CCSSCH470J50
C 403 (A,25,10)	CCSSCKR50C50
C 404 (A,14,10)	CKSSYB102K50
C 405 (A,32,7)	CKSSYB103K16
C 406 (A,35,18)	CKSSYB104K10
C 407 (A,19,11)	CKSSYB104K10
C 408 (A,22,11) 1 uF	DCH1246
C 409 (A,21,10) 1 uF	DCH1246



Unit Number : EXX2001

Unit Name : PCB Assy (Service)

MISCELLANEOUS

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connector	CKS4997

RESISTORS

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
R 101		RS1/16S221J
R 102		RS1/16S221J
R 103		RS1/16S0R0J

A

CAPACITORS

C 101		CEVW220M16
C 102		CKSRYB104K16

■

B

■

C

■

D

■

E

■

F