




EXPLODED VIEW

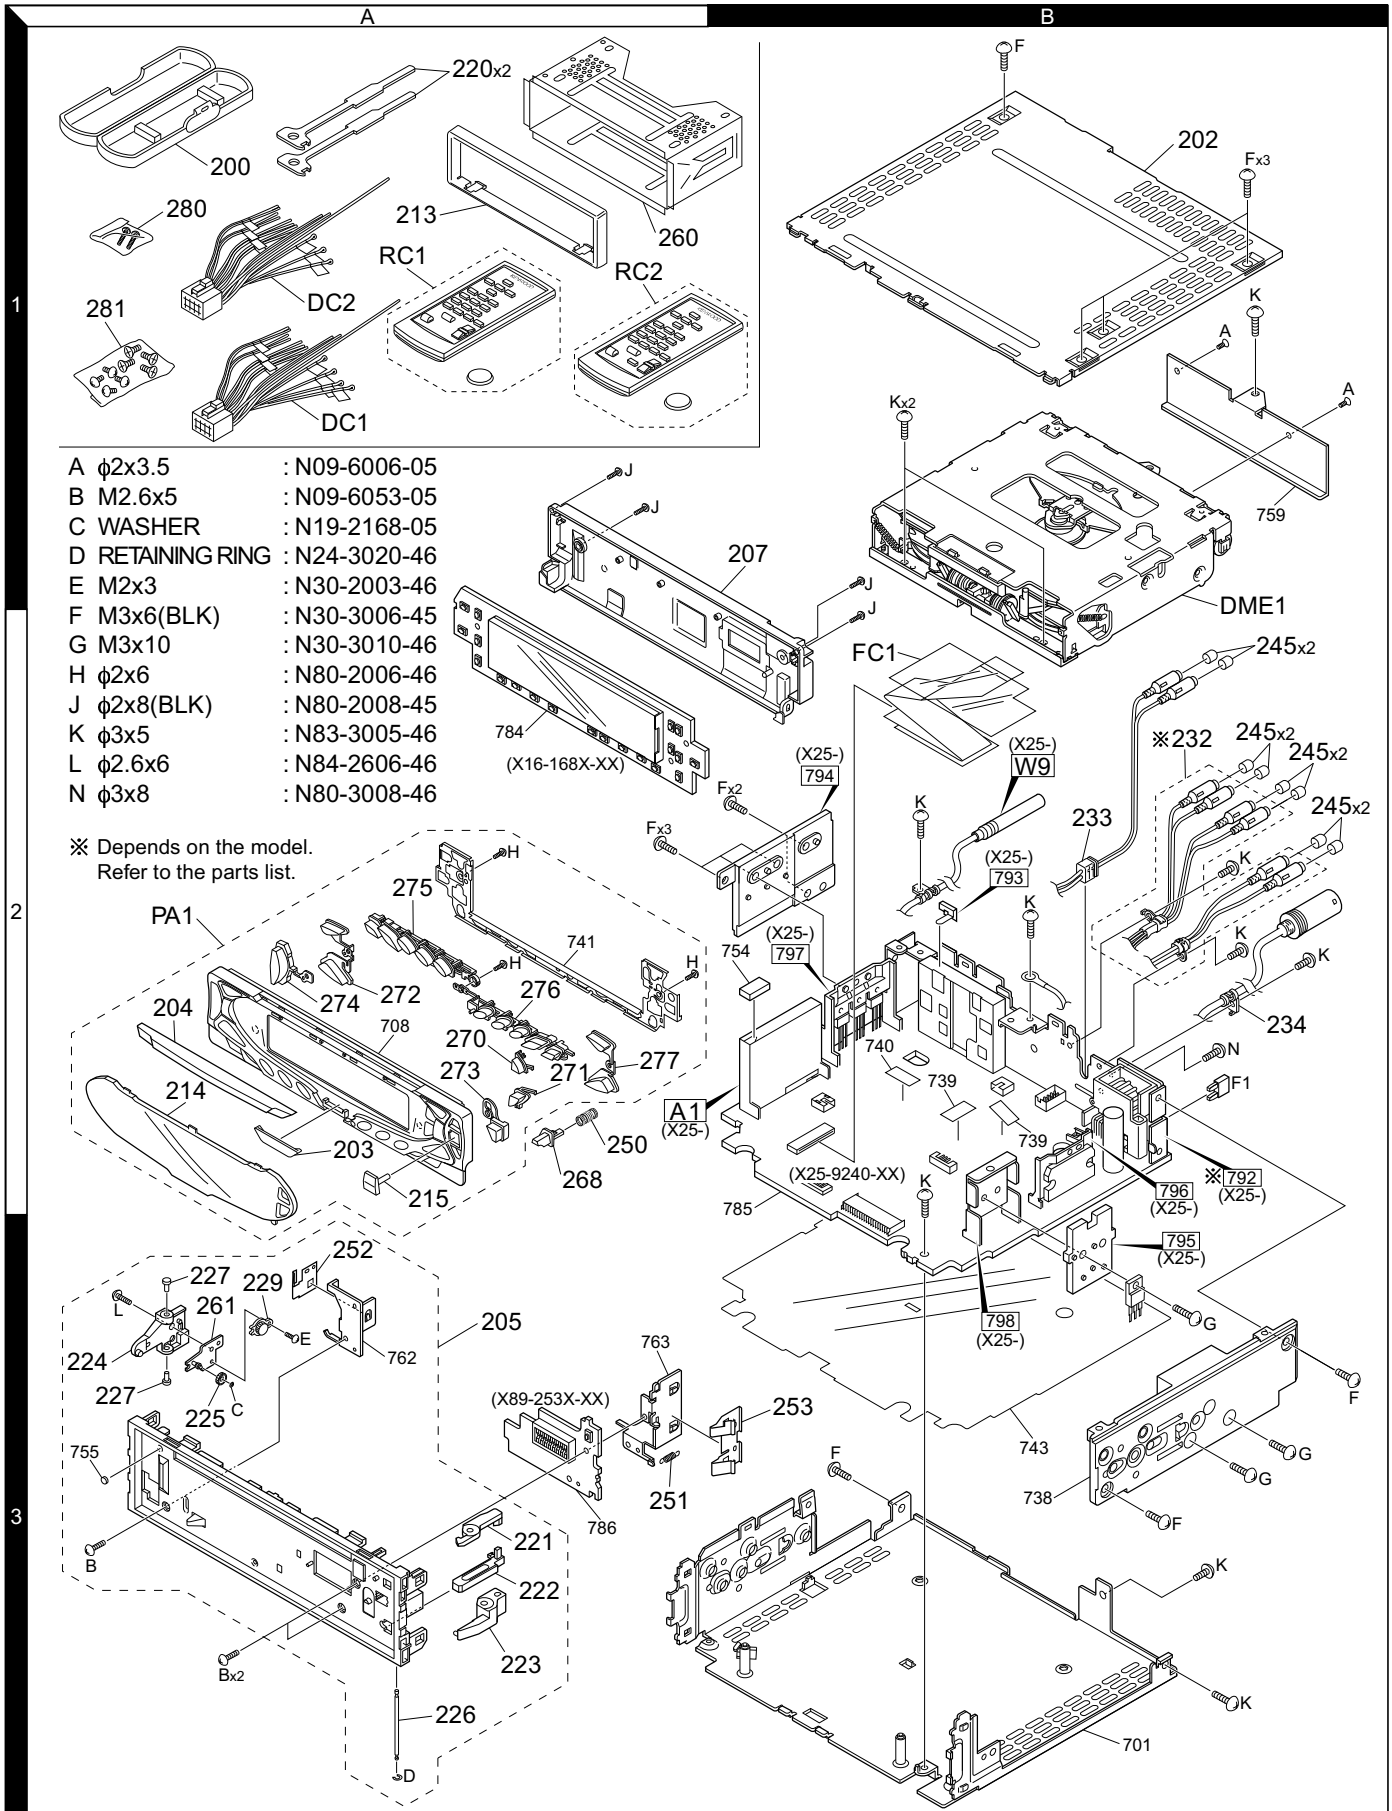

KDC-MP819/X659/Z838

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohane Parts No. werden nicht geliefert.

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
KDC-MP819/X659/Z838					
200	1A	*	A02-2712-13	PLASTIC CABINET ASSY	K1 K3,M1
202	1B	*	A52-0811-12	TOP PLATE	
203	2A	*	A21-4175-04	DRESSING PANEL	
204	2A	*	A21-4184-02	DRESSING PANEL	
204	2A	*	A21-4209-02	DRESSING PANEL	
205	3A	*	A22-2946-12	SUB PANEL ASSY	K1 K3 M1
207	1B	*	A46-1756-11	REAR COVER	
PA1	2A	*	A64-2643-11	PANEL ASSY	
PA1	2A	*	A64-2644-11	PANEL ASSY	
PA1	2A	*	A64-2649-11	PANEL ASSY	
RC1	1A	*	A70-2025-05	REMOTE CONTROLLER ASSY(RC-410)	K1,M1 K3
RC2	1A	*	A70-2026-05	REMOTE CONTROLLER ASSY(RC-420)	
213	1A	*	B07-3050-02	ESCUTCHEON (SIL)	K3,M1 K1 K1 K3 M1
213	1A	*	B07-3057-02	ESCUTCHEON (BLK)	
214	2A	*	B10-4206-01	FRONT GLASS	
214	2A	*	B10-4207-01	FRONT GLASS	
214	2A	*	B10-4212-01	FRONT GLASS	
215	2A	*	B10-4217-04	FRONT GLASS	K1,M1 K3 K1,M1
-			B46-0100-50	WARRANTY CARD	
-			B46-0606-04	ID CARD	
-			B46-0612-14	ID CARD	
-			B46-0645-03	USER CARD	
-			B46-0648-03	USER CARD	K1 K1,M1 K1,M1 K3
-			B58-1365-04	CAUTION CARD	
-	*		B64-2176-00	INST. MANUAL (ENGLISH)	
-	*		B64-2177-00	INST. MANUAL (FRE,SPA)	
-	*		B64-2178-00	INST. MANUAL (ENG,T-CHI)	
220	1A	*	D10-4674-04	LEVER	K1,K3 M1
221	3A	*	D10-4675-04	LEVER	
222	3A	*	D10-4676-04	LEVER	
223	3A	*	D10-4677-04	LEVER	
224	3A	*	D10-4678-03	LEVER	
225	3A	*	D13-2242-04	GEAR	K1,K3 M1
226	3A	*	D21-2406-04	SHAFT	
227	3A	*	D21-2407-04	SHAFT	
229	3A	*	D39-0237-05	DAMPER	
232	2B	*	E30-6064-05	CORD WITH PINPLUG (6P)	
232	2B	*	E30-6065-05	CORD WITH PINPLUG (4P)	K1,K3 M1
233	2B	*	E30-6067-15	CORD WITH PINPLUG (AUX 2P)	
234	2B	*	E30-6068-05	CORD WITH DIN CONNECTOR (13P)	
△ DC1	1A	*	E30-6062-05	DC CORD	
△ DC2	1A	*	E30-6106-05	DC CORD	M1
△ FC1	2B	*	E39-0447-05	FLAT CABLE (24P)	
△ F1	2B	*	F29-0049-05	INSULATING COVER	K1,K3 M1
△ F1	2B	*	F52-0006-05	FUSE(MINI BLADE TYPE) (10A)	
△ F1	2B	*	F52-0011-05	FUSE(MINI BLADE TYPE) (10A)	
250	2A	*	G01-3135-04	COMPRESSION SPRING (OPEN)	K1,K3 M1
251	3A	*	G01-3136-14	EXTENSION SPRING	
252	3A	*	G02-1428-04	FLAT SPRING	
253	3B	*	G02-1429-04	FLAT SPRING	
-	*		H10-4802-12	POLYSTYRENE FOAMED FIXTURE	

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on	
- - - - -			H25-0329-04 H25-0337-04 * H54-2317-03 * H54-2318-03 * H54-2323-03	PROTECTION BAG (280X450X0.03) PROTECTION BAG (180X300X0.03) ITEM CARTON CASE ITEM CARTON CASE ITEM CARTON CASE	K1 K3 M1	
260 261	1A 3A	* *	J21-9823-03 J21-9831-04	MOUNTING HARDWARE ASSY MOUNTING HARDWARE ASSY		
268 270 270 271 271	2A 2A 2A 2A 2A	* * * * *	K24-3837-04 K24-3850-04 K24-3852-04 K24-3851-04 K24-3853-04	KNOB (OPEN) KNOB (SKIP UP) KNOB (SKIP UP) KNOB (SKIP DOWN) KNOB (SKIP DOWN)		K3,M1 K1 K3,M1 K1
272 273 274 275 275	2A 2A 2A 2A 2A	* * * * *	K25-1417-13 K25-1418-03 K25-1423-03 K25-1428-03 K25-1456-03	KNOB (EQ,SRC) KNOB (PAUSE) KNOB (VOL) KNOB (PRE1-3,ATT,Q) KNOB (PRE1-3)		
276 276 277 277	2A 2A 2A 2A	* * * *	K25-1429-03 K25-1457-03 K25-1458-13 K25-1459-13	KNOB (PRE4-6,AUTO,DISP) KNOB (PRE4-6) KNOB (FM,AM) KNOB (FM,AM)		
280 281 A B C	1A 1A 1B 3A 3A		N99-1656-05 N99-1723-05 N09-6006-05 * N09-6053-05 * N19-2168-05	SCREW SET SCREW SET TAPTITE SCREW (PAN ST 2X3.5T) MACHINE SCREW (M2.6X5) FLAT WASHER (1.4X3.0X0.25)		
D E F G H	3A 3A 1B 3B 2A		N24-3020-46 N30-2003-46 N30-3006-45 N30-3010-46 N80-2006-46	E TYPE RETAINING RING (2X5X1.7) PAN HEAD MACHINE SCREW PAN HEAD MACHINE SCREW PAN HEAD MACHINE SCREW PAN HEAD TAPTITE SCREW		
J K L	1A 1B 3A		N80-2008-45 N83-3005-46 N84-2606-46	PAN HEAD TAPTITE SCREW PAN HEAD TAPTITE SCREW PAN HEAD TAPTITE SCREW		
DME1	1B	*	X92-4460-01	MECHANISM ASSY (DXM-6401W)		
SWITCH UNIT (X16-168X-XX)						
C1 C2 C3 C4 C5			CK73FB1A105K CK73GB1H103K CK73GB1C104K CK73FB1A225K CK73GB1H103K	CHIP C 1.0UF K CHIP C 0.010UF K CHIP C 0.10UF K CHIP C 2.2UF K CHIP C 0.010UF K	K1 K3,M1 K1,K3 M1	
C6 C7 C8 C9 C10			CK73FB1A225K CC73GCH1H101J CK73EB0J106K CK73FB1A225K CK73FB1A105K	CHIP C 2.2UF K CHIP C 100PF J CHIP C 10UF K CHIP C 2.2UF K CHIP C 1.0UF K		
C12 C13 C16-19 C20 C21			CK73FB1A105K CK73GB1C104K CK73GB1H103K CK73GB1H104K CK73GB1H103K	CHIP C 1.0UF K CHIP C 0.10UF K CHIP C 0.010UF K CHIP C 0.10UF K CHIP C 0.010UF K		
J1			E59-0829-05	RECTANGULAR PLUG (16P)		

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

SWITCH UNIT (X16-168X-XX)

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
L1			L40-4795-68	SMALL FIXED INDUCTOR (4.7UH)	
L2		*	L40-1005-68	SMALL FIXED INDUCTOR (10UH)	
L4			L92-0332-05	CHIP FERRITE	
L9			L92-0332-05	CHIP FERRITE	
L13			L92-0332-05	CHIP FERRITE	
X1			L78-0821-05	RESONATOR (20.0MHZ)	
CP1			R90-1016-05	MULTI-COMP 470 X4	
CP2			R90-0724-05	MULTI-COMP 1K X4	
CP3			R90-0720-05	MULTI-COMP 100K X4	
CP4			R90-1022-05	MULTI-COMP 470 X2	
CP5			R90-0724-05	MULTI-COMP 1K X4	
CP6,7			R90-1019-05	MULTI-COMP 100 X2	
CP8			R90-1014-05	MULTI-COMP 100 X4	
CP9			R90-0737-05	MULTI-COMP 100K X2	
R1			RK73GB2A103J	CHIP R 10K J 1/10W	
R7		*	RK73GB2A220J	CHIP R 22 J 1/10W	
R8			RK73GB2A563J	CHIP R 56K J 1/10W	
R9			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R10			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R11			RK73GB2A101J	CHIP R 100 J 1/10W	
R12			RK73GB2A104J	CHIP R 100K J 1/10W	
R13,14		*	RK73GB2A274J	CHIP R 270K J 1/10W	
R15,16			RK73GB2A153J	CHIP R 15K J 1/10W	
R17			RK73GB2A100J	CHIP R 10 J 1/10W	
R21			RK73GB2A104J	CHIP R 100K J 1/10W	
R25			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R27			RK73GB2A153J	CHIP R 15K J 1/10W	
R32			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R33			RK73GB2A223J	CHIP R 22K J 1/10W	
R34-36			RK73GB2A104J	CHIP R 100K J 1/10W	
R39			RK73GB2A101J	CHIP R 100 J 1/10W	
R42			RK73GB2A101J	CHIP R 100 J 1/10W	M1
R43			RK73GB2A101J	CHIP R 100 J 1/10W	
R48			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R49			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R50			RK73GB2A392J	CHIP R 3.9K J 1/10W	M1
R51			RK73GB2A222J	CHIP R 2.2K J 1/10W	M1
W2			R92-1252-05	CHIP R 0 OHM J 1/16W	
S1			S70-0863-05	TACT SWITCH	
S2,3			S70-0856-05	TACT SWITCH	M1
S2,3			S70-0873-05	TACT SWITCH	K1,K3
S4			S70-0857-05	TACT SWITCH	
S5-10			S70-0856-05	TACT SWITCH	M1
S5-10			S70-0873-05	TACT SWITCH	K1,K3
S11			S70-0857-05	TACT SWITCH	
S12,13			S70-0856-05	TACT SWITCH	M1
S12,13			S70-0873-05	TACT SWITCH	K1,K3
S14			S70-0857-05	TACT SWITCH	
S15-19			S70-0856-05	TACT SWITCH	M1
S15-19			S70-0873-05	TACT SWITCH	K1,K3
S20			S70-0857-05	TACT SWITCH	
D1,2			DA204U	DIODE	
D3-5			MA8056-M	ZENER DIODE	

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
D9			MA8056-M	ZENER DIODE	
D10,11			FTZ6.8E	ZENER DIODE	
D12			MA8062-L	ZENER DIODE	
D13,14			MA8056-M	ZENER DIODE	
D15,16			DA204U	DIODE	
ED1		*	CN2034M	FLUORESCENT INDICATOR TUBE	
IC1		*	TAR5S33	ANALOGUE IC	
IC2			TC74HC4050AFT	MOS-IC	
IC3			RS-171	ANALOGUE IC	
IC4			BA3830F	ANALOGUE IC	
IC5		*	UPD703032GFA04	MI-COM IC	
Q1			DTA144EUA	DIGITAL TRANSISTOR	
Q1			UN5113	DIGITAL TRANSISTOR	
Q2			DTC114YUA	DIGITAL TRANSISTOR	
Q2			UN5214	DIGITAL TRANSISTOR	
Q3			DTA114EUA	DIGITAL TRANSISTOR	
Q3			UN5111	DIGITAL TRANSISTOR	
Q4			DTC114EUA	DIGITAL TRANSISTOR	
Q4			UN5211	DIGITAL TRANSISTOR	
Q6			DTC114YK	DIGITAL TRANSISTOR	
Q6			UN2214	DIGITAL TRANSISTOR	
Q7			2SC4081	TRANSISTOR	
Q8			2SC4081	TRANSISTOR	M1
Q9			DTA114EUA	DIGITAL TRANSISTOR	K1,K3
Q9			UN5111	DIGITAL TRANSISTOR	K1,K3
Q9,10			DTA114EUA	DIGITAL TRANSISTOR	M1
Q9,10			UN5111	DIGITAL TRANSISTOR	M1
ELECTRIC UNIT (X25-9240-XX)					
D101			B30-1566-05	LED (1608,RED)	
C1			C90-2822-05	ELECTRO 3900UF 16WV	K3,M1
C1			C90-5377-05	ELECTRO 3900UF 16WV	K1
C2			CK73GB1H103K	CHIP C 0.010UF K	
C3			CK73GB1C104K	CHIP C 0.10UF K	
C4		*	C90-5442-05	ELECTRO 100UF 10WV	
C5,6			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	
C7			CK73FB1C105K	CHIP C 1.0UF K	
C8			CE04DW1A221M	ELECTRO 220UF 10WV	
C9			CK73FB1C224K	CHIP C 0.22UF K	
C10			CK73GB1H103K	CHIP C 0.010UF K	
C11			C90-2966-05	ELECTRO 100UF 16WV	
C12			CK73GB1H103K	CHIP C 0.010UF K	
C13			C90-2966-05	ELECTRO 100UF 16WV	
C14			CK73FB1A225K	CHIP C 2.2UF K	
C15			C90-2979-05	ELECTRO 100UF 50WV	
C16			CK73GB1C104K	CHIP C 0.10UF K	
C17			CK73GB1H103K	CHIP C 0.010UF K	
C19			CK73GB1H103K	CHIP C 0.010UF K	
C21			CK73GB1E223K	CHIP C 0.022UF K	
C22			C90-2558-05	ELECTRO 1.0UF 50WV	
C23			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	K1,M1
C24			C90-2966-05	ELECTRO 100UF 16WV	K1,M1
C25-28			CK73EB1C225K	CHIP C 2.2UF K	K1,M1
C29			CE04NW1C220M	ELECTRO 22UF 16WV	K1,M1
C30			CK73GB1E223K	CHIP C 0.022UF K	K1,M1

K1 : KDC-X659 K3 : KDC-MP819 M1 : KDC-Z838

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref.No.	Added	Parts No.	Description	Destination
C31		CK73GB1H103K	CHIP C 0.010UF K	K1,M1
C32,33		CE04NW1E4R7M	ELECTRO 4.7UF 25WV	K1,M1
C34		C90-2556-05	ELECTRO 3.3UF 50WV	
C35		CK73GB1C683K	CHIP C 0.068UF K	
C36		C90-2562-05	ELECTRO 0.10UF 50WV	
C37		CK73GB1H102K	CHIP C 1000PF K	
C38-41		CK73GB1H103K	CHIP C 0.010UF K	
C42		CC73GCH1H270J	CHIP C 27PF J	
C43		CC73GCH1H220J	CHIP C 22PF J	
C44		CE04NW1A220M	ELECTRO 22UF 10WV	
C45		CE04NW1C100M	ELECTRO 10UF 16WV	
C46,47		C90-2658-05	NP-ELEC 1.0UF 50WV	
C48		CK73GB1H103K	CHIP C 0.010UF K	
C49-53	*	C90-5444-05	ELECTRO 4.7UF 25WV	
C54		CK73GB1H103K	CHIP C 0.010UF K	
C55		CK73FB1C105K	CHIP C 1.0UF K	K1,M1
C56,57		C90-2524-05	NP-ELEC 4.7UF 16WV	
C58		CE04NW1C100M	ELECTRO 10UF 16WV	
C59		CE04MW1C100M	ELECTRO 10UF 16WV	
C60		CE04NW1H2R2M	ELECTRO 2.2UF 50WV	K1,M1
C63	*	CE04NW1E4R7MEL	ELECTRO 4.7UF 25WV	
C65,66		C90-2658-05	NP-ELEC 1.0UF 50WV	
C67,68		CE04NW1HR47M	ELECTRO 0.47UF 50WV	
C69		CE04NW0J470M	ELECTRO 47UF 6.3WV	
C70		CK73GB1A474K	CHIP C 0.47UF K	
C71		CC73GCH1H151J	CHIP C 150PF J	
C72		CK73GB1E333K	CHIP C 0.033UF K	
C73		CK73GB1H103K	CHIP C 0.010UF K	
C74,75		CK73GB1C104K	CHIP C 0.10UF K	
C76-79		C90-2524-05	NP-ELEC 4.7UF 16WV	K1,M1
C81,82	*	C90-5429-05	NP-ELEC 0.33UF 50WV	K1,M1
C83,84		CK73FB1C334K	CHIP C 0.33UF K	K1,M1
C85,86		CE04NW1HR33M	ELECTRO 0.33UF 50WV	K1,M1
C87,88		CK73FB1C334K	CHIP C 0.33UF K	K1,M1
C89-92		CK73GB1C104K	CHIP C 0.10UF K	K1,M1
C93,94		CE04NW1C100M	ELECTRO 10UF 16WV	K3
C93,94		CE04NW1C220M	ELECTRO 22UF 16WV	K1,M1
C95,96		CE04NW1C100M	ELECTRO 10UF 16WV	K1,M1
C97,98		CK73GB1H222K	CHIP C 2200PF K	
C99,100		CE04NW1C100M	ELECTRO 10UF 16WV	K3
C99,100		CE04NW1C220M	ELECTRO 22UF 16WV	K1,M1
C101,102		CE04NW1C100M	ELECTRO 10UF 16WV	K1,M1
C103,104		CK73GB1H222K	CHIP C 2200PF K	
C105,106		CE04NW1C220M	ELECTRO 22UF 16WV	K1,M1
C107,108		CE04NW1C100M	ELECTRO 10UF 16WV	K1,M1
C109,110		CK73GB1H222K	CHIP C 2200PF K	K1,M1
C111		CK73GB1H102K	CHIP C 1000PF K	
C113		CE04NW1C470M	ELECTRO 47UF 16WV	
C114		C90-2551-05	ELECTRO 33UF 10WV	
C115,116		C90-2558-05	ELECTRO 1.0UF 50WV	
C117-120		C90-5297-05	NP-ELECT 0.22UF 50WV	
C129		C90-5308-05	ELECTRO 1.0UF 50WV	
C130		CK73FB1C334K	CHIP C 0.33UF K	
C131		CK73GB1H103K	CHIP C 0.010UF K	
C132		CC73GCH1H100D	CHIP C 10PF D	

Ref.No.	Added	Parts No.	Description	Destination
C133		CK73GB1H103K	CHIP C 0.010UF K	
C134		CC73GCH1H100D	CHIP C 10PF D	
C135		CK73GB1H103K	CHIP C 0.010UF K	
C136		CC73GCH1H100D	CHIP C 10PF D	
C137		CK73GB1H103K	CHIP C 0.010UF K	
C139		CK73GB1H103K	CHIP C 0.010UF K	
C201,202		CK73GB1H332K	CHIP C 3300PF K	
C203		CK73GB1H104K	CHIP C 0.10UF K	
C204		CK73GB1H103K	CHIP C 0.010UF K	
C205		CK73GB1H104K	CHIP C 0.10UF K	
C206		CK73GB1C104K	CHIP C 0.10UF K	
C305		CK73FB0J475K	CHIP C 4.7UF K	
C351		CK73GB1H102K	CHIP C 1000PF K	
C352	*	C90-5443-05	ELECTRO 47UF 16WV	
C353		CK73GB1H103K	CHIP C 0.010UF K	
C354		CK73FB1C105K	CHIP C 1.0UF K	
C355		CK73GB1C104K	CHIP C 0.10UF K	
C473		C90-2965-05	ELECTRO 220UF 10WV	
C474,475		C90-2963-05	ELECTRO 100UF 25WV	
C479		C90-2547-05	ELECTRO 100UF 6.3WV	
C480		C90-2554-05	ELECTRO 10UF 16WV	
C481		CK73GB1H103K	CHIP C 0.010UF K	K1,M1
C485		C90-2980-05	ELECTRO 220UF 16WV	
C802		CK73FB1H104K	CHIP C 0.10UF K	
C803,804		CK73FB1H104K	CHIP C 0.10UF K	
C851,852		CK73GB1H103K	CHIP C 0.010UF K	
C853,854		CK73GB1H104K	CHIP C 0.10UF K	
C856		CK73GB1H103K	CHIP C 0.010UF K	
C857		CK73GB1H102K	CHIP C 1000PF K	
C858-861		CK73GB1H104K	CHIP C 0.10UF K	
C900		CK73GB1H103K	CHIP C 0.010UF K	
CN1	*	E41-0174-05	PIN ASSY (10P)	
CN2		E40-3299-05	PIN ASSY (2P)	
CN3		E40-3266-05	PIN ASSY (8P)	
CN4		E40-3261-05	PIN ASSY (3P)	
CN6		E40-9490-15	PIN ASSY (20P)	
CN7		E40-3261-05	PIN ASSY (3P)	
CN8	*	E41-0194-05	FLAT CABLE CONNECTOR (24P)	
J1		E58-0863-15	RECTANGULAR RECEPTACLE (16P)	
W9	2B *	E30-6098-05	CORD WITH PLUG	
L1		L33-1170-05	CHOKE COIL ASSY (140UH)	
L2		L33-1153-05	SMALL FIXED INDUCTOR (10UH)	
L3		L40-2201-78	SMALL FIXED INDUCTOR (22UH)	K1,M1
L5		L40-4792-78	SMALL FIXED INDUCTOR (4.7UH)	
L7		L33-1039-05	LINE FILTER COIL (52mH)	
L9-13		L40-4795-68	SMALL FIXED INDUCTOR (4.7UH)	
L351		L92-0075-05	CHIP FERRITE	
L352		L40-4792-78	SMALL FIXED INDUCTOR (4.7UH)	
L471	*	L33-1853-05	CHOKE COIL (100UH)	
X1		L78-0821-05	RESONATOR (20.0MHZ)	
X4		L77-2738-05	CRYSTAL RESONATOR (32.768kHz)	
F	2B	N30-3006-45	PAN HEAD MACHINE SCREW	
G	3B	N30-3010-46	PAN HEAD MACHINE SCREW	

K1 : KDC-X659 K3 : KDC-MP819 M1 : KDC-Z838

 indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

ELECTRIC UNIT (X25-9240-XX)

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
K	2B		N83-3005-46	PAN HEAD TAPTITE SCREW	
N	2B		N80-3008-46	PAN HEAD TAPTITE SCREW	
CP2			R90-1016-05	MULTI-COMP 470 X4	
CP3,4			R90-1022-05	MULTI-COMP 470 X2	
CP5			R90-0725-05	MULTI-COMP 1K X2	
CP6			R90-1013-05	MULTI-COMP 2.2K X2	
CP7		*	R90-1048-05	MULTI-COMP 4.7K X2	
CP8		*	R90-1508-05	MULTI-COMP 100 X2	
CP9		*	R90-1048-05	MULTI-COMP 4.7K X2	
CP10		*	R90-1045-05	MULTI-COMP 470 X2	
CP11-13		*	R90-1051-05	MULTI-COMP 100K X2	
CP16		*	R90-1058-05	MULTI-COMP 100K X4	
CP17			R90-1046-05	MULTI-COMP 1K X2	
R1			RK73GB2A104J	CHIP R 100K J 1/10W	
R2			RK73FB2B152J	CHIP R 1.5K J 1/8W	
R3			RK73GB2A223J	CHIP R 22K J 1/10W	
R4			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R5			RK73EB2E221J	CHIP R 220 J 1/4W	
R6			RK73GB2A153J	CHIP R 15K J 1/10W	
R7			RK73GH1J432D	CHIP R 4.3K D 1/16W	
R8			RK73GH1J243D	CHIP R 24K D 1/16W	
R10			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R11			RK73GB2A104J	CHIP R 100K J 1/10W	
R12			RK73FB2B103J	CHIP R 10K J 1/8W	
R13			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R14			RK73FB2B561J	CHIP R 560 J 1/8W	
R16			RK73GB2A104J	CHIP R 100K J 1/10W	K1,M1
R19			RK73EB2E103J	CHIP R 10K J 1/4W	
R20			RK73GB2A104J	CHIP R 100K J 1/10W	
R21			RK73FB2B102J	CHIP R 1.0K J 1/8W	K1,M1
R23		*	RK73GB2A750J	CHIP R 75 J 1/10W	K1,M1
R24			RK73GB2A272J	CHIP R 2.7K J 1/10W	K1,M1
R25			RK73GB2A470J	CHIP R 47 J 1/10W	K1,M1
R26		*	RK73GB2A752J	CHIP R 7.5K J 1/10W	K1,M1
R27			RK73GB2A563J	CHIP R 56K J 1/10W	K1,M1
R28			RK73GB2A913J	CHIP R 91K J 1/10W	K1,M1
R29			RK73GB2A470J	CHIP R 47 J 1/10W	K1,M1
R30			RK73GB2A103J	CHIP R 10K J 1/10W	K1,M1
R31,32			RK73GB2A913J	CHIP R 91K J 1/10W	K1,M1
R33			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R35			RK73GB2A471J	CHIP R 470 J 1/10W	
R36			RK73GB2A104J	CHIP R 100K J 1/10W	
R37			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R38			R92-0365-05	CHIP R 1.0K J 1/2W	
R39			RK73GB2A223J	CHIP R 22K J 1/10W	
R40			R92-0365-05	CHIP R 1.0K J 1/2W	
R41			RK73GB2A123J	CHIP R 12K J 1/10W	
R42			RK73GB2A223J	CHIP R 22K J 1/10W	
R43			RK73GB2A153J	CHIP R 15K J 1/10W	
R44			RK73GB2A223J	CHIP R 22K J 1/10W	
R45			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
R46			RK73EB2E473J	CHIP R 47K J 1/4W	
R47			RK73GB2A183J	CHIP R 18K J 1/10W	
R48			RK73GB2A104J	CHIP R 100K J 1/10W	

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
R50			RK73GB2A104J	CHIP R 100K J 1/10W	
R52-54			RK73GB2A473J	CHIP R 47K J 1/10W	
R55,56			RK73EB2E100J	CHIP R 10 J 1/4W	
R57			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R58			RK73GB2A104J	CHIP R 100K J 1/10W	
R98			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R103			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R111			RK73FB2B223J	CHIP R 22K J 1/8W	
R112			R92-0366-05	CHIP R 560 J 1W	
R115			RK73GB2A333J	CHIP R 33K J 1/10W	
R127			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R130,131			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R132-134			RK73EB2E101J	CHIP R 100 J 1/4W	
R135-137			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R140			RK73GB2A473J	CHIP R 47K J 1/10W	
R141			RK73GB2A153J	CHIP R 15K J 1/10W	
R142			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R143			RK73GB2A473J	CHIP R 47K J 1/10W	
R144			RK73GB2A333J	CHIP R 33K J 1/10W	
R145			RK73GB2A473J	CHIP R 47K J 1/10W	
R146		*	RK73GB2A821J	CHIP R 820 J 1/10W	
R147			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R148			RK73FB2B912J	CHIP R 9.1K J 1/8W	
R149			RK73FB2B243J	CHIP R 24K J 1/8W	
R150			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R151			RK73GB2A103J	CHIP R 10K J 1/10W	
R152			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R153,154			RK73GB2A334J	CHIP R 330K J 1/10W	
R155,156			RK73EB2E100J	CHIP R 10 J 1/4W	
R157			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R161,162			RK73FB2B471J	CHIP R 470 J 1/8W	
R163,164			RK73FB2B222J	CHIP R 2.2K J 1/8W	K1,M1
R163,164			RK73FB2B223J	CHIP R 22K J 1/8W	K3
R165,166			RK73FB2B103J	CHIP R 10K J 1/8W	K1,M1
R167,168			RK73FB2B223J	CHIP R 22K J 1/8W	K1,M1
R169,170		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R171,172			RK73FB2B471J	CHIP R 470 J 1/8W	
R173,174			RK73FB2B222J	CHIP R 2.2K J 1/8W	K1,M1
R173,174			RK73FB2B223J	CHIP R 22K J 1/8W	K3
R175,176			RK73FB2B103J	CHIP R 10K J 1/8W	K1,M1
R177,178			RK73FB2B223J	CHIP R 22K J 1/8W	K1,M1
R179,180		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R181,182			RK73FB2B471J	CHIP R 470 J 1/8W	K1,M1
R183,184			RK73FB2B222J	CHIP R 2.2K J 1/8W	K1,M1
R185,186			RK73FB2B103J	CHIP R 10K J 1/8W	K1,M1
R187,188			RK73FB2B223J	CHIP R 22K J 1/8W	K1,M1
R189,190		*	RK73FB2B820J	CHIP R 82 J 1/8W	K1,M1
R200			RK73GB2A221J	CHIP R 220 J 1/10W	
R201			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R202			RK73GB2A103J	CHIP R 10K J 1/10W	
R203			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R204			RK73GB2A100J	CHIP R 10 J 1/10W	
R210			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R211			RK73GB2A223J	CHIP R 22K J 1/10W	
R212			RK73FB2B102J	CHIP R 1.0K J 1/8W	

K1 : KDC-X659 K3 : KDC-MP819 M1 : KDC-Z838

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref.No.	A d d	N e w	Parts No.	Description				Dest inati on
R213			RK73GB2A223J	CHIP R	22K	J	1/10W	
R230			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R231			RK73GB2A223J	CHIP R	22K	J	1/10W	
R301			RK73GB2A104J	CHIP R	100K	J	1/10W	
R303		*	RK73GB2A241J	CHIP R	240	J	1/10W	
R305			RK73GB2A394J	CHIP R	390K	J	1/10W	
R306			RK73GB2A101J	CHIP R	100	J	1/10W	
R353			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R355			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R357			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R358			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R359			RK73GB2A104J	CHIP R	100K	J	1/10W	
R360			RK73GB2A471J	CHIP R	470	J	1/10W	
R361,362			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R364			RK73GB2A104J	CHIP R	100K	J	1/10W	
R366			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R367			RK73GB2A473J	CHIP R	47K	J	1/10W	
R370			RK73GB2A104J	CHIP R	100K	J	1/10W	
R375			RK73GB2A105J	CHIP R	1.0M	J	1/10W	
R382			RK73GB2A104J	CHIP R	100K	J	1/10W	
R389			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R390			RK73GB2A473J	CHIP R	47K	J	1/10W	
R392			RK73GB2A473J	CHIP R	47K	J	1/10W	
R393			RK73GB2A104J	CHIP R	100K	J	1/10W	
R397			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R400			RK73GB2A101J	CHIP R	100	J	1/10W	
R401			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R402			RK73GB2A471J	CHIP R	470	J	1/10W	
R403			RK73GB2A104J	CHIP R	100K	J	1/10W	K1,M1
R404			RK73GB2A104J	CHIP R	100K	J	1/10W	K3
R405			RK73GB2A104J	CHIP R	100K	J	1/10W	K3,M1
R406			RK73GB2A104J	CHIP R	100K	J	1/10W	K1
R407			RK73GB2A104J	CHIP R	100K	J	1/10W	K3,M1
R408			RK73GB2A104J	CHIP R	100K	J	1/10W	K1
R409			RK73GB2A104J	CHIP R	100K	J	1/10W	K1,K3
R410			RK73GB2A104J	CHIP R	100K	J	1/10W	M1
R412			RK73GB2A104J	CHIP R	100K	J	1/10W	
R414			RK73GB2A104J	CHIP R	100K	J	1/10W	
R417			RK73GB2A223J	CHIP R	22K	J	1/10W	
R421			RK73GB2A473J	CHIP R	47K	J	1/10W	
R422			RK73GB2A223J	CHIP R	22K	J	1/10W	
R475			RK73FB2B223J	CHIP R	22K	J	1/8W	
R477			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R815			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R902			RK73GB2A104J	CHIP R	100K	J	1/10W	
R903			RK73GB2A471J	CHIP R	470	J	1/10W	
R905			RK73GB2A471J	CHIP R	470	J	1/10W	
W1-6			R92-1252-05	CHIP R	0 OHM	J	1/16W	K3
W11,12			R92-1252-05	CHIP R	0 OHM	J	1/16W	K1,M1
W14			R92-1252-05	CHIP R	0 OHM	J	1/16W	
W15-18			R92-1252-05	CHIP R	0 OHM	J	1/16W	K3
W19			R92-1252-05	CHIP R	0 OHM	J	1/16W	
W112,113			R92-1252-05	CHIP R	0 OHM	J	1/16W	
W120,121			R92-1252-05	CHIP R	0 OHM	J	1/16W	
W902			R92-1252-05	CHIP R	0 OHM	J	1/16W	

ELECTRIC UNIT (X25-9240-XX)								
Ref.No.	A d d	N e w	Parts No.	Description				Dest inati on
S1			S74-0809-05	MICRO SWITCH				
D1			RM10ZLF	DIODE				
D3		*	MA8082-L	ZENER DIODE				
D5		*	MA8100-L	ZENER DIODE				
D6			MA4051(N)-M	ZENER DIODE				
D7			MA8056-M	ZENER DIODE				K1,M1
D9			MA4110(N)-M	ZENER DIODE				K1,M1
D10			MA4056(N)-M	ZENER DIODE				K1,M1
D13,14			S1J	DIODE				
D13,14			1SR154-400	DIODE				
D15			1SS133	DIODE				
D16			MA4068(N)-M	ZENER DIODE				
D17			MA4062(N)-M	ZENER DIODE				
D19,20			DAP202U	DIODE				
D19,20			MA142WA	DIODE				
D21			DA204U	DIODE				
D22-24			MA4062-L	ZENER DIODE				
D25,26			RD6.8M(B2)	ZENER DIODE				
D27,28			MA8068-M	ZENER DIODE				
D29			MA8062-L	ZENER DIODE				
D30			DAP202U	DIODE				
D30			MA142WA	DIODE				
D31			MA4062-L	ZENER DIODE				
D32			DAN202U	DIODE				
D32			MA142WK	DIODE				
D33-36			S1J	DIODE				
D33-36			1SR154-400	DIODE				
D38-41			1SR154-400	DIODE				
D39,40			S1J	DIODE				
D42			DA204U	DIODE				
D43			IMSA-6801	SURGE ABSORBER				
D44			MA8068-M	ZENER DIODE				
D45			MA8062-L	ZENER DIODE				
D46			MA8068-M	ZENER DIODE				
D50			MA4056(N)-M	ZENER DIODE				
D51-53			FTZ6.8E	ZENER DIODE				
D54			DA204U	DIODE				
D111,112			S1J	DIODE				
D111,112			1SR154-400	DIODE				
D472			SS14	DIODE				
D473			MA8056-M	ZENER DIODE				
D475			SS14	DIODE				
IC1		*	UPD703033GFA17	MI-COM IC				
IC2			TDA7407	ANALOGUE IC				
IC3			M5237ML	IC (VOLTAGE REGULATOR)				
IC4			TDA7560	ANALOGUE IC				
IC5			TDA7401	ANALOGUE IC				K1,M1
IC6			ICL7660SIBA	ANALOGUE IC				K1,M1
IC7			TC74HC02AF	MOS-IC				
IC8			NJM4565M-TE2	ANALOGUE IC				
IC10-12			NJM4565M-TE2	ANALOGUE IC				K1,M1
IC16			S-80837ANNP	MOS-IC				
IC20			BA3121F	IC (ISO AMP)				
IC21			BA3129F	IC (SWITCH)				

K1 : KDC-X659 K3 : KDC-MP819 M1 : KDC-Z838

 indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

ELECTRIC UNIT (X25-9240-XX)

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
IC23			SI-8050JD	ANALOGUE IC	
IC25			BR24C02F-W	MEMORY IC	
Q1			2SD2375	TRANSISTOR	
Q3			2SA1037K	TRANSISTOR	
Q4			2SA2057	TRANSISTOR	
Q5			DTC144EUA	DIGITAL TRANSISTOR	
Q5			UN5213	DIGITAL TRANSISTOR	
Q6,7			DTA124EUA	DIGITAL TRANSISTOR	
Q6,7			UN5112	DIGITAL TRANSISTOR	
Q8			DTC124EUA	DIGITAL TRANSISTOR	
Q8			UN5212	DIGITAL TRANSISTOR	
Q9			2SB1427	TRANSISTOR	
Q10			2SA2057	TRANSISTOR	
Q11			2SC4081	TRANSISTOR	
Q12			DTC124EUA	DIGITAL TRANSISTOR	
Q12			UN5212	DIGITAL TRANSISTOR	
Q13			DTA124EUA	DIGITAL TRANSISTOR	
Q13			UN5112	DIGITAL TRANSISTOR	
Q14			DTA123JK	DIGITAL TRANSISTOR	K1,M1
Q14			KRA105S	DIGITAL TRANSISTOR	K1,M1
Q15			DTC144EUA	DIGITAL TRANSISTOR	
Q15			UN5213	DIGITAL TRANSISTOR	
Q16			2SB1443	TRANSISTOR	K1,M1
Q17			2SC4081	TRANSISTOR	K1,M1
Q18			2SA1576A	TRANSISTOR	K1,M1
Q19			2SC4081	TRANSISTOR	K1,M1
Q20			2SA1576A	TRANSISTOR	K1,M1
Q21,22			2SC4081	TRANSISTOR	K1,M1
Q23			2SA1576A	TRANSISTOR	K1,M1
Q26			2SB1277(Q,R)	TRANSISTOR	
Q27			2SA1576A	TRANSISTOR	
Q28			DTA124EUA	DIGITAL TRANSISTOR	
Q28			UN5112	DIGITAL TRANSISTOR	
Q29			DTC114YUA	DIGITAL TRANSISTOR	
Q29			UN5214	DIGITAL TRANSISTOR	
Q30,31			2SC4081	TRANSISTOR	
Q32,33			DTA124EUA	DIGITAL TRANSISTOR	
Q32,33			UN5112	DIGITAL TRANSISTOR	
Q34			2SC4081	TRANSISTOR	
Q35			DTC124EUA	DIGITAL TRANSISTOR	
Q35			UN5212	DIGITAL TRANSISTOR	K3
Q36-40			DTC143TUA	DIGITAL TRANSISTOR	K3
Q36-40			UN5216	DIGITAL TRANSISTOR	K1,M1
Q36-42			DTC143TUA	DIGITAL TRANSISTOR	K1,M1
Q36-42			UN5216	DIGITAL TRANSISTOR	K1,M1
Q43			DTC124EUA	DIGITAL TRANSISTOR	
Q43			UN5212	DIGITAL TRANSISTOR	
Q44			CPH3105	TRANSISTOR	
Q45			DTC124EUA	DIGITAL TRANSISTOR	
Q45			UN5212	DIGITAL TRANSISTOR	
Q46			CPH3105	TRANSISTOR	
Q101			DTA114YUA	DIGITAL TRANSISTOR	
Q101			UN5114	DIGITAL TRANSISTOR	
Q103			DTC124EUA	DIGITAL TRANSISTOR	
Q103			UN5212	DIGITAL TRANSISTOR	

Ref.No.	A d d	N e w	Parts No.	Description	Dest inati on
Q111			2SB1277(Q,R)	TRANSISTOR	
Q112			DTC114YUA	DIGITAL TRANSISTOR	
Q112			UN5214	DIGITAL TRANSISTOR	
Q305			DTA114YUA	DIGITAL TRANSISTOR	K1,K3
Q305			UN5114	DIGITAL TRANSISTOR	K1,K3
Q305,306			DTA114YUA	DIGITAL TRANSISTOR	M1
Q305,306			UN5114	DIGITAL TRANSISTOR	M1
Q472			DTC144EUA	DIGITAL TRANSISTOR	
Q472			UN5213	DIGITAL TRANSISTOR	
Q473			2SC4081	TRANSISTOR	
Q474			2SB1548(P)	TRANSISTOR	
TH1			PTH9C42BD471Q	POSITIVE RESISTOR	
A1	2A	*	W02-3341-05	ELECTRIC CIRCUIT MODULE	
FE1		*	X86-3530-11	TUNER UNIT	

DAUGHTER UNIT (X89-253X-XX)

CN1			E40-9488-05	SOCKET FOR PIN ASSY (20P)	
J1			E58-0865-05	RECTANGULAR RECEPTACLE (16P)	
R1			RK73EB2E471J	CHIP R 470 J 1/4W	
R2			RK73EB2E241J	CHIP R 240 J 1/4W	
R3			RK73EB2E471J	CHIP R 470 J 1/4W	
R4-6			RK73EB2E241J	CHIP R 240 J 1/4W	
R7			RK73EB2E471J	CHIP R 470 J 1/4W	
R8			RK73EB2E511J	CHIP R 510 J 1/4W	
R9			RK73EB2E471J	CHIP R 470 J 1/4W	
R10			RK73EB2E221J	CHIP R 220 J 1/4W	M1
R11			RK73EB2E221J	CHIP R 220 J 1/4W	
S1			S70-0856-05	TACT SWITCH	M1
S1			S70-0873-05	TACT SWITCH	K1,K3

K1 : KDC-X659 K3 : KDC-MP819 M1 : KDC-Z838

⚠ indicates safety critical components.

X92-4430-0x
X92-4450-0x

PARTS LIST

*New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
CD PLAYER UNIT (X32-5180-0X, X32-5200-0X)					
C1 ,2 C3 C4 C5 C6			CK73GB0J105K CK73FB1A225K C92-0566-05 CC73GCH1H220J CC73GCH1H030C	CHIP C 1.0UF K CHIP C 2.2UF K CHIP-TAN 10UF 6.3WV CHIP C 22PF J CHIP C 3.0PF C	
C7 C8 C10 C11 C12			CK73GB1C104K CK73GB0J105K CK73GB1H472K CK73GB1H682K CK73GB1H332K	CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 4700PF K CHIP C 6800PF K CHIP C 3300PF K	
C13 C14 C15 C16 C17			CK73GB1C333K CK73GB1H472K CK73GB1E473K CC73GCH1H221J CK73GB1H472K	CHIP C 0.033UF K CHIP C 4700PF K CHIP C 0.047UF K CHIP C 220PF J CHIP C 4700PF K	
C18 C19 ,20 C21 C23 C24			CC73GCH1H331J CK73GB1C104K CK73FB1A225K CK73GB1H102K CK73GB1E223K	CHIP C 330PF J CHIP C 0.10UF K CHIP C 2.2UF K CHIP C 1000PF K CHIP C 0.022UF K	
C25 C26 C28 C29 C33			CK73GB1H153K CK73GB0J105K CK73GB0J105K CK73GB1C104K CK73GB1C104K	CHIP C 0.015UF K CHIP C 1.0UF K CHIP C 1.0UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C35 C39 C40 C41 C42			CK73GB1C104K CK73GB1H152K CK73GB1H103K CK73EB1C225K CK73GB1H152K	CHIP C 0.10UF K CHIP C 1500PF K CHIP C 0.010UF K CHIP C 2.2UF K CHIP C 1500PF K	
C44 C46 C51 C55 C67 ,68			CK73GB1H103K CK73GB1E473K CK73GB1C104K CK73GB1C104K CK73GB1C104K	CHIP C 0.010UF K CHIP C 0.047UF K CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C71 ,72 C77 ,78 C79 ,80 C85 C89			CK73GB1H471K CC73GCH1H680J CK73GB1H222K CK73GB1C104K CK73GB1H222K	CHIP C 470PF K CHIP C 68PF J CHIP C 2200PF K CHIP C 0.10UF K CHIP C 2200PF K	
CN1 CN1 CN2 CN2			E40-9536-05 E41-0193-05 E40-9527-05 E41-0213-05	FLAT CABLE CONNECTOR FLAT CABLE CONNECTOR FLAT CABLE CONNECTOR FLAT CABLE CONNECTOR	
X1		*	L78-0851-05	RESONATOR (16.93MHZ)	
CP1 CP2 R3 R5 R6			R90-1019-05 R90-1014-05 RK73GB2A272J RK73GB2A361J RK73GB2A272J	MULTI-COMP 100 X2 MULTI-COMP 100 X4 CHIP R 2.7K J 1/10W CHIP R 360 J 1/10W CHIP R 2.7K J 1/10W	
R9 R10 ,11			RK73FB2B100J RK73GB2A562J	CHIP R 10 J 1/8W CHIP R 5.6K J 1/10W	

A : X92-4430-00 (DXM-6010W) A1 : X92-4430-01 (DXM-6011W)
A2 : X92-4430-02 (DXM-6012W) A3 : X92-4430-03 (DXM-6013W)

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
R12 R13 R15 R16 R17			RK73GB2A682J RK73GB2A392J RK73GB2A824J RK73GB2A223J RK73GB2A393J	CHIP R 6.8K J 1/10W CHIP R 3.9K J 1/10W CHIP R 820K J 1/10W CHIP R 22K J 1/10W CHIP R 39K J 1/10W	
R18 R19 R20 R21 R22		*	RK73GB2A392J RK73GB2A473J RK73GB2A104J RK73GB2A244J RK73GB2A623J	CHIP R 3.9K J 1/10W CHIP R 47K J 1/10W CHIP R 100K J 1/10W CHIP R 240K J 1/10W CHIP R 62K J 1/10W	
R32 R34 R35 R36 R37			RK73GB2A683J RK73GB2A363J RK73GB2A104J RK73GB2A151J RK73GB2A471J	CHIP R 68K J 1/10W CHIP R 36K J 1/10W CHIP R 100K J 1/10W CHIP R 150 J 1/10W CHIP R 470 J 1/10W	
R38 R40 R46 R47 R49			RK73GB2A224J RK73GB2A133J RK73GB2A102J RK73GB2A103J RK73GB2A472J	CHIP R 220K J 1/10W CHIP R 13K J 1/10W CHIP R 1.0K J 1/10W CHIP R 10K J 1/10W CHIP R 4.7K J 1/10W	
R52 R53 R54 R70 R71			RK73GB2A104J RK73GB2A103J RK73GB2A104J RK73GB2A103J RK73GB2A183J	CHIP R 100K J 1/10W CHIP R 10K J 1/10W CHIP R 100K J 1/10W CHIP R 10K J 1/10W CHIP R 18K J 1/10W	
R73 R74 R75 R76 R79 ,80			RK73GB2A683J RK73GB2A123J RK73GB2A333J RK73GB2A103J RK73GB2A103J	CHIP R 68K J 1/10W CHIP R 12K J 1/10W CHIP R 33K J 1/10W CHIP R 10K J 1/10W CHIP R 10K J 1/10W	
R81 R82 R84 R81 ,102 R103 ,104			RK73GB2A333J RK73GB2A223J RK73GB2A103J RK73GB2A332J RK73GB2A562J	CHIP R 33K J 1/10W CHIP R 22K J 1/10W CHIP R 10K J 1/10W CHIP R 3.3K J 1/10W CHIP R 5.6K J 1/10W	
R107 ,108 R110 R117 ,118 R121 ,122 R125 ,126			RK73FB2B331J RK73FB2B201J RK73FB2B203J RK73FB2B203J RK73FB2B203J	CHIP R 330 J 1/8W CHIP R 200 J 1/8W CHIP R 20K J 1/8W CHIP R 20K J 1/8W CHIP R 20K J 1/8W	
R202 R213 R213 R214 R214			RK73GB2A104J RK73GB2A104J RK73GB2A104J RK73GB2A104J RK73GB2A104J	CHIP R 100K J 1/10W CHIP R 100K J 1/10W CHIP R 100K J 1/10W CHIP R 100K J 1/10W CHIP R 100K J 1/10W	BB1B2 B3 AA1A2 A3
R218 R233 R234			RK73GB2A473J RK73GB2A622J RK73GB2A103J	CHIP R 47K J 1/10W CHIP R 6.2K J 1/10W CHIP R 10K J 1/10W	
S1 ,2 S3 S4 S4			S68-0863-05 S68-0862-05 S68-0864-05 S68-0864-05	PUSH SWITCH PUSH SWITCH PUSH SWITCH PUSH SWITCH	A2A3B2 B3
D1 D2			DAN202U MA8051-L	DIODE ZENER DIODE	

B : X92-4450-00 (DXM-6110W) B1 : X92-4450-01 (DXM-6111W)
B2 : X92-4450-02 (DXM-6112W) B3 : X92-4450-03 (DXM-6113W)

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5180-0X, X32-5200-0X)

Ref. No.	A d d	N e w	Parts No.	Description	P e s t i n a t i o n
D3			DA204U	DIODE	
D4			DAN202U	DIODE	
IC1			AN22000AA	ANALOGUE IC	
IC2		*	MN662773KH2	MOS-IC	BB1B2
IC2		*	MN662773KH2	MOS-IC	B3
IC2			MN662774KJ2	MOS-IC	AA1A2
IC2			MN662774KJ2	MOS-IC	A3
IC4			BA5824FP	ANALOGUE IC	
IC6			NJM4580M1	ANALOGUE IC	
Q1			MCH6101	TRANSISTOR	
Q2			DTC124EUA	DIGITAL TRANSISTOR	
Q3			DTA143XUA	DIGITAL TRANSISTOR	
Q4			2SA1362(Y)	TRANSISTOR	
Q5			DTC124EUA	DIGITAL TRANSISTOR	

CD MECHANISM ASSY (X92-4430-0X, X92-4450-0X)

2	1B		A10-4827-12	CHASSIS (OUTER)	
5	1B		D10-4576-23	ARM ASSY (CLAMPER ASSY)	
8	2A		D10-4579-03	LEVER ASSY (ROLLER ASSY)	
10	3A		D10-4581-13	ARM (DISC L)	
11	2A		D10-4582-13	ARM (DISC L)	
12	3A		D10-4583-03	ARM (JOINT L)	
13	3A		D10-4584-03	ARM (JOINT R)	
14	3B		D10-4585-03	ARM (CARRIER)	
15	2A		D10-4586-03	SLIDER (L)	
16	3B	*	D10-4587-12	SLIDER (R)	
17	3B		D10-4588-03	SLIDER (TRIG)	
18	3B		D10-4595-04	ARM (LOCK)	
19	3B		D10-4596-04	ARM (ROLLER)	
22	2A		D13-2151-04	GEAR (ROLLER)	
23	2B		D13-2152-04	GEAR (HELICAL 1)	
24	3B		D13-2153-04	GEAR (SUN)	
25	3B		D13-2154-04	GEAR (PLANET)	
26	3B		D13-2155-04	WORM (2)	
27	3B		D13-2156-04	GEAR (HELICAL 2)	
28	3B		D13-2157-04	GEAR (LOAD 1)	
29	3B		D13-2158-04	GEAR (LOAD 2)	
30	3B		D13-2168-04	GEAR (PICK 1)	
31	3B		D13-2171-04	GEAR (PICK 2)	
32	2B		D13-2172-03	RACK (GEAR)	
33	2A		D14-0759-04	ROLLER (N100X3DIES)	
35	2B		D21-2382-04	SHAFT (PICK)	
36	1A		D23-0954-04	RETAINER	
37	1B		D39-0246-05	DAMPER	
38	2B		G01-3072-04	EXTENSION SPRING (TRIGGER)	
39	2A		G01-3073-04	TORSION COIL SPRING (ROLLER L)	
40	2A		G01-3074-04	EXTENSION SPRING (ROLLER R)	
41	2B		G01-3075-04	EXTENSION SPRING (PICKUP)	
42	2A		G01-3076-04	EXTENSION SPRING (JOINT SP)	
43	1B		G01-3077-04	EXTENSION SPRING (FLOATING)	
44	2B		G02-1399-04	FLAT SPRING (CLAMP)	
45	2B		G02-1408-04	FLAT SPRING (WORM)	
51	1A		J21-9676-12	MOUNTING HARDWARE (GUIDE BKT)	
52	3B		J21-9677-02	MOUNTING HARDWARE (GEAR BKT)	

Ref. No.	A d d	N e w	Parts No.	Description	P e s t i n a t i o n
53	1B		J21-9678-03	MOUNTING HARDWARE (DAMPER BKT)	
55	1A		J90-1001-11	GUIDE (1)	
56	1B		J90-1023-03	GUIDE (2)	
DFPC1	2B		J84-0128-15	FLEXIBLE P. W. B. (PICKUP FPC)	
A	2B		N09-4460-05	TAPTITE SCREW (OVAL P TAPTIT)	
B	1B		N09-4472-05	MACHINE SCREW (M1.7X8.5)	
C	2B		N09-6004-05	MACHINE SCREW (M1.7X2.5 1B-L)	
D	1B		N09-6006-05	TAPTITE SCREW (PAN ST 2X3.5T)	
E	2B		N09-6007-05	MACHINE SCREW (PAN M2X2)	
F	1A		N09-6051-05	TAPTITE SCREW (BIND P 2X5)	
G	2A		N19-2163-04	FLAT WASHER (1.6X0.25X6)	
H	1B		N39-2020-46	PAN HEAD MACHIN SCREW (M2X2)	
DM1	3B		T42-1066-04	DC MOTOR ASSY (SP)	
DM2	2B		T42-1067-04	DC MOTOR ASSY (LO)	
DPU1	2B		T25-0105-15	OPTICAL PICKUP HEAD	

A : X92-4430-00 (DXM-6010W) A1 : X92-4430-01 (DXM-6011W)
A2 : X92-4430-02 (DXM-6012W) A3 : X92-4430-03 (DXM-6013W)

B : X92-4450-00 (DXM-6110W) B1 : X92-4450-01 (DXM-6111W)
B2 : X92-4450-02 (DXM-6112W) B3 : X92-4450-03 (DXM-6113W)