



EXPLODED VIEW • PARTS LIST:

Escutcheon section

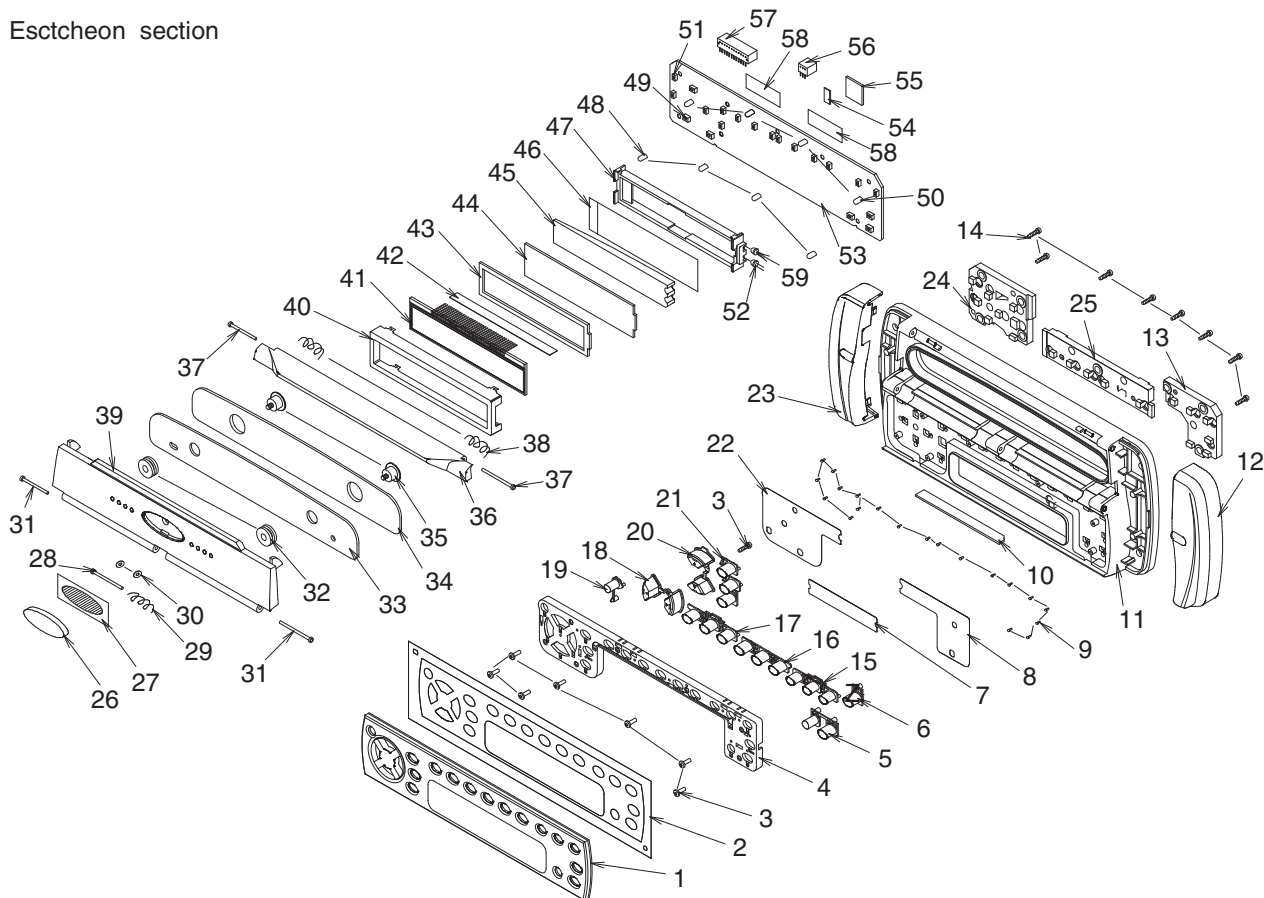

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	373-0935-03	DIAL-CVR	1	31	341-1715-01	SHAFT	2
2	347-6235-00	DOUBLE FACE	1	32	345-8427-00	RUBBER PART	2
3	716-0872-00	PAD SCREW(M1.7x5)	8	33	331-2878-01	DOOR PLATE	1
4	335-6297-00	BUTTON HOLDER	1	34	345-8425-01	SPONGE	1
5	382-5796-01	BUTTON(PLAY)	1	35	780-2610-01	MACHINE SCREW(M2.6x10)	2
6	382-5797-02	BUTTON(Z+)	1	36	335-6300-01	HOOK	1
7	347-6233-00	FILM-M	1	37	341-1716-01	SHAFT	2
8	347-6234-00	FILM-R	1	38	750-6704-00	SPRING	2
9	335-6299-00	PIN	20	39	320-0577-00	DUSTPROOF	1
10	290-7886-00	LABEL	1	40	331-3618-00	LCD COVER	1
11	370-5884-02	ESCUTCHEON	1	41	379-1269-40	INDICATOR	1
12	335-6302-01	SIDE-CVR(R)	1	42	347-7014-00	FILM	1
13	335-6305-00	ILLUMI PLATE(R)	1	43	347-6167-00	SHADE	1
14	716-1721-00	SCREW(M2x8)	8	44	347-6166-00	FILM	1
15	382-5795-01	BUTTON(TITLE)	1	45	335-6962-00	LCD ILLUMI	1
16	382-5794-01	BUTTON(4/5/6)	1	46	347-7669-00	REFLECTOR	1
17	382-5802-01	BUTTON(1/2/3)	1	47	335-6961-00	LCD HOLDER	1
18	382-5800-00	BUTTON(SRC)	1	48	345-4441-37	LAMP CAP	4
19	382-5798-01	BUTTON(MUTE)	1	49	013-3812-11	TACT SWITCH	19
20	382-5799-00	BUTTON(VOL)	1	50	017-0444-00	PILOT LAMP	4
21	382-5801-01	BUTTON(PWR)	1	51	013-6001-50	TACT SWITCH	1
22	347-6236-00	FILM-L	1	52	001-7046-00	DIODE	1
23	335-6301-01	SIDE-CVR(L)	1	53	039-2298-00	SWITCH PWB (WITHOUT COMPONENT)	1
24	335-6303-00	ILLUMI PLATE(L)	1	54	051-7400-06	IC	1
25	335-6304-00	ILLUMI PLATE(M)	1	55	051-6066-00	IC	1
26	378-0532-01	BADGE	1	56	076-0566-03	PLUG	1
27	347-6232-00	DOUBLE FACE	1	57	076-9001-14	PLUG	1
28	341-1714-00	SHAFT	1	58	347-6986-00	SHADE	2
29	750-6705-00	SPRING	1	59	001-7046-01	DIODE	1
30	746-0918-01	MASHER	2				

Main Section

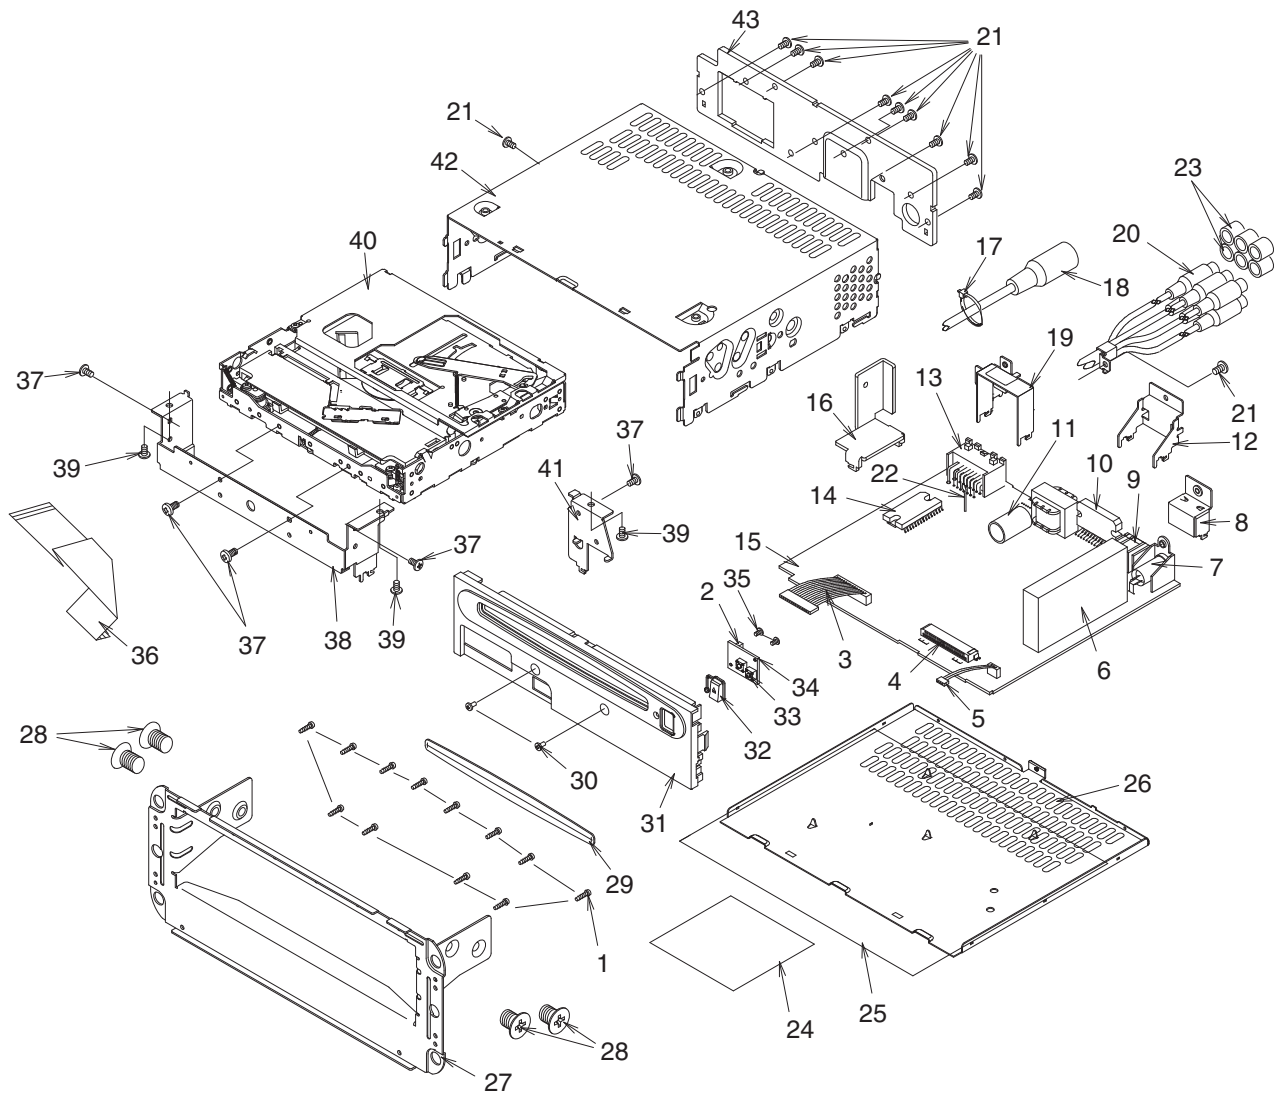

NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1721-00	SCREW(M2x8)	12
2	076-0566-03	PLUG	1
3	854-4563-50	EXTENSION LEAD	1
4	074-1237-76	OUTLET SOCKET	1
5	854-4564-50	EXTENSION LEAD	1
6	880-2090B	TUNER	1
7	092-4000-51	ANT-RECEPT	1
8	331-3567-00	CONNECT HOLDER	1
9	074-1194-00	OUTLET SOCKET	1
10	051-2050-00	IC	1
11	042-0447-00	ALLUMI ELE-C	1
12	331-3560-01	IC HOLDER	1
13	074-1214-00	OUTLET SOCKET	1
14	051-3297-10	IC	1
15	039-2345-00	MAIN PWB (WITHOUT COMPONENT)	1
16	313-1867-00	HEAT SINK	1
17	335-0833-07	CABLE TIE	1
18	855-1442-50	DIN CORD	1
19	331-3561-02	CONNECT HOLDER	1
20	855-5478-50	RCA PIN CORD	1
21	714-3006-81	MACHINE SCREW(M3x6)	11
22	321-0969-00	CLAMP	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	345-3799-20	RUBBER CAP	6
24	286-6125-00	SETPLATE	1
25	347-6880-00	INSULATOR	1
26	311-1859-02	LOWER CASE	1
27	300-9870-00	MOUNT BRKT	1
28	714-5008-41	MACHINE SCREW(M5x8)	4
29	346-0114-01	LEATHER SHEET	1
30	780-2607-02	SCREW(M2.6x7)	2
31	370-6039-00	ESCUTCHEON(I)	1
32	382-5803-00	BUTTON	1
33	013-6002-50	TACT SWITCH	2
34	039-2299-00	EJECT PWB (WITHOUT COMPONENT)	1
35	716-0872-11	PAD SCREW(M1.7x6)	2
36	816-2627-50	FLAT CABLE	1
37	714-2603-80	SCREW	5
38	331-3598-00	MECH BRKT	1
39	714-3004-81	MACHINE SCREW(M3x4)	3
40	929-0221-80	CD-MECH-MODULE	1
41	331-3427-00	MECH BRKT	1
42	310-1778-01	UPPER CASE	1
43	313-1866-00	HEAT SINK	1

ELECTRICAL PARTS LIST:

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL 1	880-2090B	TUNER	C 136	172-3331-15	50V 0.033uF	C 538	182-1073-29	10V 100uF
C 1	166-2096-50	50V 2pF	C 137	172-3331-15	50V 0.033uF	C 541	184-2273-22	10V 220uF
C 2	166-2201-50	50V 22pF	C 140	182-2256-55	35V 2.2uF	C 542	168-1042-78	25V 0.1uF
C 3	166-2201-50	50V 22pF	C 141	182-2256-55	35V 2.2uF	C 543	166-1011-50	50V 100pF
C 4	168-1022-55	50V 1000pF	C 142	182-2256-55	35V 2.2uF	C 544	166-1011-50	50V 100pF
C 5	168-2232-55	25V 0.022uF	C 143	182-2256-55	35V 2.2uF	C 545	166-1011-50	50V 100pF
C 6	168-2232-55	25V 0.022uF	C 210	182-2263-17	6.3V 22uF	C 546	166-1011-50	50V 100pF
C 9	168-1032-55	50V 0.01uF	C 214	042-0447-00	16V 2200uF	C 601	042-0650-00	5.5V 0.1F
C 10	168-2232-55	25V 0.022uF	C 222	182-4763-39	16V 47uF	C 612	168-4732-78	25V 0.047uF
C 11	182-1053-67	50V 1uF	C 223	172-2231-15	50V 0.022uF	C 614	168-1032-55	50V 0.01uF
C 12	168-1532-55	50V 0.015uF	C 224	182-2263-37	16V 22uF	C 615	042-0577-00	6.3V 100uF
C 13	168-2732-55	25V 0.027uF	C 225	182-1073-39	16V 100uF	C 616	183-1063-37	16V 10uF
C 14	168-2732-55	25V 0.027uF	C 227	182-1063-37	16V 10uF	C 617	182-2263-37	16V 22uF
C 17	182-4763-35	16V 47uF	C 228	182-4763-39	16V 47uF	D 102	001-0466-90	S5688B
C 18	168-2232-55	25V 0.022uF	C 229	182-1063-37	16V 10uF	D 103	001-0466-90	S5688B
C 19	168-1022-55	50V 1000pF	C 230	173-1021-18	50V 1000pF	D 104	001-0466-90	S5688B
C 20	168-6822-55	50V 6800pF	C 243	182-1073-29	10V 100uF	D 105	001-0466-90	S5688B
C 21	182-1073-35	16V 100uF	C 244	183-1073-27	6.3V 100uF	D 106	001-0466-90	S5688B
C 22	182-4763-35	16V 47uF	C 246	168-1032-55	50V 0.01uF	D 107	001-0466-90	S5688B
C 27	182-4763-19	6.3V 47uF	C 247	166-1011-50	50V 100pF	D 108	001-0466-90	S5688B
C 28	168-1032-55	50V 0.01uF	C 301	182-1063-37	16V 10uF	D 109	001-0466-90	S5688B
C 50	168-1032-55	50V 0.01uF	C 302	182-1063-37	16V 10uF	D 110	001-0347-41	MA4075M
C 51	182-3353-67	50V 3.3uF	C 303	182-1063-37	16V 10uF	D 201	001-0466-90	S5688B
C 52	166-1801-50	50V 18pF	C 304	182-1063-37	16V 10uF	D 202	001-0516-90	MA111
C 53	166-1501-50	50V 15pF	C 305	168-4732-78	25V 0.047uF	D 203	001-0592-00	RM4Z
C 54	166-1011-50	50V 100pF	C 320	168-4732-78	25V 0.047uF	D 205	001-0516-90	MA111
C 55	166-1011-50	50V 100pF	C 458	182-2263-17	6.3V 22uF	D 221	001-0516-90	MA111
C 56	166-1011-50	50V 100pF	C 459	182-2263-17	6.3V 22uF	D 225	001-0466-91	S5688G
C 57	166-3311-50	50V 330pF	C 460	182-2263-17	6.3V 22uF	D 226	001-0466-91	S5688G
C 58	168-1022-55	50V 1000pF	C 461	182-2263-17	6.3V 22uF	D 501	001-0516-90	MA111
C 59	166-2201-50	50V 22pF	C 462	182-2263-17	6.3V 22uF	D 502	001-0516-90	MA111
C 102	178-2242-78	25V 0.22uF	C 463	182-2263-17	6.3V 22uF	D 503	001-0347-23	MA4043M
C 103	178-2242-78	25V 0.22uF	C 464	166-4711-50	50V 470pF	D 604	001-0516-90	MA111
C 104	178-2242-78	25V 0.22uF	C 500	182-1053-67	50V 1uF	D 610	001-0516-90	MA111
C 105	178-2242-78	25V 0.22uF	C 501	182-1053-67	50V 1uF	D 611	001-0516-90	MA111
C 106	182-4763-39	16V 47uF	C 502	182-1053-67	50V 1uF	IC 2	051-6212-08	LC72191JM
C 107	182-2263-37	16V 22uF	C 503	182-1053-67	50V 1uF	IC 101	051-2050-00	LA47532
C 108	172-2231-15	50V 0.022uF	C 504	182-1063-37	16V 10uF	IC 102	051-3297-10	BA4916-V2
C 109	182-2253-67	50V 2.2uF	C 505	182-1063-37	16V 10uF	IC 301	051-0350-93	NJM4558M
C 118	166-1011-50	50V 100pF	C 506	182-1063-37	16V 10uF	IC 501	051-5028-90	TDA7409
C 119	166-1011-50	50V 100pF	C 507	182-1063-37	16V 10uF	IC 502	051-0350-93	NJM4558M
C 120	166-4711-50	50V 470pF	C 508	182-1063-37	16V 10uF	IC 505	051-5437-08	S-80821CNMC
C 121	166-4711-50	50V 470pF	C 509	182-1063-37	16V 10uF	IC 507	051-5830-90	UPC5701GR
C 122	166-4711-50	50V 470pF	C 512	182-4763-19	6.3V 47uF	IC 508	051-0350-93	NJM4558M
C 123	166-4711-50	50V 470pF	C 514	182-1063-37	16V 10uF	IC 601	052-3927-01	M30624MGA-503GP
C 124	166-4711-50	50V 470pF	C 515	182-4763-39	16V 47uF	IC 602	051-6600-38	CA0008AM
C 125	166-4711-50	50V 470pF	C 516	168-1045-56	25V 0.1uF	J 401	855-5478-50	RCA PIN CORD
C 126	166-4711-50	50V 470pF	C 517	168-4722-55	50V 4700pF	J 601	074-1194-00	13P
C 127	166-4711-50	50V 470pF	C 518	168-4722-55	50V 4700pF	J 602	074-1237-76	26P
C 128	166-1011-50	50V 100pF	C 519	182-1053-67	50V 1uF	J 605	854-4563-50	EX-LEAD
C 129	166-1011-50	50V 100pF	C 520	182-1053-67	50V 1uF	J 606	855-1442-50	DIN CORD
C 130	172-3331-15	50V 0.033uF	C 521	182-1053-67	50V 1uF	J 607	854-4564-50	EX-LEAD
C 131	172-3331-15	50V 0.033uF	C 522	182-1053-67	50V 1uF	J 903	074-1214-00	16P
C 132	172-3331-15	50V 0.033uF	C 534	168-1032-55	50V 0.01uF	L 1	010-2003-04	COIL
C 133	172-3331-15	50V 0.033uF	C 535	168-1032-55	50V 0.01uF	L 2	010-2230-88	220uH
C 134	172-3331-15	50V 0.033uF	C 536	168-1032-55	50V 0.01uF	L 3	010-2285-56	BLM21B222S
C 135	172-3331-15	50V 0.033uF	C 537	168-1032-55	50V 0.01uF			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L 4	010-2285-56	BLM21B222S	R 102	119-1031-15	1/16W 10Kohm	R 531	119-4721-15	1/16W 4.7Kohm
L 500	010-2230-88	220uH	R 105	119-1021-15	1/16W 1Kohm	R 532	119-4721-15	1/16W 4.7Kohm
L 601	010-3100-66	2.2uH	R 106	119-3311-15	1/16W 330ohm	R 537	119-8221-15	1/16W 8.2Kohm
L 602	010-3100-66	2.2uH	R 107	119-3311-15	1/16W 330ohm	R 538	119-3321-15	1/16W 3.3Kohm
L 603	010-3100-66	2.2uH	R 108	119-3311-15	1/16W 330ohm	R 540	119-2231-15	1/16W 22Kohm
Q 3	125-2199-93	KRC103S	R 109	119-3311-15	1/16W 330ohm	R 541	119-1021-15	1/16W 1Kohm
Q 4	125-3004-90	KTA1504S	R 130	116-2291-15	1/4WS 2.2ohm	R 542	119-1011-15	1/16W 100ohm
Q 5	125-3004-90	KTA1504S	R 131	116-2291-15	1/4WS 2.2ohm	R 543	119-1011-15	1/16W 100ohm
Q 50	192-2712-51	2SC2712GL	R 132	116-2291-15	1/4WS 2.2ohm	R 551	119-4721-15	1/16W 4.7Kohm
Q 51	192-2712-51	2SC2712GL	R 133	116-2291-15	1/4WS 2.2ohm	R 552	119-0000-05	0
Q 210	125-0200-96	KRA226S	R 134	116-2291-15	1/4WS 2.2ohm	R 553	119-4721-15	1/16W 4.7Kohm
Q 211	125-2199-96	KRC106S	R 135	116-2291-15	1/4WS 2.2ohm	R 554	119-1011-15	1/16W 100ohm
Q 227	193-1802-61	2SD1802	R 136	116-2291-15	1/4WS 2.2ohm	R 555	119-1021-15	1/16W 1Kohm
Q 228	125-4011-90	KTD863	R 137	116-2291-15	1/4WS 2.2ohm	R 556	119-1021-15	1/16W 1Kohm
Q 452	125-4012-90	KTD1304	R 204	119-3321-15	1/16W 3.3Kohm	R 557	119-1011-15	1/16W 100ohm
Q 453	125-4012-90	KTD1304	R 205	119-1831-15	1/16W 18Kohm	R 558	119-1041-15	1/16W 100Kohm
Q 454	125-4012-90	KTD1304	R 207	119-1231-15	1/16W 12Kohm	R 559	119-1041-15	1/16W 100Kohm
Q 455	125-4012-90	KTD1304	R 208	119-1011-15	1/16W 100ohm	R 601	119-0000-05	0
Q 456	125-4012-90	KTD1304	R 209	119-3311-15	1/16W 330ohm	R 603	116-6801-15	1/4WS 68ohm
Q 457	125-4012-90	KTD1304	R 210	119-1031-15	1/16W 10Kohm	R 604	119-3321-15	1/16W 3.3Kohm
Q 501	125-2199-96	KRC106S	R 211	119-2741-15	1/16W 270Kohm	R 607	119-2231-15	1/16W 22Kohm
Q 502	125-0199-96	KRA106S	R 252	116-1521-15	1/4WS 1.5Kohm	R 611	119-1041-15	1/16W 100Kohm
Q 503	125-4010-90	KTC3875S	R 301	119-1041-15	1/16W 100Kohm	R 612	119-1041-15	1/16W 100Kohm
Q 505	125-3005-90	KTA1273	R 302	119-1041-15	1/16W 100Kohm	R 613	119-4731-15	1/16W 47Kohm
Q 506	125-2199-96	KRC106S	R 303	032-0140-64	1/10W 43Kohm(F)	R 614	119-4731-15	1/16W 47Kohm
Q 507	125-2199-93	KRC103S	R 304	032-0140-64	1/10W 43Kohm(F)	R 615	119-1031-15	1/16W 10Kohm
Q 508	125-0199-96	KRA106S	R 305	032-0140-64	1/10W 43Kohm(F)	R 616	119-4711-15	1/16W 470ohm
Q 510	125-2199-96	KRC106S	R 306	032-0140-64	1/10W 43Kohm(F)	R 620	119-1031-15	1/16W 10Kohm
Q 511	125-3005-90	KTA1273	R 307	119-1021-15	1/16W 1Kohm	R 621	116-1221-15	1/4WS 1.2Kohm
Q 602	125-2199-93	KRC103S	R 308	032-0140-52	1/10W 33Kohm(F)	R 622	119-1031-15	1/16W 10Kohm
Q 604	125-3004-90	KTA1504S	R 309	032-0140-52	1/10W 33Kohm(F)	R 624	116-1221-15	1/4WS 1.2Kohm
Q 606	125-2199-93	KRC103S	R 310	032-0140-52	1/10W 33Kohm(F)	R 627	119-1031-15	1/16W 10Kohm
Q 607	125-3007-90	KTA1298	R 311	032-0140-52	1/10W 33Kohm(F)	R 628	116-1521-15	1/4WS 1.5Kohm
Q 609	125-3007-90	KTA1298	R 320	119-1021-15	1/16W 1Kohm	R 634	119-1031-15	1/16W 10Kohm
Q 610	125-2199-93	KRC103S	R 470	119-4721-15	1/16W 4.7Kohm	R 635	119-3321-15	1/16W 3.3Kohm
Q 611	125-3004-90	KTA1504S	R 471	119-4721-15	1/16W 4.7Kohm	R 642	119-1031-15	1/16W 10Kohm
Q 612	125-4010-90	KTC3875S	R 472	119-4721-15	1/16W 4.7Kohm	R 643	119-5621-15	1/16W 5.6Kohm
Q 620	125-2199-93	KRC103S	R 473	119-4721-15	1/16W 4.7Kohm	R 652	119-1811-15	1/16W 180ohm
R 3	119-1021-15	1/16W 1Kohm	R 474	119-2231-15	1/16W 22Kohm	R 653	119-1811-15	1/16W 180ohm
R 4	119-1021-15	1/16W 1Kohm	R 475	119-2231-15	1/16W 22Kohm	R 654	119-1811-15	1/16W 180ohm
R 7	119-1231-15	1/16W 12Kohm	R 476	119-3311-15	1/16W 330ohm	R 657	119-1811-15	1/16W 180ohm
R 9	119-1031-15	1/16W 10Kohm	R 477	119-3311-15	1/16W 330ohm	R 658	119-1041-15	1/16W 100Kohm
R 14	119-1031-15	1/16W 10Kohm	R 478	119-3311-15	1/16W 330ohm	R 659	119-4731-15	1/16W 47Kohm
R 15	119-1031-15	1/16W 10Kohm	R 479	119-3311-15	1/16W 330ohm	R 660	119-1531-15	1/16W 15Kohm
R 17	119-5631-15	1/16W 56Kohm	R 480	119-1021-15	1/16W 1Kohm	R 661	119-4731-15	1/16W 47Kohm
R 18	119-1521-15	1/16W 1.5Kohm	R 481	119-1021-15	1/16W 1Kohm	R 662	119-2221-15	1/16W 2.2Kohm
R 19	119-1521-15	1/16W 1.5Kohm	R 482	119-1021-15	1/16W 1Kohm	R 663	119-1031-15	1/16W 10Kohm
R 22	119-1041-15	1/16W 100Kohm	R 490	119-3311-15	1/16W 330ohm	R 664	119-2221-15	1/16W 2.2Kohm
R 23	119-1031-15	1/16W 10Kohm	R 491	119-3311-15	1/16W 330ohm	R 670	119-4731-15	1/16W 47Kohm
R 24	119-2221-15	1/16W 2.2Kohm	R 501	032-0140-58	1/10W 51Kohm(F)	R 688	119-1031-15	1/16W 10Kohm
R 25	119-2221-15	1/16W 2.2Kohm	R 502	032-0140-58	1/10W 51Kohm(F)	R 690	119-4721-15	1/16W 4.7Kohm
R 26	119-2221-15	1/16W 2.2Kohm	R 503	032-0140-58	1/10W 51Kohm(F)	R 691	119-4721-15	1/16W 4.7Kohm
R 29	119-1031-15	1/16W 10Kohm	R 504	032-0140-58	1/10W 51Kohm(F)	R 696	119-1041-15	1/16W 100Kohm
R 31	119-4741-15	1/16W 470Kohm	R 505	032-0140-51	1/10W 15Kohm(F)	R 697	119-1031-15	1/16W 10Kohm
R 32	119-8201-15	1/16W 82ohm	R 506	032-0140-51	1/10W 15Kohm(F)	SUP 1	060-0122-91	DSP141N
R 51	119-2221-15	1/16W 2.2Kohm	R 507	032-0140-51	1/10W 15Kohm(F)	T 101	009-9006-60	CHOKE
R 52	119-1021-15	1/16W 1Kohm	R 508	032-0140-51	1/10W 15Kohm(F)	X 2	061-1066-00	7.2MHZ
R 60	119-1021-15	1/16W 1Kohm	R 509	119-3311-15	1/16W 330ohm	X 601	060-1505-50	10MHZ
R 101	119-1231-15	1/16W 12Kohm	R 530	119-3931-15	1/16W 39Kohm			

Switch PWB (B2) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 702	168-4732-78	25V 0.047uF	P L 4	017-0444-00	14V 50MA	S 701	013-3812-11	SWITCH
C 703	168-4732-78	25V 0.047uF	P L 4	017-0461-00	14V 50MA	S 702	013-3812-11	SWITCH
C 704	042-0416-52	10V 10uF TAN	Q 701	125-3004-90	KTA1504S	S 703	013-3812-11	SWITCH
C 706	168-4732-78	25V 0.047uF	Q 702	125-2199-93	KRC103S	S 704	013-3812-11	SWITCH
D 701	001-0529-29	MA8051M	R 701	119-1031-15	1/16W 10Kohm	S 705	013-3812-11	SWITCH
D 702	001-0529-14	MA8030L	R 703	119-1021-15	1/16W 1Kohm	S 706	013-3812-11	SWITCH
D 710	001-7046-01	DIODE	R 704	119-1021-15	1/16W 1Kohm	S 707	013-3812-11	SWITCH
D 711	001-7046-00	DIODE	R 705	119-1021-15	1/16W 1Kohm	S 708	013-3812-11	SWITCH
IC 701	051-6066-00	NJU6535	R 706	119-3921-15	1/16W 3.9Kohm	S 709	013-3812-11	SWITCH
IC 702	051-7400-06	74LS07	R 707	119-1041-15	1/16W 100Kohm	S 710	013-3812-11	SWITCH
L 701	010-2198-56	2.2uH	R 708	119-1011-15	1/16W 100ohm	S 711	013-3812-11	SWITCH
L 702	010-2198-56	2.2uH	R 709	119-1011-15	1/16W 100ohm	S 712	013-3812-11	SWITCH
L 703	010-2198-56	2.2uH	R 710	119-1021-15	1/16W 1Kohm	S 713	013-3812-11	SWITCH
P 702	076-0566-03	3P	R 711	119-1021-15	1/16W 1Kohm	S 714	013-3812-11	SWITCH
P 703	076-9001-14	14P	R 712	119-1021-15	1/16W 1Kohm	S 715	013-3812-11	SWITCH
P L 1	017-0444-00	14V 50MA	R 713	119-1011-15	1/16W 100ohm	S 716	013-3812-11	SWITCH
P L 1	017-0461-00	14V 50MA	R 714	119-6811-15	1/16W 680ohm	S 717	013-6001-50	SWITCH
P L 2	017-0444-00	14V 50MA	R 715	119-1211-15	1/16W 120ohm	S 718	013-3812-11	SWITCH
P L 2	017-0461-00	14V 50MA	R 716	119-1211-15	1/16W 120ohm	S 719	013-3812-11	SWITCH
P L 3	017-0444-00	14V 50MA	R 718	119-1811-15	1/16W 180ohm	S 720	013-3812-11	SWITCH
P L 3	017-0461-00	14V 50MA	R 719	119-1811-15	1/16W 180ohm			

EJECT-PWB (B3) section

REF No.	PART No.	DESCRIPTION
P 701	076-0566-03	3P
SW 1	013-6002-50	SWITCH
SW 2	013-6002-50	SWITCH

EXPLODED VIEW:

CD mechanism section 929-0221-80

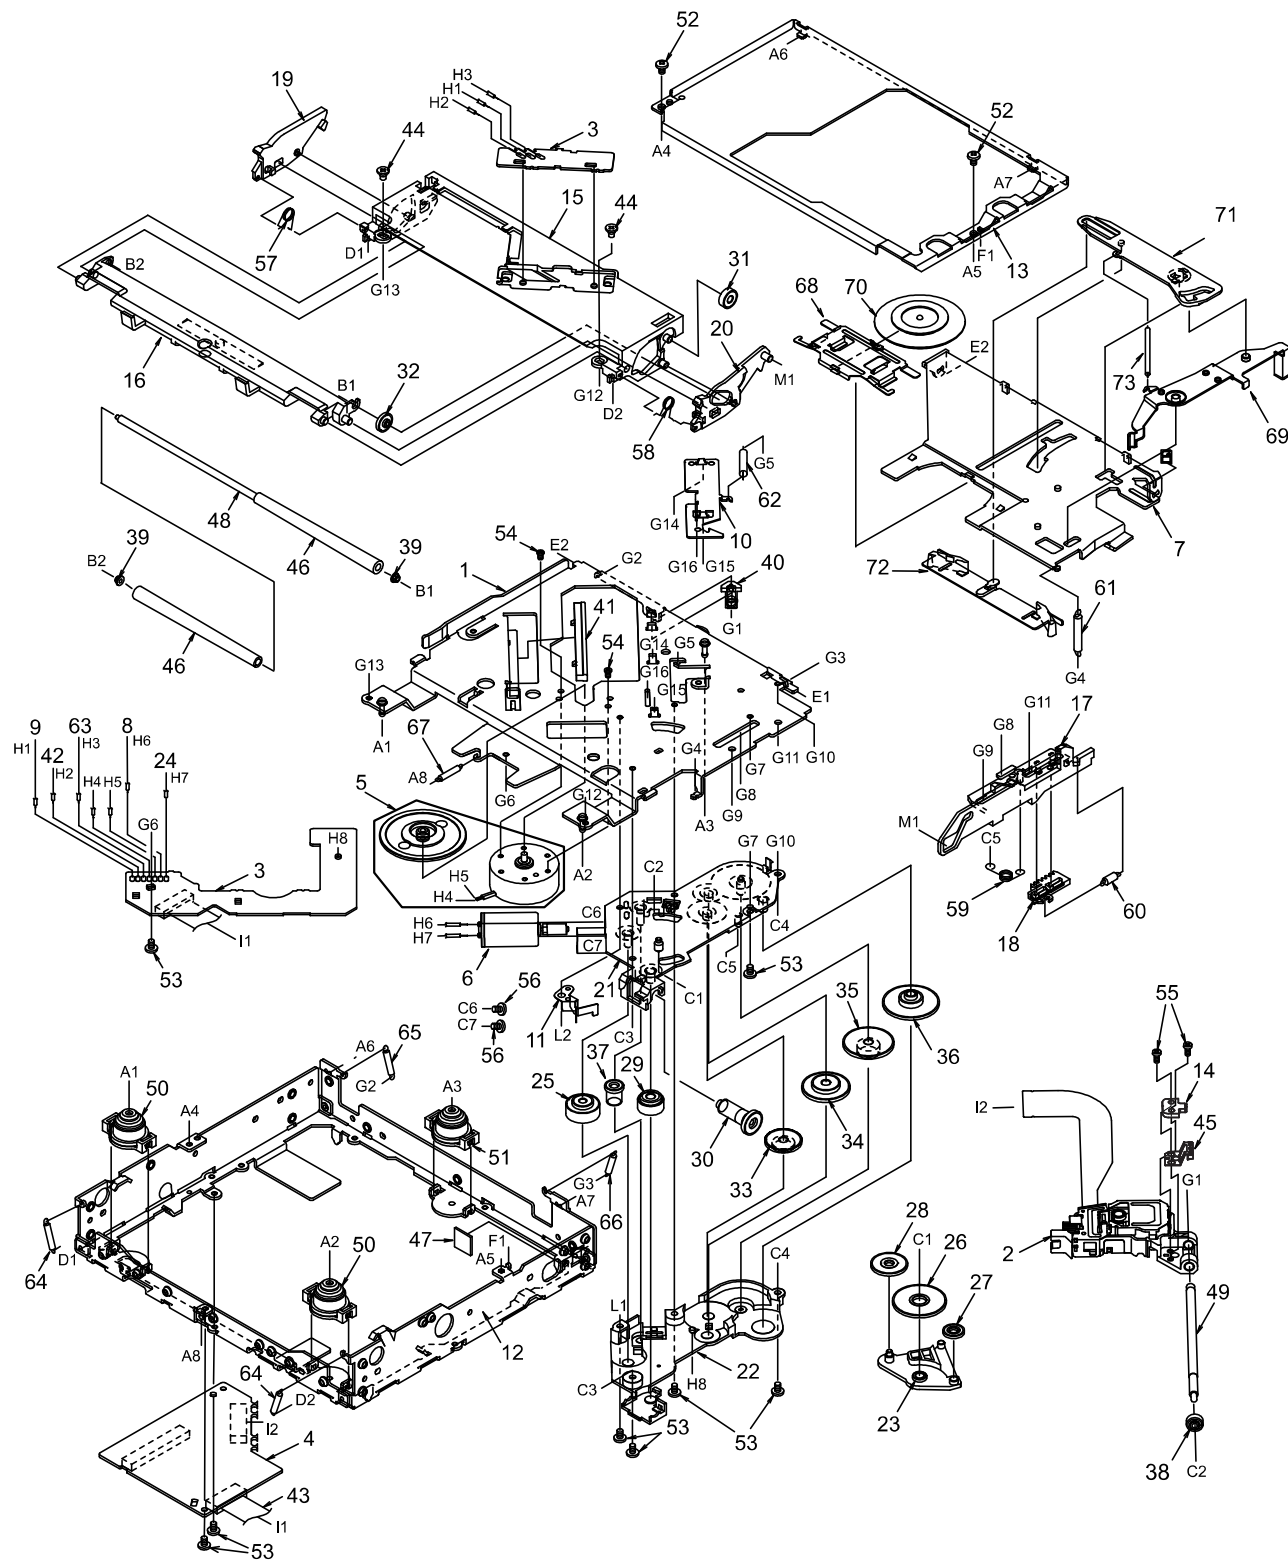

PARTS LIST:

CD mechanism section 929-0221-80

NO.	PARTS NO.	DESCRIPTION	QTY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0065-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-24	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-25	LOWER CHASSIS	1
13	620-1028-22	UPPER CHASSIS	1
14	966-0638-20	SH-RACK-ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0599-25	ROLLER GUIDE	1
17	621-0600-25	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM(L)	1
20	621-0603-25	LOCK ARM(R)	1
21	621-0604-22	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0606-21	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0613-20	ROLLER GEAR B	1
31	621-0614-20	ROLLER GEAR C	1
32	621-0615-21	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1

NO.	PARTS NO.	DESCRIPTION	QTY
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-22	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE(PUR)	1
43	816-2542-01	FLAT WIRE(10P)	1
44	716-3473-00	SCREW	2
45	621-0709-20	SH-BASE	1
46	621-0629-20	LOADING ROLLER	2
47	345-8704-20	CUSHION RUBBER	1
48	622-1571-21	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0081-20	DAMPER F	2
51	629-0082-20	DAMPER R	1
52	714-2003-81	MACHINE SCREW	2
53	716-1507-00	SCREW	8
54	716-1733-00	SCREW	2
55	716-3469-00	SCREW	2
56	716-3446-00	SCREW	2
57	750-3465-21	ROLLER SPRING(L)	1
58	750-3466-20	ROLLER SPRING(R)	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE(BLU)	1
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1
67	750-3475-21	DR-SPRING C	1
68	620-1023-23	CLAMPER PLATE	1
69	620-1024-23	SENSOR ARM	1
70	621-0708-20	CLAMPER RING	1
71	621-0626-21	STOPPER LINK	1
72	621-0627-21	DISC STOPPER	1
73	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST :

CD mechanism (B4) section 929-0221-80

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 101	168-1042-78	0.1uF	C 207	043-0533-50	0.047uF	R 109	033-1031-15	1/16W 10k ohm
C 102	045-4701-50	47pF	C 208	046-6822-58	6800pF	R 110	033-1051-15	1/16W 1M ohm
C 103	046-4722-58	4700pF	C 209	168-1042-78	0.1uF	R 111	033-3321-15	1/16W 3.3k ohm
C 104	168-1042-78	0.1uF	C 210	043-0533-50	0.047uF	R 114	033-2211-15	1/16W 220 ohm
C 105	046-1532-78	0.015uF	C 211	168-1042-78	0.1uF	R 115	033-2211-15	1/16W 220 ohm
C 106	046-1032-78	0.01uF	C 212	168-1042-78	0.1uF	R 116	033-1031-15	1/16W 10k ohm
C 107	046-1032-78	0.01uF	C 213	045-5096-50	5pF	R 117	033-1021-15	1/16W 1k ohm
C 108	046-4722-58	4700pF	C 214	045-5601-50	56pF	R 131	033-4711-15	1/16W 470 ohm
C 109	046-1522-58	1500pF	C 215	043-0533-50	0.047uF	R 132	033-2211-15	1/16W 220 ohm
C 110	046-3332-78	0.033uF	C 216	178-1052-78	1uF	R 201	117-2201-15	1/10W 22 ohm
C 111	168-1042-78	0.1uF	C 217	045-1011-50	100pF	R 202	117-2201-15	1/10W 22 ohm
C 112	046-3332-78	0.033uF	C 301	163-1073-35	16V 100uF	R 203	033-1041-15	1/16W 100k ohm
C 113	168-1042-78	0.1uF	C 302	168-1042-78	0.1uF	R 204	033-1041-15	1/16W 100k ohm
C 114	168-1042-78	0.1uF	C 303	043-0533-50	0.047uF	R 205	033-1541-15	1/16W 150k ohm
C 115	046-4712-58	470pF	D 201	001-0516-90	MA111	R 206	033-1541-15	1/16W 150k ohm
C 116	046-4712-58	470pF	IC 101	051-6376-00	TC94A14FA	R 207	033-1041-15	1/16W 100k ohm
C 117	043-0533-50	0.047uF	IC 102	051-3279-90	BA033LBSG	R 208	033-8231-15	1/16W 82k ohm
C 118	043-0533-50	0.047uF	IC 201	051-5710-90	TA2157F	R 209	033-6811-15	1/16W 680 ohm
C 119	045-2701-50	27pF	IC 301	051-6049-08	BA5983FP-E2	R 210	033-6831-15	1/16W 68k ohm
C 120	045-1801-50	18pF	J 101	074-1228-76	26P	R 211	033-1831-15	1/16W 18k ohm
C 121	163-1063-35	16V 10uF	J 201	074-1138-65	15P	R 212	033-2721-15	1/16W 2.7k ohm
C 122	178-1052-78	1uF	J 301	074-1138-60	10P	R 213	033-1011-15	1/16W 100 ohm
C 123	046-1032-78	0.01uF	L 101	010-2285-57	BLM21B102SPT	R 214	033-1021-15	1/16W 1k ohm
C 124	163-1073-05	4V 100uF	L 102	010-2285-57	BLM21B102SPT	R 215	033-1031-15	1/16W 10k ohm
C 125	168-1042-78	0.1uF	L 103	010-2285-57	BLM21B102SPT	R 217	033-1041-15	1/16W 100k ohm
C 126	168-1042-78	0.1uF	L 104	010-2285-57	BLM21B102SPT	R 218	033-2211-15	1/16W 220 ohm
C 129	178-1052-78	1uF	L 105	010-2285-57	BLM21B102SPT	R 301	117-6811-15	1/16W 680 ohm
C 201	163-3363-05	4V 33uF	L 401	010-3050-93	10uH	R 304	033-3921-15	1/16W 3.9k ohm
C 202	168-1042-78	0.1uF	Q 201	131-1188-50	2SB1188	R 305	033-3921-15	1/16W 3.9k ohm
C 203	178-1052-78	1uF	R 102	033-5621-15	1/16W 5.6k ohm	R 306	033-1041-15	1/16W 100k ohm
C 204	163-1073-05	4V 100uF	R 104	033-4731-15	1/16W 47k ohm	R 307	033-2211-15	1/16W 220 ohm
C 205	163-3363-05	4V 33uF	R 105	033-1041-15	1/16W 100k ohm	X 102	060-1528-90	16.934M
C 206	168-1042-78	0.1uF	R 108	033-1531-15	1/16W 15k ohm			

LED PWB (B5) section

REF No.	PART No.	DESCRIPTION
D 1	001-7058-90	AN1105W-RR
D 2	001-7058-90	AN1105W-RR
J 1	074-1138-60	10P
Q 1	060-4015-90	PS1192H
Q 2	060-4015-90	PS1192H
S 1	013-7414-50	CHUCKING
S 2	013-7413-50	LIMIT