


EXPLODED VIEW / PARTS LIST


Main section

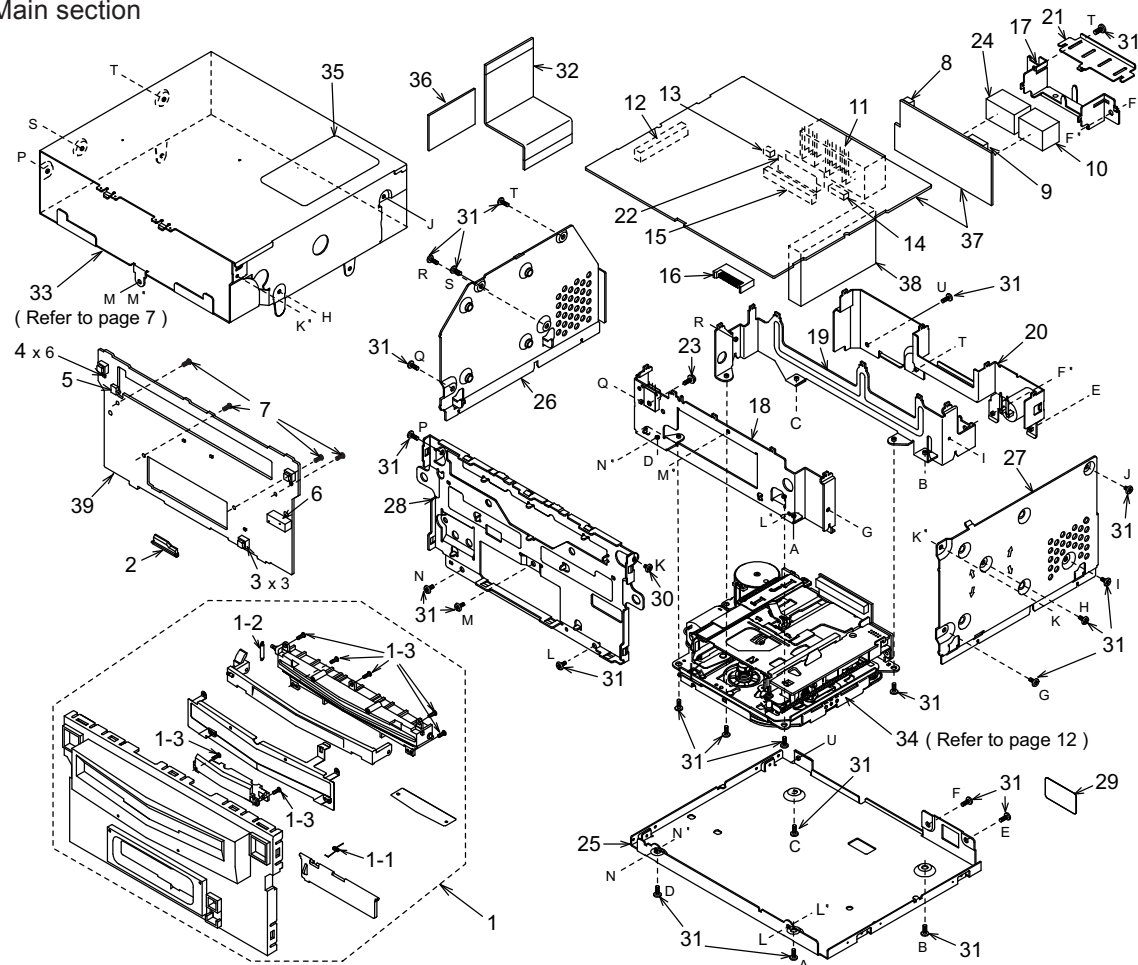

Note) Some parts depend on each model. The model name is specified in the description.


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8018-64	ESCUTCHEON ASSY	1	20	331-3239-21	REAR PLATE	1
1-1	750-2626-00	SPRING	1	21	331-3257-20	CONNECTOR HOLDER	1
1-2	750-6708-01	SPRING	1	22	347-6595-01	INSULATOR	1
1-3	716-0872-00	PAD SCREW(M1.7 x 5 SILVER)	7	23	716-1494-00	IT SCREW (M2.6 x 6)	1
2	335-6826-01	GUIDE ILLUMI	1	24	074-1013-30	OUTLET SOCKET(A12 MW)	1
3	013-6201-51	TACT SWITCH	3	25	311-1834-23	LOWER CASE	1
4	001-7069-90	LED	6	26	331-3258-22	SIDE CASE(L)	1
5	013-7415-50	DETECTOR SWITCH	1	27	331-3259-22	SIDE CASE(R)	1
6	074-1151-10	OUTLET SOCKET	1	28	331-3483-20	ES-PLATE	1
7	716-0778-10	WAVE SCREW(2 x 6)	4	29	347-6623-01	SPACER	1
8	074-0898-06	OUTLET SOCKET(6P)	1	30	714-2004-81	MACHINE SCREW(M2 x 4)	1
9	074-0898-18	OUTLET SOCKET(18P)	1	31	714-2605-81	MACHINE SCREW(M2.6 x 5)	24
10	074-1087-12	OUTLET SOCKET(A16 MW)	1	32	816-2563-10	FLAT WIRE	1
11	074-1141-00	OUTLET SOCKET(NS10+NS06)	1	33	929-0196-85	CD CHANGER MODULE	1
12	074-1192-22	OUTLET SOCKET(22P)	1	34	930-0794-80	CASSETTE TAPE MECHANISM	1
13	076-0368-06	PLUG(6P)	1	35	286-6126-77 286-6657-04	SET PLATE(PN2765DA) SET PLATE(PN2765DB)	1
14	076-0368-18	PLUG(18P)	1	36	335-6788-01	MOLDED PART	1
15	076-0509-20	PLUG(20P)	1	37	-----	MAIN PWB (WITHOUT COMPONENT)	1
16	076-0540-10	PLUG(10P)	1	38	880-1921V	AM/FM TUNER	1
17	331-2025-21	CONNECTOR HOLDER	1	39	-----	SWITCH PWB (WITHOUT COMPONENT)	1
18	331-3236-22	MECH BRACKET(FRONT)	1				
19	331-3237-21	MECH BRACKET(REAR)	1				


CD changer module section

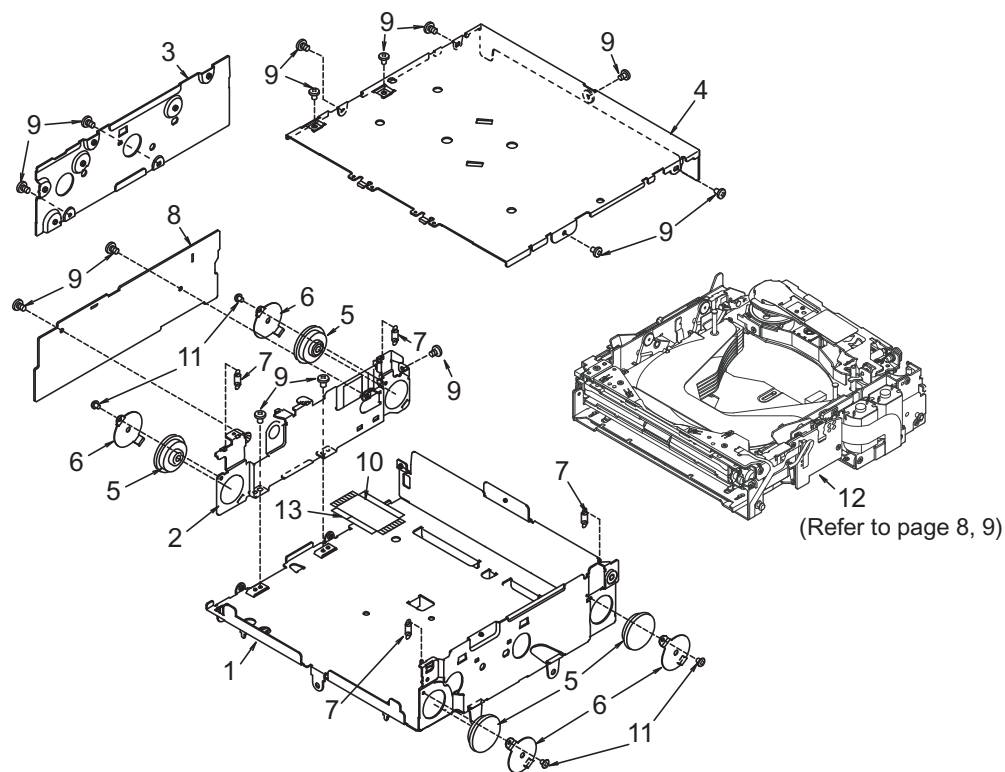

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-25	LOWER CASE	1	8	-----	CD-SIDE PWB	1
2	331-3266-24	PWB HOLDER	1	9	716-1716-00	SCREW(M2 x 3)	14
3	305-0315-21	SIDE CASE	1	10	HBS-561-100	FPC(45P)	1
4	310-1741-23	UPPER CASE	1	11	716-3450-00	SCREW(M1.7 x 2)	4
5	629-0083-01	DAMPER	4	12	-----	CD CHANGER MECHANISM	1
6	620-1086-20	DAMPER-H-PLT	4	13	347-6619-00	INSULATOR	1
7	750-3491-00	FL-SPRING	4				

CD changer mechanism section : CD changer module

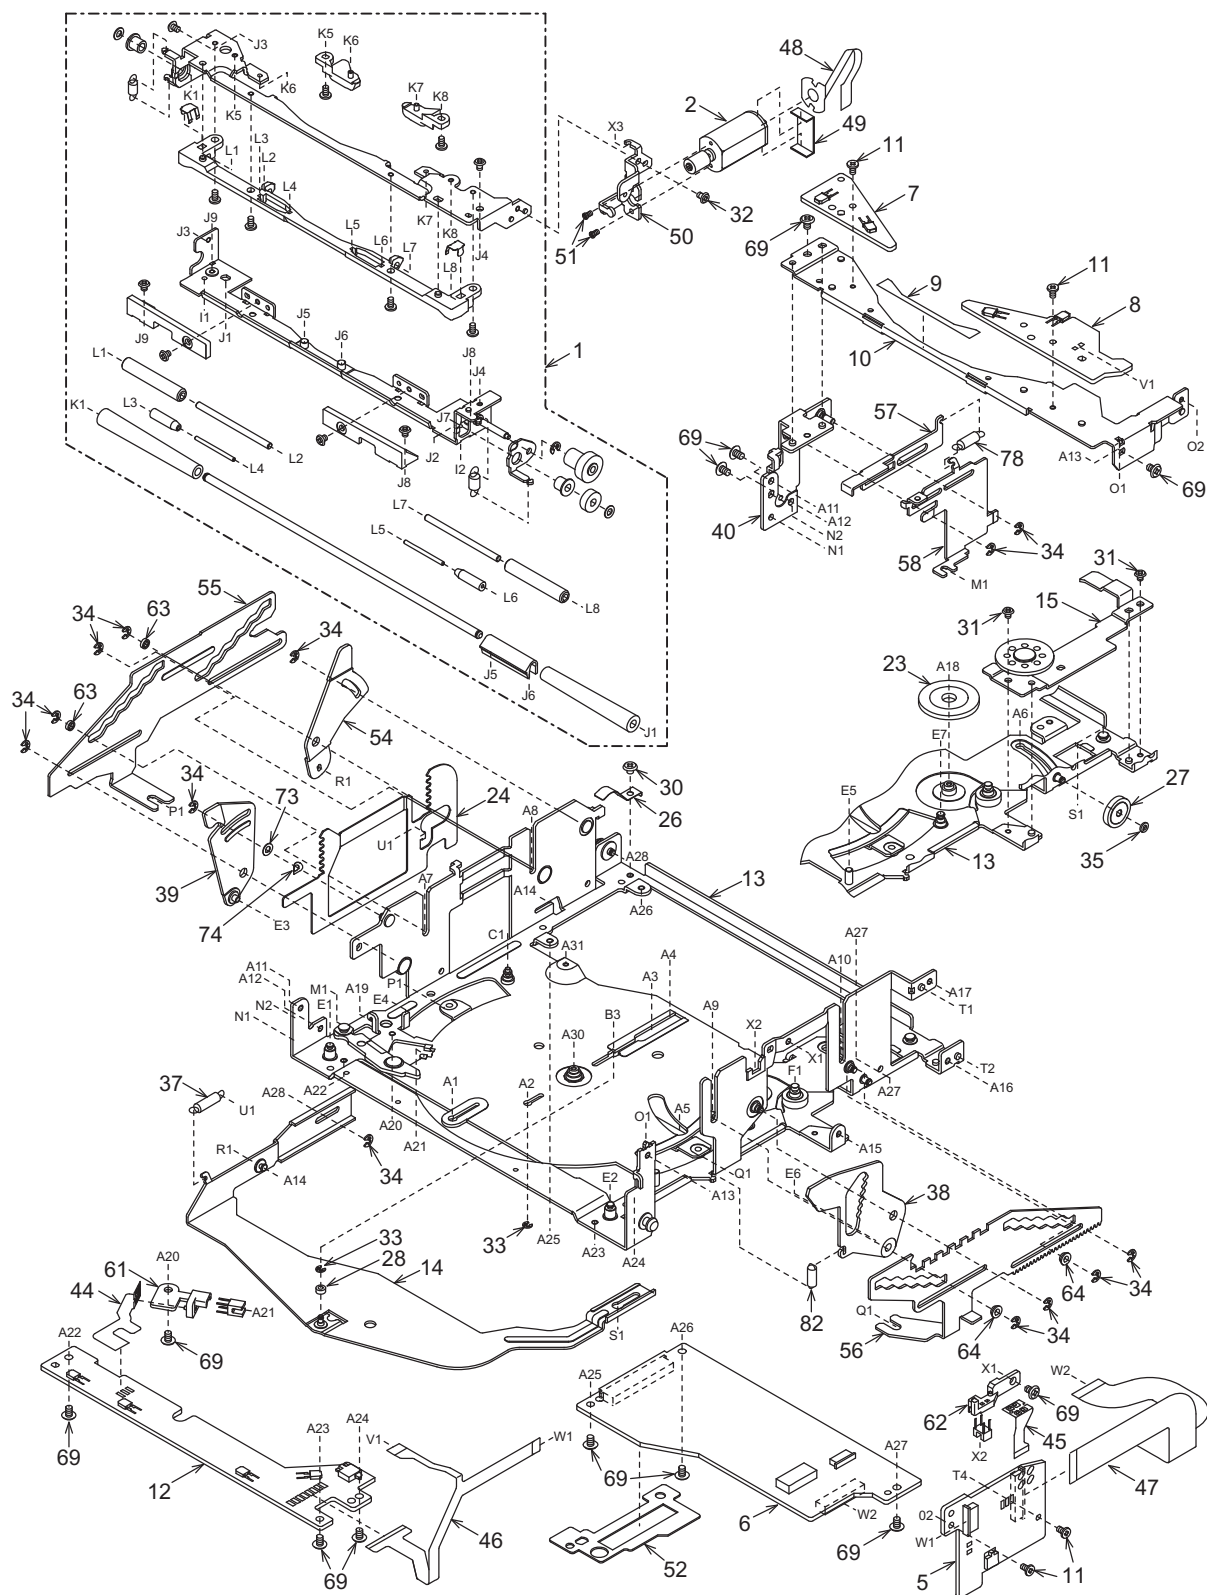


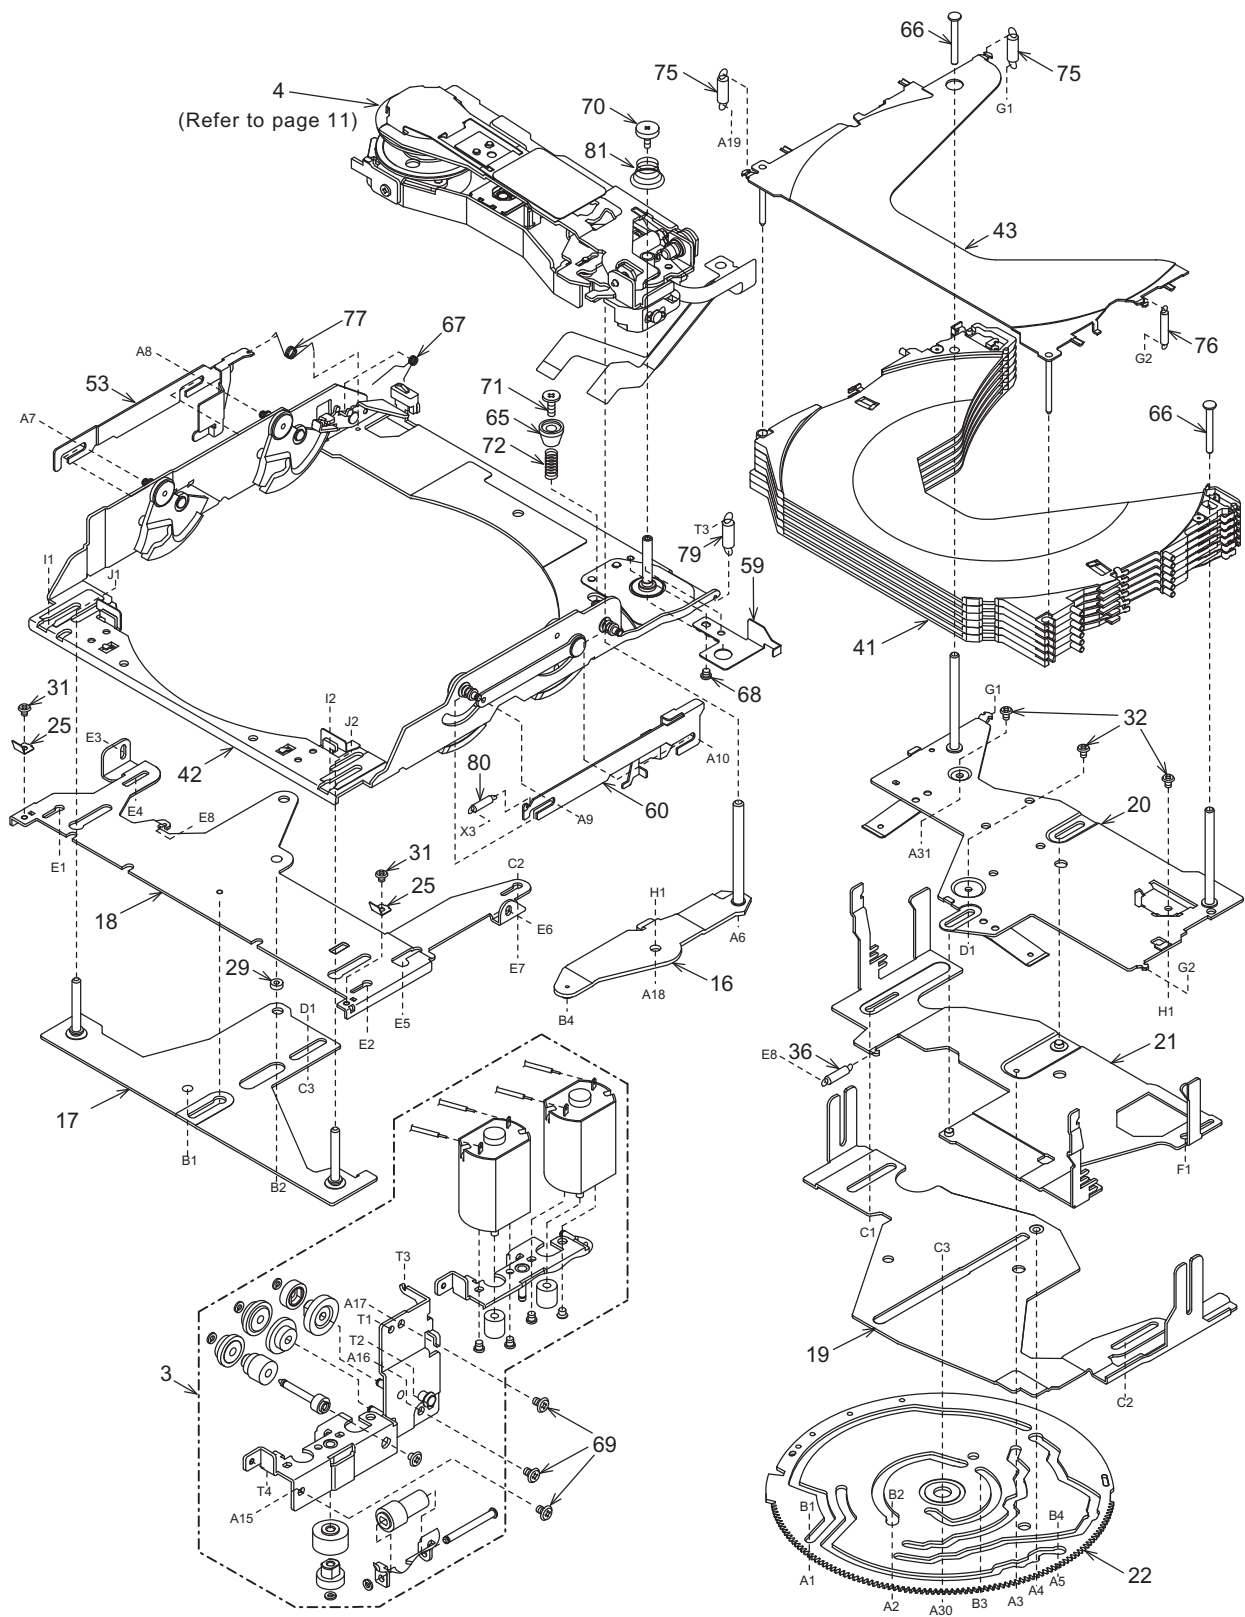

CD changer mechanism section : CD changer module


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT	1	43	HBS-535-100	TOP PLATE-ASSY	1
2	SMA-186-100	LOADING MOTOR-ASSY	1	44	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
3	HBS-530-100	MTR-P-SUB-ASSY	1	45	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
4	HBS-531-104	DRIVE UNIT ASSY	1	46	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
5	-----	DRIVER PWB	1	47	039-2013-02	MOS-FPC (WITHOUT COMPONENT)	1
6	-----	CD-PWB	1	48	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
7	-----	LED-L-PWB	1	49	347-6657-01	LO-COVER SHEET	1
8	-----	LED-R-PWB	1	50	620-1576-20	LO-MOTOR-PLT	1
9	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1	51	738-1422-11	SCREW(M1.4 x 2.2)	2
10	620-1577-20	FRONT-PLATE	1	52	347-6974-21	FPC COVER	1
11	716-1866-00	SCREW(M1.7 x 3)	4	53	620-1056-22	HLR-PLATE-L	1
12	-----	SENSOR PWB	1	54	620-1066-20	LOCK LINK-LR	1
13	966-1751-21	CHASSIS-ASSY	1	55	620-1067-21	SLIDE PLATE L	1
14	966-0600-23	LOCK-P-RE-ASSY	1	56	620-1068-22	SLIDE PLATE-R	1
15	966-0601-21	M-GEAR-P-ASSY	1	57	620-1071-21	EJECT ARM	1
16	966-0602-24	DR-LINK-ASSY	1	58	620-1072-20	EJECT PLATE	1
17	966-0603-21	MODE-P-ASSY	1	59	620-1083-20	FPC-PLATE	1
18	966-0604-26	LOCK-PF-ASSY	1	60	620-1580-20	HLR-PLATE-R	1
19	966-0605-20	SHIFT-P-ASSY	1	61	621-0641-21	PI-HOLDER-M	1
20	966-0607-26	COV-PLATE-ASSY	1	62	621-0656-21	PI-HOLDER-V	1
21	966-0606-23	HLC-PLATE-ASSY	1	63	622-1622-20	SL-G-ROLLER	2
22	620-1041-26	GEAR PLATE	1	64	622-1623-00	SL-G-ROLLER-R	2
23	620-1042-20	M-GEAR-H	1	65	622-1648-23	DU-STP-SLEEVE	1
24	620-1090-20	GAP PLATE	1	66	622-1650-23	COV-PLATE PIN B	2
25	620-1568-21	RATTLE PLATE-F	2	67	750-6712-01	DR-LOCK-SP-B	1
26	620-1604-20	DR-PLATE-SPRING	1	68	716-1873-00	SCREW(M2 x 1.6)	1
27	621-0640-20	V-GEAR-G	1	69	716-3449-00	SCREW(M2 x 3)	15
28	622-1651-00	LOCK-RE-ROLLER	1	70	716-3459-00	SCREW(M1.7 x 5)	1
29	622-1652-00	LOCK-PF-ROLLER	1	71	716-3466-03	SCREW(M2 x 6)	1
30	716-1850-01	SCREW(M2 x 2)	1	72	750-6711-01	DU-STP-SPRING	1
31	716-3450-00	SCREW(M1.7 x 2)	4	73	746-0624-00	WASHER	1
32	716-3451-00	SCREW(M1.7 x 2.5)	4	74	746-0712-23	WASHER	1
33	743-1200-10	E-RING	2	75	750-3478-01	TOP-P-SP-L	2
34	743-1500-10	E-RING	13	76	750-3479-01	TOP-P-SP-R	1
35	746-0761-00	WASHER	1	77	750-3480-01	DR-LOCK-SP	1
36	750-3485-01	TENTION-SP-L	1	78	750-3483-00	EJECT-A-SPRING	1
37	750-3497-00	GAP-P-SPRING L	1	79	750-3484-01	DR-BASE-SPRING	1
38	966-0615-21	LOCK-L-RF-ASSY	1	80	750-3486-01	LO-TENSION-SP	1
39	966-0616-20	LOCK-L-LF-ASSY	1	81	750-3489-01	DRIVE-P-SPRING	1
40	966-0618-21	EJECT-B-ASSY	1	82	750-3496-00	GAP-P-SPRING R	1
41	966-1742-20	DISC-HOL-ASSY	1				
42	966-0652-24	DR-BASE-P-ASSY	1				

Drive unit section : CD changer module

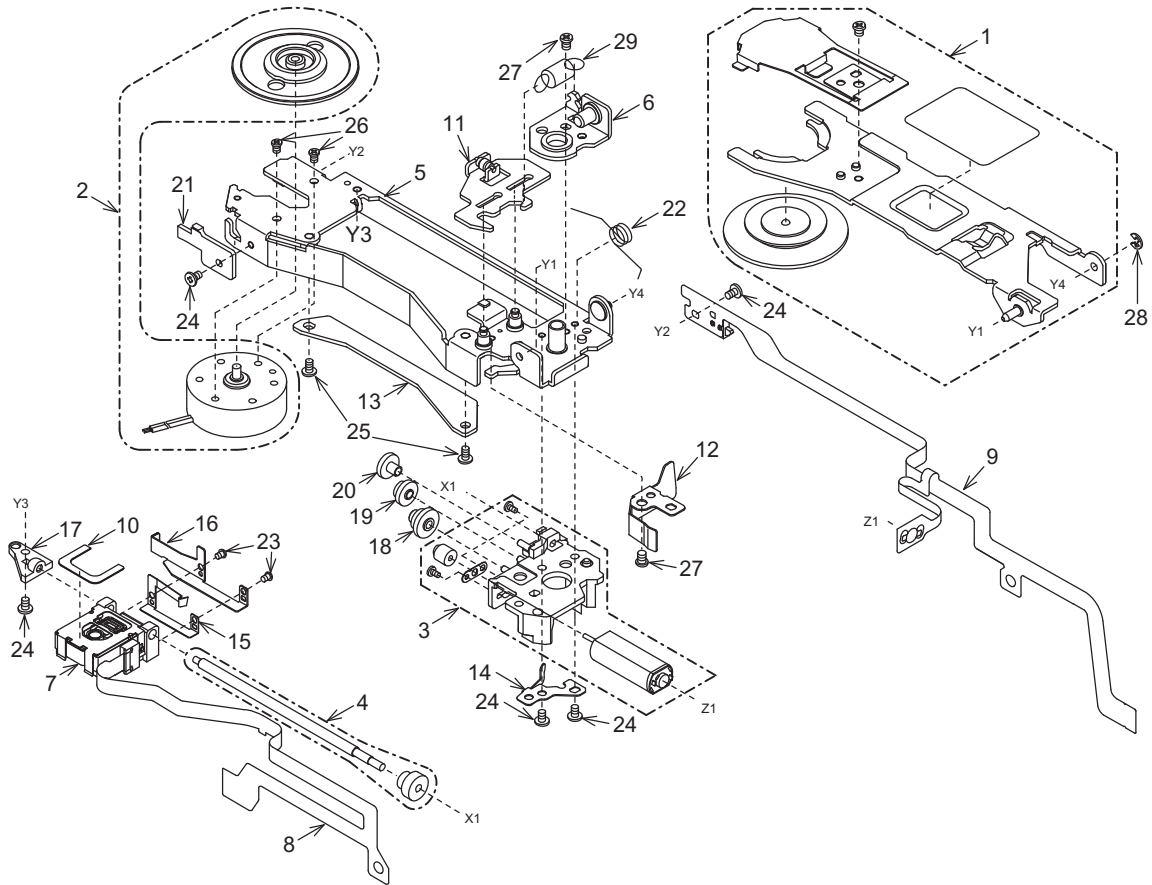

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMP SUB-ASSY	1	15	620-1587-03	SH-SPRING-PLT	1
2	SMA-193-101	SPINDLE MOTOR-ASSY	1	16	620-1730-01	SCREW-HOL-PLT	1
3	SMA-191-100	SLED MOTOR-ASSY	1	17	621-0670-20	LS-HOLDER-L	1
4	HBS-515-101	LS-ASSY	1	18	621-0673-20	D-GEAR-A	1
5	966-0649-02	DRIVE PLT-ASSY	1	19	621-0674-20	D-GEAR-B	1
6	966-0650-20	SPRING-PLT-ASSY	1	20	621-0675-20	D-GEAR-C	1
7	969-0011-01	PICK UP-ASSY	1	21	621-0683-21	DU-STOPPER	1
8	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1	22	750-3504-00	CLAMP-A-SPRING	1
9	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1	23	716-3511-00	SCREW(1.4 x 3)	2
10	347-6632-00	PU-SHEET	1	24	716-3470-00	SCREW(M1.7 x 3)	5
11	HBS-542-101	D-SHIFT-P-ASSY	1	25	716-3474-00	SCREW(M1.7 x 3)	2
12	620-1078-21	PUSH PLATE	1	26	738-1720-17	PRECISION SCREW(M1.7 x 2)	2
13	620-1080-22	PU-GUIDE-PLATE	1	27	738-2025-17	PRECISION SCREW(M2 x 2.5)	2
14	620-1081-20	SCREW PUSH-PLT	1	28	743-1500-10	E-RING	1
				29	750-3487-00	SHIFT-P-SPRING	1

Cassette tape mechanism section

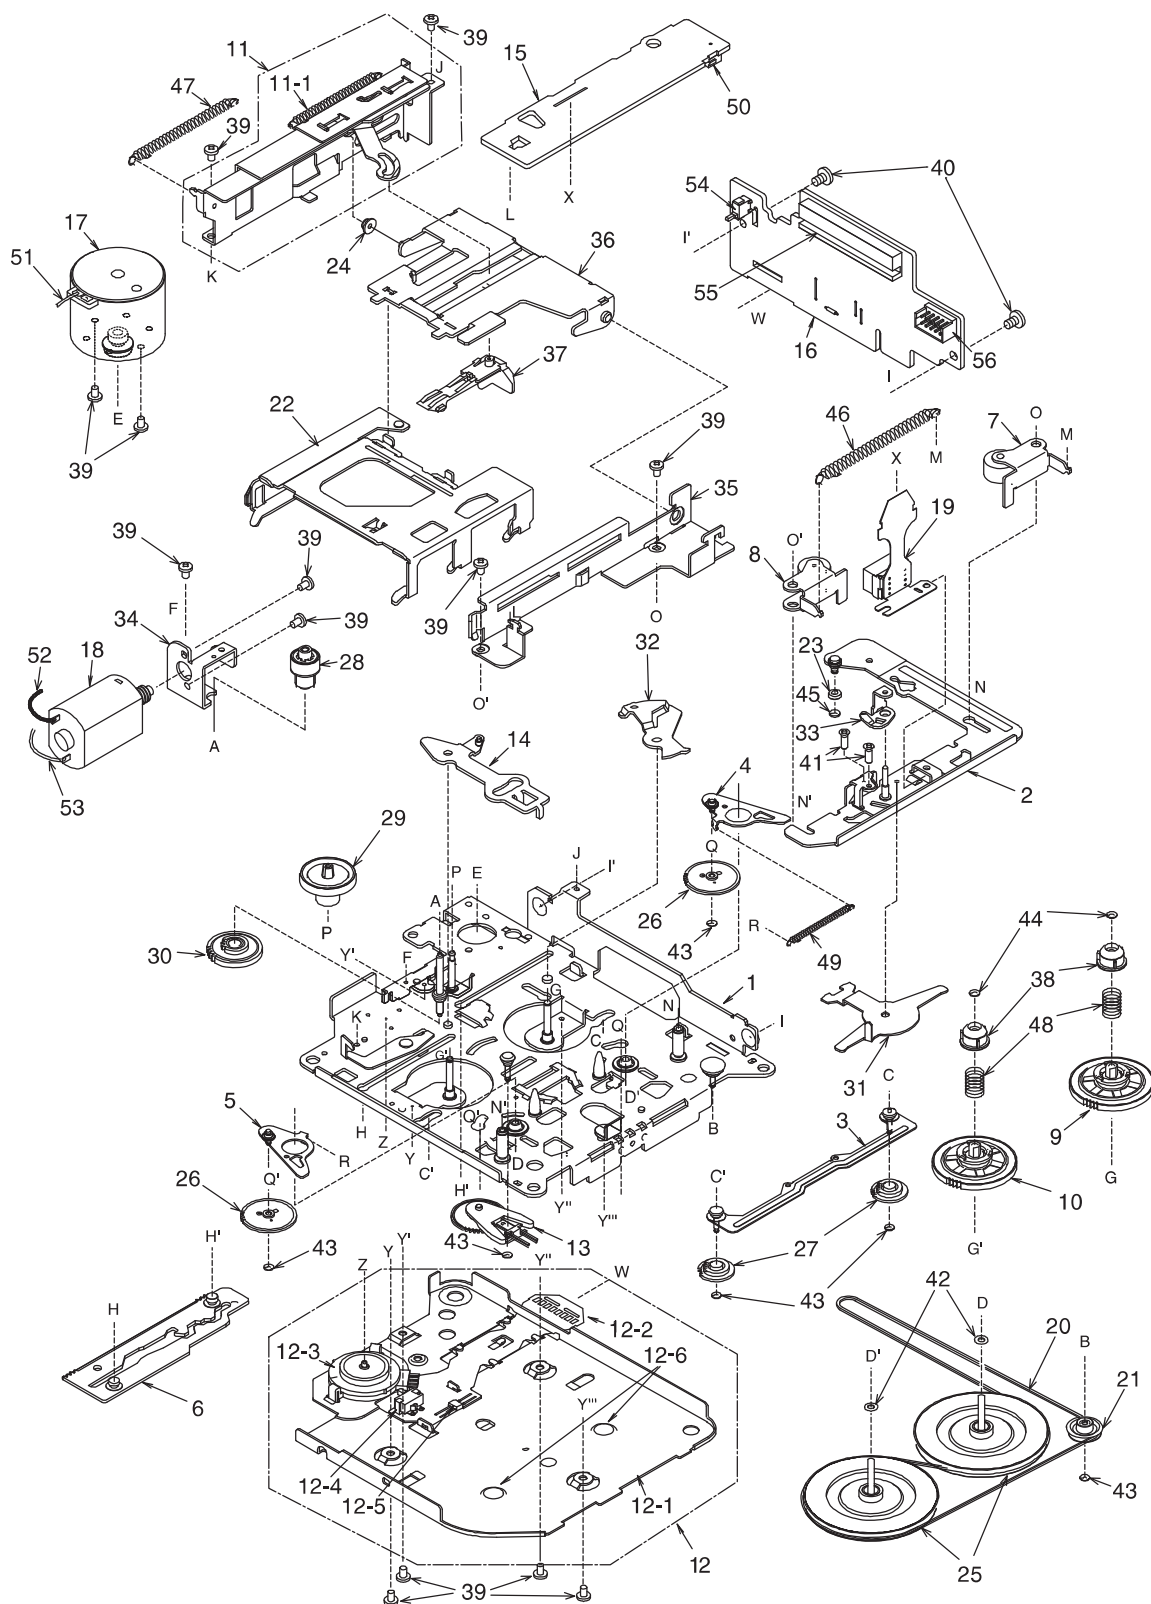

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-04	FF/REW-P ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-20	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-03	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM P-ASSY	1
12-2	-----	BOTTOM PWB	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	-----	CS-SIDE PWB	1
16	-----	REAR PWB	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-01	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0093-07	PACK GUIDE	1
23	610-0342-01	HEAD P-ROLLER	1
24	610-0343-00	GUIDE A-ROLLER	1
25	611-0091-03	FLYWHEEL	2

NO.	PART NO.	DESCRIPTION	Q'TY
26	613-0662-00	IDLER GEAR	2
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-00	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-06	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2x2.5)	13
40	716-1676-00	PWB SCREW(M2.6x6)	2
41	716-0833-10	SCREW(M2x5.6)	2
42	746-0624-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-2947-04	EJECT P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER P-SPRING	1
50	074-0898-10	OUTLET SOCKET(10P)	1
51	802-4909-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLUE)	1
53	816-2349-00	WIRE(WHITE)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-1012-20	OUTLET SOCKET(20P)	1
56	076-0368-10	PLUG(10P)	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	331-3239-21	REAR PLATE with ANT.recept	C328	168-8212-55	820pF K	C712	166-5601-50	56pF CH
BL101	880-1921V	AM/FM TUNER	C329	168-8212-55	820pF K	C713	166-2201-50	22pF CH
C101	166-1511-50	150pF CH	C330	168-8212-55	820pF K	C714	166-2201-50	22pF CH
C102	166-4701-50	47pF CH	C331	042-0592-58	16V 10uF	C715	166-2201-50	22pF CH
C103	166-4701-50	47pF CH	C332	042-0592-58	16V 10uF	C716	166-2201-50	22pF CH
C104	178-1542-78	0.15uF	C333	168-1832-55	0.018uF K	C717	166-5601-50	56pF CH
C105	168-1032-55	0.01uF K	C334	168-1022-55	1000pF K	C718	166-5601-50	56pF CH
C106	168-1032-55	0.01uF K	C401	168-1042-78	16V 0.1uF	C719	166-5601-50	56pF CH
C107	178-1052-78	1uF	C402	168-1042-78	16V 0.1uF	C720	166-5601-50	56pF CH
C108	187-1063-37	16V10uF	C403	168-1042-78	16V 0.1uF	C721	166-2201-50	22pF CH
C109	168-3322-55	3300pF K	C404	168-1042-78	16V 0.1uF	C722	166-2201-50	22pF CH
C110	168-1022-55	1000pF K	C405	042-1505-82	16V 10uF	C723	166-2201-50	22pF CH
C111	168-4732-78	0.047uF K	C406	168-1042-78	16V 0.1uF	C724	166-2201-50	22pF CH
C112	166-1501-50	15pF CH	C408	178-1052-78	1uF	C725	166-5601-50	56pF CH
C114	178-2242-78	0.22uF	C409	168-2232-55	0.022uF K	C726	166-5601-50	56pF CH
C115	166-1007-50	10pF CH	C410	168-1042-78	16V 0.1uF	C727	042-1548-52	10V 220uF
C116	188-4763-18	6.3V 47uF	C411	168-6822-55	6800pF K	C728	042-1548-52	10V 220uF
C117	168-5612-55	560pF Z	C412	166-1011-50	100pF CH	C729	042-1548-52	10V 220uF
C118	178-1052-78	1uF	C413	166-1011-50	100pF CH	C730	042-1548-52	10V 220uF
C119	166-4701-50	47pF CH	C414	166-1011-50	100pF CH	C731	042-1548-52	10V 220uF
C120	188-2253-68	50V 2.2uF	C415	166-1011-50	100pF CH	C732	042-1548-52	10V 220uF
C121	188-1073-28	10V 100uF	C416	166-1011-50	100pF CH	C733	042-1548-52	10V 220uF
C122	043-0277-51	0.022uF	C417	166-1011-50	100pF CH	C734	042-1548-52	10V 220uF
C123	166-5601-50	56pF CH	C418	168-1022-55	1000pF K	C737	042-1548-52	10V 220uF
C124	168-1042-78	16V 0.1uF	C420	188-4763-18	6.3V 47uF	C740	187-4763-35	16V47uF
C125	188-1073-28	10V 100uF	C421	168-1042-78	16V 0.1uF	C743	188-1063-38	16V 10uF
C126	168-3312-55	330pF K	C422	168-1022-55	1000pF K	C744	042-1562-15	10V 220uF
C129	168-1042-78	16V 0.1uF	C423	168-1042-78	16V 0.1uF	C745	166-2201-50	22pF CH
C130	188-1073-28	10V 100uF	C424	168-1032-55	0.01uF K	C1001	042-1562-17	16V 10uF
C132	178-1052-78	1uF	C427	168-1042-78	16V 0.1uF	C1002	042-1562-17	16V 10uF
C133	168-1232-55	0.012uF K	C461	178-1052-78	1uF	C1003	042-1562-17	16V 10uF
C134	186-1053-69	50V1uF	C462	166-1011-50	100pF CH	C1004	042-1562-17	16V 10uF
C135	188-4763-38	16V 47uF	C463	166-1011-50	100pF CH	C1006	168-1022-55	1000pF K
C136	043-0277-51	0.022uF	C464	166-1011-50	100pF CH	C1007	168-2232-55	0.022uF K
C138	168-1022-55	1000pF K	C465	166-1011-50	100pF CH	C1010	168-1022-55	1000pF K
C140	188-4763-38	16V 47uF	C466	166-1011-50	100pF CH	C1011	168-1022-55	1000pF K
C141	168-2232-55	0.022uF K	C501	168-1042-78	16V 0.1uF	C1012	188-1066-38	16V 10uF NP
C142	166-1011-50	100pF CH	C502	188-1073-28	10V 100uF	C1013	188-1066-38	16V 10uF NP
C143	166-1011-50	100pF CH	C503	188-1063-38	16V 10uF	C1014	188-1063-38	16V 10uF
C144	166-1011-50	100pF CH	C504	187-1073-37	16V100uF	C1015	188-1063-38	16V 10uF
C145	166-1011-50	100pF CH	C505	168-1042-78	16V 0.1uF	C1017	168-1022-55	1000pF K
C146	166-1801-50	18pF CH	C506	163-1073-35	16V100uF	C1018	168-1022-55	1000pF K
C147	168-3932-78	0.039uF K	C507	187-1073-37	16V100uF	CCT401	050-0122-50	1/10W 10k ohm x4 J
C148	168-3932-78	0.039uF K	C508	187-1073-37	16V100uF	CCT402	050-0140-54	1/32W 1k ohm x4J
C149	168-3932-78	0.039uF K	C509	042-0423-94	10V 4.7uF	CCT403	050-0140-54	1/32W 1k ohm x4J
C150	168-3932-78	0.039uF K	C510	168-1042-78	16V 0.1uF	CCT404	050-0140-54	1/32W 1k ohm x4J
C151	166-1801-50	18pF CH	C511	188-1063-38	16V 10uF	CCT405	050-0140-54	1/32W 1k ohm x4J
C152	168-4722-55	4700pF K	C515	188-4763-38	16V 47uF	CCT406	050-0140-54	1/32W 1k ohm x4J
C153	166-1201-50	12pF CH	C601	168-2222-55	2200pF K	CCT407	050-0140-54	1/32W 1k ohm x4J
C154	168-1032-55	0.01uF K	C602	168-2222-55	2200pF K	CCT408	050-0140-54	1/32W 1k ohm x4J
C156	166-2201-50	22pF CH	C603	168-2222-55	2200pF K	CCT409	050-0140-54	1/32W 1k ohm x4J
C158	166-2201-50	22pF CH	C604	168-2222-55	2200pF K	CCT411	050-0140-54	1/32W 1k ohm x4J
C159	168-1022-55	1000pF K	C605	168-2222-55	2200pF K	CCT412	050-0140-54	1/32W 1k ohm x4J
C160	166-2201-50	22pF CH	C606	168-2222-55	2200pF K	CCT414	050-0140-54	1/32W 1k ohm x4J
C161	187-1073-37	16V100uF	C607	168-2222-55	2200pF K	CCT415	050-0140-54	1/32W 1k ohm x4J
C162	168-1042-78	16V 0.1uF	C608	168-2222-55	2200pF K	CCT417	050-0140-54	1/32W 1k ohm x4J
C163	168-1022-55	1000pF K	C609	168-2222-55	2200pF K	D101	001-3205-90	1SV251
C301	178-4742-78	0.47uF	C610	168-2222-55	2200pF K	D102	001-3205-90	1SV251
C305	163-2263-35	16V22uF	C611	172-1041-15	0.1uF	D400	001-0516-90	MA111
C307	042-0592-73	50V 1uF	C612	042-1551-02	16V 1000uF	D401	001-0516-90	MA111
C308	188-1053-68	50V 1uF	C613	188-1053-68	50V 1uF	D402	001-0529-44	MA8082-M
C311	188-1053-68	50V 1uF	C614	172-1041-15	0.1uF	D501	001-0504-49	HZS9 C3L
C312	042-0592-73	50V 1uF	C615	188-1063-38	16V 10uF	D502	001-0504-48	HZS9C2L
C316	188-1053-68	50V 1uF	C620	168-2232-55	0.022uF K	D503	001-0466-90	S5688B
C317	188-1053-68	50V 1uF	C701	188-1053-68	50V 1uF	D504	001-0466-90	S5688B
C323	178-1842-78	0.18uF	C702	188-1053-68	50V 1uF	D602	001-0529-34	MA8062-L
C324	178-1842-78	0.18uF	C705	042-0592-58	16V 10uF	D603	001-0466-90	S5688B
C325	178-1842-78	0.18uF	C706	042-0592-58	16V 10uF	D604	001-0516-90	MA111
C326	178-1842-78	0.18uF	C707	042-0592-58	16V 10uF	D605	001-0466-90	S5688B
C327	168-8212-55	820pF K	C708	042-0592-58	16V 10uF	D606	001-0516-90	MA111
			C711	166-5601-50	56pF CH	D607	001-2015-00	RL253

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D608	001-0466-90	S5688B	Q605	191-0709-00	2SB709A Q,R,S	R356	119-4721-15	1/10W 4.7k ohm
D703	001-0356-91	1SS184	Q606	100-1359-00	2SA1359	R401	119-1031-15	1/10W 10k ohm
D1002	001-0422-38	MTZJ36	Q607	125-2005-91	UN2211	R402	119-1031-15	1/10W 10k ohm
D1003	001-0529-44	MA8082-M	Q608	191-0709-00	2SB709A Q,R,S	R403	116-1221-15	1/4W 1.2k ohm
D1006	001-0330-90	1SS119	Q609	100-1359-00	2SA1359	R404	116-1221-15	1/4W 1.2k ohm
D1007	001-0330-90	1SS119	Q701	193-0601-00	2SD601A	R405	119-1031-15	1/10W 10k ohm
D1009	001-0584-35	MA8240	Q703	193-0601-00	2SD601A	R406	116-1001-15	1/4W 10 ohm
D1010	001-0516-90	MA111	Q704	191-0709-00	2SB709A Q,R,S	R407	116-1001-15	1/4W 10 ohm
IC101	051-4617-90	LA1061M-TE-L	Q705	191-0709-00	2SB709A Q,R,S	R408	116-1001-15	1/4W 10 ohm
IC102	051-4607-90	SAA6581T	Q706	191-0709-00	2SB709A Q,R,S	R409	116-1001-15	1/4W 10 ohm
IC103	051-3020-90	NJM4565V	Q707	191-0709-00	2SB709A Q,R,S	R410	119-2221-15	1/10W 2.2k ohm
IC104	051-6212-08	LC72191JM-TLM	Q1001	125-0001-91	UN2111	R412	119-1021-15	1/10W 1k ohm
IC302	051-5027-00	LC75412WH	Q1003	193-0601-00	2SD601A	R414	119-4731-15	1/10W 47k ohm
IC401	051-1014-08	TA7291F	Q1006	125-2005-91	UN2211	R415	119-4731-15	1/10W 47k ohm
IC403	051-3034-90	NJM4558V	Q1007	125-9006-90	IMX1	R416	119-4731-15	1/10W 47k ohm
IC404	052-3177-30	M30624MGA-636GP	Q1008	125-0001-91	UN2111	R417	119-1021-15	1/10W 1k ohm
IC405	051-5436-08	S-80933CNMC-G83(ANMP-DDX)	Q1009	193-0601-00	2SD601A	R418	119-1041-15	1/10W 100k ohm
IC501	051-1834-00	LM2936Z-5.0	Q1010	125-2005-91	UN2211	R419	119-4731-15	1/10W 47k ohm
IC601	051-5418-08	S-80827ANMP-EDQ	Q1011	193-0601-00	2SD601A	R421	119-4731-15	1/10W 47k ohm
IC701	051-1407-00	NJM4556AL	R101	119-1041-15	1/10W 100k ohm	R423	119-4731-15	1/10W 47k ohm
IC702	051-1407-00	NJM4556AL	R102	119-1041-15	1/10W 100k ohm	R425	119-4731-15	1/10W 47k ohm
IC703	051-1407-00	NJM4556AL	R103	119-2731-15	1/10W 27k ohm	R426	119-1531-15	1/10W 15k ohm
IC704	051-1407-00	NJM4556AL	R104	119-2731-15	1/10W 27k ohm	R428	119-4731-15	1/10W 47k ohm
IC705	051-3020-90	NJM4565V	R105	119-1041-15	1/10W 100k ohm	R429	119-1021-15	1/10W 1k ohm
IC707	051-3020-90	NJM4565V	R106	119-1041-15	1/10W 100k ohm	R431	119-4731-15	1/10W 47k ohm
J402	074-1192-22	22P	R107	119-1031-15	1/10W 10k ohm	R433	119-4731-15	1/10W 47k ohm
J601	074-1141-00	OUTLET SOCKET	R108	119-1031-15	1/10W 10k ohm	R434	119-2231-15	1/10W 22k ohm
J1001	074-1087-12	OUTLET SOCKET	R109	119-5631-15	1/10W 56k ohm	R436	119-2231-15	1/10W 22k ohm
J1002	074-1013-30	OUTLET SOCKET	R110	119-3911-15	1/10W 390 ohm	R437	032-0140-52	1/10W 33k ohm F
L101	010-2198-65	0.1uH	R111	119-4731-15	1/10W 47k ohm	R438	119-2231-15	1/10W 22k ohm
L102	010-2198-53	5.6uH	R113	119-2221-15	1/10W 2.2k ohm	R439	032-0140-89	1/10W 47k ohm F
L103	010-2312-52	0.27uH	R114	119-1031-15	1/10W 10k ohm	R440	119-4731-15	1/10W 47k ohm
L104	010-2003-04	30uH	R115	119-1021-15	1/10W 1k ohm	R442	119-1021-15	1/10W 1k ohm
L106	010-6009-76	22uH J	R116	119-1021-15	1/10W 1k ohm	R444	119-4731-15	1/10W 47k ohm
L151	010-6009-76	22uH J	R117	119-4721-15	1/10W 4.7k ohm	R445	032-0140-52	1/10W 33k ohm F
L401	010-3407-66	NLV32 22uH J	R118	119-1021-15	1/10W 1k ohm	R446	032-0140-89	1/10W 47k ohm F
L601	010-8028-00	520uH	R119	119-1021-15	1/10W 1k ohm	R447	119-4731-15	1/10W 47k ohm
P201	076-0368-18	18P	R120	119-2221-15	1/10W 2.2k ohm	R448	032-0140-00	1/10W 56k ohm F
P202	076-0368-06	6P	R121	119-4721-15	1/10W 4.7k ohm	R449	032-0140-00	1/10W 56k ohm F
P402	076-0540-10	10P	R122	119-8201-15	1/10W 82 ohm	R450	032-0140-89	1/10W 47k ohm F
P403	076-0509-20	20P	R124	119-3321-15	1/10W 3.3k ohm	R451	032-0140-89	1/10W 47k ohm F
P1001	074-0898-18	18P	R125	119-1031-15	1/10W 10k ohm	R452	119-1031-15	1/10W 10k ohm
P1002	074-0898-06	6P	R126	116-1501-15	1/4W 15 ohm	R453	119-4731-15	1/10W 47k ohm
Q101	193-0601-00	2SD601A	R127	116-1001-15	1/4W 10 ohm	R458	119-4731-15	1/10W 47k ohm
Q102	193-0601-00	2SD601A	R128	119-2221-15	1/10W 2.2k ohm	R459	119-4731-15	1/10W 47k ohm
Q103	125-2005-91	UN2211	R129	119-2221-15	1/10W 2.2k ohm	R460	119-1041-15	1/10W 100k ohm
Q104	125-2005-91	UN2211	R130	119-1031-15	1/10W 10k ohm	R463	119-4731-15	1/10W 47k ohm
Q105	192-2712-51	2SC2712 G,L	R131	119-1031-15	1/10W 10k ohm	R466	119-6821-15	1/10W 6.8k ohm
Q106	125-2005-91	UN2211	R132	119-4721-15	1/10W 4.7k ohm	R469	119-4731-15	1/10W 47k ohm
Q107	192-2712-51	2SC2712 G,L	R133	119-1021-15	1/10W 1k ohm	R470	119-1031-15	1/10W 10k ohm
Q109	190-1298-00	2SA1298	R134	119-2221-15	1/10W 2.2k ohm	R480	119-4731-15	1/10W 47k ohm
Q111	190-1298-00	2SA1298	R135	119-1021-15	1/10W 1k ohm	R481	119-4731-15	1/10W 47k ohm
Q113	193-0601-00	2SD601A	R136	119-1021-15	1/10W 1k ohm	R487	119-4731-15	1/10W 47k ohm
Q401	125-2004-96	RN1406	R137	116-2701-15	1/4W 27 ohm	R488	119-4731-15	1/10W 47k ohm
Q402	190-1428-00	2SA1428	R138	119-1021-15	1/10W 1k ohm	R489	119-4731-15	1/10W 47k ohm
Q404	125-2005-91	UN2211	R140	119-4721-15	1/10W 4.7k ohm	R492	119-4731-15	1/10W 47k ohm
Q405	191-0709-00	2SB709A Q,R,S	R141	119-4731-15	1/10W 47k ohm	R493	119-4731-15	1/10W 47k ohm
Q407	125-2005-91	UN2211	R142	119-1031-15	1/10W 10k ohm	R494	119-4731-15	1/10W 47k ohm
Q408	125-0006-90	UN2110	R143	119-1031-15	1/10W 10k ohm	R495	119-1031-15	1/10W 10k ohm
Q415	125-2005-91	UN2211	R144	119-1021-15	1/10W 1k ohm	R496	119-5631-15	1/10W 56k ohm
Q416	193-0601-00	2SD601A	R145	119-1011-15	1/10W 100 ohm	R497	119-1021-15	1/10W 1k ohm
Q417	193-0601-00	2SD601A	R146	119-4741-15	1/10W 470k ohm	R501	111-2211-98	1/4W 220 ohm
Q418	125-0001-91	UN2111	R161	119-0000-05	1/10W 0 ohm JW	R502	116-3911-15	1/4W 390 ohm
Q501	103-2353-00	2SD2353	R162	119-0000-05	1/10W 0 ohm JW	R503	119-1031-15	1/10W 10k ohm
Q502	193-2118-00	2SD2118F5 Q,R,S	R218	119-0000-05	1/10W 0 ohm JW	R504	116-1011-15	1/4W 100 ohm
Q503	193-1858-00	2SD1858	R310	119-2731-15	1/10W 27k ohm	R505	119-4721-15	1/10W 4.7k ohm
Q504	125-9003-92	IMD3	R311	119-2731-15	1/10W 27k ohm	R506	119-1021-15	1/10W 1k ohm
Q505	125-2005-91	UN2211	R312	119-2731-15	1/10W 27k ohm	R507	119-1031-15	1/10W 10k ohm
Q506	190-1048-00	2SA1048	R313	119-2731-15	1/10W 27k ohm	R508	116-7501-15	1/4W 75 ohm
Q507	191-1205-65	2SB1205 S,T	R320	119-2731-15	1/10W 27k ohm	R509	116-2201-15	1/4W 22 ohm
Q508	125-9003-92	IMD3	R321	119-2731-15	1/10W 27k ohm	R510	116-2201-15	1/4W 22 ohm
Q603	193-0601-00	2SD601A	R351	119-4721-15	1/10W 4.7k ohm	R511	119-1041-15	1/10W 100k ohm
Q604	125-2005-91	UN2211	R352	119-4721-15	1/10W 4.7k ohm	R601	119-4741-15	1/10W 470k ohm
			R355	119-4721-15	1/10W 4.7k ohm	R602	119-2741-15	1/10W 270k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R605	119-1031-15	1/10W 10k ohm	R723	119-2231-15	1/10W 22k ohm	R1002	119-3011-15	1/10W 300 ohm
R606	119-5611-15	1/10W 560 ohm	R724	119-1001-15	1/10W 10 ohm	R1003	119-3011-15	1/10W 300 ohm
R607	116-1221-15	1/4W 1.2k ohm	R725	119-2231-15	1/10W 22k ohm	R1004	119-1031-15	1/10W 10k ohm
R608	119-4721-15	1/10W 4.7k ohm	R726	119-2031-15	1/10W 20k ohm	R1005	119-5631-15	1/10W 56k ohm
R609	111-6891-98	1/4W 6.8 ohm	R727	119-1001-15	1/10W 10 ohm	R1006	119-1021-15	1/10W 1k ohm
R610	111-6891-98	1/4W 6.8 ohm	R728	119-3931-15	1/10W 39k ohm	R1010	119-2231-15	1/10W 22k ohm
R611	116-1221-15	1/4W 1.2k ohm	R729	119-3931-15	1/10W 39k ohm	R1015	119-4731-15	1/10W 47k ohm
R612	119-4721-15	1/10W 4.7k ohm	R730	119-1031-15	1/10W 10k ohm	R1016	119-1031-15	1/10W 10k ohm
R613	116-1221-15	1/4W 1.2k ohm	R731	119-1031-15	1/10W 10k ohm	R1017	119-1031-15	1/10W 10k ohm
R614	111-5691-98	1/4W 5.6 ohm	R732	119-2231-15	1/10W 22k ohm	R1018	119-5631-15	1/10W 56k ohm
R615	111-5691-98	1/4W 5.6 ohm	R733	119-1001-15	1/10W 10 ohm	R1019	119-5631-15	1/10W 56k ohm
R616	116-1531-15	1/4W 15k ohm	R734	119-2231-15	1/10W 22k ohm	R1020	119-5621-15	1/10W 5.6k ohm
R617	114-2291-18	1W 2.2 ohm	R735	119-1001-15	1/10W 10 ohm	R1021	119-5621-15	1/10W 5.6k ohm
R618	119-0000-05	1/10W 0 ohm JW	R736	119-1541-15	1/10W 150k ohm	R1022	119-3011-15	1/10W 300 ohm
R701	119-4731-15	1/10W 47k ohm	R737	119-1541-15	1/10W 150k ohm	R1023	119-3011-15	1/10W 300 ohm
R702	119-1041-15	1/10W 100k ohm	R738	119-2231-15	1/10W 22k ohm	R1026	119-4731-15	1/10W 47k ohm
R703	119-1031-15	1/10W 10k ohm	R739	119-2231-15	1/10W 22k ohm	R1040	119-1031-15	1/10W 10k ohm
R704	119-4731-15	1/10W 47k ohm	R740	119-1001-15	1/10W 10 ohm	R1041	119-5631-15	1/10W 56k ohm
R705	119-1041-15	1/10W 100k ohm	R741	119-2231-15	1/10W 22k ohm	R1042	119-1031-15	1/10W 10k ohm
R706	119-1031-15	1/10W 10k ohm	R742	119-2031-15	1/10W 20k ohm	R1043	119-4721-15	1/10W 4.7k ohm
R708	119-5621-15	1/10W 5.6k ohm	R743	119-1001-15	1/10W 10 ohm	R1044	119-1531-15	1/10W 15k ohm
R709	119-5621-15	1/10W 5.6k ohm	R744	119-3931-15	1/10W 39k ohm	R1045	119-3321-15	1/10W 3.3k ohm
R710	119-5621-15	1/10W 5.6k ohm	R745	119-3931-15	1/10W 39k ohm	SUP101	060-0122-91	DSP-141N-S00B
R711	119-5621-15	1/10W 5.6k ohm	R746	119-1031-15	1/10W 10k ohm	SUP102	060-0122-91	DSP-141N-S00B
R714	119-3321-15	1/10W 3.3k ohm	R747	119-1031-15	1/10W 10k ohm	VR101	012-5203-63	470k ohm
R715	119-1031-15	1/10W 10k ohm	R748	119-2231-15	1/10W 22k ohm	VR102	012-5203-56	10k ohm
R716	119-1031-15	1/10W 10k ohm	R749	119-1001-15	1/10W 10 ohm	X101	061-3013-00	4.332MHz
R717	119-3321-15	1/10W 3.3k ohm	R750	119-2231-15	1/10W 22k ohm	X102	061-1066-00	7.2MHz
R718	119-1031-15	1/10W 10k ohm	R751	119-1001-15	1/10W 10 ohm	X401	060-1505-50	CSTCC10.0MG-TC
R719	119-1031-15	1/10W 10k ohm	R756	119-1031-15	1/10W 10k ohm	PWB	039-2548-20	PWB(WITHOUT COMPONENT)
R720	119-3321-15	1/10W 3.3k ohm	R757	119-1031-15	1/10W 10k ohm			
R721	119-3321-15	1/10W 3.3k ohm	R758	119-4731-15	1/10W 47k ohm			
R722	119-2231-15	1/10W 22k ohm	R759	119-4731-15	1/10W 47k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D901	001-7069-90	LED YELLOW	R901	116-2221-15	1/8W 2.2k ohm	S902	013-6201-52	TACT SWITCH
D902	001-7069-90	LED YELLOW	R902	116-2221-15	1/8W 2.2k ohm	S903	013-6201-52	TACT SWITCH
D903	001-7069-90	LED YELLOW	R903	116-3321-15	1/8W 3.3k ohm	S904	013-6201-52	TACT SWITCH
D904	001-7069-90	LED YELLOW	R904	116-6821-15	1/8W 6.8k ohm	PWB	039-2270-02	PWB(WITHOUT COMPONENT)
D905	001-7069-90	LED YELLOW	R905	116-8211-15	1/8W 820 ohm			
D906	001-7069-90	LED YELLOW	R906	116-8211-15	1/8W 820 ohm			
J901	074-1151-10	10P	S901	013-7415-50	SPVG110400			

CD-Side PWB(B3) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF Z	C504	168-1045-56	0.1uF Z	Q508	192-2712-00	2SC2712
C102	168-1042-78	16V 0.1uF	D100	001-0516-90	MA111	R101	119-4711-15	1/10W 470 ohm
C104	163-1073-15	6.3V100uF	D103	001-0504-07	HZS4BLL	R102	119-2231-15	1/10W 22k ohm
C106	163-1063-35	16V10uF	D104	001-0516-90	MA111	R103	119-1821-15	1/10W 1.8k ohm
C107	163-1073-15	6.3V100uF	D105	001-0529-31	MA8056-L	R104	119-1831-15	1/10W 18k ohm
C108	168-1042-78	16V 0.1uF	IC501	051-9400-28	BR93LC46F-WE2	R105	116-1211-15	1/4W 120 ohm
C109	168-1042-78	16V 0.1uF	IC502	052-5047-24	M30621MCM-4U9GP	R106	119-1041-15	1/10W 100k ohm
C110	168-1042-78	16V 0.1uF				R107	119-4731-15	1/10W 47k ohm
C111	163-1073-35	16V100uF	IC503	051-5418-08	S-80827ANMP-EDQ	R108	119-1031-15	1/10W 10k ohm
C112	168-2722-55	2700pF K	IC504	051-1407-90	NJM4556AM	R109	119-1031-15	1/10W 10k ohm
C113	163-2263-35	16V22uF	J101	074-1189-95	45P	R110	119-4741-15	1/10W 470k ohm
C114	163-2263-35	16V22uF	J102	074-1191-22	22P	R111	119-4741-15	1/10W 470k ohm
C115	166-3311-50	330pF CH	L101	010-3071-65	18uH	R112	119-2731-15	1/10W 27k ohm
C116	166-3311-50	330pF CH	L102	010-3407-68	NLV32 33uH J	R113	119-2731-15	1/10W 27k ohm
C117	166-1011-50	100pF CH	Q101	125-2004-92	RN1402	R114	119-2731-15	1/10W 27k ohm
C118	166-1011-50	100pF CH	Q102	131-1188-50	2SB1188PQR	R115	119-2731-15	1/10W 27k ohm
C119	168-2722-55	2700pF K	Q103	193-1758-00	2SD1758TK P,Q,R	R116	119-5611-15	1/10W 560 ohm
C120	168-1022-55	1000pF K	Q104	193-1758-00	2SD1758TK P,Q,R	R117	119-5611-15	1/10W 560 ohm
C121	163-2263-35	16V22uF	Q105	125-0014-92	DTA114EK	R118	119-4731-15	1/10W 47k ohm
C122	168-1022-55	1000pF K	Q106	125-2004-92	RN1402	R119	119-4731-15	1/10W 47k ohm
C123	163-2263-35	16V22uF	Q502	190-1162-00	2SA1162	R120	119-3941-15	1/10W 390k ohm
C124	042-0403-55	16V 33uF	Q503	190-1162-00	2SA1162	R121	119-1041-15	1/10W 100k ohm
C125	042-0403-55	16V 33uF	Q504	192-2712-00	2SC2712	R123	119-1041-15	1/10W 100k ohm
C501	163-1063-35	16V10uF	Q505	125-2004-92	RN1402	R124	119-1041-15	1/10W 100k ohm
C502	168-1045-56	0.1uF Z	Q506	125-0014-92	DTA114EK	R125	119-1041-15	1/10W 100k ohm
C503	168-4735-56	0.047uF Z	Q507	125-0002-92	RN2402	R126	119-2221-15	1/10W 2.2k ohm

REF No.	PART No.	DESCRIPTION
R504	119-5621-15	1/10W 5.6k ohm
R506	119-1031-15	1/10W 10k ohm
R508	119-1041-15	1/10W 100k ohm
R509	119-0000-05	1/10W 0 ohm JW
R507	119-4731-15	1/10W 47k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R512	060-0145-54	1/16W 47k ohm x4
R513	119-1041-15	1/10W 100k ohm
R514	119-1041-15	1/10W 220k ohm
R515	119-2241-15	1/10W 220k ohm
R516	119-2241-15	1/10W 220k ohm
R517	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R518	119-2241-15	1/10W 220k ohm
R522	119-1041-15	1/10W 100k ohm
R544	119-1041-15	1/10W 100k ohm
R526	119-4731-15	1/10W 47k ohm
R529	119-1021-15	1/10W 1k ohm
R531	119-1021-15	1/10W 1k ohm
R532	119-1021-15	1/10W 1k ohm
R533	119-1021-15	1/10W 1k ohm
R535	119-2231-15	1/10W 22k ohm
R536	119-2231-15	1/10W 22k ohm
R538	119-1031-15	1/10W 10k ohm
R539	119-5631-15	1/10W 56k ohm
R541	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R542	119-4721-15	1/10W 4.7k ohm
R543	119-1041-15	1/10W 100k ohm
R544	119-1041-15	1/10W 100k ohm
R545	119-1041-15	1/10W 100k ohm
R546	119-1021-15	1/10W 1k ohm
R547	119-1021-15	1/10W 1k ohm
R548	119-1021-15	1/10W 1k ohm
R549	119-1021-15	1/10W 1k ohm
X501	060-1505-50	10MHz
PWB	039-2433-20	PWB(WITHOUT COMPONENT)

CD PWB(B4) section : CD changer module

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V 220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF Z
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF K
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF K
C21	168-3932-78	0.039uF K
C22	168-3932-78	0.039uF K
C23	042-0416-52	10V 10uF M TAN
C25	178-1052-78	1uF
C26	042-0472-91	16V 47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF K
C30	042-0416-58	4V 100uF M TAN
C31	042-0636-52	4V 47uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027uF K
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V 47uF
C39	042-0636-50	6.3V 100uF

Sensor PWB(B5) section : CD changer module

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F

PIM-FPC(B6) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section : CD changer module

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF Z
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S2	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONENT)

PIV-FPC(B8) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B10) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B11) section : CD changer module

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B12) section : CD changer module

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-193-101	SPINDLE	M3	SMA-191-100	SIED

REF No.	PART No.	DESCRIPTION
S3	013-7414-50	SPVG22

CS-Side PWB(B13) section : Cassette tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-5612-05	560pF	C16	168-1032-05	0.01uF
C2	168-5612-05	560pF	C17	178-4745-79	0.47uF
C3	168-5612-05	560pF	C18	168-1042-78	0.1uF
C4	168-5612-05	560pF	C19	163-2263-30	16V22uF
C5	178-1055-79	1uF	IC1	051-5204-00	HA12216F
C6	168-1232-05	0.012uF	J1	074-0898-10	10P
C7	168-1232-05	0.012uF	L1	010-2198-26	0.047uH
C8	168-4732-78	0.047uF	L2	010-2198-26	0.047uH
C9	168-4732-78	0.047uF	R1	119-2731-10	1/10W 27k ohm
C10	168-5612-05	560pF	R2	119-2731-10	1/10W 27k ohm
C11	168-5612-05	560pF	R3	119-2731-10	1/10W 27k ohm
C12	168-1042-78	0.1uF	R4	119-2731-10	1/10W 27k ohm
C13	168-1042-78	0.1uF	R5	119-1811-10	1/10W 180 ohm
C14	168-1032-05	0.01uF	R6	119-1811-10	1/10W 180 ohm
C15	163-4753-50	35V4.7uF	R7	119-3341-10	1/10W 330k ohm

REF No.	PART No.	DESCRIPTION
R8	119-3341-10	1/10W 330k ohm
R9	119-1131-15	1/10W 11k ohm
R10	119-1131-15	1/10W 11k ohm
R11	119-1531-10	1/10W 15k ohm
R12	119-1531-10	1/10W 15k ohm
R13	032-0140-80	1/10W 18k ohm F
R14	119-1531-10	1/10W 15k ohm
R15	119-1031-10	1/10W 10k ohm
R16	119-3921-10	1/10W 3.9k ohm
R17	119-1241-10	1/10W 120k ohm
R18	119-2231-10	1/10W 22k ohm
VR1	012-6014-56	10kohm
VR2	012-6014-56	10kohm
PWB	039-1912-01	PWB(WITHOUT COMPONENT)

Bottom PWB(B14) section : Cassette tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5601K	SW2	013-3951-32	MODE SWITCH
SW1	013-3953-01	SPPB32			

REF No.	PART No.	DESCRIPTION
PWB	099-9926-01	PWB(WITHOUT COMPONENT)

Rear PWB(B15) section : Cassette tape mechanism

REF No.	PART No.	DESCRIPTION
P1	076-0368-10	10P
J2	074-1012-20	20P

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R19	111-5611-91	1/4WS 560 ohm	S1	013-3906-00	SPPB51

REF No.	PART No.	DESCRIPTION
PWB	039-1913-00	PWB(WITHOUT COMPONENT)