


COMPONENTS


QY-5014B-A

1.	Main unit	-----	1
2.	Remote control unit (Battery CR2025	RCB-198-600 -----	1 1)
3.	Microphone	081-0039-01	1
4.	GPS antenna	096-0151-00	1
5.	Finisher	383-0752-00	1
6.	Power supply cord (15A FUSE	854-6488-50 120-0150-00	1 1)
	(3A FUSE	120-0030-00	1)
7.	RCA pin cord	855-5576-50	1
8.	Bag for accessories	-----	1
8-1.	Lead holder	321-1026-01	3
8-2.	Rubber cap(for RCA pin cord)	345-3799-20	14
8-3.	Double-sided tape(for fastening GPS antenna)	347-6369-20	1
8-4.	Flat head screw(M5x8)	714-5008-4B	8
8-5.	Hexagonal screw(M5x8)	716-0496-51	8

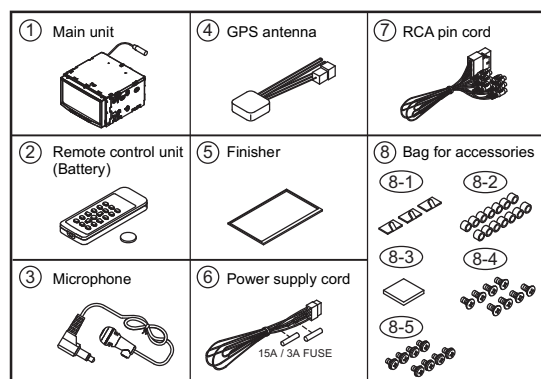


QY-5015E-A

1.	Main unit	-----	1
2.	Microphone	081-0039-01	1
3.	GPS antenna	096-0151-00	1
4.	Power supply cord (15A FUSE	854-6495-50 120-0150-00	1 1)
5.	RCA pin cord	855-5576-50	1
6.	Bag for accessories	-----	1
6-1.	Electro tap	060-0018-00	1
6-2.	Lead holder	321-1026-01	3
6-3.	Rubber cap(for RCA pin cord)	345-3799-20	14
6-4.	Double-sided tape(for fastening GPS antenna)	347-6369-20	1
6-5.	Flat head screw(M5x8)	714-5008-4B	8
6-6.	Hexagonal screw(M5x8)	716-0496-51	8

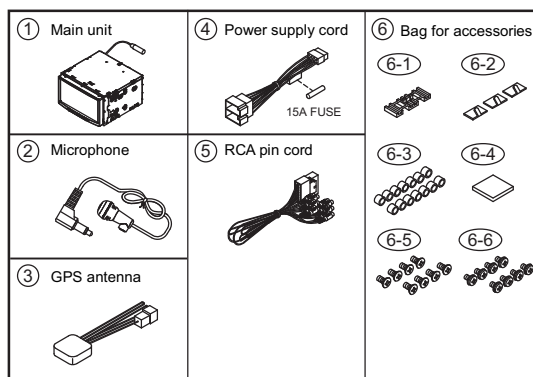


CONNECTIONS

Wire connections

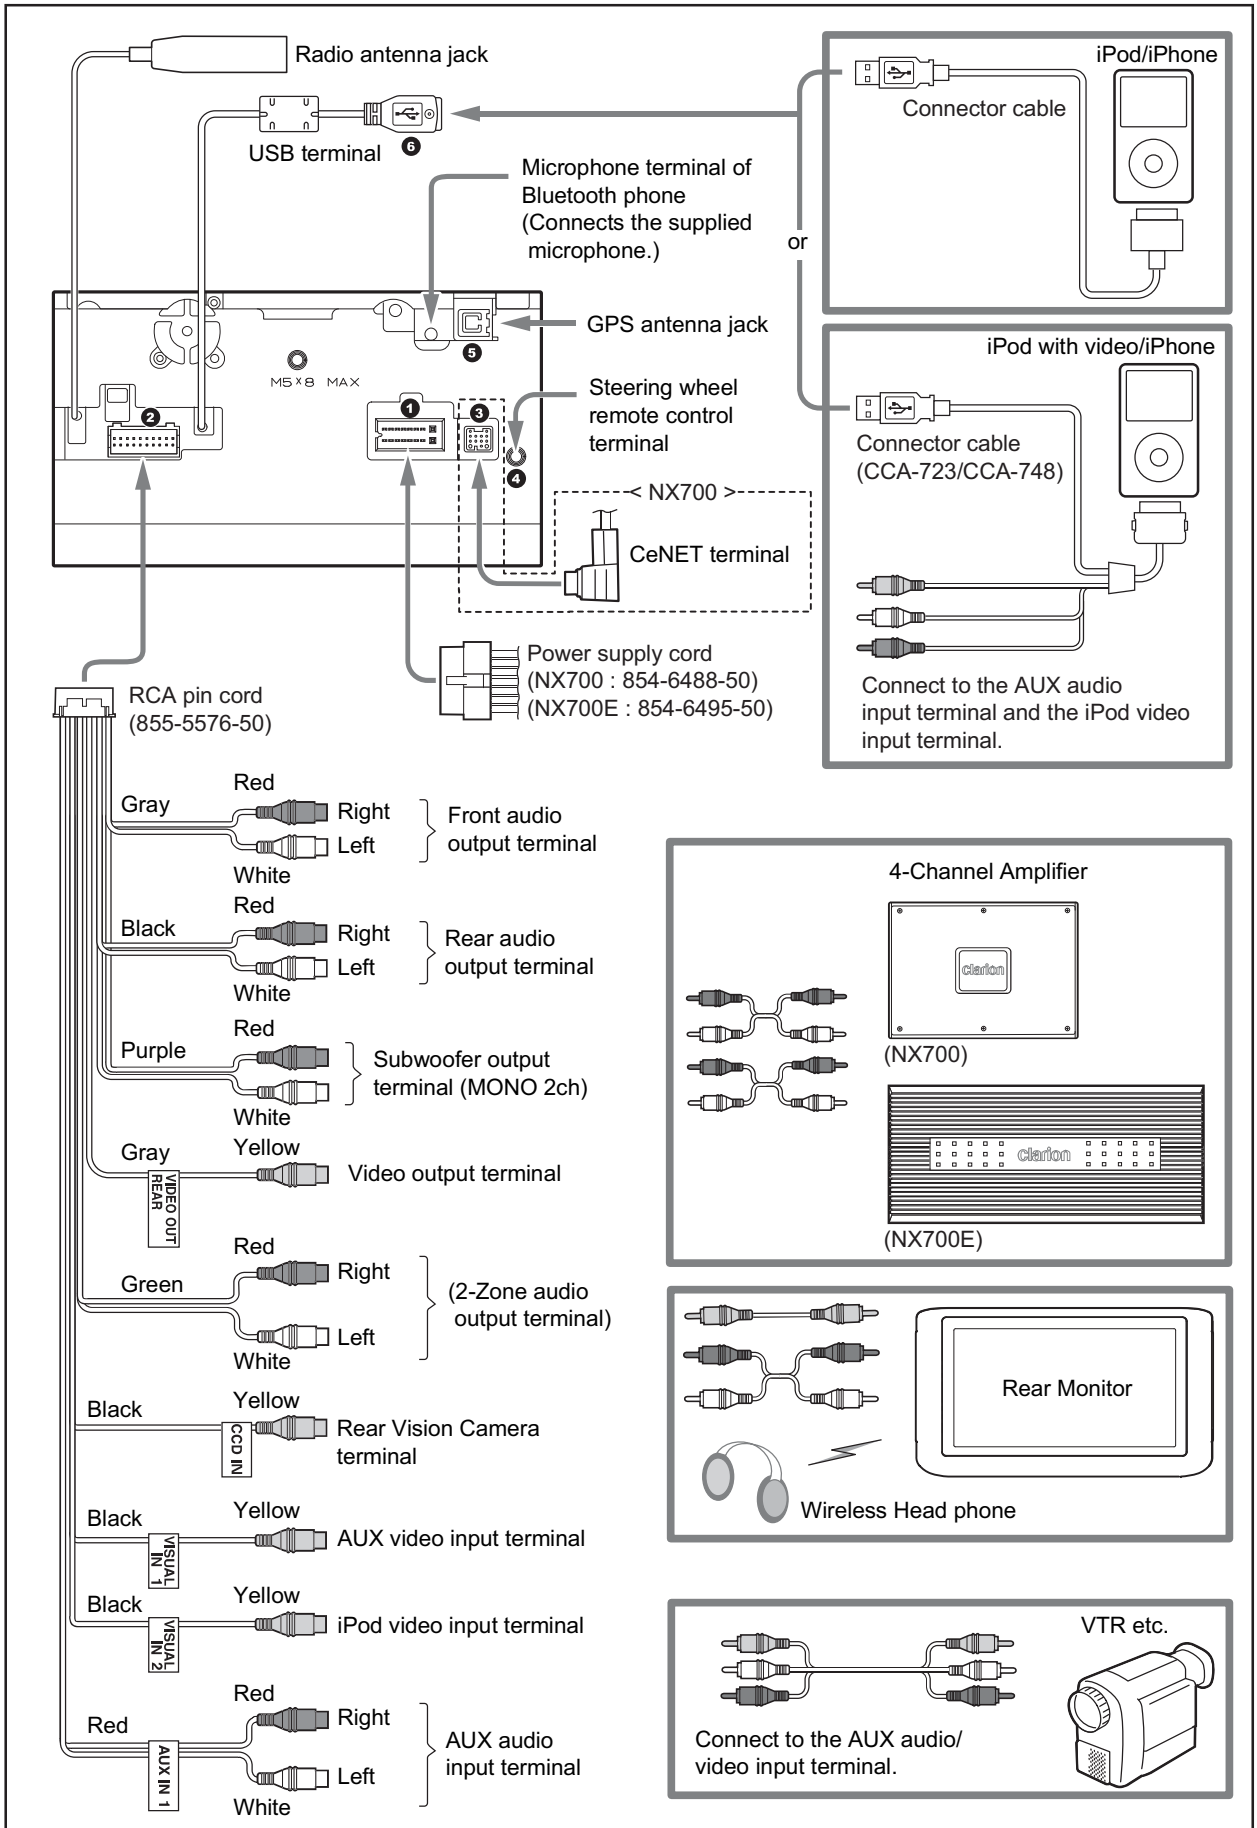

< NX700 (QY-5014B-A) >

Power supply cord (854-6488-50)

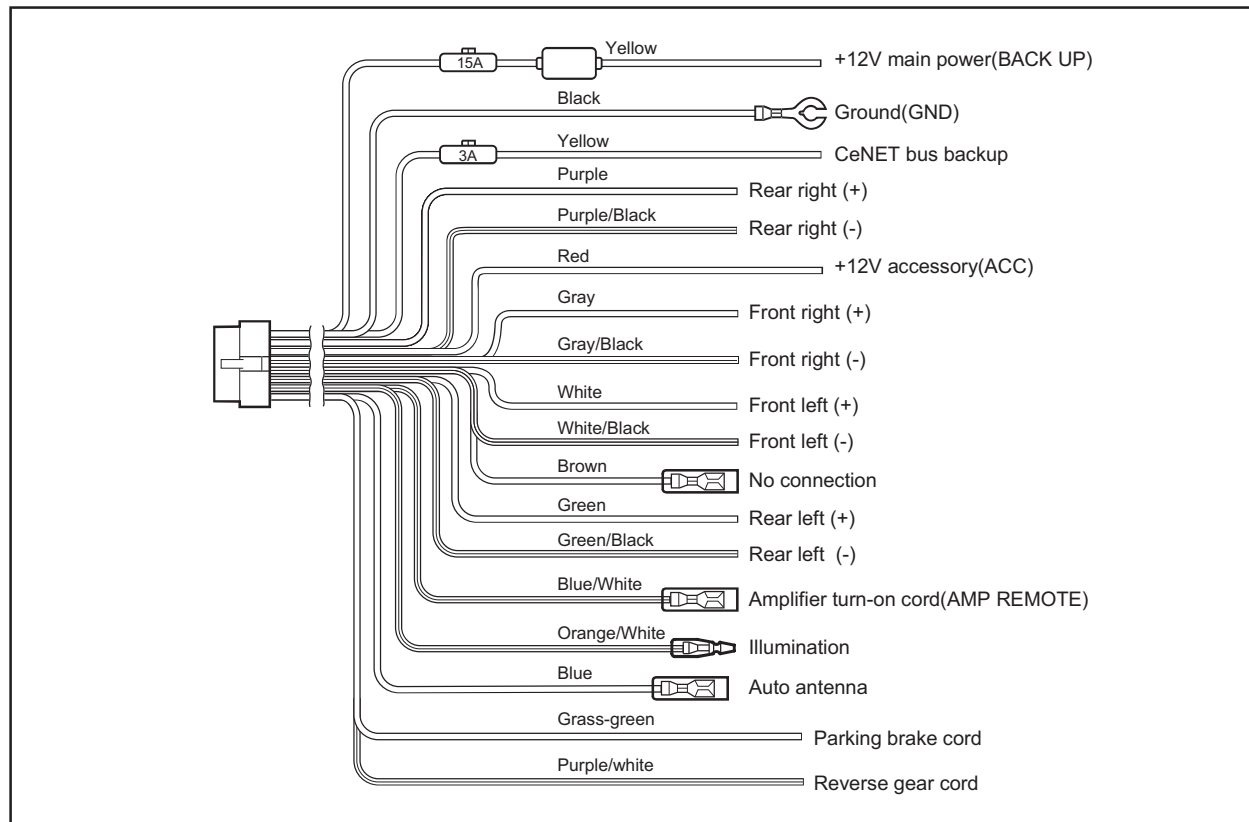

Connectors

1 Power supply connector
(Main PWB J601)

2 RCA connector
(Main PWB P203)

No.	Pin name	No.	Pin name	No.	Pin name	No.	Pin name
1	REAR L-CH (-)	13	REAR R-CH (+)	1	LINE OUT REAR L-CH	13	REAR VIDEO OUTPUT GND
2	REVERSE GEAR	14	ILLUMINATION	2	LINE OUT REAR R-CH	14	VIDEO INPUT-1 GND
3	REAR L-CH (+)	15	REAR R-CH (-)	3	LINE OUT FRONT L-CH	15	REAR VIDEO OUTPUT
4	PARKING BRAKE	16	BUS BACK UP	4	LINE OUT FRONT R-CH	16	VIDEO INPUT-1
5	FRONT L-CH (-)	17	BACK UP	5	S-GND	17	AUX INPUT-1 L-CH GND
6	N.C.	18	GND	6	S-GND	18	AUX INPUT-1 R-CH GND
7	FRONT L-CH (+)			7	SUB-WOOFER L-CH	19	AUX INPUT-1 L-CH
8	ACC			8	SUB-WOOFER R-CH	20	AUX INPUT-1 R-CH
9	FRONT R-CH (+)			9	S-GND	21	VIDEO INPUT-2 GND
10	AUTO ANTENNA			10	S-GND	22	CCD CAMERA GND
11	FRONT R-CH (-)			11	2-ZONE L-CH	23	VIDEO INPUT-2
12	AMP REMOTE			12	2-ZONE R-CH	24	CCD CAMERA INPUT

3 CeNET terminal for Sirius/XM
(Main PWB J602)

4 Steering wheel remote control terminal
(Main PWB J506)


5 GPS antenna jack
(Navi PWB assy)

6 USB terminal
(Main PWB)

No.	Pin name	No.	Pin name	No.	Pin name	No.	Pin name
1	GND	9	SYSTEM ACC	1	REMOTE CONT	1	RF IN
2	B/U +14V	10	BUS (-)	2	SHIELD GND	2	GPS GND
3	BUS AUDIO L-CH (+)	11	BUS AUDIO L-CH (-)				
4	N.C.	12	N.C.				
5	N.C.	13	N.C.				
6	BUS (+)						
7	BUS AUDIO R-CH (+)						
8	BUS AUDIO R-CH (-)						

< NX700E (QY-5015E-A) >

Power supply cord (854-6495-50)

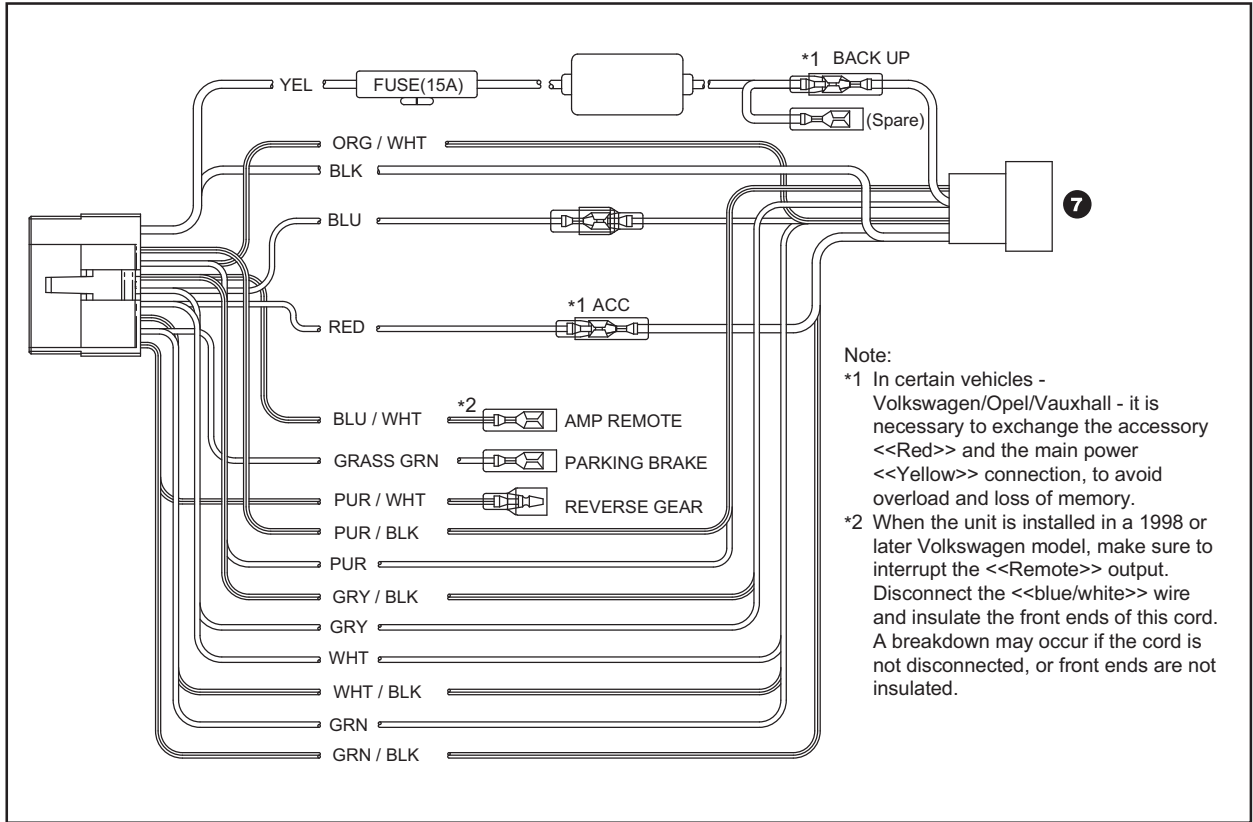

Connectors


1 Power supply connector (Main PWB J601)				2 RCA connector (Main PWB P203)			
No.	Pin name	No.	Pin name	No.	Pin name	No.	Pin name
1	REAR L-CH (-)	13	REAR R-CH (+)	1	LINE OUT REAR L-CH	13	REAR VIDEO OUTPUT GND
2	REVERSE GEAR	14	ILLUMINATION	2	LINE OUT REAR R-CH	14	VIDEO INPUT-1 GND
3	REAR L-CH (+)	15	REAR R-CH (-)	3	LINE OUT FRONT L-CH	15	REAR VIDEO OUTPUT
4	PARKING BRAKE	16	N.C.(BUS BACK UP)	4	LINE OUT FRONT R-CH	16	VIDEO INPUT-1
5	FRONT L-CH (-)	17	BACK UP	5	S-GND	17	AUX INPUT-1 L-CH GND
6	N.C.	18	GND	6	S-GND	18	AUX INPUT-1 R-CH GND
7	FRONT L-CH (+)			7	SUB-WOOFER L-CH	19	AUX INPUT-1 L-CH
8	ACC			8	SUB-WOOFER R-CH	20	AUX INPUT-1 R-CH
9	FRONT R-CH (+)			9	S-GND	21	VIDEO INPUT-2 GND
10	AUTO ANTENNA			10	S-GND	22	CCD CAMERA GND
11	FRONT R-CH (-)			11	2-ZONE L-CH	23	VIDEO INPUT-2
12	AMP REMOTE			12	2-ZONE R-CH	24	CCD CAMERA INPUT

4 Steering wheel remote control terminal (Main PWB J506)		5 GPS antenna jack (Navi PWB assy)		6 USB terminal (Main PWB)		7 ISO connector (Power supply cord)	
No.	Pin name	No.	Pin name	No.	Pin name	No.	Pin name
1	REMOTE CONT	1	RF IN	1	VBUS	A-1	N.C.
2	SHIELD GND	2	GPS GND	2	USB D (-)	A-2	N.C.
				3	USB D (+)	A-3	N.C.
				4	GND	A-4	BACK UP (BATTERY)
				5	SHIELD GND	A-5	AUTO ANTENNA
						A-6	ILLUMINATION
						A-7	ACC (ACCESSORY)
						A-8	GND (GROUND)

No.	Pin name	No.	Pin name	No.	Pin name	No.	Pin name
B-1	REAR R-CH (+)	PUR	PUR/BLK				
B-2	REAR R-CH (-)	GRY	GRY/BLK				
B-3	FRONT R-CH (+)	WHT	WHT/BLK				
B-4	FRONT R-CH (-)	GRN	GRN/BLK				
B-5	FRONT L-CH (+)						
B-6	FRONT L-CH (-)						
B-7	REAR L-CH (+)						
B-8	REAR L-CH (-)						

EXPLODED VIEW/PARTS LIST

Panel assy section

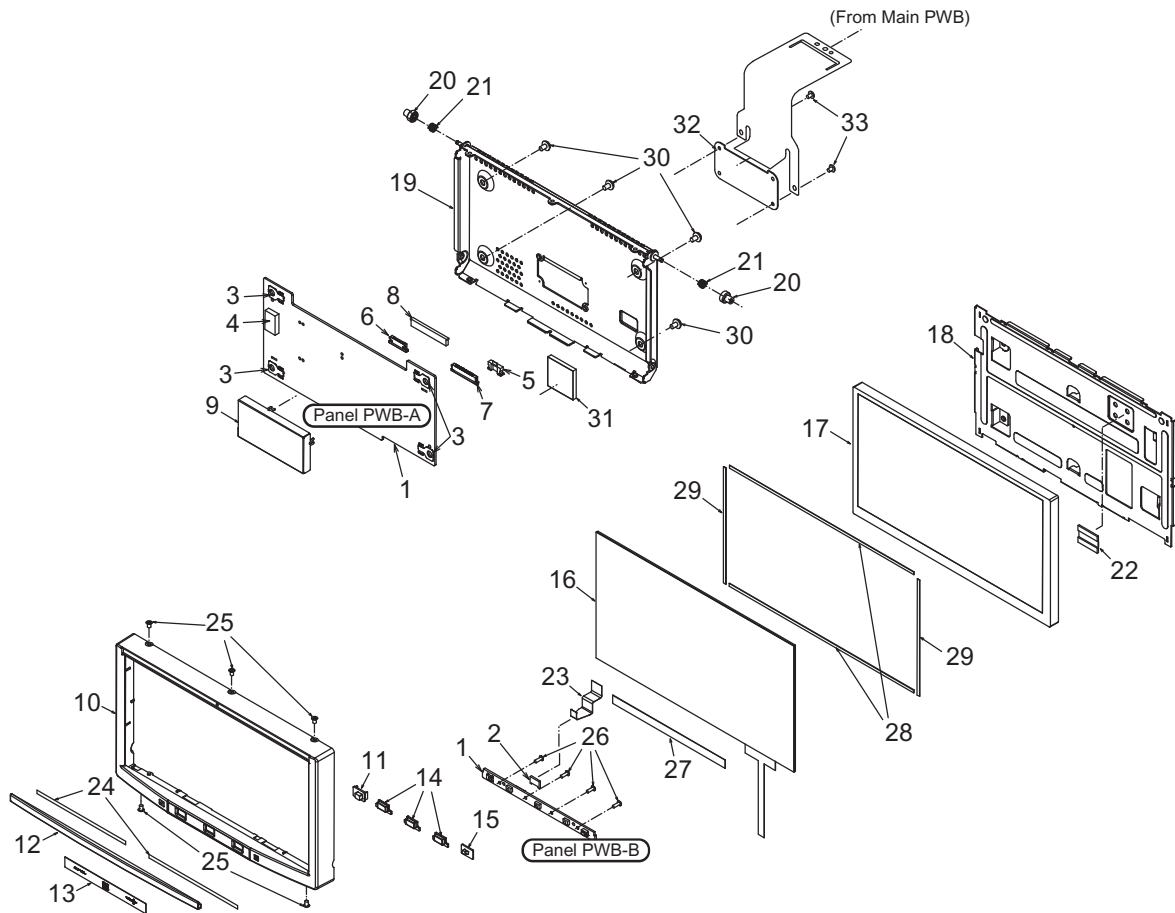


Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	PANEL PWB	1
2	074-2236-65	OUTLET SOCKET(15P)	1
3	073-0762-90	TERMINAL	4
4	076-0529-02	PLUG(LCD 2P)	1
5	074-2219-54	OUTLET SOCKET(T/P 4P)	1
6	074-2225-66	OUTLET SOCKET(SW FPC 16P)	1
7	074-2226-80	OUTLET SOCKET(30P)	1
8	074-2233-50	OUTLET SOCKET(50P)	1
9	331-4805-00	SHIELD CASE	1
10	370-6443-00	ESCUTCHEON	1
11	335-8654-00	IR-FILTER	1
12	378-0559-03 378-0559-04	BADGE : NX700 BADGE : NX700E	1 1
13	382-9175-00	SHEET KEY	1
14	382-9176-00	BUTTON(VOL/SRC)	3
15	382-9177-00	BUTTON(RESET)	1
16	013-9723-00	SWITCH(T/P)	1
17	379-0478-00	INDICATOR(LCD)	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	331-4803-00	LCD HOLDER	1
19	331-4804-10	REAR-CVR	1
20	335-7074-00	ROLLER	2
21	750-6746-10	ROLLER SPRING	2
22	331-3038-00	EARTH PLATE	1
23	039-3225-00	FPC(SW-LCD)	1
24	347-8742-00	DOUBLE FACE(BADGE)	2
25	780-2003-03	SPECIAL SCREW(M2x3 LOCK)	5
26	778-2004-01	PAD SCREW(M1.7x5)	4
27	347-8743-00	FILM	1
28	347-8740-00	SPACER(U/D)	2
29	347-8741-00	SPACER(L/R)	2
30	780-2604-50	IT SCREW(M2.6x4)	4
31	345-6395-00	HEAT RUBBER	1
32	039-3502-00	PWB(COVER)	1
33	716-1851-00	SPECIAL SCREW(M2x3 LOCK)	2

Main section

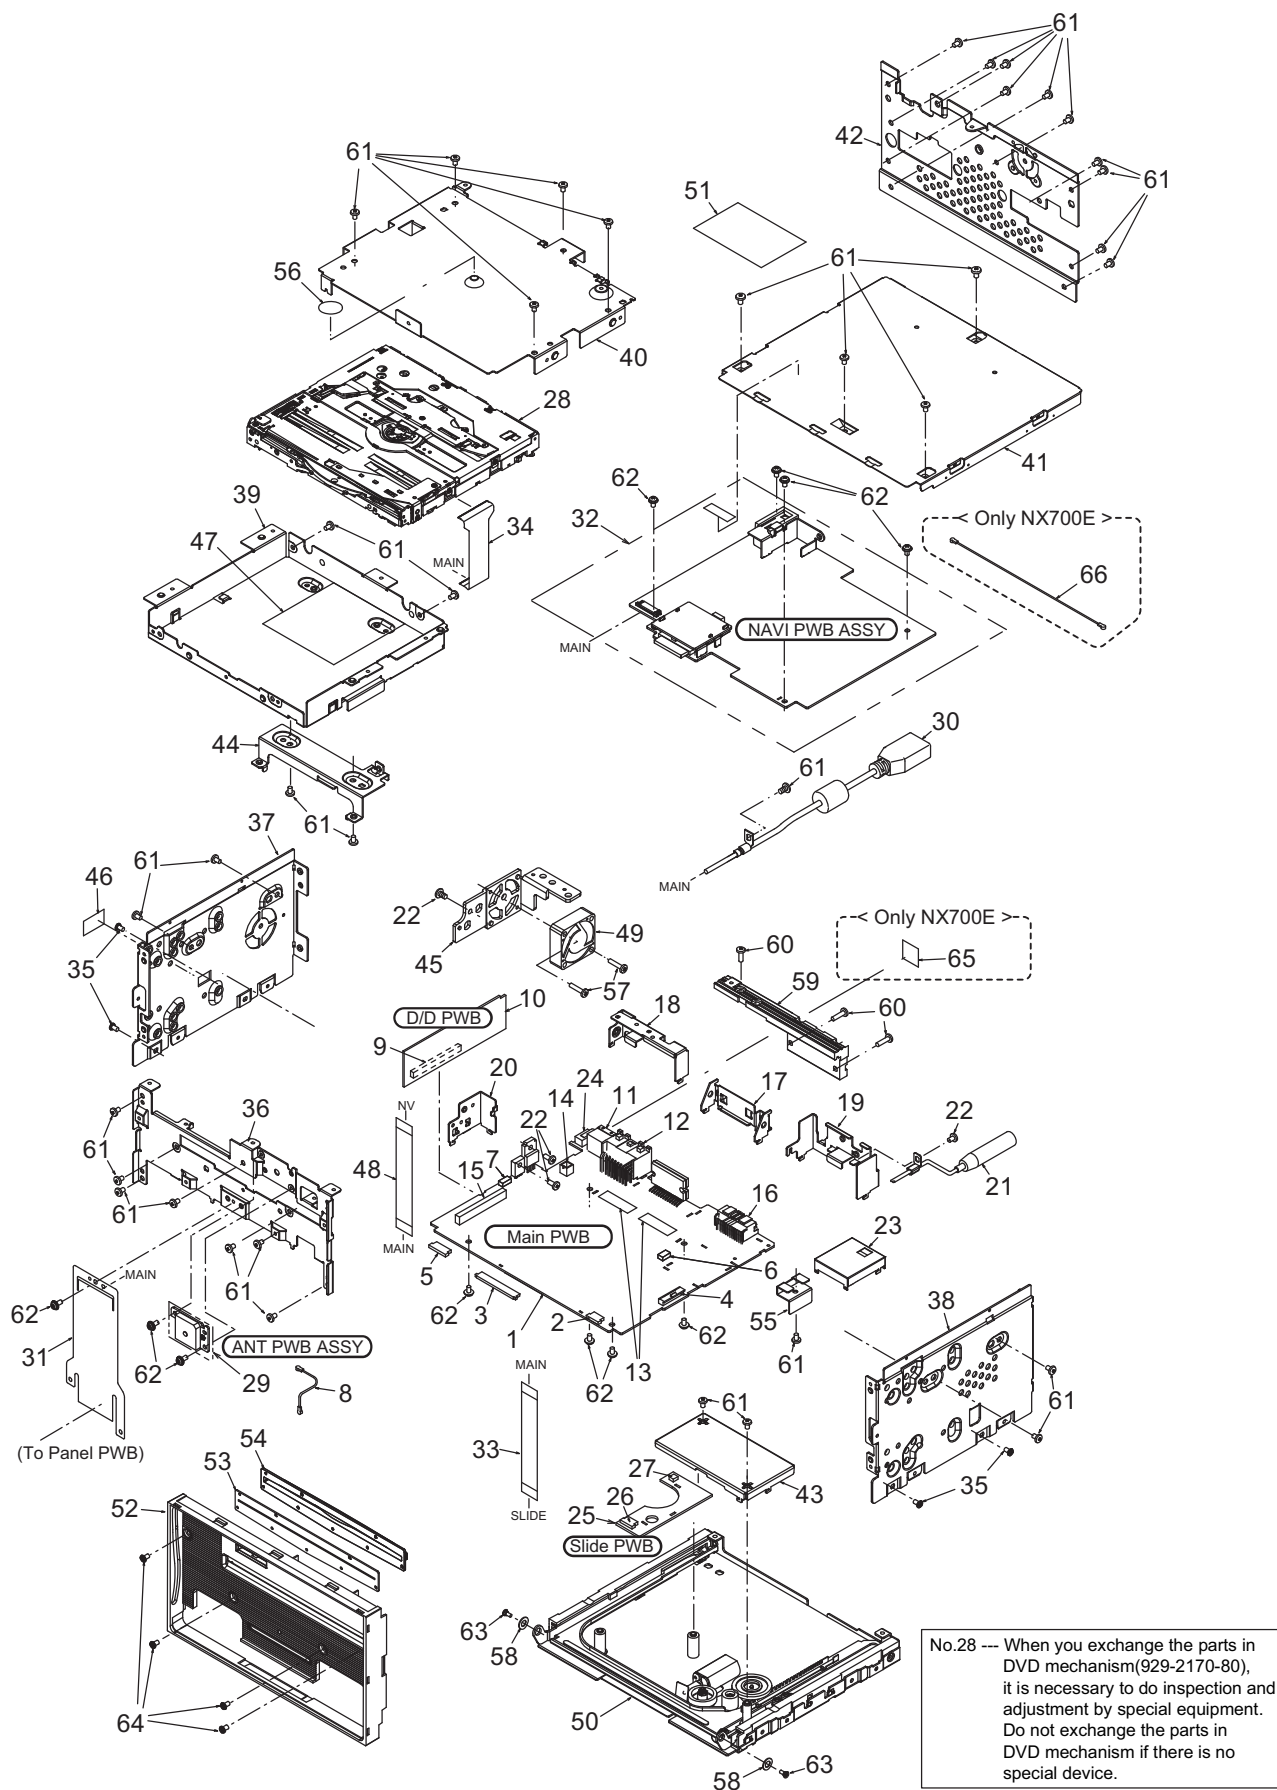

Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1	35	780-2604-51	SCREW(M2.6x4)	4
2	074-2233-08	OUTLET SOCKET(MA-SENS 8P)	1	36	309-1911-00	FRONT PLATE	1
3	074-2233-50	OUTLET SOCKET(MA-PAN 50P)	1	37	312-0503-00	SIDE CHASSIS(L)	1
4	074-2238-36	OUTLET SOCKET(MEC-MA 36P)	1	38	312-0504-00	SIDE CHASSIS(R)	1
5	074-2233-24	OUTLET SOCKET(MA-NV 24P)	1	39	312-0505-01	CHASSIS	1
6	076-0478-55	PLUG(USB 5P)	1	40	312-0506-00	UPPER CHASSIS	1
7	076-0478-57	PLUG(7P)	1	41	310-1831-02	UPPER CASE	1
8	092-2239-01	ANT-RECEPT	1	42	307-0738-01	REAR PLATE	1
9	074-0881-20	OUTLET SOCKET(20P)	1	43	331-4806-00	PWB HOLDER(SLIDE-PWB)	1
10	-----	D/D PWB	1	44	331-4807-00	M-PWB HOLDER(MAIN-PWB)	1
11	074-1194-00	OUTLET SOCKET(13P)	1	45	313-2075-00	HEAT SINK(FAN)	1
12	074-4030-00	OUTLET SOCKET(POWER 18P)	1	46	347-8527-00	SHADE	1
13	347-7739-20	DOUBLE FACE	2	47	347-8504-00	INSULATOR(MECH FPC)	1
14	076-0349-02	PLUG(FAN 2P)	1	48	816-3041-55	FLAT WIRE(MAIN-NAVI)	1
15	076-0353-20	PLUG(D/D PWB 20P)	1	49	020-3053-00	DC-MOTOR(FAN)	1
16	076-0714-24	PLUG(RCA 24P)	1	50	932-0121-80	SLIDE MECH	1
17	331-4179-00	IC HOLDER(POWER)	1	51	276-0720-00 276-0721-00	SETPLATE : NX700 SETPLATE : NX700E	1 1
18	331-4792-00	CONNECT HOLD(L)	1	52	370-6444-02 370-6444-03	ESCUTCHEON : NX700 ESCUTCHEON : NX700E	1 1
19	331-4864-00	CONNECT HOLD(R)	1	53	346-0221-00	LEAHER SHEET	1
20	331-4791-00	IC HOLDER(TR)	1	54	335-8199-00	DISC GUIDE	1
21	092-2216-50	ANT-RECEPT	1	55	331-4870-00	EARTH PLATE	1
22	714-2606-8B	MACHINE SCREW(M2.6x6)	4	56	347-8760-00	SPACER	1
23	331-4794-00	TUNER BRKT	1	57	780-2612-50	SCREW(M2.6x12 LOCK)	2
24	075-0339-00	JACK	1	58	335-7903-00	BUSH	2
25	-----	SLIDE PWB	1	59	313-2076-00	HEAT SINK(IC)	1
26	074-2225-58	OUTLET SOCKET(8P)	1	60	714-2608-8H	MACHINE SCREW(M2.6x8)	3
27	076-0478-52	PLUG(2P)	1	61	714-2604-8B	MACHINE SCREW(M2.6x4)	38
28	929-2170-80	DVD-MECH-MODULE	1	62	780-2604-50	IT SCREW(M2.6x4)	11
29	-----	ANT PWB ASSY	1	63	716-3577-00	DECORATIVE SCREW	2
30	855-0707-50	USB CABLE	1	64	780-2604-52	SCREW(M2.6x4)	4
31	039-3448-00	FPC(MAIN-PANEL)	1	65	347-8719-00	SPACER : ONLY NX700E	1
32	-----	NAVI PWB ASSY	1	66	092-2204-03	ANT-RECEPT : ONLY NX700E	1
33	816-3040-55	FLAT WIRE(MAIN-SLIDE)	1				
34	039-3447-00	FPC(MAIN-MECH)	1				

ELECTRICAL PARTS LIST

Panel PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C104	168-1052-78	16V 1uF K	C189	043-6401-90	16V 10uF	D108	001-2643-90	CUS02
C108	168-1042-78	16V 0.1uF K	C190	043-0540-00	6.3V 10uF	D109	001-2643-90	CUS02
C109	043-0552-90	6.3V 47uF M	C191	166-1521-50	1500pF CH	D112	001-4305-20	UDZSTE-17 5.6B
C111	168-1042-78	16V 0.1uF K	C192	043-6401-90	16V 10uF	D113	001-4305-20	UDZSTE-17 5.6B
C112	166-2001-50	20pF CH	C193	168-1042-78	16V 0.1uF K	D114	001-4305-20	UDZSTE-17 5.6B
C115	166-2001-50	20pF CH	C194	168-1032-55	0.01uF K	D115	001-4305-20	UDZSTE-17 5.6B
C116	168-1042-78	16V 0.1uF K	C195	166-1521-50	1500pF CH	D116	001-1306-90	HSU83 TRF-E
C117	166-2001-50	20pF CH	C196	166-1521-50	1500pF CH	D701	001-0529-29	MA8051-M
C118	043-0540-00	6.3V 10uF	C197	043-6401-90	16V 10uF	D703	001-0367-91	1SS226
C119	168-1042-38	50V 0.1uF K	C198	166-1521-50	1500pF CH	D704	001-0367-91	1SS226
C120	166-4711-50	470pF CH	C199	043-0540-00	6.3V 10uF	D901	001-0516-90	MA111
C121	166-1011-50	100pF CH	C200	168-1042-78	16V 0.1uF K	D902	001-7103-90	CL-191HR-CD-T
C122	043-0566-90	50V 2.2uF K	C201	043-0540-00	6.3V 10uF	D903	001-7131-90	SML312WBCW1
C124	168-2242-58	0.22uF K	C202	043-0540-00	6.3V 10uF			WHT
C125	168-1042-78	16V 0.1uF K	C203	043-0566-90	50V 2.2uF K	D904	001-7131-90	SML312WBCW1
C126	166-1011-50	100pF CH	C204	043-0568-90	25V 2.2uF			WHT
C127	043-0540-00	6.3V 10uF	C205	168-1042-78	16V 0.1uF K	D905	001-7131-90	SML312WBCW1
C128	168-1042-78	16V 0.1uF K	C206	166-2211-50	220pF CH			WHT
C129	168-1042-78	16V 0.1uF K	C207	043-6401-90	16V 10uF	D909	001-4305-20	UDZSTE-17 5.6B
C130	168-1042-78	16V 0.1uF K	C208	168-1042-78	16V 0.1uF K	D910	001-4305-20	UDZSTE-17 5.6B
C131	168-1042-78	16V 0.1uF K	C209	168-1042-78	16V 0.1uF K	D911	001-4305-20	UDZSTE-17 5.6B
C132	043-0540-00	6.3V 10uF	C210	168-1042-78	16V 0.1uF K	D912	001-4305-20	UDZSTE-17 5.6B
C134	043-0568-90	25V 2.2uF	C211	043-6401-90	16V 10uF	F701	060-8100-50	1A 1.6X0.8
C135	043-0568-90	25V 2.2uF	C212	043-6401-90	16V 10uF	IC103	051-6467-00	MST7701-LF
C136	043-0540-00	6.3V 10uF	C213	166-1021-50	1000pF CH	IC104	052-7094-10	MX25L1605DMI-12G
C137	168-1042-78	16V 0.1uF K	C214	166-1021-50	1000pF CH	IC105	051-1292-90	NJM4565M-D
C138	168-1042-78	16V 0.1uF K	C215	168-1032-55	0.01uF K	IC701	125-9023-90	TPCF8402TE85L,F
C139	166-1021-50	1000pF CH	C216	168-1032-55	0.01uF K	IC702	051-3925-90	OZ9910ISN-T2
C140	168-1042-78	16V 0.1uF K	C217	168-1032-55	0.01uF K	IC703	125-9023-90	TPCF8402TE85L,F
C141	168-1042-78	16V 0.1uF K	C218	168-1032-55	0.01uF K	IR901	060-4023-90	RS-471
C142	043-0540-00	6.3V 10uF	C219	168-1032-55	0.01uF K	J102	074-2219-54	4P
C143	168-1042-78	16V 0.1uF K	C257	043-6401-90	16V 10uF	J103	074-2233-50	50P
C144	168-1042-78	16V 0.1uF K	C262	043-0559-90	6.3V 22uF	J104	074-2226-80	30P
C145	168-1042-78	16V 0.1uF K	C701	178-2255-79	2.2uF	J105	074-2225-66	16P
C147	168-1042-78	16V 0.1uF K	C702	043-0549-50	3KV 10PF	J901	074-2236-65	15P
C148	166-1801-50	18pF CH	C703	043-6401-90	16V 10uF	L102	010-3104-50	30 ohm/100MHz
C149	166-1801-50	18pF CH	C704	168-1045-56	25V 0.1uF Z	L103	010-3105-70	240ohm/100MHz
C150	168-1042-78	16V 0.1uF K	C705	168-1032-55	0.01uF K	L104	010-3105-70	240ohm/100MHz
C151	168-1042-78	16V 0.1uF K	C706	166-3911-50	390pF CH	L105	010-3105-70	240ohm/100MHz
C152	168-1042-78	16V 0.1uF K	C707	168-1022-55	1000pF K	L106	010-3105-70	240ohm/100MHz
C153	168-1042-78	16V 0.1uF K	C708	168-1032-55	0.01uF K	L107	010-3105-62	1k ohm/100MHz
C156	168-1032-55	0.01uF K	C709	166-1811-50	180pF CH	L108	010-3414-91	3.3uH
C157	168-1042-78	16V 0.1uF K	C710	168-4722-55	4700pF K	L109	010-3514-90	15uH M
C158	043-0540-00	6.3V 10uF	C711	168-6832-78	0.068uF K	L110	010-3514-90	15uH M
C159	168-1042-78	16V 0.1uF K	C712	178-2255-79	2.2uF	L111	010-3104-50	30 ohm/100MHz
C160	168-1042-78	16V 0.1uF K	C713	168-2232-55	0.022uF K	L112	010-3506-90	47uH
C161	168-1042-78	16V 0.1uF K	C714	043-0567-90	25V 22uF	L113	010-3506-90	47uH
C162	168-1042-78	16V 0.1uF K	C715	043-0567-90	25V 22uF	L114	010-3104-50	30 ohm/100MHz
C164	168-1042-78	16V 0.1uF K	C716	168-1032-55	0.01uF K	L115	010-3103-70	MMZ1608Y121BTA00
C165	168-1042-78	16V 0.1uF K	C717	043-0567-90	25V 22uF	L116	010-3104-50	30 ohm/100MHz
C166	168-1042-78	16V 0.1uF K	C720	042-1763-90	25V 47uF M	L117	010-3104-50	30 ohm/100MHz
C167	168-1042-78	16V 0.1uF K	C721	168-1042-78	16V 0.1uF K	L118	010-3104-50	30 ohm/100MHz
C168	043-6401-90	16V 10uF	C724	166-1021-50	1000pF CH	L119	010-3104-50	30 ohm/100MHz
C169	168-1042-78	16V 0.1uF K	C725	043-0554-90	25V 10uF	L120	010-3104-50	30 ohm/100MHz
C170	168-1042-78	16V 0.1uF K	C726	043-0554-90	25V 10uF	L121	010-3407-68	33uH J
C171	168-1042-78	16V 0.1uF K	C727	043-0554-90	25V 10uF	L122	010-3104-50	30 ohm/100MHz
C172	168-1042-78	16V 0.1uF K	C848	043-6401-90	16V 10uF	L123	010-3104-50	30 ohm/100MHz
C173	168-1042-78	16V 0.1uF K	C901	168-1042-78	16V 0.1uF K	L124	010-3104-50	30 ohm/100MHz
C174	043-0540-00	6.3V 10uF	CCT102	050-0140-59	1/32W 33 ohm x4J	L125	010-3104-50	30 ohm/100MHz
C175	168-1042-78	16V 0.1uF K	CCT104	050-0140-59	1/32W 33 ohm x4J	L126	010-3407-62	10uH J
C176	043-6401-90	16V 10uF	CCT105	050-0140-59	1/32W 33 ohm x4J	L127	010-3506-90	47uH
C177	168-1042-78	16V 0.1uF K	CCT106	050-0140-59	1/32W 33 ohm x4J	L128	010-3505-90	22uH
C178	168-1042-78	16V 0.1uF K	CCT107	050-0140-59	1/32W 33 ohm x4J	L129	010-3104-50	30 ohm/100MHz
C179	166-2701-50	27pF CH	D100	001-0367-91	1SS226	L130	010-3104-50	30 ohm/100MHz
C180	043-6401-90	16V 10uF	D101	001-4305-28	UDZSTE-17 12B	L131	010-3105-62	1k ohm/100MHz
C181	166-4711-50	470pF CH	D102	001-2643-90	CUS02	L132	010-3105-62	1k ohm/100MHz
C182	166-4711-50	470pF CH	D103	001-0367-91	1SS226	L133	010-3105-62	1k ohm/100MHz
C183	166-4711-50	470pF CH	D104	001-0367-91	1SS226	L134	010-3105-62	1k ohm/100MHz
C186	168-1042-78	16V 0.1uF K	D105	001-0367-91	1SS226	L135	010-3105-62	1k ohm/100MHz
C187	168-1032-55	0.01uF K	D106	001-0367-91	1SS226	L136	010-3105-62	1k ohm/100MHz
C188	043-0540-00	6.3V 10uF	D107	001-4305-25	UDZSTE-17 9.1B	L137	010-3105-62	1k ohm/100MHz

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L138	010-3105-62	1k ohm/100MHz	R136	119-4721-15	1/10W 4.7k ohm	R216	119-4731-15	1/10W 47k ohm
L139	010-3105-62	1k ohm/100MHz	R137	119-3301-15	1/10W 33 ohm	R217	119-4721-15	1/10W 4.7k ohm
L140	010-3105-62	1k ohm/100MHz	R139	119-1041-15	1/10W 100k ohm	R218	119-4731-15	1/10W 47k ohm
L141	010-3105-69	80 ohm/100MHz	R140	119-1051-15	1/10W 1M ohm	R221	119-0000-05	1/10W 0 ohm JW
L142	010-3105-69	80 ohm/100MHz	R141	119-1001-15	1/10W 10 ohm	R250	119-4731-15	1/10W 47k ohm
L143	010-3105-69	80 ohm/100MHz	R144	119-0000-05	1/10W 0 ohm JW	R252	119-2211-15	1/10W 220 ohm
L701	010-3059-90	200 ohm FILTER	R145	119-1031-15	1/10W 10k ohm	R253	119-1511-15	1/10W 150 ohm
L702	010-3108-54	600 ohm/100MHz	R146	119-2221-15	1/10W 2.2k ohm	R254	119-1511-15	1/10W 150 ohm
L703	010-3108-54	600 ohm/100MHz	R147	119-2221-15	1/10W 2.2k ohm	R255	119-1511-15	1/10W 150 ohm
P701	076-0529-02	2P	R149	119-3331-15	1/10W 33k ohm	R260	119-1041-15	1/10W 100k ohm
Q100	125-7011-90	RSR025P03TL	R150	119-3331-15	1/10W 33k ohm	R261	119-1041-15	1/10W 100k ohm
Q102	125-7011-90	RSR025P03TL	R151	119-1031-15	1/10W 10k ohm	R262	119-4731-15	1/10W 47k ohm
Q103	125-7011-90	RSR025P03TL	R152	119-1031-15	1/10W 10k ohm	R263	119-4731-15	1/10W 47k ohm
Q104	125-3014-90	ISA1602AM1 E,F	R153	119-3331-15	1/10W 33k ohm	R264	119-4731-15	1/10W 47k ohm
Q105	125-3014-90	ISA1602AM1 E,F	R154	119-3321-15	1/10W 3.3k ohm	R701	116-6811-15	1/4W 680 ohm
Q106	125-8028-90	RSR025N03 TL	R155	119-3331-15	1/10W 33k ohm	R702	119-1041-15	1/10W 100k ohm
Q107	125-7011-90	RSR025P03TL	R157	032-0140-04	1/10W 8.2k ohm F	R703	119-3931-15	1/10W 39k ohm
Q108	125-0034-93	RT1P241M	R158	119-1031-15	1/10W 10k ohm	R705	032-0140-05	1/10W 82k ohm F
Q109	125-2041-93	RT1N241M	R159	119-2231-15	1/10W 22k ohm	R706	119-3351-15	1/10W 3.3M ohm
Q110	125-2041-93	RT1N241M	R160	032-0140-52	1/10W 33k ohm F	R707	119-1021-15	1/10W 1k ohm
Q112	125-2041-93	RT1N241M	R161	119-1031-15	1/10W 10k ohm	R708	119-1021-15	1/10W 1k ohm
Q113	125-0034-93	RT1P241M	R163	032-0217-56	1/3W 0.047 ohm	R709	119-1031-15	1/10W 10k ohm
Q701	125-0025-92	RN2302	R165	119-0000-05	1/10W 0 ohm JW	R711	119-6841-15	1/10W 680k ohm
Q702	125-2032-92	RN1302	R166	119-0000-05	1/10W 0 ohm JW	R712	119-1051-15	1/10W 1M ohm
Q705	192-4155-49	2SC4155A R,S	R168	032-0219-50	1/8W 0.22 ohm	R713	032-0140-79	1/10W 2.7k ohm F
Q901	192-4081-00	2SC4081	R169	032-0140-94	1/10W 30k ohm F	R714	032-0140-90	1/10W 560 ohm F
Q902	192-4081-00	2SC4081	R170	119-0000-05	1/10W 0 ohm JW	R715	119-1021-15	1/10W 1k ohm
R101	119-1301-15	1/10W 13 ohm	R171	119-0000-05	1/10W 0 ohm JW	R716	119-1021-15	1/10W 1k ohm
R102	032-0217-56	1/3W 0.047 ohm	R172	119-0000-05	1/10W 0 ohm JW	R720	119-1021-15	1/10W 1k ohm
R103	119-1031-15	1/10W 10k ohm	R173	032-0140-08	1/10W 13k ohm F	R721	119-1021-15	1/10W 1k ohm
R105	032-0140-12	1/10W 75 ohm F	R177	032-0140-50	1/10W 10k ohm F	R901	119-1021-15	1/10W 1k ohm
R106	119-1301-15	1/10W 13 ohm	R178	119-3301-15	1/10W 33 ohm	R902	119-1011-15	1/10W 100 ohm
R108	119-6201-15	1/10W 62 ohm	R179	119-3301-15	1/10W 33 ohm	R903	119-3311-15	1/10W 330 ohm
R109	119-1301-15	1/10W 13 ohm	R180	119-3301-15	1/10W 33 ohm	R904	119-3311-15	1/10W 330 ohm
R110	032-0217-56	1/3W 0.047 ohm	R181	119-1211-15	1/10W 120 ohm	R905	119-3311-15	1/10W 330 ohm
R111	032-0140-12	1/10W 75 ohm F	R182	119-0000-05	1/10W 0 ohm JW	R906	119-2211-15	1/10W 220 ohm
R114	119-6201-15	1/10W 62 ohm	R183	119-0000-05	1/10W 0 ohm JW	R907	119-5611-15	1/10W 560 ohm
R115	119-1301-15	1/10W 13 ohm	R185	119-0000-05	1/10W 0 ohm JW	S901	013-6312-50	SKRP-ABE-010
R116	032-0140-12	1/10W 75 ohm F	R188	119-0000-05	1/10W 0 ohm JW	S902	013-6318-51	SKRKAEE010
R117	119-6201-15	1/10W 62 ohm	R194	116-5611-15	1/4W 560 ohm	S903	013-6318-51	SKRKAEE010
R118	119-6201-15	1/10W 62 ohm	R197	119-4731-15	1/10W 47k ohm	S904	013-6318-51	SKRKAEE010
R119	032-0219-50	1/8W 0.22 ohm	R198	119-4731-15	1/10W 47k ohm	T701	007-1178-00	OUTPUT-TRANS
R120	119-6201-15	1/10W 62 ohm	R199	119-0000-05	1/10W 0 ohm JW			BLC4126
R121	032-0140-12	1/10W 75 ohm F	R200	119-0000-05	1/10W 0 ohm JW	TM100	073-0762-90	TERMINAL
R123	119-6201-15	1/10W 62 ohm	R201	119-4731-15	1/10W 47k ohm	TM101	073-0762-90	TERMINAL
R124	032-0140-04	1/10W 8.2k ohm F	R202	119-0000-05	1/10W 0 ohm JW	TM102	073-0762-90	TERMINAL
R125	032-0140-50	1/10W 10k ohm F	R203	119-6891-15	1/10W 6.8 ohm	TM103	073-0762-90	TERMINAL
R126	032-0140-99	1/10W 39k ohm F	R204	119-6891-15	1/10W 6.8 ohm	TM104	073-0785-90	TERMINAL
R127	032-0140-55	1/10W 4.7k ohm F	R205	119-6891-15	1/10W 6.8 ohm	TM105	073-0785-90	TERMINAL
R128	119-0000-05	1/10W 0 ohm JW	R206	119-6891-15	1/10W 6.8 ohm	X101	061-3569-90	NX3225GA
R131	119-3311-15	1/10W 330 ohm	R208	119-0000-05	1/10W 0 ohm JW	PWB	039-3500-00	PWB(WITHOUT COMPONENTS)
R132	119-1021-15	1/10W 1k ohm	R213	119-0000-05	1/10W 0 ohm JW			
R133	119-4791-15	1/10W 4.7 ohm	R215	119-4721-15	1/10W 4.7k ohm			

Main PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT201	092-2216-50	ANTENNA RECEPT	C250	166-3901-50	39pF CH	C426	168-1042-78	16V 0.1uF K
ANT202	092-2203-00	ANT-RECEPT			(NX700E)	C427	042-1764-90	16V 100uF M
		(NX700E)	C251	168-1052-78	16V 1uF K	C428	168-1042-78	16V 0.1uF K
C101	168-1022-55	1000pF K	C252	168-1052-78	16V 1uF K	C429	168-1052-78	16V 1uF K
C102	166-2096-50	2pF +/-0.25pF CK	C253	165-4763-35	16V 47uF	C430	168-1052-78	16V 1uF K
C104	166-1501-50	15pF CH			(NX700E)	C431	168-1042-78	16V 0.1uF K
C105	168-1022-55	1000pF K	C256	168-1042-78	16V 0.1uF K	C432	168-1052-78	16V 1uF K
C106	166-3901-50	39pF CH	C257	168-1042-78	16V 0.1uF K	C433	168-1052-78	16V 1uF K
C107	168-2242-58	0.22uF K	C258	165-4763-35	16V 47uF	C435	168-1052-78	16V 1uF K
C108	166-1201-50	12pF CH	C259	168-1042-78	16V 0.1uF K	C436	168-1022-55	1000pF K
C109	168-2242-58	0.22uF K			(NX700E)	C455	042-1764-90	16V 100uF M
C110	168-1052-78	16V 1uF K	C260	168-1042-78	16V 0.1uF K	C456	043-6401-90	16V 10uF
C111	168-2242-58	0.22uF K	C261	166-5611-50	560pF CH			(NX700E)
C112	166-1201-50	12pF CH			(NX700E)	C457	043-6401-90	16V 10uF
C113	168-1052-78	16V 1uF K	C262	168-1042-78	16V 0.1uF K			(NX700E)
C114	168-1032-55	0.01uF K	C263	165-4763-35	16V 47uF	C460	168-1032-55	0.01uF K
C115	168-1032-55	0.01uF K	C264	166-3311-50	330pF CH	C491	043-0551-90	6.3V 4.7uF M
C116	168-1032-55	0.01uF K			(NX700E)	C492	043-0551-90	6.3V 4.7uF M
C117	168-1042-78	16V 0.1uF K	C265	166-2201-50	22pF CH	C501	043-0540-00	6.3V 10uF
C118	168-1042-78	16V 0.1uF K			(NX700E)	C504	168-1042-78	16V 0.1uF K
C119	168-1032-55	0.01uF K	C268	165-1063-35	16V 10uF	C505	168-1042-78	16V 0.1uF K
C120	168-2232-55	0.022uF K			(NX700E)	C506	043-0540-00	6.3V 10uF
C121	177-1062-78	10pF	C269	166-3301-50	33pF CH	C507	168-1042-78	16V 0.1uF K
C122	168-1042-78	16V 0.1uF K			(NX700E)	C508	043-0551-90	6.3V 4.7uF M
C123	168-1042-78	16V 0.1uF K	C271	166-2201-50	22pF CH	C509	166-2201-50	22pF CH
C124	043-6401-90	16V 10uF			(NX700E)	C510	168-1032-55	0.01uF K
		(NX700E)	C272	168-1022-55	1000pF K	C511	168-1022-55	1000pF K
C200	166-2201-50	22pF CH	C273	168-1022-55	1000pF K	C512	168-1052-78	16V 1uF K
C202	168-1042-78	16V 0.1uF K	C274	168-1022-55	1000pF K	C513	168-1042-78	16V 0.1uF K
C203	043-0540-00	6.3V 10uF	C275	168-1042-78	16V 0.1uF K	C514	168-4732-78	0.047uF K
C204	043-0540-00	6.3V 10uF	C279	166-2201-50	22pF CH	C515	165-1063-35	16V 10uF
C205	166-2211-50	220pF CH	C280	166-2201-50	22pF CH	C516	042-4022-90	6.3V 1000uF
C206	166-2211-50	220pF CH	C282	168-1042-78	16V 0.1uF K	C517	168-1052-78	16V 1uF K
C207	043-0540-00	6.3V 10uF	C283	168-1042-78	16V 0.1uF K	C518	165-4763-15	6.3V 47uF
C208	043-0540-00	6.3V 10uF	C284	168-1042-78	16V 0.1uF K	C520	168-1042-78	16V 0.1uF K
C209	043-0540-00	6.3V 10uF	C285	168-1042-78	16V 0.1uF K	C521	166-1201-50	12pF CH
C210	043-0540-00	6.3V 10uF	C287	168-1052-78	16V 1uF K	C522	166-1201-50	12pF CH
C211	168-1042-78	16V 0.1uF K	C288	165-1063-35	16V 10uF	C523	166-1011-50	100pF CH
C213	168-1052-78	16V 1uF K	C292	168-1042-78	16V 0.1uF K	C527	168-1022-55	1000pF K
		(NX700)			(NX700E)	C528	042-1764-90	16V 100uF M
C214	168-1052-78	16V 1uF K	C293	168-1042-78	16V 0.1uF K	C530	168-1042-78	16V 0.1uF K
		(NX700)	C294	165-1063-35	16V 10uF	C531	165-2263-35	16V 22uF
C215	168-1052-78	16V 1uF K	C295	165-1063-35	16V 10uF	C532	168-1042-78	16V 0.1uF K
		(NX700)	C296	165-1063-35	16V 10uF	C534	043-6401-90	16V 10uF
C216	168-1052-78	16V 1uF K	C297	165-1063-35	16V 10uF	C535	043-6401-90	16V 10uF
		(NX700)	C298	165-1063-35	16V 10uF	C601	168-2222-55	2200pF K
C217	168-1052-78	16V 1uF K	C299	165-1063-35	16V 10uF	C602	168-2222-55	2200pF K
C218	043-0540-00	6.3V 10uF	C300	165-1063-35	16V 10uF	C603	168-2222-55	2200pF K
C219	168-1052-78	16V 1uF K	C301	165-1063-35	16V 10uF	C604	168-2222-55	2200pF K
C220	168-1052-78	16V 1uF K	C302	166-3911-50	390pF CH	C605	168-2222-55	2200pF K
C221	168-1052-78	16V 1uF K	C303	166-3911-50	390pF CH	C606	168-2222-55	2200pF K
C227	166-1211-50	120pF CH	C304	043-0540-00	6.3V 10uF	C607	168-2222-55	2200pF K
C228	166-1211-50	120pF CH	C305	043-0540-00	6.3V 10uF	C608	168-2222-55	2200pF K
C229	166-5611-50	560pF CH	C322	168-1022-55	1000pF K	C610	165-4763-35	16V 47uF
C230	166-5611-50	560pF CH	C323	168-1022-55	1000pF K	C611	168-1052-78	16V 1uF K
C231	166-5611-50	560pF CH	C324	168-2242-58	0.22uF K	C612	165-1053-65	50V 1uF
C232	166-5611-50	560pF CH	C325	168-2242-58	0.22uF K	C613	042-1545-00	16V 2200uF
C233	166-5611-50	560pF CH	C326	168-2242-58	0.22uF K	C616	172-2241-11	0.22uF
C234	166-2201-50	22pF CH	C327	168-2242-58	0.22uF K	C617	042-1545-00	16V 2200uF
C235	166-5611-50	560pF CH	C385	166-1011-50	100pF CH	C619	042-1764-90	16V 100uF M
C236	166-2201-50	22pF CH	C386	166-1011-50	100pF CH	C620	168-1042-78	16V 0.1uF K
C237	166-5611-50	560pF CH	C387	168-1042-78	16V 0.1uF K	C622	168-1042-78	16V 0.1uF K
C238	166-5611-50	560pF CH	C388	168-1032-55	0.01uF K	C623	168-1032-55	0.01uF K
C243	168-1042-78	16V 0.1uF K	C401	043-0540-00	6.3V 10uF	C625	165-4763-35	16V 47uF
C245	042-1764-90	16V 100uF M	C404	043-0540-00	6.3V 10uF	C626	168-1042-78	16V 0.1uF K
C246	168-1042-78	16V 0.1uF K	C405	043-0540-00	6.3V 10uF	C630	165-3363-45	25V 33uF
C247	166-2096-50	2pF +/-0.25pF CK	C406	168-1042-78	16V 0.1uF K	C633	042-1764-90	16V 100uF M
		(NX700)	C407	043-6401-90	16V 10uF	C634	043-6401-90	16V 10uF
C248	166-3901-50	39pF CH	C408	166-1007-50	10pF CH	C635	043-6401-90	16V 10uF
		(NX700E)	C410	168-1022-55	1000pF K	C636	168-4732-78	0.047uF K
C249	166-2096-50	2pF +/-0.25pF CK	C423	168-1042-78	16V 0.1uF K	C637	043-6401-90	16V 10uF
		(NX700E)	C424	168-1042-78	16V 0.1uF K	C638	043-0540-00	6.3V 10uF
			C425	168-1042-78	16V 0.1uF K	C639	043-0540-00	6.3V 10uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C640	168-1052-78	16V 1uF K	D389	001-0516-90	MA111	L103	010-3062-54	290nH
C641	166-1011-50	100pF CH	D390	001-0516-90	MA111	L104	010-3406-43	0.27uH J
C642	043-6401-90	16V 10uF	D391	001-0516-90	MA111	L105	010-3072-90	560uH
C643	043-6401-90	16V 10uF	D421	001-0529-14	MA8030-L	L106	010-3072-90	560uH
C671	168-3342-58	0.33uF K	D422	001-0529-14	MA8030-L	L107	010-4054-00	35.7pF/100MHz
C701	043-0540-00	6.3V 10uF	D504	001-0529-53	MA8110M	L108	010-3105-62	1k ohm/100MHz
C702	043-0540-00	6.3V 10uF	D515	001-0516-90	MA111	L109	010-3105-62	1k ohm/100MHz
C703	042-4022-90	6.3V 1000uF	D516	001-4313-50	HZU6A2L	L200	010-2198-87	0.082uH
C704	046-1042-78	0.1uF K B	D602	001-0516-90	MA111			(NX700E)
C705	043-0559-90	6.3V 22uF	D603	001-0516-90	MA111	L201	010-8037-00	0.545uH M
C706	168-1042-78	16V 0.1uF K	D604	001-4912-90	SM5S22A-HE3/2D			(NX700E)
C707	168-1042-78	16V 0.1uF K	D606	001-0516-90	MA111	L202	010-8037-01	0.85uH M
C708	043-0540-00	6.3V 10uF	D607	001-0529-14	MA8030-L			(NX700E)
C709	168-1042-78	16V 0.1uF K	D608	001-0516-90	MA111	L203	010-2198-87	0.082uH
C710	043-0540-00	6.3V 10uF	D609	001-0516-90	MA111			(NX700)
C711	046-1042-78	0.1uF K B	D610	001-0516-90	MA111		117-0000-05	1/8W 0 ohm JW
C712	046-1042-78	0.1uF K B	D611	001-2403-90	M1F60			(NX700E)
C713	045-1007-50	10 +/-0.5pF CH	D613	001-2403-90	M1F60	L204	010-2003-04	30uH
C714	045-1007-50	10 +/-0.5pF CH	D614	001-0516-90	MA111	L205	010-3407-58	4.7uH J
C715	168-1042-78	16V 0.1uF K	D615	001-0529-26	MA8047-M	L206	010-3105-62	1k ohm/100MHz
C716	046-1042-78	0.1uF K B	D616	001-2403-90	M1F60	L207	010-3103-64	1.5k ohm/100MHz
C717	046-2222-58	2200pF K B	D617	001-2403-90	M1F60	L208	010-3103-64	1.5k ohm/100MHz
C718	046-1042-78	0.1uF K B	D618	001-0516-90	MA111	L209	010-3407-78	220uH J
C719	168-1042-78	16V 0.1uF K	D619	001-2403-90	M1F60			(NX700E)
C720	046-1032-78	0.01uF K B	D620	001-0504-47	HZS9 B3L	L210	010-3103-64	1.5k ohm/100MHz
C721	046-1042-78	0.1uF K B	D623	001-2403-90	M1F60	L211	010-3103-64	1.5k ohm/100MHz
C722	046-1042-78	0.1uF K B			(NX700)	L212	010-3103-64	1.5k ohm/100MHz
C723	043-0552-90	6.3V 47uF M	D624	001-0529-32	MA8056-M	L213	010-3103-64	1.5k ohm/100MHz
C725	046-1042-78	0.1uF K B	D625	001-0529-69	MA8180-M	L214	010-3103-64	1.5k ohm/100MHz
C726	046-1042-78	0.1uF K B	D626	001-0529-69	MA8180-M	L215	010-3103-64	1.5k ohm/100MHz
C727	046-1042-78	0.1uF K B	D703	060-8101-50	TEW2XCP020V	L216	010-3103-64	1.5k ohm/100MHz
C728	046-1042-78	0.1uF K B	IC101	051-4700-90	TEF6606/V4	L217	010-3103-64	1.5k ohm/100MHz
C730	045-1801-50	18pFJ CH	IC200	051-6739-90	AK4388ET-E2	L218	010-3103-64	1.5k ohm/100MHz
C731	045-1801-50	18pFJ CH	IC205	051-3034-90	NJM4558V	L219	010-3103-64	1.5k ohm/100MHz
C732	046-1042-78	0.1uF K B	IC207	051-3034-90	NJM4558V	L220	010-3104-53	220 ohm/100MHz
C733	046-1032-78	0.01uF K B	IC208	051-7106-90	CD4052B-PWR	L221	010-3105-62	1k ohm/100MHz
C734	045-1007-50	10 +/-0.5pF CH	IC209	051-5048-90	NJW1222-TE2			(NX700E)
C735	045-1007-50	10 +/-0.5pF CH	IC210	051-4620-90	LC72725KM	L222	010-3103-64	1.5k ohm/100MHz
C736	168-1042-78	16V 0.1uF K			(NX700E)	L223	010-3103-64	1.5k ohm/100MHz
C737	046-1042-78	0.1uF K B	IC212	051-3034-90	NJM4558V	L401	010-3103-50	1500 ohm/100MHz
C738	046-1032-78	0.01uF K B	IC381	051-7262-48	TC7WH14FU-TE12L,F	L402	010-3103-50	1500 ohm/100MHz
C739	168-1042-78	16V 0.1uF K				L403	010-3103-50	1500 ohm/100MHz
C740	168-1042-78	16V 0.1uF K	IC421	051-5352-90	AK4254	L404	010-3103-55	120 ohm/100MHz
C741	043-0540-00	6.3V 10uF	IC491	051-3568-90	S-1172B19-E6T1G	L405	010-3103-64	1.5k ohm/100MHz
C742	043-0540-00	6.3V 10uF	IC503	-----	uPD70F3354GJ-GAE-A(FLASH	L406	010-3103-64	1.5k ohm/100MHz
C743	166-2211-50	220pF CH			033100-052)	L407	010-3103-64	1.5k ohm/100MHz
C744	166-2211-50	220pF CH				L408	010-3104-50	30 ohm/100MHz
C745	168-1042-78	16V 0.1uF K	IC504	051-5440-08	S-80931CNMC-G81	L409	010-3104-50	30 ohm/100MHz
C746	043-0552-90	6.3V 47uF M	IC505	051-3406-90	NJM2078M	L411	010-3104-50	30 ohm/100MHz
C747	043-0552-90	6.3V 47uF M	IC506	051-5410-38	BU4820G-TR	L412	010-3041-90	10uH
C749	043-0540-00	6.3V 10uF	IC507	051-9432-90	S-24CS04AFT-V-G	L413	010-3103-64	1.5k ohm/100MHz
C750	168-1042-78	16V 0.1uF K	IC508	051-6100-90	BD6221F-E2	L421	010-3406-66	22uH J
C751	168-1042-78	16V 0.1uF K	IC601	051-2070-00	TB2926HQ	L491	010-3104-50	30 ohm/100MHz
C752	043-0552-90	6.3V 47uF M	IC602	051-3335-90	AN77L04M	L501	010-2279-50	4.7uH
C755	168-1022-55	1000pF K	IC605	051-6600-90	LA2335M(NX700)	L502	010-2279-50	4.7uH
C756	168-1022-55	1000pF K	IC701	051-3579-90	S1112B15MCL6ATFG	L503	010-3407-78	220uH J
C757	168-1032-55	0.01uF K	IC702	051-3579-90	S1112B15MCL6ATFG	L551	010-3108-54	600 ohm/100MHz
C758	168-1022-55	1000pF K	IC703	051-6711-40	TC94A34FG-010	L552	010-3108-54	600 ohm/100MHz
C759	168-1042-78	16V 0.1uF K	IC704	051-6739-90	AK4388ET-E2	L601	010-3407-66	22uH J
C760	043-6401-90	16V 10uF (NX700E)	IC705	052-3409-30	TMP92FD28AFG	L602	010-3104-50	30 ohm/100MHz
			IC706	051-6926-90	BD2051AFJ-TR	L603	010-3104-50	30 ohm/100MHz
C761	043-6401-90	16V 10uF (NX700E)	IC707	051-5418-08	S-80827CNMC-B8K	L701	010-3103-64	1.5k ohm/100MHz
			IC708	051-7226-08	TC7SH00FU	L702	010-3103-64	1.5k ohm/100MHz
			IC709	051-6934-90	MFI341S2313	L703	010-3103-64	1.5k ohm/100MHz
CCT708	050-0140-63	1/32W 47k ohm x4J	J382	074-2233-24	24P	L704	010-3103-55	120 ohm/100MHz
D351	001-0529-14	MA8030-L	J401	074-2238-36	36P	L705	010-3103-64	1.5k ohm/100MHz
D352	001-0529-14	MA8030-L	J452	074-2233-50	50P	L706	010-3103-64	1.5k ohm/100MHz
D353	001-0529-14	MA8030-L	J502	074-2233-08	8P	L707	010-3105-62	1k ohm/100MHz
D354	001-0529-14	MA8030-L	J506	075-0339-00	MINI JACK	L708	010-3104-53	220 ohm/100MHz
D355	001-0529-14	MA8030-L	J601	074-4030-00	OUTLET SOCKET	P203	076-0714-24	PLUG
D356	001-0529-14	MA8030-L	J602	074-1194-00	13P Ce-NET(NX700)	P504	076-0478-57	7P
D361	001-0516-90	MA111	L101	010-3406-50	1uH J	P601	076-0349-02	2P
D362	001-0516-90	MA111	L102	010-3406-53	1.8uH J	P602	076-0353-20	20P
D363	001-0529-44	MA8082-M						

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
P702	076-0478-55	6P	R116	119-0000-05	1/10W 0 ohm JW (NX700)	R293	119-1031-15	1/10W 10k ohm
Q201	125-2041-93	RT1N241M	R200	119-1021-15	1/10W 1k ohm	R294	119-1031-15	1/10W 10k ohm
Q202	125-2041-93	RT1N241M	R203	119-4731-15	1/10W 47k ohm	R295	119-3311-15	1/10W 330 ohm
Q203	192-6053-00	2SC6053	R204	119-4731-15	1/10W 47k ohm	R296	119-1021-15	1/10W 1k ohm
Q204	192-6053-00	2SC6053	R207	119-1011-15	1/10W 100 ohm	R297	119-1021-15	1/10W 1k ohm
Q205	192-6053-00	2SC6053	R216	119-0000-05	1/10W 0 ohm JW (NX700E)	R298	119-3311-15	1/10W 330 ohm
Q206	192-6053-00	2SC6053	R220	119-0000-05	1/10W 0 ohm JW (NX700)	R299	119-3311-15	1/10W 330 ohm
Q207	192-6053-00	2SC6053	R221	119-2731-15	1/10W 27k ohm	R300	119-1021-15	1/10W 1k ohm
Q208	192-6053-00	2SC6053	R222	119-2731-15	1/10W 27k ohm	R301	119-1021-15	1/10W 1k ohm
Q209	192-6053-00	2SC6053	R223	119-5621-15	1/10W 5.6k ohm	R302	119-3311-15	1/10W 330 ohm
Q210	192-6053-00	2SC6053	R224	119-5621-15	1/10W 5.6k ohm	R303	119-3311-15	1/10W 330 ohm
Q211	192-4155-49	2SC4155A R,S	R225	119-1511-15	1/10W 150 ohm (NX700E)	R304	119-1021-15	1/10W 1k ohm
Q212	192-4155-49	2SC4155A R,S	R226	119-0000-05	1/10W 0 ohm JW (NX700)	R305	119-1021-15	1/10W 1k ohm
Q213	192-4155-49	2SC4155A R,S	R227	119-0000-05	1/10W 0 ohm JW (NX700)	R306	119-3311-15	1/10W 330 ohm
Q214	192-4155-49	2SC4155A R,S	R229	119-0000-05	1/10W 0 ohm JW (NX700)	R307	119-3311-15	1/10W 330 ohm
Q215	125-0034-96	RT1P436M	R230	119-0000-05	1/10W 0 ohm JW (NX700)	R308	119-1021-15	1/10W 1k ohm
Q216	125-0034-96	RT1P436M	R231	032-0140-89	1/10W 47k ohm F	R309	119-1021-15	1/10W 1k ohm
Q217	125-0034-96	RT1P436M	R232	032-0140-63	1/10W 27k ohm F	R310	119-3311-15	1/10W 330 ohm
Q218	125-0034-96	RT1P436M	R233	032-0140-89	1/10W 47k ohm F	R311	119-2721-15	1/10W 2.7k ohm
Q219	125-2041-96	RT1N436M	R234	119-1831-15	1/10W 18k ohm (NX700)	R312	119-2721-15	1/10W 2.7k ohm
Q220	192-4155-49	2SC4155A R,S	R235	119-5631-15	1/10W 56k ohm (NX700)	R319	119-3921-15	1/10W 3.9k ohm
Q221	125-2041-96	RT1N436M	R236	119-5631-15	1/10W 56k ohm (NX700)	R320	119-3921-15	1/10W 3.9k ohm
Q222	192-4155-49	2SC4155A R,S	R237	032-0140-89	1/10W 47k ohm F	R321	119-1021-15	1/10W 1k ohm
Q381	192-4155-49	2SC4155A R,S	R238	032-0140-63	1/10W 27k ohm F	R322	119-1021-15	1/10W 1k ohm
Q382	192-4155-49	2SC4155A R,S	R239	032-0140-89	1/10W 47k ohm F	R323	119-1031-15	1/10W 10k ohm
Q383	125-2041-93	RT1N241M	R240	119-1831-15	1/10W 18k ohm (NX700)	R324	119-1031-15	1/10W 10k ohm
Q384	125-3014-90	ISA1602AM1 E,F	R241	119-1831-15	1/10W 18k ohm (NX700)	R325	119-1021-15	1/10W 1k ohm
Q385	125-3014-90	ISA1602AM1 E,F	R242	119-5631-15	1/10W 56k ohm (NX700)	R326	119-1021-15	1/10W 1k ohm
Q401	190-1365-50	2SA1365 AF,AG	R243	119-5631-15	1/10W 56k ohm (NX700)	R327	119-8231-15	1/10W 82k ohm
Q402	125-2041-96	RT1N436M	R244	032-0140-63	1/10W 27k ohm F	R328	119-8231-15	1/10W 82k ohm
Q403	190-2071-00	2SA2071	R245	119-0000-05	1/10W 0 ohm JW	R329	119-2231-15	1/10W 22k ohm
Q404	125-2041-96	RT1N436M	R246	032-0140-63	1/10W 27k ohm F	R330	119-2231-15	1/10W 22k ohm
Q451	190-2071-00	2SA2071	R247	119-1831-15	1/10W 18k ohm (NX700)	R331	119-1021-15	1/10W 1k ohm
Q452	192-4155-49	2SC4155A R,S	R255	119-1031-15	1/10W 10k ohm	R332	119-2231-15	1/10W 22k ohm
Q501	192-4155-49	2SC4155A R,S	R260	032-0140-89	1/10W 47k ohm F	R333	119-1021-15	1/10W 1k ohm
Q502	192-4155-49	2SC4155A R,S	R261	032-0140-89	1/10W 47k ohm F	R334	119-8221-15	1/10W 8.2k ohm
Q503	192-4155-49	2SC4155A R,S	R263	032-0140-55	1/10W 4.7k ohm F	R335	119-1021-15	1/10W 1k ohm
Q504	125-0034-93	RT1P241M	R264	032-0140-55	1/10W 4.7k ohm F	R336	119-1021-15	1/10W 1k ohm
Q505	125-3014-90	ISA1602AM1 E,F	R267	119-1021-15	1/10W 1k ohm (NX700E)	R338	119-2211-15	1/10W 220 ohm
Q506	192-4155-49	2SC4155A R,S	R268	119-1021-15	1/10W 1k ohm (NX700E)	R339	119-2211-15	1/10W 220 ohm
Q507	125-2041-92	RT1N141M	R275	119-4731-15	1/10W 47k ohm	R350	119-2721-15	1/10W 2.7k ohm
Q511	125-2041-96	RT1N436M	R278	119-4731-15	1/10W 47k ohm	R352	119-2721-15	1/10W 2.7k ohm
Q601	125-4021-90	3CG1260 Q	R279	119-1011-15	1/10W 100 ohm	R353	119-4731-15	1/10W 47k ohm
Q604	125-3014-90	ISA1602AM1 E,F	R280	119-1011-15	1/10W 100 ohm	R354	119-4731-15	1/10W 47k ohm
Q605	192-4155-49	2SC4155A R,S	R281	119-6831-15	1/10W 68k ohm	R355	119-2721-15	1/10W 2.7k ohm
Q607	192-4155-49	2SC4155A R,S	R282	119-6831-15	1/10W 68k ohm	R356	119-2721-15	1/10W 2.7k ohm
Q610	125-4021-90	3CG1260 Q	R283	119-4731-15	1/10W 47k ohm	R357	119-4731-15	1/10W 47k ohm
Q612	125-4021-90	3CG1260 Q	R284	119-4731-15	1/10W 47k ohm	R358	119-4731-15	1/10W 47k ohm
Q614	125-3014-90	ISA1602AM1 E,F	R285	119-2231-15	1/10W 22k ohm	R359	119-2721-15	1/10W 2.7k ohm
Q616	125-2041-96	RT1N436M	R286	119-2231-15	1/10W 22k ohm	R360	119-2721-15	1/10W 2.7k ohm
Q617	125-2041-96	RT1N436M	R287	119-2231-15	1/10W 22k ohm	R361	119-0000-05	1/10W 0 ohm JW
Q618	192-4155-49	2SC4155A R,S	R288	119-2231-15	1/10W 22k ohm	R366	119-0000-05	1/10W 0 ohm JW
Q619	192-4155-49	2SC4155A R,S	R289	119-2231-15	1/10W 22k ohm	R367	119-0000-05	1/10W 0 ohm JW
Q620	102-3420-50	2SC3420 GR,BL	R290	119-2231-15	1/10W 22k ohm	R368	119-0000-05	1/10W 0 ohm JW
Q621	125-3014-90	ISA1602AM1 E,F	R291	119-2231-15	1/10W 22k ohm	R369	119-0000-05	1/10W 0 ohm JW
Q623	125-2041-96	RT1N436M	R292	119-2231-15	1/10W 22k ohm	R370	119-0000-05	1/10W 0 ohm JW
Q627	125-2041-96	RT1N436M				R371	119-0000-05	1/10W 0 ohm JW
Q628	192-5824-00	2SC5824				R372	119-0000-05	1/10W 0 ohm JW
Q634	101-1375-00	2SB1375				R373	119-0000-05	1/10W 0 ohm JW
Q701	190-1365-50	2SA1365 AF,AG				R374	119-0000-05	1/10W 0 ohm JW
Q703	125-2041-93	RT1N241M				R375	119-0000-05	1/10W 0 ohm JW
Q706	125-0034-96	RT1P436M				R376	119-0000-05	1/10W 0 ohm JW
Q707	125-2041-93	RT1N241M				R377	119-0000-05	1/10W 0 ohm JW
R101	119-4741-15	1/10W 470k ohm				R379	119-0000-05	1/10W 0 ohm JW
R102	119-4741-15	1/10W 470k ohm				R380	119-0000-05	1/10W 0 ohm JW
R103	119-1011-15	1/10W 100 ohm				R381	119-1011-15	1/10W 100 ohm
R104	119-4721-15	1/10W 4.7k ohm				R382	119-3911-15	1/10W 390 ohm
R105	116-2201-15	1/4W 22 ohm				R383	119-0000-05	1/10W 0 ohm JW
R106	119-1011-15	1/10W 100 ohm				R384	119-1021-15	1/10W 1k ohm
R107	119-1011-15	1/10W 100 ohm				R385	119-4711-15	1/10W 470 ohm
R108	119-0000-05	1/10W 0 ohm JW				R386	119-2231-15	1/10W 22k ohm
R115	119-0000-05	1/10W 0 ohm JW (NX700E)				R387	119-2231-15	1/10W 22k ohm
						R388	119-1031-15	1/10W 10k ohm
						R389	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R390	119-2231-15	1/10W 22k ohm	R546	119-1031-15	1/10W 10k ohm	R636	119-6811-15	1/10W 680 ohm
R391	119-2231-15	1/10W 22k ohm			(NX700)	R637	116-1521-15	1/4W 1.5k ohm
R394	119-4731-15	1/10W 47k ohm	R547	119-1041-15	1/10W 100k ohm	R638	119-3321-15	1/10W 3.3k ohm
R395	119-4721-15	1/10W 4.7k ohm	R548	119-1031-15	1/10W 10k ohm	R639	119-2231-15	1/10W 22k ohm
R396	119-1031-15	1/10W 10k ohm			(NX700)	R640	119-4731-15	1/10W 47k ohm
R397	119-4731-15	1/10W 47k ohm	R549	119-1031-15	1/10W 10k ohm	R641	119-1031-15	1/10W 10k ohm
R398	119-4721-15	1/10W 4.7k ohm			(NX700E)	R642	119-0000-05	1/10W 0 ohm JW
R399	119-4721-15	1/10W 4.7k ohm	R550	119-1031-15	1/10W 10k ohm	R643	119-4721-15	1/10W 4.7k ohm
R401	119-0000-05	1/10W 0 ohm JW	R551	119-1031-15	1/10W 10k ohm	R644	119-3321-15	1/10W 3.3k ohm
R402	119-1031-15	1/10W 10k ohm	R554	119-1011-15	1/10W 100 ohm	R645	119-0000-05	1/10W 0 ohm JW
R403	119-5611-15	1/10W 560 ohm	R555	119-1011-15	1/10W 100 ohm	R647	116-6801-15	1/4W 68 ohm
R406	119-1031-15	1/10W 10k ohm	R556	119-1011-15	1/10W 100 ohm	R648	119-0000-05	1/10W 0 ohm JW
R407	116-3311-15	1/4W 330 ohm	R557	119-1011-15	1/10W 100 ohm	R687	119-2201-15	1/10W 22 ohm
R409	119-5601-15	1/10W 56 ohm	R558	119-1011-15	1/10W 100 ohm	R688	119-0000-05	1/10W 0 ohm JW
R410	119-8211-15	1/10W 820 ohm	R559	119-1011-15	1/10W 100 ohm	R689	119-1211-15	1/10W 120 ohm
R411	119-8211-15	1/10W 820 ohm	R560	119-1031-15	1/10W 10k ohm	R690	119-1211-15	1/10W 120 ohm
R412	119-8211-15	1/10W 820 ohm	R561	119-1031-15	1/10W 10k ohm	R691	119-4721-15	1/10W 4.7k ohm
R421	119-4731-15	1/10W 47k ohm	R562	119-1031-15	1/10W 10k ohm	R692	119-4731-15	1/10W 47k ohm
R422	119-7501-15	1/10W 75 ohm	R563	119-4731-15	1/10W 47k ohm	R693	116-3301-15	1/4W 33 ohm
R423	119-7501-15	1/10W 75 ohm	R564	119-2231-15	1/10W 22k ohm	R694	116-3301-15	1/4W 33 ohm
R424	119-7501-15	1/10W 75 ohm	R566	119-1031-15	1/10W 10k ohm	R695	116-3301-15	1/4W 33 ohm
R425	119-7501-15	1/10W 75 ohm	R567	119-1031-15	1/10W 10k ohm	R696	116-5601-15	1/4W 56 ohm
R429	119-7501-15	1/10W 75 ohm	R568	119-2241-15	1/10W 220k ohm	R697	116-5601-15	1/4W 56 ohm
R431	119-4731-15	1/10W 47k ohm	R569	119-4741-15	1/10W 470k ohm	R698	116-5601-15	1/4W 56 ohm
R451	119-1031-15	1/10W 10k ohm	R570	119-1041-15	1/10W 100k ohm	R699	116-3301-15	1/4W 33 ohm
R452	116-3311-15	1/4W 330 ohm	R571	119-1041-15	1/10W 100k ohm	R701	033-2211-15	1/16W 220 ohm J
R453	116-3311-15	1/4W 330 ohm	R572	119-1041-15	1/10W 100k ohm	R702	033-2211-15	1/16W 220 ohm J
R468	119-0000-05	1/10W 0 ohm JW	R573	032-0140-66	1/10W 220 ohm F	R703	033-2211-15	1/16W 220 ohm J
R469	119-0000-05	1/10W 0 ohm JW	R574	119-1041-15	1/10W 100k ohm	R704	033-4721-15	1/16W 4.7k ohm J
R471	119-0000-05	1/10W 0 ohm JW	R575	119-4731-15	1/10W 47k ohm	R705	033-4721-15	1/16W 4.7k ohm J
R472	119-4721-15	1/10W 4.7k ohm	R576	119-1031-15	1/10W 10k ohm	R706	033-2211-15	1/16W 220 ohm J
R473	119-4731-15	1/10W 47k ohm	R577	119-1031-15	1/10W 10k ohm	R707	033-1031-15	1/16W 10k ohm J
R500	119-2211-15	1/10W 220 ohm	R578	119-5621-15	1/10W 5.6k ohm	R708	033-1221-15	1/16W 1.2k ohm J
R501	119-2211-15	1/10W 220 ohm	R579	119-3331-15	1/10W 33k ohm	R709	033-0000-05	1/16W 0 ohm
R502	119-1041-15	1/10W 100k ohm	R580	032-0140-03	1/10W 220k ohm F	R712	033-2211-15	1/16W 220 ohm J
R503	119-1021-15	1/10W 1k ohm	R581	119-1041-15	1/10W 100k ohm	R713	033-2211-15	1/16W 220 ohm J
R504	119-1031-15	1/10W 10k ohm	R582	032-0140-67	1/10W 3.3k ohm F	R714	033-2221-15	1/16W 2.2k ohm J
R505	119-0000-05	1/10W 0 ohm JW	R583	119-4721-15	1/10W 4.7k ohm	R715	033-1051-15	1/16W 1M ohm J
R506	119-1031-15	1/10W 10k ohm	R584	119-4721-15	1/10W 4.7k ohm	R716	033-2211-15	1/16W 220 ohm J
		(NX700)	R586	119-1051-15	1/10W 1M ohm	R717	119-1031-15	1/10W 10k ohm
R507	119-1011-15	1/10W 100 ohm	R587	032-0140-16	1/10W 180k ohm F	R718	119-2211-15	1/10W 220 ohm
R508	119-4721-15	1/10W 4.7k ohm	R589	032-0140-03	1/10W 220k ohm F	R719	119-2211-15	1/10W 220 ohm
R509	119-1031-15	1/10W 10k ohm	R590	032-0140-52	1/10W 33k ohm F	R720	119-2211-15	1/10W 220 ohm
R510	119-4721-15	1/10W 4.7k ohm	R591	032-0140-56	1/10W 12k ohm F	R721	119-1041-15	1/10W 100k ohm
R511	119-1011-15	1/10W 100 ohm	R592	119-1031-15	1/10W 10k ohm	R722	033-1041-15	1/16W 100k ohm J
R512	119-1031-15	1/10W 10k ohm	R593	119-1031-15	1/10W 10k ohm	R724	119-1811-15	1/10W 180 ohm
R513	119-4721-15	1/10W 4.7k ohm	R594	119-1031-15	1/10W 10k ohm	R725	119-1031-15	1/10W 10k ohm
R514	119-1031-15	1/10W 10k ohm	R595	119-1031-15	1/10W 10k ohm	R726	033-2211-15	1/16W 220 ohm J
		(NX700)	R597	119-1031-15	1/10W 10k ohm	R727	033-2211-15	1/16W 220 ohm J
R515	119-1031-15	1/10W 10k ohm	R599	119-1031-15	1/10W 10k ohm	R728	033-2211-15	1/16W 220 ohm J
R516	119-1011-15	1/10W 100 ohm	R601	119-4731-15	1/10W 47k ohm	R729	033-1021-15	1/16W 1k ohm J
R517	119-1011-15	1/10W 100 ohm	R603	119-1221-15	1/10W 1.2k ohm	R730	119-4731-15	1/10W 47k ohm
R520	119-1021-15	1/10W 1k ohm	R604	119-1231-15	1/10W 12k ohm	R731	119-4731-15	1/10W 47k ohm
R521	119-1031-15	1/10W 10k ohm	R605	119-3331-15	1/10W 33k ohm	R732	119-4731-15	1/10W 47k ohm
R522	119-2231-15	1/10W 22k ohm	R607	119-4731-15	1/10W 47k ohm	R734	119-4731-15	1/10W 47k ohm
R523	119-1031-15	1/10W 10k ohm	R609	032-0140-50	1/10W 10k ohm F	R735	119-1031-15	1/10W 10k ohm
R524	119-1031-15	1/10W 10k ohm	R610	119-4731-15	1/10W 47k ohm	R736	033-0000-05	1/16W 0 ohm
R525	119-1031-15	1/10W 10k ohm	R611	119-1031-15	1/10W 10k ohm	R737	119-1021-15	1/10W 1k ohm
R526	119-1041-15	1/10W 100k ohm	R612	119-2231-15	1/10W 22k ohm	R739	119-0000-05	1/10W 0 ohm JW
R527	119-1031-15	1/10W 10k ohm	R613	119-4711-15	1/10W 470 ohm	R740	033-4731-15	1/16W 47k ohm J
R529	119-4721-15	1/10W 4.7k ohm	R614	119-6821-15	1/10W 6.8k ohm	R741	033-1041-15	1/16W 100k ohm J
R530	119-1031-15	1/10W 10k ohm	R615	116-1591-15	1/4W 1.5 ohm	R742	033-1031-15	1/16W 10k ohm J
R531	119-1031-15	1/10W 10k ohm	R616	116-1591-15	1/4W 1.5 ohm	R743	033-0000-05	1/16W 0 ohm
R537	119-0000-05	1/10W 0 ohm JW	R618	119-1031-15	1/10W 10k ohm	R744	033-2211-15	1/16W 220 ohm J
R538	119-4721-15	1/10W 4.7k ohm	R619	116-1591-15	1/4W 1.5 ohm	R747	033-0000-05	1/16W 0 ohm
R539	119-4721-15	1/10W 4.7k ohm	R620	116-1591-15	1/4W 1.5 ohm	R748	119-1011-15	1/10W 100 ohm
R540	119-1031-15	1/10W 10k ohm	R624	119-1031-15	1/10W 10k ohm	R749	119-1011-15	1/10W 100 ohm
R541	119-1031-15	1/10W 10k ohm	R625	119-4711-15	1/10W 470 ohm	R750	119-1011-15	1/10W 100 ohm
R542	119-0000-05	1/10W 0 ohm JW	R626	116-1221-15	1/4W 1.2k ohm	R751	119-2211-15	1/10W 220 ohm
R543	119-2231-15	1/10W 22k ohm	R628	119-5621-15	1/10W 5.6k ohm	R752	119-2211-15	1/10W 220 ohm
R544	119-0000-05	1/10W 0 ohm JW	R630	116-1221-15	1/4W 1.2k ohm	R753	033-1041-15	1/16W 100k ohm J
R545	119-1031-15	1/10W 10k ohm	R631	119-3321-15	1/10W 3.3k ohm	R754	033-1041-15	1/16W 100k ohm J
		(NX700E)	R632	119-1031-15	1/10W 10k ohm	R755	033-1031-15	1/16W 10k ohm J
			R634	119-4721-15	1/10W 4.7k ohm	R756	032-0163-96	1/2W 27 ohm J

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R757	032-0163-96	1/2W 27 ohm J	R780	119-1041-15	1/10W 100k ohm	X131	061-3013-00	4.33MHz
R758	119-4731-15	1/10W 47k ohm	R781	119-1041-15	1/10W 100k ohm			(NX700E)
R759	033-1031-15	1/16W 10k ohm J	R782	119-1041-15	1/10W 100k ohm	X501	061-3560-90	3.145728MHz AT-41CD2
R760	033-5621-15	1/16W 5.6k ohm J	R783	119-4731-15	1/10W 47k ohm	X503	060-0100-71	HAS-RP2-14-41-11
R761	119-1031-15	1/10W 10k ohm	R997	119-0000-05	1/10W 0 ohm JW	X701	061-3534-90	16.92MHz
R762	119-1531-15	1/10W 15k ohm	R998	119-0000-05	1/10W 0 ohm JW	X702	061-3568-90	32.768kHz
R763	119-1531-15	1/10W 15k ohm			(NX700E)	X703	061-3559-90	9.000MHz
R766	119-8211-15	1/10W 820 ohm	SUP201	060-8057-90	CSA20-141N-T	PWB	039-3646-00	PWB(WITHOUT COMPONENTS)
R767	119-8211-15	1/10W 820 ohm	TH501	002-0315-00	TN10-3U153JT			
R768	119-8211-15	1/10W 820 ohm	TM101	073-0785-90	TERMINAL			
R769	119-4731-15	1/10W 47k ohm	TM102	073-0785-90	TERMINAL			
R772	033-0000-05	1/16W 0 ohm	X101	061-3031-00	4.00MHz			
R779	119-1041-15	1/10W 100k ohm						

D/D PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C750	168-2232-55	0.022uF K	C790	043-6401-90	16V 10uF	R757	032-0140-56	1/10W 12k ohm F
C751	168-2232-55	0.022uF K	C791	168-3332-78	0.033uF K	R758	119-2711-15	1/10W 270 ohm
C752	166-4701-50	47pF CH	C792	168-1022-55	1000pF K	R759	032-0140-22	1/10W 68k ohm F
C753	168-3322-55	3300pF K	C793	168-1022-55	1000pF K	R760	119-3011-15	1/10W 300 ohm
C754	166-3301-50	33pF CH	C794	168-3332-78	0.033uF K	R761	119-1001-15	1/10W 10 ohm
C755	168-2222-55	2200pF K	C795	043-6401-90	16V 10uF	R762	119-1001-15	1/10W 10 ohm
C756	168-1522-55	1500pF K	C796	043-6401-90	16V 10uF	R765	119-1011-15	1/10W 100 ohm
C757	043-0574-90	25V 1.0uF	C797	043-6401-90	16V 10uF	R766	119-1011-15	1/10W 100 ohm
C758	168-1522-55	1500pF K	C798	043-0554-90	25V 10uF	R769	032-0217-52	1/3W 0.082 ohm
C759	043-6400-90	16V 4.7uF K	C799	043-0554-90	25V 10uF	R771	032-0217-51	1/3W 0.039 ohm
C760	043-6400-90	16V 4.7uF K	IC750	051-3569-90	BD9017KV-E2	R772	032-0140-76	1/10W 9.1k ohm F
C763	043-6401-90	16V 10uF	IC751	051-3569-90	BD9017KV-E2	R773	032-0140-00	1/10W 56k ohm F
C764	043-6401-90	16V 10uF	J750	074-0881-20	20P	R774	119-4741-15	1/10W 470k ohm
C765	043-6401-90	16V 10uF	L750	010-3500-92	10uH	R775	119-6221-15	1/10W 6.2k ohm
C766	168-3332-78	0.033uF K	L751	010-3408-61	22uH M	R776	032-0140-56	1/10W 12k ohm F
C767	168-1022-55	1000pF K	L752	010-3408-61	22uH M	R777	119-4721-15	1/10W 4.7k ohm
C768	168-1022-55	1000pF K	L753	010-3500-92	10uH	R778	032-0140-22	1/10W 68k ohm F
C769	168-3332-78	0.033uF K	L754	010-3108-53	330 ohm/100MHz	R779	032-0140-50	1/10W 10k ohm F
C770	043-6401-90	16V 10uF	L755	010-3108-53	330 ohm/100MHz	R780	119-3311-15	1/10W 330 ohm
C771	043-6401-90	16V 10uF	L756	010-3108-54	600 ohm/100MHz	R781	032-0140-05	1/10W 82k ohm F
C772	043-6401-90	16V 10uF	L757	010-3108-53	330 ohm/100MHz	R782	119-5611-15	1/10W 560 ohm
C773	043-0554-90	25V 10uF	L758	010-3108-53	330 ohm/100MHz	R783	119-1001-15	1/10W 10 ohm
C774	043-0554-90	25V 10uF	L759	010-3108-53	330 ohm/100MHz	R784	119-1001-15	1/10W 10 ohm
C775	168-2232-55	0.022uF K	Q750	125-2041-93	RT1N241M	R787	119-1011-15	1/10W 100 ohm
C776	168-2232-55	0.022uF K	Q751	125-8029-90	SP8K23 TB	R788	119-1011-15	1/10W 100 ohm
C777	166-3301-50	33pF CH	Q752	125-8029-90	SP8K23 TB	R791	032-0217-51	1/3W 0.039 ohm
C778	168-2222-55	2200pF K	Q753	125-2041-93	RT1N241M	R793	032-0217-51	1/3W 0.039 ohm
C779	166-3301-50	33pF CH	Q754	125-8029-90	SP8K23 TB	R794	032-0140-90	1/10W 560 ohm F
C780	168-2222-55	2200pF K	Q755	125-8029-90	SP8K23 TB	R795	032-0140-76	1/10W 9.1k ohm F
C781	168-1022-55	1000pF K	R750	032-0140-76	1/10W 9.1k ohm F	R796	032-0140-67	1/10W 3.3k ohm F
C782	043-0574-90	25V 1.0uF	R751	032-0140-00	1/10W 56k ohm F	R797	032-0140-67	1/10W 3.3k ohm F
C783	166-8211-50	820pF CH	R752	119-4741-15	1/10W 470k ohm	R802	032-0140-75	1/10W 1.5k ohm F
C784	043-6400-90	16V 4.7uF K	R753	119-3021-15	1/10W 3k ohm	R803	032-0140-72	1/10W 470 ohm F
C785	043-6400-90	16V 4.7uF K	R754	032-0140-08	1/10W 13k ohm F	PWB	039-3462-00	PWB(WITHOUT COMPONENTS)
C788	043-6401-90	16V 10uF	R755	119-6221-15	1/10W 6.2k ohm			
C789	043-6401-90	16V 10uF	R756	032-0140-89	1/10W 47k ohm F			

Slide PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C5603	168-1042-78	16V 0.1uF K	P5603	076-0478-52	2P	PWB	039-3501-00	PWB(WITHOUT COMPONENTS)
IC5604	051-5806-01	GP1S93	R5603	119-3311-15	1/10W 330 ohm			
IC5606	051-5806-01	GP1S93	R5621	116-5611-15	1/4W 560 ohm			
J5001	074-2225-58	8P	R5625	116-5611-15	1/4W 560 ohm			