


EXPLODE VIEW • PARTS LIST


Control panel section

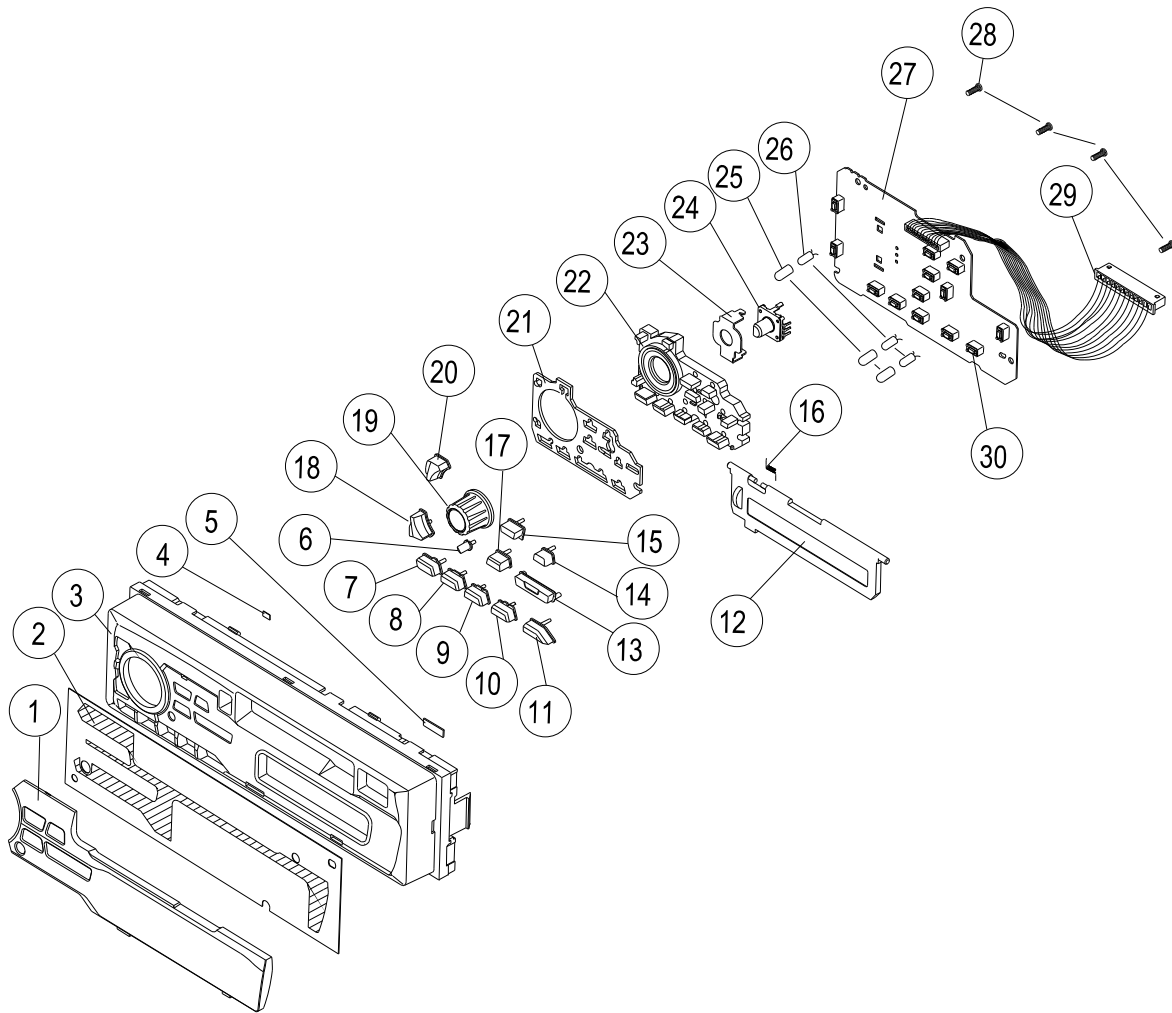

NO.	PART NO	DESCRIPTION	Q'TY
1	373-0967-00	DIAL CVR(PE-1722B-A)	1
	373-0967-06	DIAL CVR(PE-1722K-A)	
2	347-6486-00	DOUBLE FACE	1
3	370-5963-00	ESCUTCHEON(PE-1722B-A)	1
	370-5963-01	ESCUTCHEON(PE-1722K-A)	
4	347-6532-00	SHADE	1
5	347-6275-00	SHADE	1
6	382-6229-00	BUTTON (A-M)	1
7	382-6219-00	BUTTON (1/SCN)	1
8	382-6220-10	BUTTON (2/RPT)	1
9	382-6221-10	BUTTON (3/RDM)	1
10	382-6222-10	BUTTON (4/DISP)	1
11	382-6223-00	BUTTON (5/>/II)	1
12	320-0583-00	DUSTPROOF CVR	1
13	382-6234-00	BUTTON(PS/AS)	1
14	382-6227-10	BUTTON(Z-E)	1
15	382-6226-10	BUTTON(FNC)	1

NO.	PART NO	DESCRIPTION	Q'TY
16	750-3217-00	SPRING	1
17	382-6228-10	BUTTON(BND)	1
18	382-6225-00	BUTTON(SRCH DN)	1
19	380-5525-00	KNOB(ROTATE)	1
20	382-6224-00	BUTTON(SRCH UP)	1
21	345-8606-00	SPONGE	1
22	335-6578-00	ILLUMI PLATE	1
23	331-3197-00	JOG SW HOLDER	1
24	016-9900-81	VR W/SHAFT	1
25	345-2830-20	RUBBER PART	3
26	017-0410-00	PILOT LAMP(14V 50mA)	3
27	039-1869-01	SWITCH PWB (WITHOUT COMPONENTS)	1
28	716-0872-11	SCREW	4
29	854-4527-51	EXTENSION LEAD	1
30	013-3812-11	TACT SWITCH	13

Main section

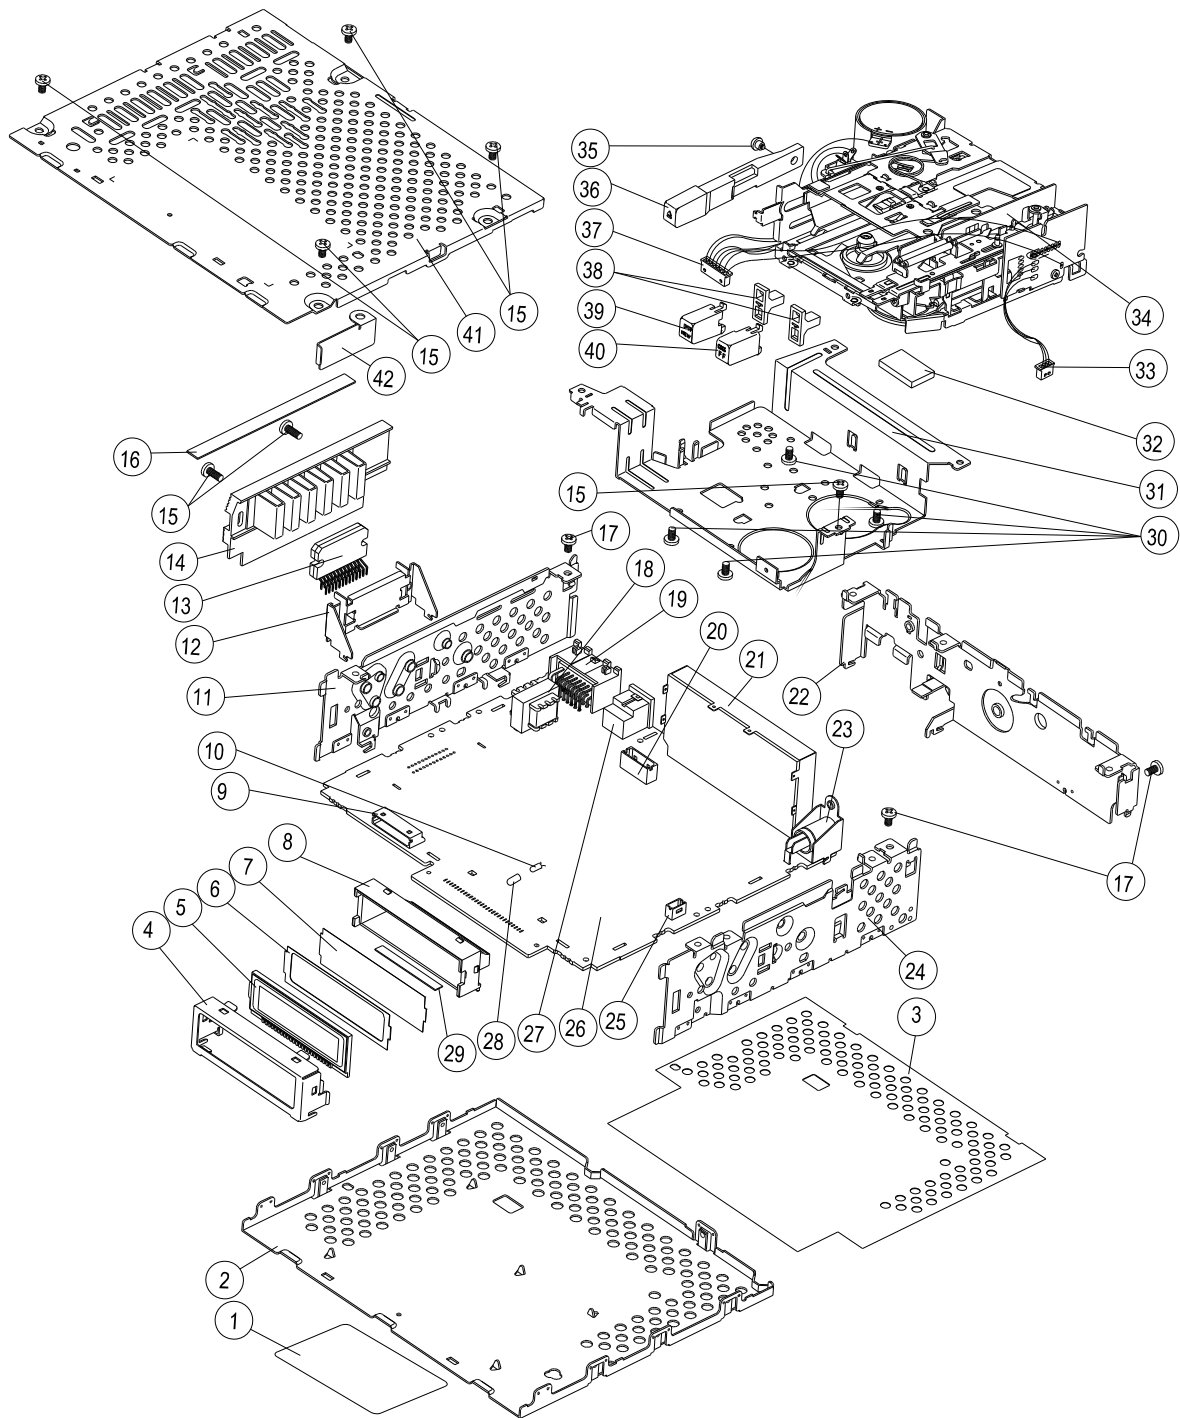

NO.	PART NO	DESCRIPTION	QTY
1	286-9543-00	SET PLATE(PE-1722B-A)	1
	286-9562-00	SET PLATE(PE-1722K-A)	
2	304-0460-01	LOWER CVR	1
3	347-5918-00	INSULATOR	1
4	331-3199-00	LCD CVR	1
5	379-1200-31	LCD	1
6	347-6487-00	SHADE	1
7	347-6488-00	FILM	1
8	335-6587-00	LCD HOLDER	1
9	076-0374-12	PLUG(12PIN)	1
10	017-0441-00	PILOT LAMP	1
11	305-0274-31	SIDE CVR(L)	1
12	331-2255-20	IC HOLDER	1
13	051-2031-11	IC LA4743B	1
14	313-1744-20	HEAT SINK	1
15	731-3006-80	TAP TIGHT SCREW	7
16	345-8511-20	RUBBER SHEET	1
17	714-3006-81	MACHINE SCREW	3
18	009-9006-60	CHOKE	1
19	074-1214-00	OUTLET SOCKET	1
20	076-9000-07	PLUG(7PIN)	1
21	880-2087G	TUNER PACK	1

NO.	PART NO	DESCRIPTION	QTY
22	307-0626-01	REAR CVR	1
23	092-4000-50	ANT RECEPTOR	1
24	305-0275-30	SIDE CVR(R)	1
25	076-9000-03	PLUG(3PIN)	1
26	039-1870-01	MAIN PWB (WITHOUT COMPONENTS)	1
27	074-1126-10	OUTLET SOCKET	1
28	345-2830-20	RUBBER PART	1
29	347-6554-00	DOUBLE FACE	1
30	714-3004-81	MACHINE SCREW	4
31	331-3196-00	MECH BRKT	1
32	345-8636-00	SPONGE	1
33	854-4436-00	EXTENSION LEAD	1
34	948-0611-00	TAPE MECH	1
35	716-1719-00	SPECIAL SCREW	1
36	382-6243-01	BUTTON(EJECT)	4
37	854-4528-51	EXTENSION LEAD	1
38	335-6586-00	SPACER(FLOAT)	2
39	382-4456-00	BUTTON(REW)	1
40	382-4455-00	BUTTON(FF)	1
41	303-0472-01	UPPER CVR	1
42	331-2744-00	STOPPER	1

ELECTRICAL PARTS LIST

Main PWB section (B1)

REFNo.	PART No.	DESCRIPTION	REFNo.	PART No.	DESCRIPTION	REFNo.	PART No.	DESCRIPTION
C101	166-2201-50	22p	CN101	379-1199-31	LCD	R113	119-2221-15	1/10W 2.2K
C102	166-2201-50	22p	CN201	076-9000-03	3PIN	R114	111-6821-98	1/4W 68K
C103	182-1073-22	10-100μF	CN202	076-9000-07	7PIN	R115	119-1021-15	1/10W 1K
C104	168-1022-55	1000p	CN3	074-1126-10	C-BUS	R116	119-6831-15	1/10W 68K
C105	168-1042-78	0.1μF	CN401	074-1214-00	OUT SOCKET	R117	119-1021-15	1/10W 1K
C106	168-1042-78	0.1μF	CN801	092-4000-50	ANT	R118	119-6831-15	1/10W 68K
C107	166-1011-50	100p	CN803	076-0374-12	12PIN	R119	119-1021-15	1/10W 1K
C108	166-3311-50	330p	CP201	854-4436-00		R120	119-1031-15	1/10W 10K
C109	166-1011-50	100p	CP202	854-4528-50		R121	119-1021-15	1/10W 1K
C110	166-1011-50	100p	CP803	854-4527-50		R122	119-6831-15	1/10W 68K
C111	168-1042-78	0.1μF	D101	001-0330-00	ISS119-TE	R123	119-1021-15	1/10W 1K
C112	182-1053-63	50-1μF	D102	001-0330-00	ISS119-TE	R124	119-5621-15	1/10W 5.6K
C113	166-1011-50	100p	D401	001-0188-01	IS1885A	R125	119-1031-15	1/10W 10K
C200	166-1011-50	100p	D402	001-0466-01	S5688B	R127	119-4731-15	1/10W 47K
C201	166-6811-50	680p	D403	001-0466-01	S5688B	R128	119-2231-15	1/10W 22K
C202	166-6811-50	680p	D404	001-0466-01	S5688B	R129	119-2231-15	1/10W 22K
C203	182-1073-22	10-100μF	D405	001-0466-01	S5688B	R130	119-2231-15	1/10W 22K
C204	182-1073-22	10-100μF	D406	001-0466-01	S5688B	R131	119-2231-15	1/10W 22K
C205	166-5601-50	56p	D407	001-0466-01	S5688B	R201	119-4731-15	1/10W 47K
C206	166-5601-50	56p	D408	001-0466-01	S5688B	R202	119-4731-15	1/10W 47K
C207	042-9002-05	50-2.2μF LN	D409	001-0466-01	S5688B	R203	119-3301-15	1/10W 33
C208	042-9002-05	50-2.2μF LN	D501	001-0330-00	ISS119-TE	R204	119-1241-15	1/10W 120K
C209	168-2232-55	0.022μF	D502	001-0330-00	ISS119-TE	R205	119-6821-15	1/10W 6.8K
C210	168-2232-55	0.022μF	D701	001-0346-44	MTZ8.2JB	R206	119-3301-15	1/10W 33
C211	182-4763-33	16-47μF	D702	001-0466-01	S5688B	R207	119-1241-15	1/10W 120K
C212	168-1032-55	0.01μF	D703	001-0376-46	MTZ9.1JA	R208	119-6821-15	1/10W 6.8K
C301	182-2253-62	50-2.2μF	D704	001-0330-00	ISS119-TE	R209	111-1021-98	1/4W 1K
C302	182-1053-63	50-1μF	D705	001-0346-36	MTZ6.2JC	R210	119-1031-15	1/10W 10K
C303	182-2253-62	50-2.2μF	D707	001-0330-00	ISS119-TE	R211	119-1011-15	1/10W 100
C304	182-2253-62	50-2.2μF	D708	001-0330-00	ISS119-TE	R302	119-3321-15	1/10W 3.3K
C305	182-1053-63	50-1μF	D709	001-0330-00	ISS119-TE	R303	119-1531-15	1/10W 15K
C306	182-2253-62	50-2.2μF	D710	001-0346-35	MTZ6.2JB	R304	119-6831-15	1/10W 68K
C307	182-2263-33	16-22μF	D715	001-0330-00	ISS119-TE	R305	119-6831-15	1/10W 68K
C308	182-1053-63	50-1μF	D720	001-0346-41	MTZ7.5JB	R306	119-1531-15	1/10W 15K
C309	182-1053-63	50-1μF	D801	060-0122-91	SURGE	R307	119-3321-15	1/10W 3.3K
C310	168-2722-55	2700p	IC101	052-1926-01	LC72338	R309	119-1031-15	1/10W 10K
C311	168-2722-55	2700p	IC201	051-0272-00	LA3161	R310	119-1031-15	1/10W 10K
C312	182-2253-62	50-2.2μF	IC301	051-5022-90	LC75421M	R401	119-1531-15	1/10W 15K
C313	182-2253-62	50-2.2μF	IC401	051-2031-11	LA4743B	R402	111-1531-98	1/4W 15K
C314	168-1032-55	0.01μF	IC501	051-0160-01	74LS07	R403	119-1531-15	1/10W 15K
C315	168-1032-55	0.01μF	IC502	051-0142-01	4013	R404	111-1531-98	1/4W 15K
C316	182-1053-63	50-1μF	L101	010-9000-02	220μH	R405	119-1231-15	1/10W 12K
C317	182-1053-63	50-1μF	L103	010-2230-02	0.22μH	R406	111-1521-98	1/4W 1.5K
C318	182-1073-22	10-100μF	L401	009-9006-60	CHOKE	R502	119-1021-15	1/10W 1K
C401	172-2231-15	0.022μF	L501	010-2230-26	22μH	R503	119-2231-15	1/10W 22K
C402	042-0447-00	16-2200μF	L801	010-2003-04	COIL	R504	119-4721-15	1/10W 4.7K
C403	172-1041-11	0.1μF	L802	010-9000-05	5.6μH	R505	119-1021-15	1/10W 1K
C404	172-1041-11	0.1μF	L803	010-9000-05	5.6μH	R506	119-1021-15	1/10W 1K
C405	172-1041-11	0.1μF	PL701	017-0441-00	9V85mA	R507	119-5621-15	1/10W 5.6K
C406	172-1041-11	0.1μF	Q201	101-1240-00	B1240	R508	119-1031-15	1/10W 10K
C407	182-2263-33	16-22μF	Q501	125-2007-02	DTC124ES	R509	119-1031-15	1/10W 10K
C408	182-4763-33	16-47μF	Q502	102-3732-00	C3732	R510	119-1031-15	1/10W 10K
C410	182-3343-63	50-0.33μF	Q701	103-1858-00	D1858	R511	119-5631-15	1/10W 56K
C411	181-4743-62	50-0.47μF LN	Q702	103-1858-00	D1858	R512	119-5631-15	1/10W 56K
C412	181-4743-62	50-0.47μF LN	Q703	101-1240-00	B1240	R701	111-4711-88	1/2W 470
C413	181-4743-62	50-0.47μF LN	Q704	125-2007-02	DTC124ES	R702	111-1091-98	1/4W 1
C414	181-4743-62	50-0.47μF LN	Q705	191-1240-00	B1240	R703	111-1091-98	1/4W 1
C501	182-1073-22	10-100μF	Q706	125-2007-02	DTC124ES	R706	111-1221-98	1/4W 1.2K
C701	168-1042-78	0.1μF	Q707	100-1048-00	A1048	R706	111-2231-98	1/4W 22K
C702	182-1073-22	10-100μF	Q708	102-2458-00	2SC2458GR	R707	119-1031-15	1/10W 10K
C703	182-1073-22	10-100μF	Q709	103-1858-00	D1858	R708	111-1591-98	1/4W 1.5
C704	168-1032-55	0.01μF	Q710	103-1858-00	D1858	R709	111-1591-98	1/4W 1.5
C706	182-4763-33	16-47μF	Q711	103-1858-00	D1858	R710	111-1591-98	1/4W 1.5
C707	182-1073-22	10-100μF	Q712	125-2003-02	RN1202	R711	111-1591-98	1/4W 1.5
C801	166-2201-50	22p	Q713	125-2003-02	RN1202	R712	119-1031-15	1/10W 10K
C802	166-1801-50	18p	Q714	125-0004-01	DTA114ES	R713	111-3321-98	1/4W 3.3K
C803	168-1032-55	0.01μF	Q715	102-2458-00	2SC2458GR	R714	111-3321-98	1/4W 3.3K
C804	168-2232-55	0.022μF	Q716	125-0003-02	RN2202	R715	119-2231-15	1/10W 22K
C805	168-1032-55	0.01μF	Q801	125-2007-02	DTC124ES	R716	119-1031-15	1/10W 10K
C806	182-2263-33	16-22μF	Q802	100-1548-00	A1548	R717	111-1221-98	1/4W 1.2K
C807	168-1032-55	0.01μF	Q803	100-1548-00	A1548	R718	111-4711-88	1/2W 470
C808	168-1032-55	0.01μF	Q804	102-2458-00	2SC2458GR	R719	111-1091-98	1/4W 1
C809	182-1073-22	10-100μF	Q805	102-2458-00	2SC2458GR	R720	111-1091-98	1/4W 1
C810	168-2732-55	0.027μF	R101	119-1031-15	1/10W 10K	R721	111-3321-98	1/4W 3.3K
C811	168-2732-55	0.027μF	R102	119-1031-15	1/10W 10K	R722	119-4721-15	1/10W 4.7K
C813	168-1032-55	0.01μF	R103	119-1031-15	1/10W 10K	R723	119-1041-15	1/10W 100K
C814	182-1053-63	50-1μF	R104	119-1031-15	1/10W 10K	R724	111-1021-98	1/4W 1K
C815	168-1532-55	0.015μF	R105	119-1031-15	1/10W 10K	R726	119-2221-15	1/10W 2.2K
C816	168-1032-55	0.01μF	R106	119-6831-15	1/10W 68K	R727	111-4721-98	1/4W 4.7K
C817	182-3353-62	50-3.3μF	R107	119-6831-15	1/10W 68K	R728	119-1031-15	1/10W 10K
C818	182-1073-22	10-100μF	R108	119-1031-15	1/10W 10K	R729	119-1031-15	1/10W 10K
C819	168-1032-55	0.01μF	R109	119-2231-15	1/10W 22K	R801	119-2221-15	1/10W 2.2K
C820	168-2232-55	0.022μF	R112	119-2221-15	1/10W 2.2K	R802	119-2221-15	1/10W 2.2K

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION
R803	119-4741-15	1/10W 470K
R804	119-1021-15	1/10W 1K
R805	119-5621-15	1/10W 5.6K

REF No.	PART No.	DESCRIPTION
R806	119-1031-15	1/10W 10K
R807	119-1031-15	1/10W 10K
R810	119-1011-15	1/10W 100

REF No.	PART No.	DESCRIPTION
R811	119-4721-15	1/10W 4.7K
R812	119-2221-15	1/10W 2.2K
TU1	880-2087G	TUNER

Switch PWB section (B2)


REF No.	PART No.	DESCRIPTION
PL601	017-0410-00	14V40mA
PL602	017-0410-00	14V40mA
PL603	017-0410-00	14V40mA
SW601	013-3812-01	SWITCH
SW602	013-3812-01	SWITCH
SW603	013-3812-01	SWITCH

REF No.	PART No.	DESCRIPTION
SW604	013-3812-01	SWITCH
SW605	013-3812-01	SWITCH
SW606	013-3812-01	SWITCH
SW607	013-3812-01	SWITCH
SW608	013-3812-01	SWITCH
SW609	013-3812-01	SWITCH

REF No.	PART No.	DESCRIPTION
SW610	013-3812-01	SWITCH
SW611	013-3812-01	SWITCH
SW612	013-3812-01	SWITCH
SW613	013-3812-01	SWITCH


PRINTED WIRING BOARD:

Switch PWB section (B2)

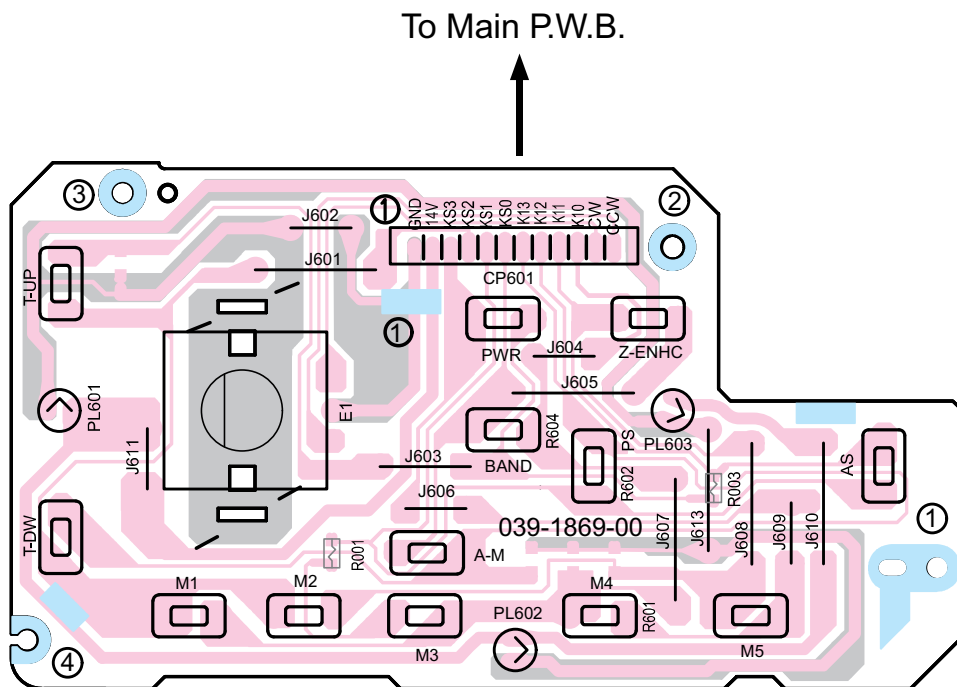

■ EXPLODE VIEW

Tape mechanism section: 948-0611-00

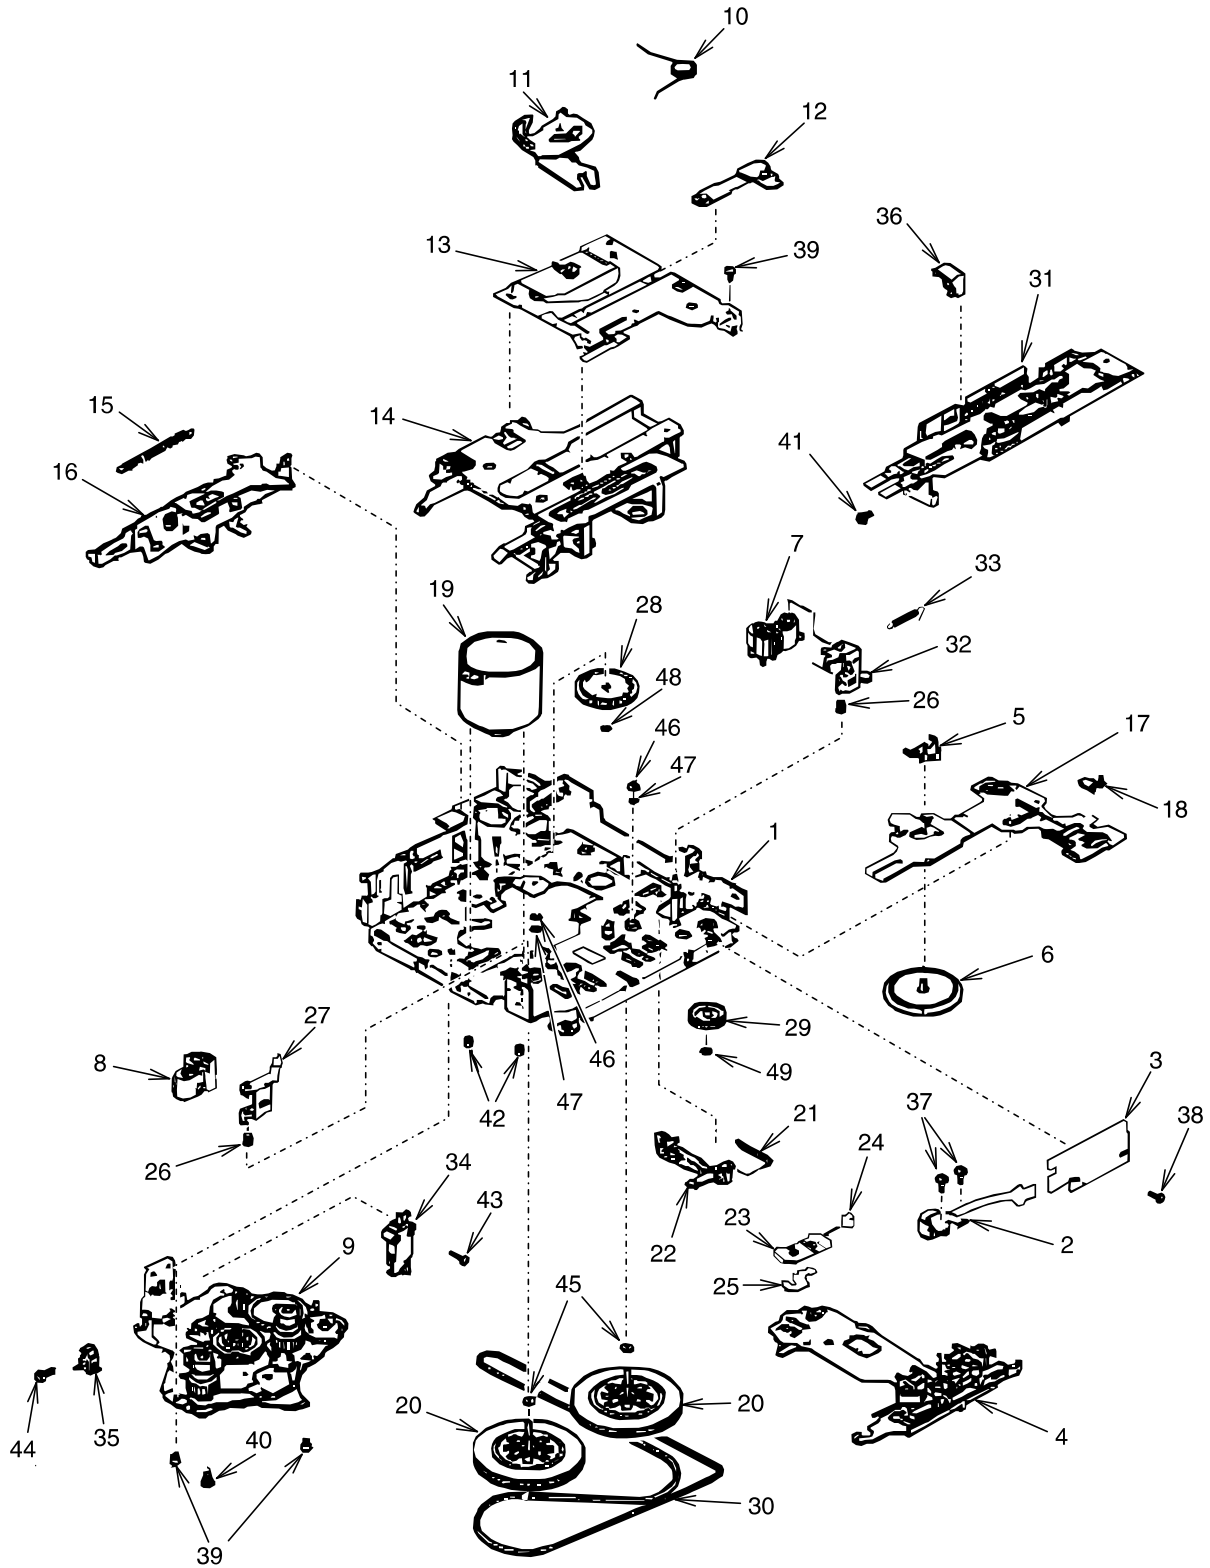

■ PARTS LIST

Tape mechanism section: 948-0611-00

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	CHASSIS(B) RIVET ASSY	1
2	658-0228-01	P HEAD MS35P-SF005	1
3	658-0228-02	HEAD SW ASSY	1
4	658-0228-03	HEAD PANEL ASSY	1
5	658-0228-04	P. GEAR METAL	1
6	658-0228-05	P. GEAR	1
7	658-0228-06	PINCH ROLLER ARM(F) ASSY	1
8	658-0228-07	PINCH ROLLER ARM(R) ASSY	1
9	658-0228-08	MG PLATE Z ASSY	1
10	658-0228-09	REVERSE SPRING	1
11	658-0228-10	P.S ACTUATOR PLATE B	1
12	658-0228-11	PACK SLIDE B	1
13	658-0228-12	CASE LEFTER B	1
14	658-0228-13	CASSETTE CASE ASSY	1
15	658-0228-14	PUSH LEVER SPRING	1
16	658-0228-15	PUSH LEVER Z RIVET ASSY	1
17	658-0228-16	MAIN PLATE	1
18	658-0228-17	H.S SPRING	1
19	658-0228-18	MOTOR ASSY EG520ED-3BB	1
20	658-0228-19	FL CAPSTAN ASSY	2
21	658-0228-20	TA. SPRING	1
22	658-0228-21	TRIGGER ARM	1
23	658-0228-22	H.P PUSH ARM B	1
24	658-0228-23	H.P ROLLER	1
25	658-0228-24	H.P PUSH PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
26	658-0228-25	P.P SPRING	2
27	658-0228-26	HP RETURN ARM	1
28	658-0228-27	MAIN GEAR V	1
29	658-0228-28	MIDDLE PULLEY	1
30	658-0228-29	MAIN BELT	1
31	658-0228-30	FR LEVER(B) ASSY	1
32	658-0228-31	LOCK PLATE	1
33	658-0228-32	LOCK PLATE SPRING	1
34	658-0228-33	SW QAS-1229-4	1
35	658-0228-34	PUSH SW SW-230-2	1
36	658-0228-35	CASE STOPPER	1
37	658-0228-36	FIX SCREW	2
38	658-0228-37	TAMS SCREW(TAPPING)S2.0x5.0	1
39	658-0228-38	CAMERA SCREW(TAPPING)S2.0x3.0	3
40	658-0228-39	CAMERA TAPPING SCREWS S32.0x2.0	1
41	658-0228-40	CAMERA SCREW(TAMS)2.6x4.5	1
42	658-0228-41	TAMS SCREW 2.0x3.0	2
43	658-0228-42	TS.S TAMS SCREW 2.0x8.5	1
44	658-0228-43	TAMS TAPPING SCREWS 2.0x7.0	1
45	658-0228-44	HIMELON WASHER 1.55x3.8x0.13	2
46	658-0228-45	LUMILAR WASHER (CUT) 1.25x3.2x0.5	2
47	658-0228-46	HIMELON WASHER 1.55x3.0x0.2	2
48	658-0228-47	HIMELON WASHER (CUT) 1.2x3.0x0.25	1
49	658-0228-48	P. WASHER (CUT) 0.85x2.8x0.25	1