


Packing Method View

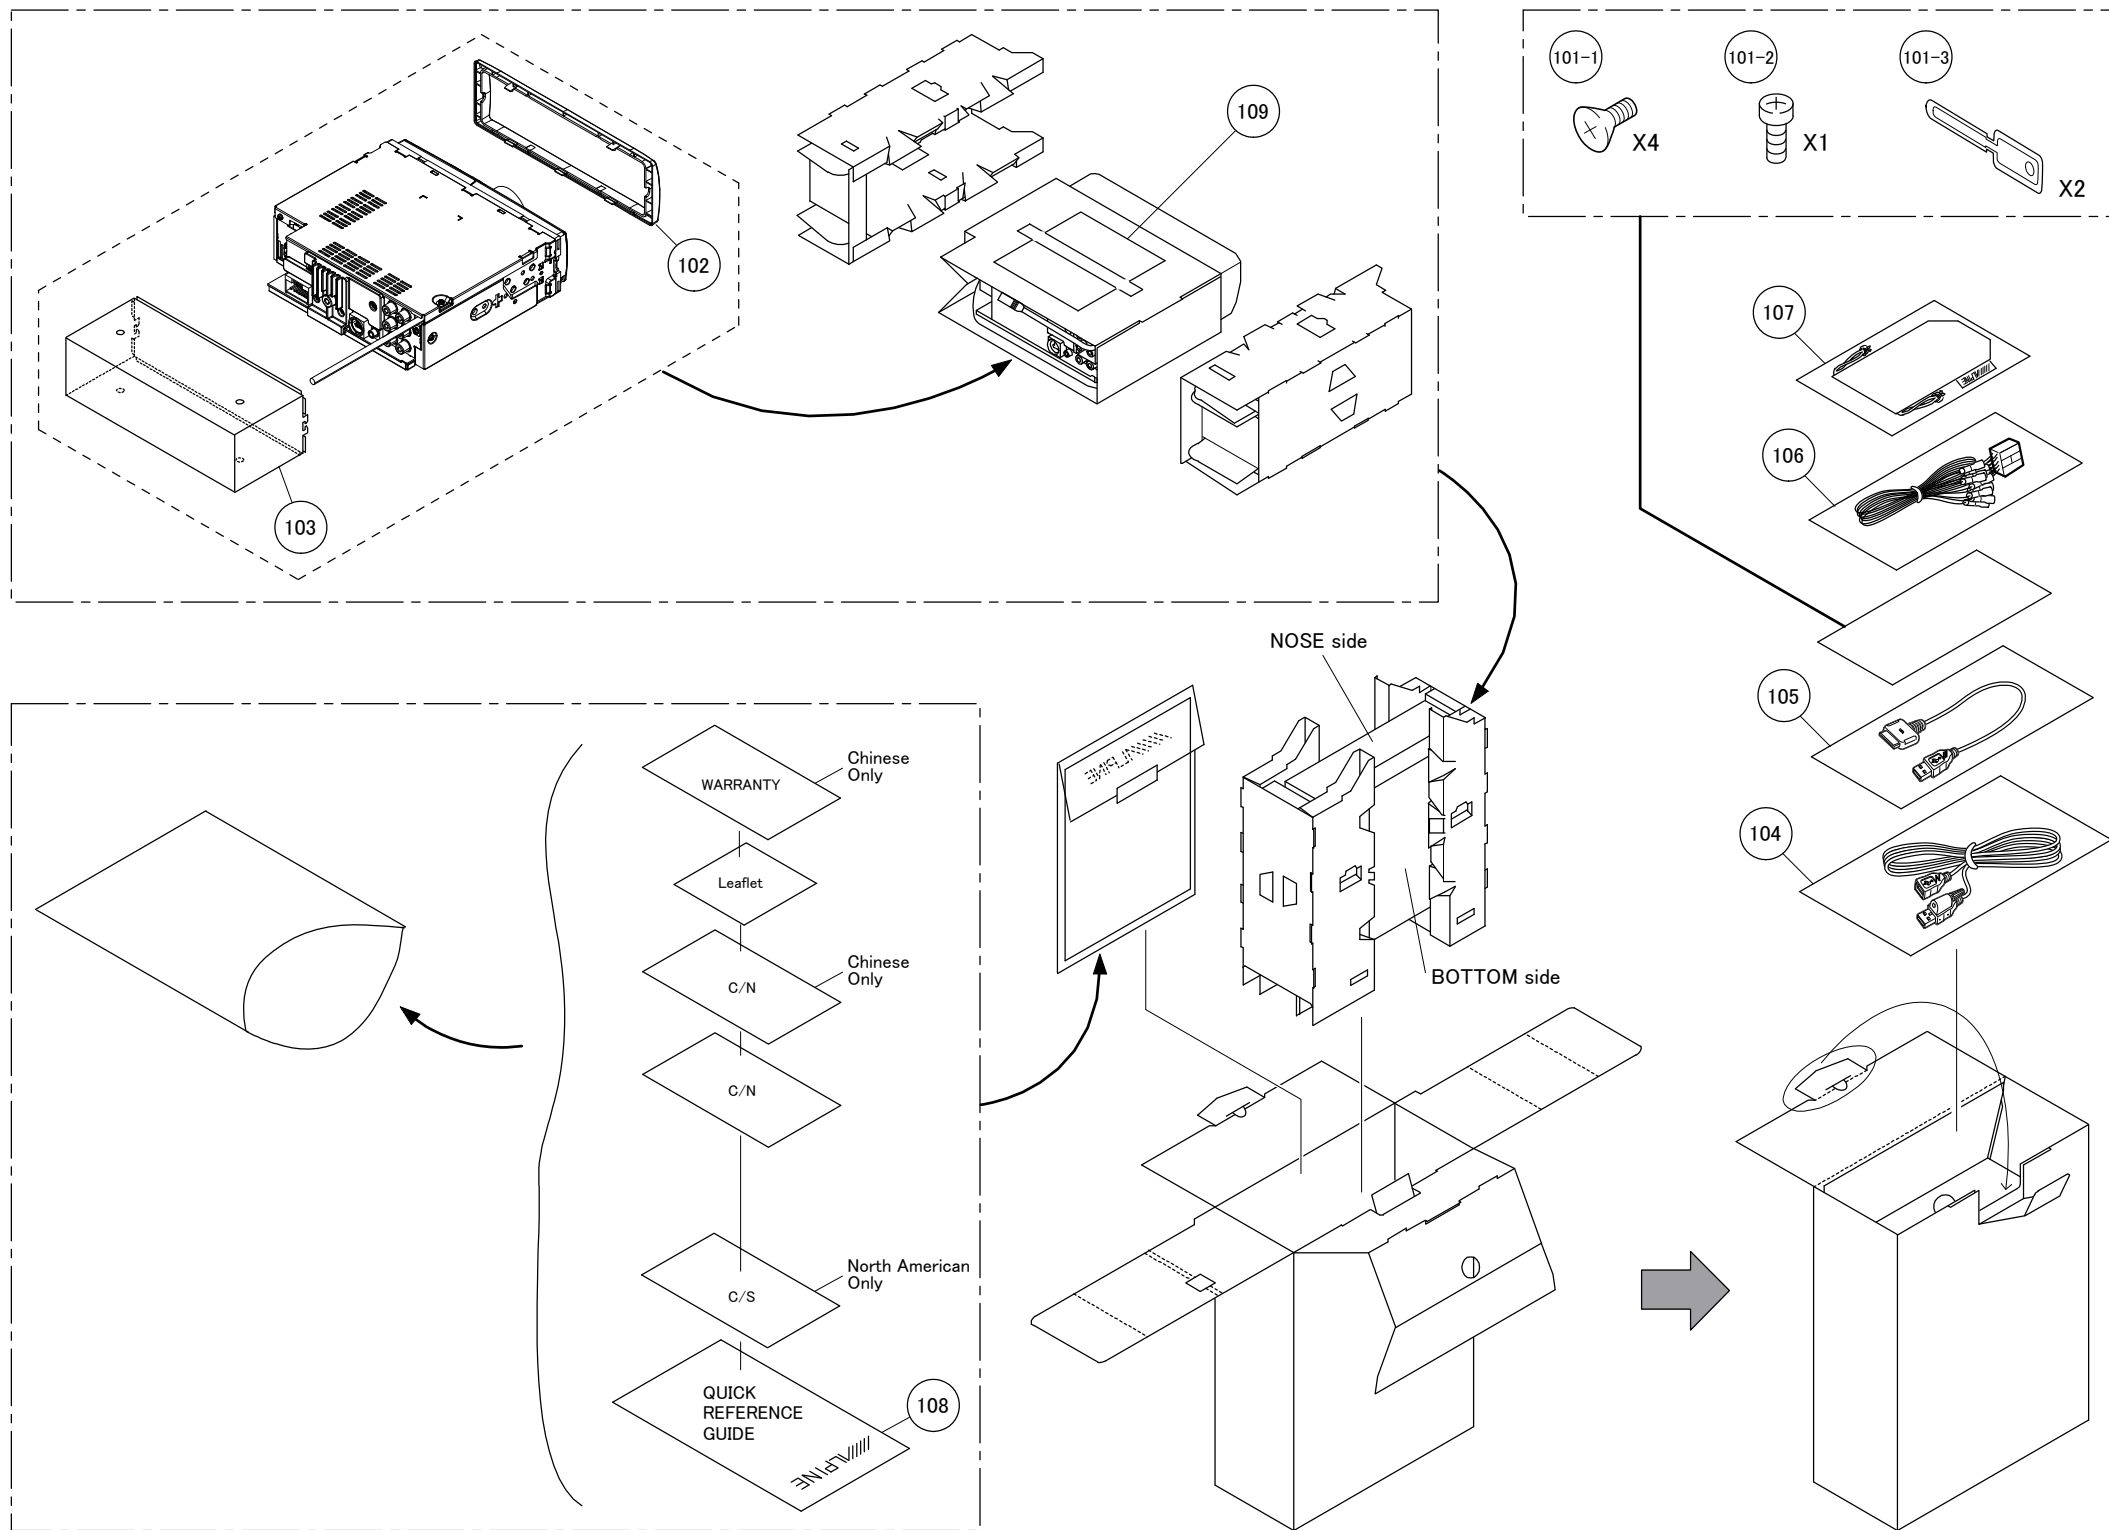

MODEL	Symbol No.	Parts No.	Description
	101-1	03S60820Y16	SCR,MCH 5X8 ZN A
	101-2	03S60824Y01	SCR,WEV 1.7X4 ZN A
	101-3	07-01964Z01	BKT,RELEASE
	102	33C04102K05	FACE,PLATE
	103	15-01970Z01	CASE,INNER
	104	09-09243Z01	ASSY,Z0607R
	105	09-09244Z01	ASSY,Z0617R
	106	09-09395Z01	ASSY,ANIC-0032-01A
	107	15-09847Z01	CARRYING,CASE
#1	108	68-08564Z74	I/M AOAM AOTA
\$1	108	68-08564Z77	I/M AAO AOTA
%1	108	68-08564Z78	I/M AOCH AOTA
	109	68-10334Z02	O/M-CDROM XPOD

Mark Model Code

#1 iDA-X001 (North American) Only,


\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

System Connection

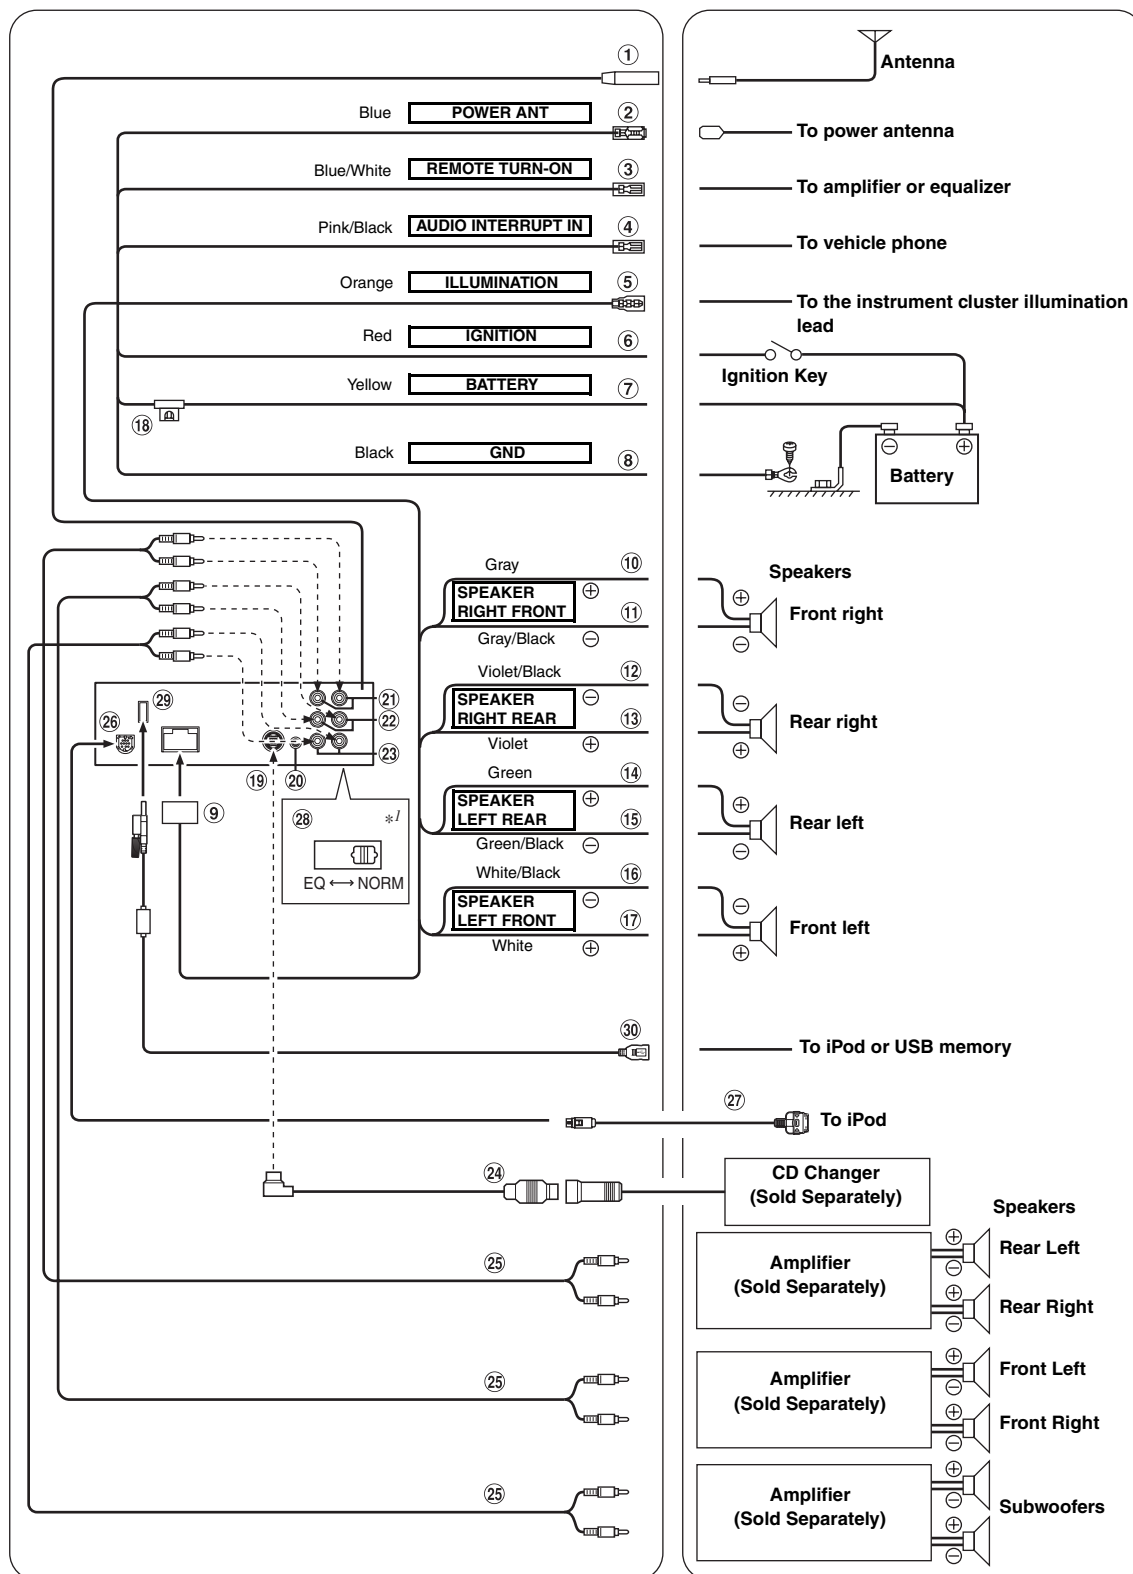

*1 The system switch is located on the bottom of the unit.

- ① **Antenna Receptacle**
- ② **Power Antenna Lead (Blue)**

Connect this lead to the +B terminal of your power antenna, if applicable.

 - *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier, or a signal processor, etc.*
- ③ **Remote Turn-On Lead (Blue/White)**

Connect this lead to the remote turn-on lead of your amplifier or signal processor.
- ④ **Audio Interrupt In Lead (Pink/Black)**
- ⑤ **Illumination Lead (Orange)**

This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the iDA-X001 to dim whenever the vehicle's lights are turned on.
- ⑥ **Switched Power Lead (Ignition) (Red)**

Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.
- ⑦ **Battery Lead (Yellow)**

Connect this lead to the positive (+) post of the vehicle's battery.
- ⑧ **Ground Lead (Black)**

Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
- ⑨ **Power Supply Connector**
- ⑩ **Right Front (+) Speaker Output Lead (Gray)**
- ⑪ **Right Front (-) Speaker Output Lead (Gray/Black)**
- ⑫ **Right Rear (-) Speaker Output Lead (Violet/Black)**
- ⑬ **Right Rear (+) Speaker Output Lead (Violet)**
- ⑭ **Left Rear (+) Speaker Output Lead (Green)**
- ⑮ **Left Rear (-) Speaker Output Lead (Green/Black)**
- ⑯ **Left Front (-) Speaker Output Lead (White/Black)**
- ⑰ **Left Front (+) Speaker Output Lead (White)**
- ⑱ **Fuse Holder (10A)**
- ⑲ **Ai-NET Connector**

Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.

 - *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*
- ⑳ **Steering Remote Control Interface Connector**

To steering Remote control interface box.
- ㉑ **Rear Output RCA Connectors**

RED is right and WHITE is left.
- ㉒ **Front Output RCA Connectors**

RED is right and WHITE is left.
- ㉓ **Subwoofer RCA Connectors**

RED is right and WHITE is left.
- ㉔ **Ai-NET Cable (Included with CD Changer)**
- ㉕ **RCA Extension Cable (sold separately)**
- ㉖ **iPod Direct Connector**

Control iPod signals.
Connect this to an iPod or to an optional Bluetooth Box. To use a hands-free mobile phone, an optional Bluetooth Box connection is required. For details on connection, refer to the Owner's Manual of the Bluetooth Box.
- ㉗ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**
- ㉘ **System Switch**

When connecting a processor or divider using Ai-NET, place this switch in the EQ position. When no device is connected, leave the switch in the NORM position.

 - *Be sure to turn the power off to the unit before changing the switch position.*
- ㉙ **USB Connector**

Connect USB cable.
- ㉚ **USB cable**

Connect this to a USB memory or to an iPod. To use an iPod, iPod Dock interface cable connection is required.


 - *Use the supplied USB cable. If a USB cable other than the supplied is used, correct performance cannot be guaranteed.*
 - *Route the USB cable away from other cables.*

To prevent external noise from entering the audio system.

- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

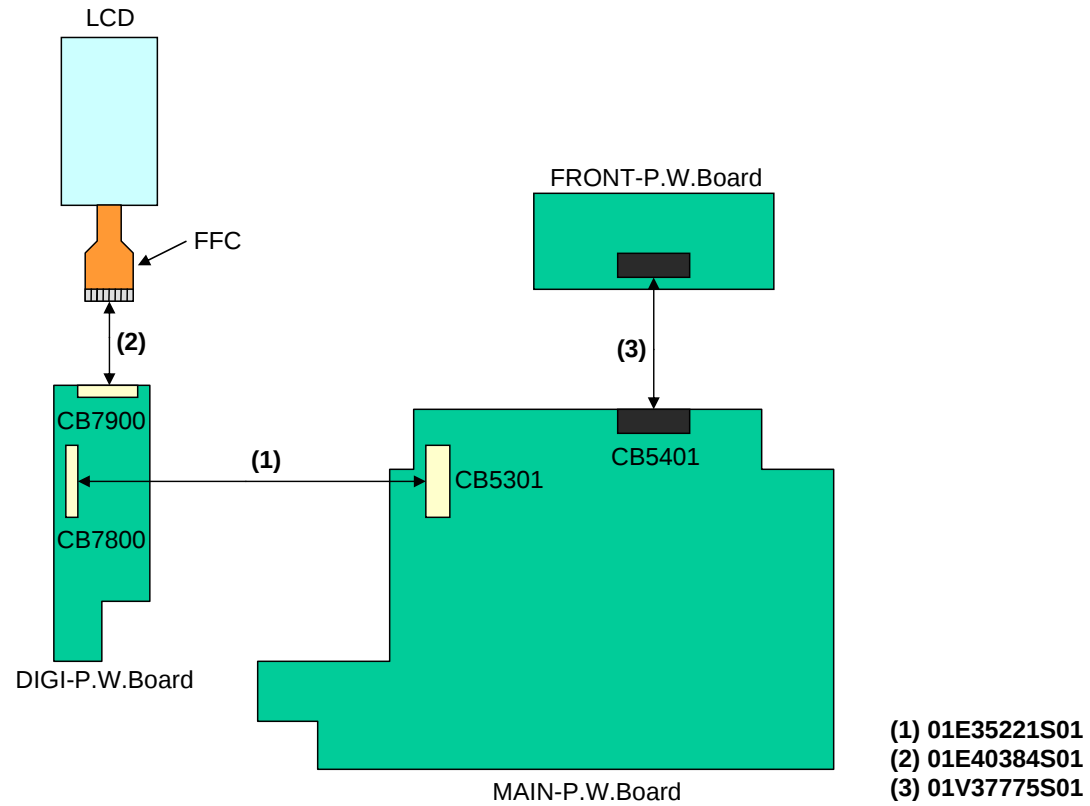

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			ANT1001	09-06103Z02	ASSY,ANID-0035-02A
MAIN-P.W.Board			BZ5101	50T15447Y02	BUZZER,PKM13EPY -R5
MAIN-P.W.Board			C1002	08S45677W54	CAP,CER 561J-CH1H-CP
MAIN-P.W.Board			C1003	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C1004	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C1006	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C1007	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C1008	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C1009	08S82122F21	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C1010	08S82122F17	CAP,CER.15RJ-CH1H-CP
MAIN-P.W.Board			C1011	08S82122F17	CAP,CER.15RJ-CH1H-CP
MAIN-P.W.Board			C2001	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C2002	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2003	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2004	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2005	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2006	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2007	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2008	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2009	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2010	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2011	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C2012	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C2013	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C2014	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C2015	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2016	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2017	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board			C2018	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board			C2019	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C2020	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2021	08S35374W11	CAP,CER 475K-B0J -CP
MAIN-P.W.Board			C2022	08S35374W11	CAP,CER 475K-B0J -CP
MAIN-P.W.Board			C2101	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C2102	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C2103	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C2104	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C2105	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2106	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2107	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2108	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2109	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2110	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2111	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2112	08S65674Y03	CAP,CER 225KX5R1A-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2113	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2114	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2115	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2116	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2117	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2118	08S65674Y03	CAP,CER 225KX5R1A-CP
MAIN-P.W.Board			C2301	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2302	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2303	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2304	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2305	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2306	08S35349Y08	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C2307	08S65676Y01	CAP,CER 335KX7R1A-CP
MAIN-P.W.Board			C2308	08S65676Y01	CAP,CER 335KX7R1A-CP
MAIN-P.W.Board			C2309	08S65676Y01	CAP,CER 335KX7R1A-CP
MAIN-P.W.Board			C2310	08S65676Y01	CAP,CER 335KX7R1A-CP
MAIN-P.W.Board			C2311	08S65676Y01	CAP,CER 335KX7R1A-CP
MAIN-P.W.Board			C2312	08S65670Y03	CAP,CER 335KX5R1E-CP
MAIN-P.W.Board			C2501	08S45676W68	CAP,CER.392K-B1H -CP
MAIN-P.W.Board			C2601	08T81833F07	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2602	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C2603	08S60102F40	CAP,CER 224K-B1E -CP
MAIN-P.W.Board			C2604	08S60102F40	CAP,CER 224K-B1E -CP
MAIN-P.W.Board			C2605	08S60102F40	CAP,CER 224K-B1E -CP
MAIN-P.W.Board			C2606	08S60102F40	CAP,CER 224K-B1E -CP
MAIN-P.W.Board			C2607	08S35349Y11	CAP,CER 223K-B1H -CP
MAIN-P.W.Board			C2701	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2702	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2703	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2704	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2705	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2706	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2707	08S65674Y06	CAP,CER 475KX5R1A-CP
MAIN-P.W.Board			C2708	08S65674Y06	CAP,CER 475KX5R1A-CP
MAIN-P.W.Board			C2709	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2710	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2711	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2712	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2713	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2714	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2715	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2716	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2717	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2718	08S35374W11	CAP,CER 475K-B0J -CP
MAIN-P.W.Board			C2719	08S65674Y06	CAP,CER 475KX5R1A-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2720	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2721	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2722	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2723	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2724	08S45677W44	CAP,CER.221J-CH1H-CP
MAIN-P.W.Board			C2725	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2726	08S45677W12	CAP,CER.10RD-CH1H-CP
MAIN-P.W.Board			C2727	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2728	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2729	08S65674Y06	CAP,CER 475KX5R1A-CP
MAIN-P.W.Board			C2730	08S65674Y06	CAP,CER 475KX5R1A-CP
MAIN-P.W.Board			C2731	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2732	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C2733	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C3001	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3002	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3003	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3004	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3005	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3006	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C3007	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C3101	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C3301	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C3501	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5001	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C5002	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5003	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C5004	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C5005	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C5006	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C5007	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C5008	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C5009	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5010	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5011	08S35349Y16	CAP,CER 105K-B1A -CP
MAIN-P.W.Board			C5012	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C5014	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C5015	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C5201	08S45676W89	CAP,CER 473K-B1E -CP
MAIN-P.W.Board			C5202	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5203	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5204	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5301	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5302	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C5401	08S45676W80	CAP,CER 223K-B1E -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5402	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C5403	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C6001	08S45677W36	CAP,CER.101J-CH1H-CP
MAIN-P.W.Board			C6002	08S45677W36	CAP,CER.101J-CH1H-CP
MAIN-P.W.Board			C6003	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C6004	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C6005	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C6006	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C6301	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C6302	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board			C6304	08T15807W05	CAP,104-B-K-1H -CP
MAIN-P.W.Board			C6401	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6402	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6501	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C6502	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C6503	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C6701	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C6702	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C6703	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C6704	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C6705	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6706	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6707	08S65670Y03	CAP,CER 335KX5R1E-CP
MAIN-P.W.Board			C6708	08S65670Y03	CAP,CER 335KX5R1E-CP
MAIN-P.W.Board			C6709	08S65670Y03	CAP,CER 335KX5R1E-CP
MAIN-P.W.Board			C6710	08S65670Y03	CAP,CER 335KX5R1E-CP
MAIN-P.W.Board			C8002	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C8003	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8004	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C8005	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8007	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8008	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8009	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8010	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8011	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8013	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C8101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8201	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8202	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8203	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8401	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8501	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8502	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C8601	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8602	08S45676W85	CAP,CER 104K-B1C -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C8604	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8606	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C8801	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C8803	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8804	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8806	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			CB3001	09T35473Y16	WTB,F169B001-16 -DB
MAIN-P.W.Board			CB5301	09T75225Y40	FFC,51374-4093 -ER
MAIN-P.W.Board			CB5401	09-05560Z01	BTB,DF15-S -DB
MAIN-P.W.Board			D1001	48T85357W01	DIO,1PS226 -CP
MAIN-P.W.Board			D2301	48T63463F01	DIO,DAP202K-96 -CP
MAIN-P.W.Board			D2302	48T63463F01	DIO,DAP202K-96 -CP
MAIN-P.W.Board			D2303	48T63463F01	DIO,DAP202K-96 -CP
MAIN-P.W.Board			D2401	48T25665Y01	DIO,1SS355-TE17 -CP
MAIN-P.W.Board			D2402	48T25665Y01	DIO,1SS355-TE17 -CP
MAIN-P.W.Board			D3101	48T25665Y01	DIO,1SS355-TE17 -CP
MAIN-P.W.Board			D3301	48T25651W02	DIO,MA152WK-TX -CP
MAIN-P.W.Board			D3401	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D6002	48T85357W01	DIO,1PS226 -CP
MAIN-P.W.Board			D6301	48T25651W02	DIO,MA152WK-TX -CP
MAIN-P.W.Board			D6401	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D6501	48T25665Y01	DIO,1SS355-TE17 -CP
MAIN-P.W.Board			D8001	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8002	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8003	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8301	48T25651W02	DIO,MA152WK-TX -CP
MAIN-P.W.Board			D8601	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8801	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			DIN6001	09-05377Z01	DIN,TC7753-019117-DB
MAIN-P.W.Board			DIN6401	09T55071W11	CON,TCP9389-11 -DT
MAIN-P.W.Board			E1002	23T75543Y06	CAP,MVA 22R-1CD55-E2
MAIN-P.W.Board			E2003	23T75543Y02	CAP,MVA 47R-0JD55-E2
MAIN-P.W.Board			E2008	23T75543Y02	CAP,MVA 47R-0JD55-E2
MAIN-P.W.Board			E2014	23T75543Y02	CAP,MVA 47R-0JD55-E2
MAIN-P.W.Board			E2015	23T75543Y02	CAP,MVA 47R-0JD55-E2
MAIN-P.W.Board			E2016	23T75543Y02	CAP,MVA 47R-0JD55-E2
MAIN-P.W.Board			E2017	23S75244Y26	CAP,ELY 33R-1E -E3
MAIN-P.W.Board			E2101	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E2102	23S75244Y26	CAP,ELY 33R-1E -E3
MAIN-P.W.Board			E2103	23S75244Y18	CAP,ELY 47R-1C -E3
MAIN-P.W.Board			E2401	23T75234Y13	CAP,MAR 1R0-1H-D55E2
MAIN-P.W.Board			E2402	23T75543Y07	CAP,MVA 47R-1CE55-E3
MAIN-P.W.Board			E2601	23S75244Y32	CAP,ELY 4R7-1V -E2
MAIN-P.W.Board			E2602	23S75244Y20	CAP,ELY 221-1C -E6
MAIN-P.W.Board			E2603	23S75244Y18	CAP,ELY 47R-1C -E3

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E2604	23-02562Z22	CAP,HA 1R0-1H-B -E2
MAIN-P.W.Board			E2605	23-02562Z22	CAP,HA 1R0-1H-B -E2
MAIN-P.W.Board			E2606	23-02562Z22	CAP,HA 1R0-1H-B -E2
MAIN-P.W.Board			E2607	23-02562Z22	CAP,HA 1R0-1H-B -E2
MAIN-P.W.Board			E2701	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E2702	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E2703	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E3001	23T35505W09	CAP,ELY 472-1C +
MAIN-P.W.Board			E3201	23S75244Y16	CAP,ELY 10R-1C -E2
MAIN-P.W.Board			E3501	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E3502	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E3503	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E5001	23T75543Y09	CAP,MVA 221-1CF80-E6
MAIN-P.W.Board			E5401	23T75543Y06	CAP,MVA 22R-1CD55-E2
MAIN-P.W.Board			E6501	23T75543Y06	CAP,MVA 22R-1CD55-E2
MAIN-P.W.Board			E6701	23T75543Y13	CAP,MVA 22R-1EE55-E3
MAIN-P.W.Board			E8001	23S75244Y22	CAP,ELY 471-1C -EA
MAIN-P.W.Board			E8002	23S75244Y22	CAP,ELY 471-1C -EA
MAIN-P.W.Board			E8003	23S75244Y25	CAP,ELY 22R-1E -E3
MAIN-P.W.Board			E8004	23S75244Y19	CAP,ELY 101-1C -E6
MAIN-P.W.Board			E8005	23S75244Y25	CAP,ELY 22R-1E -E3
MAIN-P.W.Board			E8101	23T75543Y06	CAP,MVA 22R-1CD55-E2
MAIN-P.W.Board			E8401	23T75543Y06	CAP,MVA 22R-1CD55-E2
MAIN-P.W.Board			E8502	23S75244Y17	CAP,ELY 22R-1C -E2
MAIN-P.W.Board			E8602	23S75244Y22	CAP,ELY 471-1C -EA
MAIN-P.W.Board			E8802	23S75244Y22	CAP,ELY 471-1C -EA
MAIN-P.W.Board			E8803	23S75244Y23	CAP,ELY 681-1C -EA
MAIN-P.W.Board			F5301	65T75477Y13	FUSE,CCP2E 4.0A -CP
MAIN-P.W.Board			F6001	65T75477Y05	FUSE,CCP2E 1.0A -CP
MAIN-P.W.Board			F6401	65T75477Y13	FUSE,CCP2E 4.0A -CP
MAIN-P.W.Board			IC2001	51-01487Z01	TC94A48FG -QT
MAIN-P.W.Board			IC2101	51-07764Z01	TDA7417 -QE6
MAIN-P.W.Board			IC2601	51T65184Y01	TB2901H -ZS
MAIN-P.W.Board			IC2701	51T25576W08	NJM4580ED-TE2 -SE2
MAIN-P.W.Board			IC2702	51T25576W08	NJM4580ED-TE2 -SE2
MAIN-P.W.Board			IC2703	51T25576W08	NJM4580ED-TE2 -SE2
MAIN-P.W.Board			IC3501	51T25576W08	NJM4580ED-TE2 -SE2
MAIN-P.W.Board			IC5001	51-06039Z01	MTP,M30626FJPGPXXXQT
MAIN-P.W.Board			IC5002	51T65770Y01	BR24L08F-W-E2 -SE2
MAIN-P.W.Board			IC5201	51T75063Y06	BD5228G-TR -CP
MAIN-P.W.Board			IC5301	51T45632Y01	TC74LCX07FT-EL -SE5
MAIN-P.W.Board			IC5302	51T15194Y01	TC74VHCT08AFT-EL-SE5
MAIN-P.W.Board			IC5401	51-01932Z01	TC7SZ08FU-TE85L -CP
MAIN-P.W.Board			IC5402	51-01933Z01	TC7SZ32FU-TE85L -CP
MAIN-P.W.Board			IC6001	51T25183Y02	TC7SET08FU-EL -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC6002	51T15185Y01	TC7SH08FU-TE85L -CP
MAIN-P.W.Board			IC6301	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board			IC6501	51T55070W05	MB88385CPF-ER -SE9
MAIN-P.W.Board			IC6701	51T25576W07	NJM4580V-TE2 -SE2
MAIN-P.W.Board			IC8001	51T65147Y01	HA13165 -ZS
MAIN-P.W.Board			IC8201	51T65666Y02	NJM2880U33-TE1 -NE2
MAIN-P.W.Board			IC8501	51T95558W03	BA05FP-E2 -NE5
MAIN-P.W.Board			IC8601	51T75303Y01	BD9778F-E2 -SE2
MAIN-P.W.Board			IC8801	51T75303Y01	BD9778F-E2 -SE2
MAIN-P.W.Board			JK2501	09T03083K01	RCA,AV6-901C -DB
MAIN-P.W.Board			JK6301	09T95460W01	JAC,HSJ0857-01-1010+
MAIN-P.W.Board			L1001	24T16403W29	COL,IND.15R-M -CP
MAIN-P.W.Board			L1002	24T25164Y21	IND,FSLM2520 4R7J-CP
MAIN-P.W.Board			L1003	24T55488Y59	IND,LLQ1608 R047J-CP
MAIN-P.W.Board			L1004	24T55488Y24	IND,LLQ1608 R039J-CP
MAIN-P.W.Board			L8601	24-04484Z06	IND,7B12HJ 101M -EA
MAIN-P.W.Board			L8801	24-04485Z08	IND,7E10H 221M -EA
MAIN-P.W.Board			Q1001	48T75205Y02	TR,FMC3A-T148 -CP
MAIN-P.W.Board			Q2301	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q2302	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q2303	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q2402	48T62967F02	TR,DTC114EKA-T146-CP
MAIN-P.W.Board			Q2403	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q2404	48T75205Y01	TR,FMC2A-T148 -CP
MAIN-P.W.Board			Q2405	48T62967F02	TR,DTC114EKA-T146-CP
MAIN-P.W.Board			Q2406	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q3201	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q3301	48T62966F01	TR,DTA143EKA-T146-CP
MAIN-P.W.Board			Q3401	48T15141W03	TR ,2SB1184F5 -E5
MAIN-P.W.Board			Q3402	48T62967F01	TR,DTC143EKA-T146-CP
MAIN-P.W.Board			Q5101	48T62967F02	TR,DTC114EKA-T146-CP
MAIN-P.W.Board			Q5201	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q5202	48T75205Y02	TR,FMC3A-T148 -CP
MAIN-P.W.Board			Q5203	48T75205Y01	TR,FMC2A-T148 -CP
MAIN-P.W.Board			Q5401	48T63420F01	TR,2SA1037AK-146 -CP
MAIN-P.W.Board			Q5402	48T62967F02	TR,DTC114EKA-T146-CP
MAIN-P.W.Board			Q6001	48T15141W03	TR ,2SB1184F5 -E5
MAIN-P.W.Board			Q6002	48T94606F17	TR,DTC123YUA-T106-CP
MAIN-P.W.Board			Q6301	48T63420F01	TR,2SA1037AK-146 -CP
MAIN-P.W.Board			Q6302	48T62967F05	TR,DTC143XKA-T146-CP
MAIN-P.W.Board			Q6501	48T94606F56	TR,DTA114EUA-T106-CP
MAIN-P.W.Board			Q8001	48T75205Y02	TR,FMC3A-T148 -CP
MAIN-P.W.Board			Q8101	48T35548Y04	TR,2SB710A-S-TX -CP
MAIN-P.W.Board			Q8102	48T62967F01	TR,DTC143EKA-T146-CP
MAIN-P.W.Board			Q8301	48T63419F04	TR,2SA1036K-HR-96-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q8302	48T62967F01	TR,DTC143EKA-T146-CP
MAIN-P.W.Board			Q8401	48T35548Y04	TR,2SB710A-S-TX -CP
MAIN-P.W.Board			Q8402	48T62967F01	TR,DTC143EKA-T146-CP
MAIN-P.W.Board			Q8601	48T45594W08	TR ,XN1212 -TX-CP
MAIN-P.W.Board			Q8801	48T45594W08	TR ,XN1212 -TX-CP
MAIN-P.W.Board			R1002	06S15593Y97	RES,RK 104F 1/10 -CP
MAIN-P.W.Board			R1003	06S15593Y97	RES,RK 104F 1/10 -CP
MAIN-P.W.Board			R1004	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R1005	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R1006	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R1008	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R1009	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R1010	06S55361Y17	RES,RK 10RJ 1/4 -CP
MAIN-P.W.Board			R1012	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R1013	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R1014	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2001	06S15594Y22	RES,RK 105F 1/10 -CP
MAIN-P.W.Board			R2002	06S15593Y33	RES,RK 221F 1/10 -CP
MAIN-P.W.Board			R2003	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2004	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2005	06S15593Y33	RES,RK 221F 1/10 -CP
MAIN-P.W.Board			R2006	06S15593Y33	RES,RK 221F 1/10 -CP
MAIN-P.W.Board			R2007	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2008	06S15593Y61	RES,RK 332F 1/10 -CP
MAIN-P.W.Board			R2102	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R2103	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R2301	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R2302	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R2303	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2304	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2305	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2306	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2307	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2308	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2309	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2310	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2311	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R2312	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R2313	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2314	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2315	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2316	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2317	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2318	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R2319	06S15593Y94	RES,RK 753F 1/10 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2320	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2321	06S55361Y49	RES,RK 221J 1/4 -CP
MAIN-P.W.Board			R2401	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R2402	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R2403	06S15593Y77	RES,RK 153F 1/10 -CP
MAIN-P.W.Board			R2404	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R2405	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R2406	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2407	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R2408	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2601	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2701	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2702	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2703	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2704	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2705	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2706	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2707	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2708	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2709	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2710	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2711	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R2712	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R2713	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2714	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2715	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2716	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2717	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2718	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2719	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2720	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2721	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2722	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2723	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R2724	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R2725	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2726	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R2727	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2728	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R2729	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2730	06S15593Y75	RES,RK 123F 1/10 -CP
MAIN-P.W.Board			R2731	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2732	06S15593Y95	RES,RK 823F 1/10 -CP
MAIN-P.W.Board			R2733	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2734	06S15593Y83	RES,RK 273F 1/10 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2735	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R2736	06S15593Y70	RES,RK 752F 1/10 -CP
MAIN-P.W.Board			R3101	06S35083Y29	RES,RK 222F 1/4 -CP
MAIN-P.W.Board			R3102	06S35083Y33	RES,RK 472F 1/4 -CP
MAIN-P.W.Board			R3201	06S55361Y89	RES,RK 103J 1/4 -CP
MAIN-P.W.Board			R3202	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R3301	06S55361Y89	RES,RK 103J 1/4 -CP
MAIN-P.W.Board			R3303	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R3401	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			R3402	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			R3403	06S55361Y98	RES,RK 243J 1/4 -CP
MAIN-P.W.Board			R3404	06S55361Y89	RES,RK 103J 1/4 -CP
MAIN-P.W.Board			R3501	06S15593Y69	RES,RK 682F 1/10 -CP
MAIN-P.W.Board			R3502	06S15593Y69	RES,RK 682F 1/10 -CP
MAIN-P.W.Board			R3503	06S15593Y50	RES,RK 112F 1/10 -CP
MAIN-P.W.Board			R3504	06S15593Y50	RES,RK 112F 1/10 -CP
MAIN-P.W.Board			R3505	06S15593Y50	RES,RK 112F 1/10 -CP
MAIN-P.W.Board			R3506	06S15593Y50	RES,RK 112F 1/10 -CP
MAIN-P.W.Board			R3507	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R3508	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R5001	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5002	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5003	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5004	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5005	06S15594Y14	RES,RK 474F 1/10 -CP
MAIN-P.W.Board			R5016	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R5017	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5024	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5025	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5026	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5027	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5029	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5032	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R5033	06S35083Y17	RES,RK 221F 1/4 -CP
MAIN-P.W.Board			R5034	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5035	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5036	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5037	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5038	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5039	06S55366Y06	RES,RK 473J 1/10 -CP
MAIN-P.W.Board		#1	R5040	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board		\$1	R5041	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board		%1	R5041	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board		\$1	R5042	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board		%1	R5042	06S15593Y73	RES,RK 103F 1/10 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		#1	R5043	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R5045	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5046	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5047	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5048	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R5049	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R5050	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5051	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5052	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R5053	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5054	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5055	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5101	06S55363Y89	RES,RK 103J 1/8 -CP
MAIN-P.W.Board			R5102	06S35083Y25	RES,RK 102F 1/4 -CP
MAIN-P.W.Board			R5201	06S15593Y63	RES,RK 392F 1/10 -CP
MAIN-P.W.Board			R5202	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5203	06S15593Y59	RES,RK 272F 1/10 -CP
MAIN-P.W.Board			R5204	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5205	06S35083Y45	RES,RK 473F 1/4 -CP
MAIN-P.W.Board			R5207	06S35083Y42	RES,RK 273F 1/4 -CP
MAIN-P.W.Board			R5301	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5302	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5303	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5304	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R5305	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5306	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5307	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R5308	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R5309	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN-P.W.Board			R5310	06S15594Y14	RES,RK 474F 1/10 -CP
MAIN-P.W.Board			R5311	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R5312	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R5313	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R5314	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5315	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5316	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5317	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5401	06S15593Y82	RES,RK 243F 1/10 -CP
MAIN-P.W.Board			R5402	06S35083Y25	RES,RK 102F 1/4 -CP
MAIN-P.W.Board			R5403	06S35083Y25	RES,RK 102F 1/4 -CP
MAIN-P.W.Board			R5404	06S55363Y65	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R5405	06S35083Y37	RES,RK 103F 1/4 -CP
MAIN-P.W.Board			R5406	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R5407	06S55363Y65	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R5408	06S35083Y25	RES,RK 102F 1/4 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5409	06S35083Y25	RES,RK 102F 1/4 -CP
MAIN-P.W.Board			R5410	06S55363Y65	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R5411	06S35083Y25	RES,RK 102F 1/4 -CP
MAIN-P.W.Board			R5413	06S55363Y65	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R5414	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R6001	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R6002	06S55361Y69	RES,RK 152J 1/4 -CP
MAIN-P.W.Board			R6003	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R6004	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R6005	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R6006	06S45348Y34	RES,RK 304F 1/4 -CP
MAIN-P.W.Board			R6007	06S55361Y72	RES,RK 202J 1/4 -CP
MAIN-P.W.Board			R6008	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			R6009	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R6010	06S55361Y98	RES,RK 243J 1/4 -CP
MAIN-P.W.Board			R6011	06S15594Y07	RES,RK 244F 1/10 -CP
MAIN-P.W.Board			R6012	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R6013	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R6015	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R6301	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R6302	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6305	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R6306	06S15593Y61	RES,RK 332F 1/10 -CP
MAIN-P.W.Board			R6307	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6308	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R6401	06S55361Y51	RES,RK 271J 1/4 -CP
MAIN-P.W.Board			R6402	06S55361Y51	RES,RK 271J 1/4 -CP
MAIN-P.W.Board			R6501	06S55361Y17	RES,RK 10RJ 1/4 -CP
MAIN-P.W.Board			R6502	06S55361Y46	RES,RK 161J 1/4 -CP
MAIN-P.W.Board			R6503	06S55361Y46	RES,RK 161J 1/4 -CP
MAIN-P.W.Board			R6504	06S55361Y46	RES,RK 161J 1/4 -CP
MAIN-P.W.Board			R6505	06S55361Y46	RES,RK 161J 1/4 -CP
MAIN-P.W.Board			R6506	06S15593Y69	RES,RK 682F 1/10 -CP
MAIN-P.W.Board			R6507	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R6508	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6509	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6510	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R6511	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R6512	06S15593Y65	RES,RK 472F 1/10 -CP
MAIN-P.W.Board			R6515	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R6516	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R6517	06S15593Y53	RES,RK 152F 1/10 -CP
MAIN-P.W.Board			R6518	06S15593Y53	RES,RK 152F 1/10 -CP
MAIN-P.W.Board			R6701	06S55366Y39	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R6702	06S55366Y39	RES,RK JUMPER1/10-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R6703	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6704	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6705	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6706	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6707	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6708	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6709	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6710	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R6711	06S55366Y39	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R8001	06S15593Y61	RES,RK 332F 1/10 -CP
MAIN-P.W.Board			R8003	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R8004	06S15593Y85	RES,RK 333F 1/10 -CP
MAIN-P.W.Board			R8005	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R8006	06S15593Y67	RES,RK 562F 1/10 -CP
MAIN-P.W.Board			R8009	06S15593Y91	RES,RK 563F 1/10 -CP
MAIN-P.W.Board			R8010	06S15594Y19	RES,RK 754F 1/10 -CP
MAIN-P.W.Board			R8011	06S15593Y63	RES,RK 392F 1/10 -CP
MAIN-P.W.Board			R8101	06S55363Y63	RES,RK 821J 1/8 -CP
MAIN-P.W.Board			R8102	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R8104	06S15593Y82	RES,RK 243F 1/10 -CP
MAIN-P.W.Board			R8105	06S15593Y94	RES,RK 753F 1/10 -CP
MAIN-P.W.Board			R8201	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R8301	06S15593Y82	RES,RK 243F 1/10 -CP
MAIN-P.W.Board			R8302	06S15593Y51	RES,RK 122F 1/10 -CP
MAIN-P.W.Board			R8303	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R8401	06S35083Y27	RES,RK 152F 1/4 -CP
MAIN-P.W.Board			R8402	06S15593Y82	RES,RK 243F 1/10 -CP
MAIN-P.W.Board			R8403	06S15594Y23	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R8502	06S15593Y92	RES,RK 623F 1/10 -CP
MAIN-P.W.Board			R8601	06S15594Y10	RES,RK 334F 1/10 -CP
MAIN-P.W.Board			R8602	06S15593Y96	RES,RK 913F 1/10 -CP
MAIN-P.W.Board			R8603	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R8604	06S15593Y90	RES,RK 513F 1/10 -CP
MAIN-P.W.Board			R8606	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R8607	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R8608	06S15593Y76	RES,RK 133F 1/10 -CP
MAIN-P.W.Board			R8609	06S15593Y93	RES,RK 683F 1/10 -CP
MAIN-P.W.Board			R8610	06S35083Y16	RES,RK 181F 1/4 -CP
MAIN-P.W.Board			R8612	06S35083Y16	RES,RK 181F 1/4 -CP
MAIN-P.W.Board			R8613	06S35083Y16	RES,RK 181F 1/4 -CP
MAIN-P.W.Board			R8801	06S15593Y61	RES,RK 332F 1/10 -CP
MAIN-P.W.Board			R8802	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R8803	06S15593Y82	RES,RK 243F 1/10 -CP
MAIN-P.W.Board			R8806	06S15593Y74	RES,RK 113F 1/10 -CP
MAIN-P.W.Board			R8807	06S15593Y96	RES,RK 913F 1/10 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R8808	06S15593Y93	RES,RK 683F 1/10 -CP
MAIN-P.W.Board			R8809	06S15593Y89	RES,RK 473F 1/10 -CP
MAIN-P.W.Board			R8811	06S35083Y15	RES,RK 151F 1/4 -CP
MAIN-P.W.Board			SA1001	48-00954Z01	VST,CSA30C201M-T -CP
MAIN-P.W.Board			SA6001	48T25171Y02	VST,SA-C2012-101 -CP
MAIN-P.W.Board			SD2601	48T95572W01	DIO,SHT MA736-TX -E1
MAIN-P.W.Board			SD2602	48T95572W01	DIO,SHT MA736-TX -E1
MAIN-P.W.Board			SD8601	48T45286Y01	DIO,SHT RB050L-40-E1
MAIN-P.W.Board			SD8801	48T45286Y01	DIO,SHT RB050L-40-E1
MAIN-P.W.Board			SW2101	40T45282W02	SW,SLIDE SLD-42-508X
MAIN-P.W.Board			SW5201	40T16096W03	SW ,TACT SKHHLW
MAIN-P.W.Board			TU1001	TU-04070Z04	TUNER,TFTE1U113A
MAIN-P.W.Board			VL3001	24T75055W08	CHOKE,SA10HA-452JA +
MAIN-P.W.Board			VR8601	18T25572Y19	VAR,RH03ADC 104-X-CP
MAIN-P.W.Board			VR8801	18T25572Y19	VAR,RH03ADC 104-X-CP
MAIN-P.W.Board			VT1001	24T35286Y02	IND,MG56 332J -DB
MAIN-P.W.Board			XL2001	91T55217Y13	XTL,NX8045GB 11.2-E5
MAIN-P.W.Board			XL5001	91T95554W01	XTL,CM200S 32.76K-E5
MAIN-P.W.Board			XL5002	91T45433W34	XTL,NX1255GA 6.00-E9
MAIN-P.W.Board			XL6501	91T45433W12	XTL,CP12A 4.000M -E9
MAIN-P.W.Board			Z2001	91T15509Y08	EMI,BK1608HM102 -CP
MAIN-P.W.Board			Z2002	91T15509Y08	EMI,BK1608HM102 -CP
MAIN-P.W.Board			Z2003	91T15509Y08	EMI,BK1608HM102 -CP
MAIN-P.W.Board			Z2004	91T15509Y08	EMI,BK1608HM102 -CP
MAIN-P.W.Board			Z5001	91T65112W06	EMI,BK2125HM102 -CP
MAIN-P.W.Board			Z5002	91T65112W06	EMI,BK2125HM102 -CP
MAIN-P.W.Board			Z5003	91T65112W06	EMI,BK2125HM102 -CP
MAIN-P.W.Board			ZD3001	48-02592Z01	DIO,ZEN Z5W27VJ -EA
MAIN-P.W.Board			ZD5201	48-01607Z22	DIO,ZEN LUDZ6.2B -CP
MAIN-P.W.Board			ZD6001	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
MAIN-P.W.Board			ZD6002	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
MAIN-P.W.Board			ZD6501	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
MAIN-P.W.Board			ZD6502	48T35392Y06	DIO,ZEN RLZ7.5A -CP
MAIN-P.W.Board			ZD6503	48T35392Y06	DIO,ZEN RLZ7.5A -CP
DIGI-P.W.Board			C7000	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7001	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7002	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7003	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7004	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7005	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7006	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7007	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7008	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7009	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7010	08S45232Y17	CAP,CER 104K-B0J -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			C7011	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7012	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7013	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7014	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7015	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7016	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7017	08S65667Y05	CAP,CER 105KX5R1A-CP
DIGI-P.W.Board			C7018	08S45231Y10	CAP,CER 7R0D-CH1H-CP
DIGI-P.W.Board			C7019	08S45231Y10	CAP,CER 7R0D-CH1H-CP
DIGI-P.W.Board			C7020	08S65667Y05	CAP,CER 105KX5R1A-CP
DIGI-P.W.Board			C7021	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7022	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7023	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7024	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7025	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7026	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7027	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7028	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7029	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7030	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7031	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7032	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7100	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7101	08S45232Y09	CAP,CER 472K-B1E -CP
DIGI-P.W.Board			C7102	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7103	08S45232Y09	CAP,CER 472K-B1E -CP
DIGI-P.W.Board			C7104	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7105	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7106	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7107	08S65667Y05	CAP,CER 105KX5R1A-CP
DIGI-P.W.Board			C7108	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7109	08S65667Y05	CAP,CER 105KX5R1A-CP
DIGI-P.W.Board			C7200	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7201	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7202	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7203	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7204	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7205	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7206	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7207	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7208	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7209	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7210	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7211	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7212	08S65667Y05	CAP,CER 105KX5R1A-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			C7300	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7301	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7302	08S45231Y09	CAP,CER 6R0D-CH1H-CP
DIGI-P.W.Board			C7303	08S45231Y08	CAP,CER 5R0C-CH1H-CP
DIGI-P.W.Board			C7304	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7400	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7401	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7402	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7403	08S35374W12	CAP,CER 106K-B0J -CP
DIGI-P.W.Board			C7404	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7405	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7500	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7501	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7502	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7503	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7504	08S45231Y09	CAP,CER 6R0D-CH1H-CP
DIGI-P.W.Board			C7505	08S45231Y09	CAP,CER 6R0D-CH1H-CP
DIGI-P.W.Board			C7506	08S45231Y09	CAP,CER 6R0D-CH1H-CP
DIGI-P.W.Board			C7507	08S45231Y09	CAP,CER 6R0D-CH1H-CP
DIGI-P.W.Board			C7508	08S35374W12	CAP,CER 106K-B0J -CP
DIGI-P.W.Board			C7509	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7601	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7602	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7603	08S45231Y13	CAP,CER 10RD-CH1H-CP
DIGI-P.W.Board			C7604	08S45231Y13	CAP,CER 10RD-CH1H-CP
DIGI-P.W.Board			C7605	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7606	08S35374W12	CAP,CER 106K-B0J -CP
DIGI-P.W.Board			C7608	08S35374W12	CAP,CER 106K-B0J -CP
DIGI-P.W.Board			C7610	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7612	08S45231Y11	CAP,CER 8R0D-CH1H-CP
DIGI-P.W.Board			C7613	08S45231Y11	CAP,CER 8R0D-CH1H-CP
DIGI-P.W.Board			C7614	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7615	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7616	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7617	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7618	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7619	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7620	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7621	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7622	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7623	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7624	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7626	08S35374W12	CAP,CER 106K-B0J -CP
DIGI-P.W.Board			C7700	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7701	08S45232Y17	CAP,CER 104K-B0J -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			C7702	08S45232Y17	CAP,CER 104K-B0J -CP
DIGI-P.W.Board			C7703	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7800	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7801	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7802	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7803	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7804	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7805	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7806	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7807	08S45231Y25	CAP,CER 101J-CH1H-CP
DIGI-P.W.Board			C7901	08S45232Y13	CAP,CER 223K-B1C -CP
DIGI-P.W.Board			C7902	08S65667Y05	CAP,CER 105KX5R1A-CP
DIGI-P.W.Board			C7903	08S45232Y11	CAP,CER 103K-B1C -CP
DIGI-P.W.Board			C7904	08S35349Y12	CAP,CER 105K-B0J -CP
DIGI-P.W.Board			C7905	08S60102F48	CAP,CER 105K-B1E -CP
DIGI-P.W.Board			C7906	08S35349Y12	CAP,CER 105K-B0J -CP
DIGI-P.W.Board			CB7700	09-08589Z01	SKT,CMS1400-016000DB
DIGI-P.W.Board			CB7800	09T75225Y40	FFC,51374-4093 -ER
DIGI-P.W.Board			CB7900	09T75225Y40	FFC,51374-4093 -ER
DIGI-P.W.Board			D7000	48T45701Y01	DIO,MA2S728-TX -CP
DIGI-P.W.Board			D7001	48T45701Y01	DIO,MA2S728-TX -CP
DIGI-P.W.Board			D7700	48-08988Z01	VST,EZJZ0V800AA -CP
DIGI-P.W.Board			D7701	48-08988Z01	VST,EZJZ0V800AA -CP
DIGI-P.W.Board			E7000	23S75244Y04	CAP,ELY 221-0J -E6
DIGI-P.W.Board			E7400	23S75244Y19	CAP,ELY 101-1C -E6
DIGI-P.W.Board			E7401	23S75244Y25	CAP,ELY 22R-1E -E3
DIGI-P.W.Board			E7700	23S75244Y19	CAP,ELY 101-1C -E6
DIGI-P.W.Board			E7701	23S75244Y04	CAP,ELY 221-0J -E6
DIGI-P.W.Board			IC7000	51-09003Z01	R5S72611P100FP -QT
DIGI-P.W.Board			IC7001	51T15185Y01	TC7SH08FU-TE85L -CP
DIGI-P.W.Board			IC7002	51T15185Y01	TC7SH08FU-TE85L -CP
DIGI-P.W.Board			IC7003	51T15185Y01	TC7SH08FU-TE85L -CP
DIGI-P.W.Board			IC7100	53-10753Z36	OFL, V0.994MRAL603AF1
DIGI-P.W.Board			IC7101	53-10753Z37	OFL, V0.994MRAL603AF2
DIGI-P.W.Board			IC7200	51-04096Z01	EDS6432AFTA-75TI -ST
DIGI-P.W.Board			IC7300	51-09817Z02	V112_V1-01 -LE6
DIGI-P.W.Board			IC7400	51-09404Z01	PCM1754DBQR -SE2
DIGI-P.W.Board			IC7500	51T15763Y01	TC7W74FU-TE12L -SE1
DIGI-P.W.Board			IC7501	51T25473Y01	TC7S32FU-TE85L -CP
DIGI-P.W.Board			IC7502	51T35039Y01	TC7SU04FU-TE85L -CP
DIGI-P.W.Board			IC7503	51T35039Y01	TC7SU04FU-TE85L -CP
DIGI-P.W.Board			IC7504	51T25473Y01	TC7S32FU-TE85L -CP
DIGI-P.W.Board			IC7600	51-02415Z01	R1180N151B-TR-FA -CP
DIGI-P.W.Board			IC7601	51-08870Z01	M66596FP -QT
DIGI-P.W.Board			IC7602	51T15185Y01	TC7SH08FU-TE85L -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			IC7700	51T25296Y01	TC7SET04FU-TE85L -CP
DIGI-P.W.Board			IC7701	51-07917Z01	BD6519FJ-E2 -SE2
DIGI-P.W.Board			IC7901	51-09524Z01	LT3491ESC8 -CP
DIGI-P.W.Board			L7200	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7400	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7500	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7501	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7502	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7600	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7601	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7602	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7603	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7800	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7901	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			L7902	24-09343Z01	IND,LQH2MCN 10RK -CP
DIGI-P.W.Board			L7903	24T95456W27	FBI,BLM18PG181SH1-CP
DIGI-P.W.Board			Q7500	48T75205Y01	TR,FMC2A-T148 -CP
DIGI-P.W.Board			Q7501	48T75205Y01	TR,FMC2A-T148 -CP
DIGI-P.W.Board			R7000	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7001	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7002	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7003	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7004	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7005	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7006	06S15615Y17	RES,RK 47RJ 1/16 -CP
DIGI-P.W.Board			R7007	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7008	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7009	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7010	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7011	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7012	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7013	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7014	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7015	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7016	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7018	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7019	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7020	06S15615Y57	RES,RK 222J 1/16 -CP
DIGI-P.W.Board			R7021	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7022	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7023	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7024	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7025	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7026	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7027	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			R7028	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7029	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7030	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7031	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7032	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7033	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7034	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7035	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7036	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7037	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7038	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7039	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7040	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7041	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7042	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7043	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7044	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7045	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7046	06S15615Y97	RES,RK 104J 1/16 -CP
DIGI-P.W.Board			R7047	06S15615Y73	RES,RK 103J 1/16 -CP
DIGI-P.W.Board			R7048	06S15615Y73	RES,RK 103J 1/16 -CP
DIGI-P.W.Board			R7049	06S15615Y73	RES,RK 103J 1/16 -CP
DIGI-P.W.Board			R7050	06S65415Y30	RES,RK 272F 1/16 -CP
DIGI-P.W.Board			R7051	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7052	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7053	06S15615Y73	RES,RK 103J 1/16 -CP
DIGI-P.W.Board			R7054	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7055	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7056	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7057	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7058	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7059	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7060	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7061	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7062	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7063	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7064	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7065	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7066	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7067	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7068	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7069	06S65415Y36	RES,RK 822F 1/16 -CP
DIGI-P.W.Board			R7100	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7101	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7102	06S15615Y13	RES,RK 33RJ 1/16 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			R7103	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7104	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7105	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7110	06S15594Y23	RES,RK JUMPER1/10-CP
DIGI-P.W.Board			R7111	06S15594Y23	RES,RK JUMPER1/10-CP
DIGI-P.W.Board			R7300	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7301	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7302	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7303	06S15615Y65	RES,RK 472J 1/16 -CP
DIGI-P.W.Board			R7304	06S15615Y65	RES,RK 472J 1/16 -CP
DIGI-P.W.Board			R7305	06S15615Y97	RES,RK 104J 1/16 -CP
DIGI-P.W.Board			R7306	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7307	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7308	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7309	06S15616Y39	RES,RK 475J 1/16 -CP
DIGI-P.W.Board			R7400	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7401	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7405	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7406	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7408	06S15616Y23	RES,RK JUMPER1/16-CP
DIGI-P.W.Board			R7409	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7410	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7411	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7500	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7501	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7502	06S15616Y22	RES,RK 105J 1/16 -CP
DIGI-P.W.Board			R7503	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7504	06S15616Y22	RES,RK 105J 1/16 -CP
DIGI-P.W.Board			R7505	06S15615Y45	RES,RK 681J 1/16 -CP
DIGI-P.W.Board			R7506	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7507	06S15615Y49	RES,RK 102J 1/16 -CP
DIGI-P.W.Board			R7508	06S15615Y89	RES,RK 473J 1/16 -CP
DIGI-P.W.Board			R7509	06S15615Y89	RES,RK 473J 1/16 -CP
DIGI-P.W.Board			R7510	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7511	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7512	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7513	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7514	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7515	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7600	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7602	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7603	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7604	06S15616Y22	RES,RK 105J 1/16 -CP
DIGI-P.W.Board			R7605	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7607	06S15615Y13	RES,RK 33RJ 1/16 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			R7608	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7609	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7610	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7611	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7612	06S15615Y49	RES,RK 102J 1/16 -CP
DIGI-P.W.Board			R7613	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7614	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7615	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7616	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7617	06S15615Y25	RES,RK 101J 1/16 -CP
DIGI-P.W.Board			R7618	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7621	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7634	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7640	06S65415Y34	RES,RK 562F 1/16 -CP
DIGI-P.W.Board			R7642	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7643	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7644	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7645	06S15615Y81	RES,RK 223J 1/16 -CP
DIGI-P.W.Board			R7700	06S55361Y97	RES,RK 223J 1/4 -CP
DIGI-P.W.Board			R7703	06S15615Y13	RES,RK 33RJ 1/16 -CP
DIGI-P.W.Board			R7704	06S15615Y65	RES,RK 472J 1/16 -CP
DIGI-P.W.Board			R7806	06S15615Y57	RES,RK 222J 1/16 -CP
DIGI-P.W.Board			R7900	06S15615Y31	RES,RK 181J 1/16 -CP
DIGI-P.W.Board			R7901	06S15615Y33	RES,RK 221J 1/16 -CP
DIGI-P.W.Board			R7902	06S15615Y31	RES,RK 181J 1/16 -CP
DIGI-P.W.Board			R7904	06S15615Y31	RES,RK 181J 1/16 -CP
DIGI-P.W.Board			R7906	06S15615Y49	RES,RK 102J 1/16 -CP
DIGI-P.W.Board			R7910	06S65415Y02	RES,RK 12RF 1/16 -CP
DIGI-P.W.Board			R7911	06S65415Y49	RES,RK 104F 1/16 -CP
DIGI-P.W.Board			R7912	06S65415Y49	RES,RK 104F 1/16 -CP
DIGI-P.W.Board			RA7000	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7001	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7002	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7003	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7004	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7005	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7007	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7008	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7011	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7012	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7013	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7014	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7015	06S15771Y41	RES,ARYEXB28V223J-CP
DIGI-P.W.Board			RA7016	06S15771Y41	RES,ARYEXB28V223J-CP
DIGI-P.W.Board			RA7017	06S15771Y41	RES,ARYEXB28V223J-CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			RA7108	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7109	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7110	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7111	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7112	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7113	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7114	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7115	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7116	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7117	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7118	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7119	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7120	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7121	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7122	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7123	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7124	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7125	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7126	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7127	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7200	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7201	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7202	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7203	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7204	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7205	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7206	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7207	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7208	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7209	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7210	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7211	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7600	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7601	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7602	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7603	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7604	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7605	06S15771Y07	RES,ARYEXB28V33RJ-CP
DIGI-P.W.Board			RA7900	06S15771Y16	RES,ARYEXB28V181J-CP
DIGI-P.W.Board			RA7901	06S15771Y16	RES,ARYEXB28V181J-CP
DIGI-P.W.Board			RA7902	06S15771Y16	RES,ARYEXB28V181J-CP
DIGI-P.W.Board			RA7903	06S15771Y16	RES,ARYEXB28V181J-CP
DIGI-P.W.Board			XL7000	91T55274Y11	XTL,NX5032GA 12.5-E2
DIGI-P.W.Board			XL7300	91T95554W01	XTL,CM200S 32.76K-E5
DIGI-P.W.Board			XL7500	91T55217Y03	XTL,NX8045GB 12.2-E5

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DIGI-P.W.Board			XL7501	91T55217Y01	XTL,NX8045GB 16.9-E5
DIGI-P.W.Board			XL7600	91T55274Y15	XTL,NX5032GA 24.0-E2
DIGI-P.W.Board			Z7700	91T65123Y02	EMI,DLW21SN900SQ2-CP
FRONT-P.W.Board			C4101	08S45677W52	CAP,CER 471J-CH1H-CP
FRONT-P.W.Board			C4102	08S45677W52	CAP,CER 471J-CH1H-CP
FRONT-P.W.Board			C4301	08S35349Y16	CAP,CER 105K-B1A -CP
FRONT-P.W.Board			C4401	08S35349Y11	CAP,CER 223K-B1H -CP
FRONT-P.W.Board			CH4401	09-05559Z01	BTB,DF15-P -B
FRONT-P.W.Board			D4301	48T85357W01	DIO,1PS226 -CP
FRONT-P.W.Board			IC4301	51-01707Z01	RS-771 -NE2
FRONT-P.W.Board			LD4101	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4102	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4103	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4104	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4105	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4106	48-05731Z01	LED,BLU SML012BCT-CP
FRONT-P.W.Board			LD4107	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4108	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4109	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4110	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4111	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4112	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4113	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4114	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4115	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4116	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4117	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4118	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4119	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4120	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4121	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4122	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4123	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4124	48-07697Z01	LED,BLU SML512BC5TCP
FRONT-P.W.Board			LD4125	48T15521Y02	LED,RED SML-310LT-CP
FRONT-P.W.Board			LD4126	48-07697Z01	LED,BLU SML512BC5TCP
FRONT-P.W.Board			LD4127	48-07697Z01	LED,BLU SML512BC5TCP
FRONT-P.W.Board			Q4101	48T63788F04	TR,2SD1328-T-TX -CP
FRONT-P.W.Board			Q4102	48T63788F04	TR,2SD1328-T-TX -CP
FRONT-P.W.Board			Q4103	48T63417F01	TR,2SC2412K-96 -CP
FRONT-P.W.Board			Q4104	48T63417F01	TR,2SC2412K-96 -CP
FRONT-P.W.Board			R4001	06S35083Y29	RES,RK 222F 1/4 -CP
FRONT-P.W.Board			R4002	06S35083Y32	RES,RK 392F 1/4 -CP
FRONT-P.W.Board			R4003	06S35083Y36	RES,RK 822F 1/4 -CP
FRONT-P.W.Board			R4004	06S35083Y42	RES,RK 273F 1/4 -CP

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board			R4005	06S35083Y29	RES,RK 222F 1/4 -CP
FRONT-P.W.Board			R4006	06S35083Y32	RES,RK 392F 1/4 -CP
FRONT-P.W.Board			R4007	06S35083Y36	RES,RK 822F 1/4 -CP
FRONT-P.W.Board			R4008	06S35083Y42	RES,RK 273F 1/4 -CP
FRONT-P.W.Board			R4009	06S35083Y29	RES,RK 222F 1/4 -CP
FRONT-P.W.Board			R4010	06S35083Y32	RES,RK 392F 1/4 -CP
FRONT-P.W.Board			R4011	06S35083Y36	RES,RK 822F 1/4 -CP
FRONT-P.W.Board			R4101	06S55361Y51	RES,RK 271J 1/4 -CP
FRONT-P.W.Board			R4102	06S55361Y63	RES,RK 821J 1/4 -CP
FRONT-P.W.Board			R4103	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4105	06S55361Y51	RES,RK 271J 1/4 -CP
FRONT-P.W.Board			R4106	06S55361Y51	RES,RK 271J 1/4 -CP
FRONT-P.W.Board			R4107	06S55361Y61	RES,RK 681J 1/4 -CP
FRONT-P.W.Board			R4108	06S55361Y61	RES,RK 681J 1/4 -CP
FRONT-P.W.Board			R4109	06S55361Y51	RES,RK 271J 1/4 -CP
FRONT-P.W.Board			R4110	06S55361Y51	RES,RK 271J 1/4 -CP
FRONT-P.W.Board			R4111	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4112	06S55361Y57	RES,RK 471J 1/4 -CP
FRONT-P.W.Board			R4113	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4114	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4115	06S55361Y60	RES,RK 621J 1/4 -CP
FRONT-P.W.Board			R4116	06S55361Y60	RES,RK 621J 1/4 -CP
FRONT-P.W.Board			R4117	06S15593Y25	RES,RK 101F 1/10 -CP
FRONT-P.W.Board			R4118	06S15593Y25	RES,RK 101F 1/10 -CP
FRONT-P.W.Board			R4120	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4121	06S55361Y63	RES,RK 821J 1/4 -CP
FRONT-P.W.Board			R4122	06S55361Y53	RES,RK 331J 1/4 -CP
FRONT-P.W.Board			R4123	06S15593Y57	RES,RK 222F 1/10 -CP
FRONT-P.W.Board			R4124	06S15593Y57	RES,RK 222F 1/10 -CP
FRONT-P.W.Board			R4125	06S55361Y57	RES,RK 471J 1/4 -CP
FRONT-P.W.Board			R4201	06S35083Y36	RES,RK 822F 1/4 -CP
FRONT-P.W.Board			R4202	06S35083Y34	RES,RK 562F 1/4 -CP
FRONT-P.W.Board			R4203	06S35083Y25	RES,RK 102F 1/4 -CP
FRONT-P.W.Board			R4301	06S35083Y13	RES,RK 101F 1/4 -CP
FRONT-P.W.Board			R4302	06S15593Y49	RES,RK 102F 1/10 -CP
FRONT-P.W.Board			R4405	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R4406	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R4407	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R4408	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R4410	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R4411	06S35083Y38	RES,RK 123F 1/4 -CP
FRONT-P.W.Board			SW4001	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4002	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4003	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4004	40T65353Y01	SW,TACT SKRSPACE010E2

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board			SW4005	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4006	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4007	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4008	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4009	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4010	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4011	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4012	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4013	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW4201	40T45305Y02	ENC,EC11E000LA -DB
FRONT-P.W.Board			SW4202	40-08552Z01	SW,DETCT SPVR1101-E5
FRONT-P.W.Board			SW4203	40-08552Z01	SW,DETCT SPVR1101-E5
FRONT-P.W.Board			ZD4103	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
Miscellaneous			TET7900	65-09173Z01	ASSY,T-55150GD022JU

Mark Model Code

#1 iDA-X001 (North American) Only,


\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.

Exploded View (Cabinet)

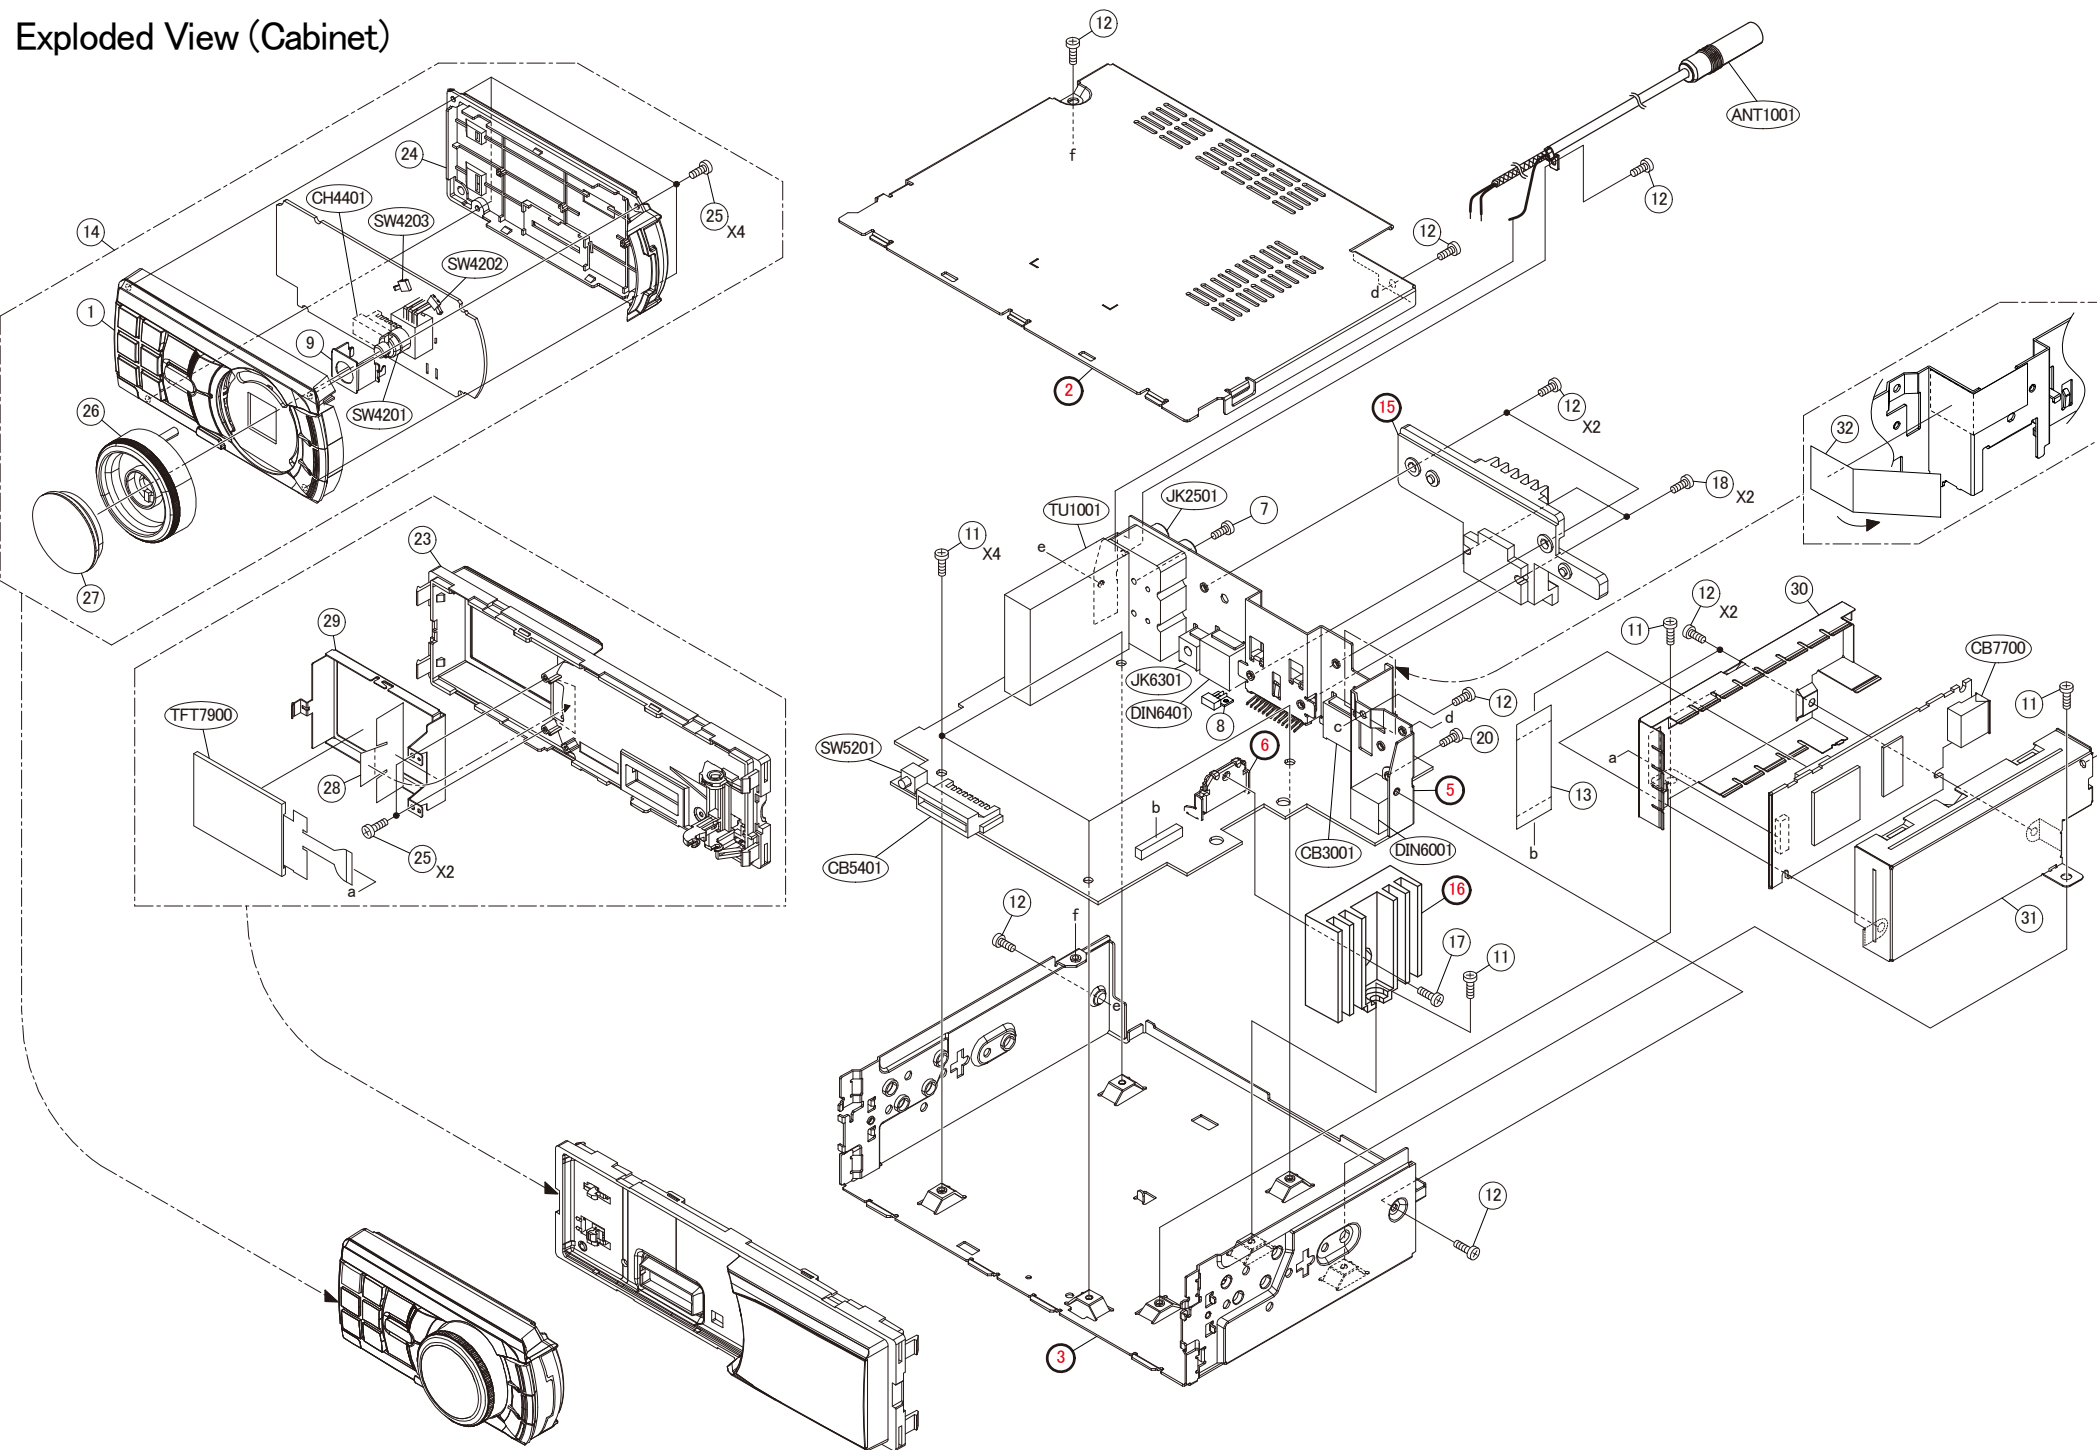

MODEL	Symbol No.	Parts No.	Description
	1	13-09073Z01	NOSE,PIECE ASSY
	2	-----	COVER, TOP
	3	-----	CHAS, BASE
	5	-----	BKT, REAR
	6	-----	BKT, IC
	7	03S60825Y09	SCR, B-T 3X6 ZN A
	8	36A70327W01	KNOB, SLIDE
	9	07-09064Z01	BKT, ENC
	11	03S60822Y33	SCR, S-T 2.6X4.5 ZN A
	12	03S60822Y12	SCR, S-T 2.6X6 ZN A
	13	30-09543Z01	SML2CD-40X45.0-BD
	14	SU-09264Z01	SERVICE_NOSE_X001(A)
	15	-----	HEAT, SINK PWR
	16	-----	HEAT, SINK SYS
	17	03S60822Y19	SCR, S-T 2.6X10 ZN A
	18	03S60822Y23	SCR, S-T 2.6X16 ZN A
	20	03S60822Y07	SCR, S-T 2.6X4 ZN A
	23	13-09074Z01	NOSE, ESC ASSY
	24	13-09050Z01	NOSE, BOTTOM
	25	03S70693Y07	SCR, P-T 1.7X5 ZB A
	26	36-09053Z01	KNOB, ROTARY
	27	15-09655Z01	PLATE, ROTARY ASSY
	28	14-09606Z01	INS, LCD
	29	07-09063Z01	BKT, LCD
	30	15-09061Z01	CASE, SHIELD L
	31	15-09062Z01	CASE, SHIELD R
	32	54-09751Z01	LABEL, REAR
	ANT1001	09-06103Z02	ASSY, ANID-0035-02A
	CB3001	09T35473Y16	WTB, F169B001-16 -DB
	CB5401	09-05560Z01	BTB, DF15-S -DB
	CB7700	09-08589Z01	SKT, CMS1400-016000DB
	CH4401	09-05559Z01	BTB, DF15-P -B
	DIN6001	09-05377Z01	DIN, TC7753-019117-DB
	DIN6401	09T55071W11	CON, TCP9389-11 -DT
	JK2501	09T03083K01	RCA, AV6-901C -DB
	JK6301	09T95460W01	JAC, HSJ0857-01-1010+
	SW4201	40T45305Y02	ENC, EC11E000LA -DB
	SW4202	40-08552Z01	SW, DETCT SPVR1101-E5
	SW4203	40-08552Z01	SW, DETCT SPVR1101-E5
	SW5201	40T16096W03	SW , TACT SKHHLW
	TFT7900	65-09173Z01	ASSY, T-55150GD022JU
	TU1001	TU-04070Z04	TUNER, TFTE1U113A

Mark Model Code

#1 iDA-X001 (North American) Only,

\$1 iDA-X001 (General Foreign) Only,

%1 iDA-X001 (Chinese) Only,

Others : Common.

NOTE : The part that has not PART NUMBER will not be supplied.