
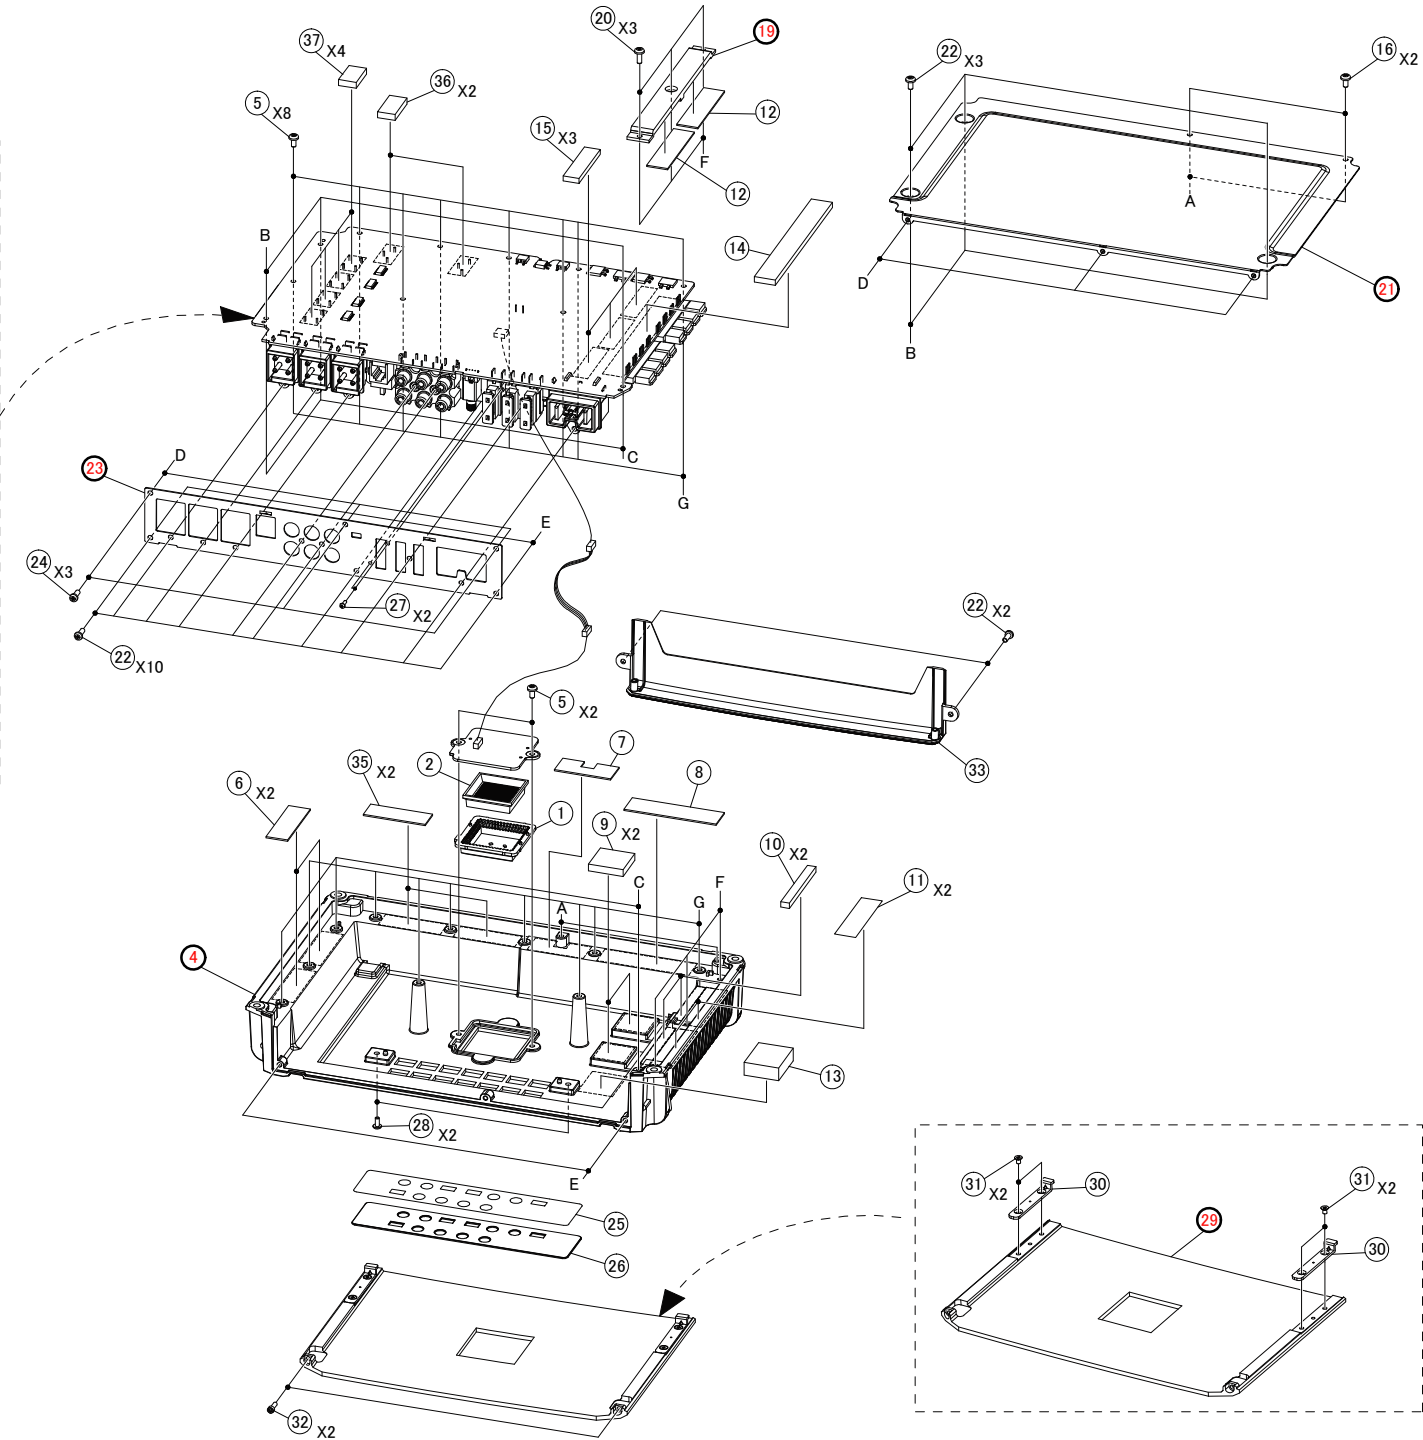


Exploded View (Cabinet)

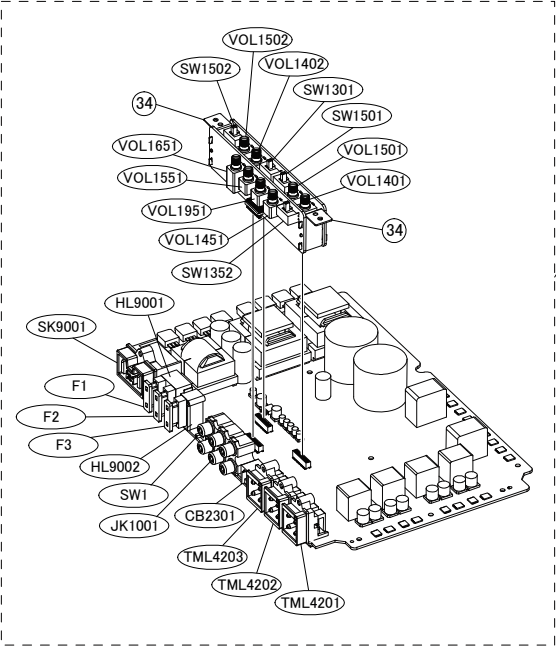

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

1	61E45141S01	LENS,OUTER
2	61E45142S01	LENS,INNER
4	-----	HEAT,SINK-MAIN
5	03E38671S01	SCR,M3X6(B)(WHT)
6	75E45128S01	GAP PAD;Full FET
7	75E45126S01	GAP PAD;AUX Power
8	75E45125S01	GAP PAD;Power Diode
9	75E45127S01	GAP PAD;Power Trans
10	75E45133S01	GAP PAD;FET Lead
11	14E45134S01	INSULATOR,SILPAD
12	75E45124S01	GAP PAD;Power FET
13	75E45132S01	GAP PAD;CHOKE
14	75E45131S01	GAP PAD;FET Solder
15	75E45130S01	GAP PAD;Trans Solder
16	03E45150S01	SCR,M3X8(TN)(CR3BK)
19	-----	HEAT,SINK-BAR
20	03E38699S01	SCR,M3X8(B)(WHT)
21	-----	COVER,BOTTOM
22	03E38698S01	SCR,M3X8(P)(BLK)
23	-----	COVER,FRONT(5CH)
24	03E45148S01	SCR,M3X6(P)(BLK)
25	14E45143S01	SHEET,TAPE-TOP
26	33E45144S01	PLATE,TOP(5CH)
27	03E39164S01	SCR,M2X6(P)(BLK)
28	03E45146S01	SCR,M3X6(B)(WHT)

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------


	29	-----	COVER,TOP
	30	07E45139S01	BKT,COVER,TOP
	31	03E45149S01	SCR,M2.6X4(F)(BLK)
	32	03E45147S01	SCR,M2.6X6(WRENCH)
	33	15E45138S01	COVER,BACK
	34	07E45145S01	BKT,SUB
	35	75E45129S01	GAP PAD;Mono FET
	36	14E44078S01	INS,GAP PAD
	37	14E44079S01	INS,GAP PAD
	CB2301	09E42970S01	CONN,JACK 6P
	F1	65E43983S01	FUSE,30A
	F2	65E43983S01	FUSE,30A
	F3	65E43983S01	FUSE,30A
	HL9001	09E42149S01	HOLDER,FUSE
	HL9002	09E39154S01	HOLDER,FUSE
	JK1001	09E42973S01	CONN,RCA 6P
	SK9001	09E45121S01	POWER SOCKET 3P
	SW1	40E45118S01	SW,SLIDE CSE-SK12D2G
	SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1352	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1501	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1502	40E41432S01	SW,SLIDE SK-22D15-G6
	TML4201	09E45122S01	SPEAKER JACK 4P
	TML4202	09E45122S01	SPEAKER JACK 4P
	TML4203	09E45122S01	SPEAKER JACK 4P

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

MODEL	Symbol No.	Parts No.	Description
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1402	18E41507S01	VOL,ROTARY 50KX2
	VOL1451	18E41439S01	VOL,ROTARY 50KX1
	VOL1501	18E42155S01	VOL,ROTARY 20KX4
	VOL1502	18E42155S01	VOL,ROTARY 20KX4
	VOL1551	18E42155S01	VOL,ROTARY 20KX4
	VOL1651	18E42201S01	VOL,ROTARY 50KX2
	VOL1951	18E42212S01	VOL,ROTARY 5K

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

Packing Method View

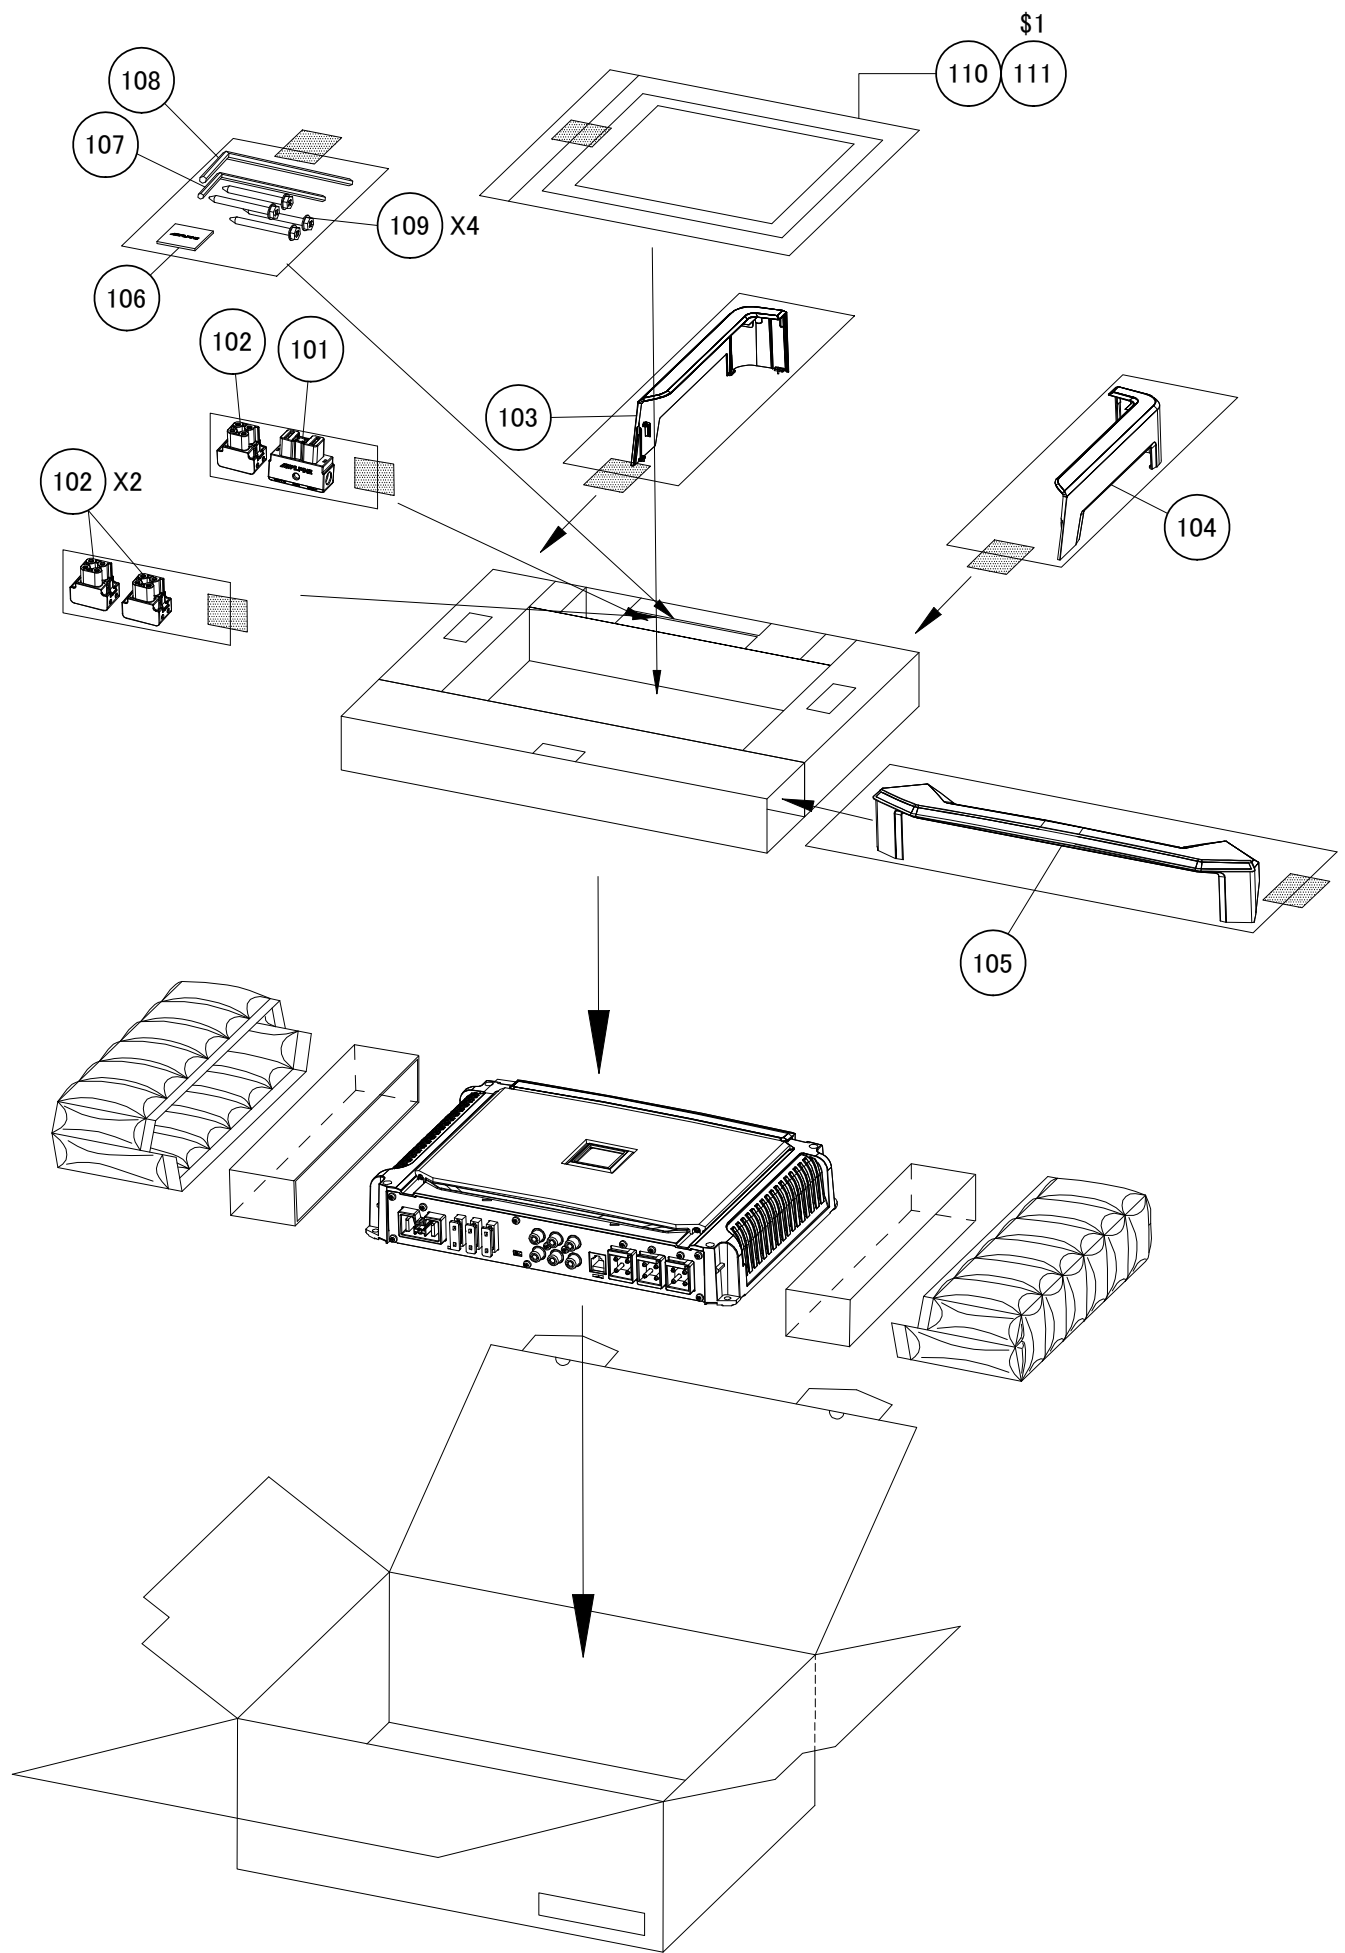

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

	101	09E41475S01	CONN,P-PLUG
	102	09E45123S01	SPEAKER PLUG 4P
	103	15E45135S01	COVER,SIDE-L
	104	15E45136S01	COVER,SIDE-R
	105	15E45137S01	COVER,TERMINAL
	106	33E45140S01	PLATE,LOGO
	107	03E36691S01	WRENCH,HEX. 2X2.3
	108	47E35195S01	WRENCH 4X4.6
	109	03E40419S01	SCR,M4X20(BLK)
	110	68-33122Z89	MANUAL,OWNER'S
\$1	111	68-33122Z90	MANUAL,OWNER'S(EU)

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1001	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1002	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1003	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1004	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1005	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1006	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1007	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1008	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1009	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1010	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1011	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1012	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1013	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1014	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1015	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1016	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1017	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1018	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1019	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1020	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1021	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1022	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1023	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1024	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1025	08E42323S01	CAP,CER. 22pF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1026	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1027	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1028	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1029	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1030	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1031	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1032	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1033	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1034	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1035	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1036	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1801	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1802	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1803	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1804	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1805	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1806	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1861	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1862	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1863	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1864	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1865	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1866	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1867	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1868	08E36675S01	CAP,CER. CP 33pF

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1869	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1870	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1871	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C1872	08E36675S01	CAP,CER. CP 33pF
MAIN-P.W.Board			C2001	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2002	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2003	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2004	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2005	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2006	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2007	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2008	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2009	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2101	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2107	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2108	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3013	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3014	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3015	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3016	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3017	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3018	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3019	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3020	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3021	08E38540S01	CAP,CER. 0.15uF/16V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C3022	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C3023	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C3024	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C3107	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3108	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3109	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3110	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3111	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3112	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3113	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3203	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3207	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3208	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3263	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3602	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3603	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3604	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3605	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3606	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3607	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3608	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3609	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3610	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3611	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3612	08E43373S01	CAP,CER. 0.22uF/50V

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3613	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3614	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3615	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3616	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3617	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3618	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3619	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3620	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3621	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3622	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3623	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3624	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3625	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3626	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3627	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3628	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3629	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3630	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3631	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3632	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3633	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3651	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3652	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3653	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3654	08E43373S01	CAP,CER. 0.22uF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3655	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3656	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3657	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3658	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3659	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3660	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3661	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3662	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3663	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3664	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3665	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3666	08E41036S01	CAP,CER 1uF/16V
MAIN-P.W.Board			C3667	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3701	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3702	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3703	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3704	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3705	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3706	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3707	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3708	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3709	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3710	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3711	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C3712	08E40757S01	CAP,CER.150pF/100V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C3713	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3714	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3715	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3716	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3717	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3718	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3719	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3720	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3751	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3752	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C3753	08E45085S01	CAP,CER. 820pF/250V
MAIN-P.W.Board			C3754	08E45085S01	CAP,CER. 820pF/250V
MAIN-P.W.Board			C3755	08E45085S01	CAP,CER. 820pF/250V
MAIN-P.W.Board			C3756	08E45085S01	CAP,CER. 820pF/250V
MAIN-P.W.Board			C3757	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3758	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3759	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3760	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3801	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3802	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3851	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3852	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C4001	08E45094S01	CAP,MYL. 1.5uF/100V
MAIN-P.W.Board			C4002	08E45094S01	CAP,MYL. 1.5uF/100V
MAIN-P.W.Board			C4003	08E45094S01	CAP,MYL. 1.5uF/100V

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4004	08E45094S01	CAP,MYL. 1.5uF/100V
MAIN-P.W.Board			C4005	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4051	08E45094S01	CAP,MYL. 1.5uF/100V
MAIN-P.W.Board			C4052	08E45094S01	CAP,MYL. 1.5uF/100V
MAIN-P.W.Board			C4053	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4054	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4201	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4202	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4203	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4204	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4205	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4206	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4207	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4208	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4209	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4210	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4251	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4252	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4701	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4702	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4703	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4704	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4705	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4706	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4707	08E42417S01	CAP,CER. 1500pF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4901	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4902	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C4903	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C5001	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5002	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C5003	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5004	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5005	08E42965S01	CAP,CER. 22nF/16V
MAIN-P.W.Board			C5006	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5007	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5008	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5009	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5010	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5011	08E41391S01	CAP,CER. 0.47uF/25V
MAIN-P.W.Board			C5012	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5013	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5014	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5015	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5017	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5018	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5019	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5020	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5021	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C5022	08E42138S01	CAP,CER. 0.1uF/16V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5023	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5024	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5025	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5026	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5027	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5028	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5029	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5501	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5502	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5503	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5504	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5505	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5506	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5508	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5509	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C5510	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			C5511	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			C5515	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			C5516	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			C5517	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C5518	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C5519	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C5520	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C5521	08E45084S01	CAP,CER. 0.1uF/100V
MAIN-P.W.Board			C6501	08E43373S01	CAP,CER. 0.22uF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C6502	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7002	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7003	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7004	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7005	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7006	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7007	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7008	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7009	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7010	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7021	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7023	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7024	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7025	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7026	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7027	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7028	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7029	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7030	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7042	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7043	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7044	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7045	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7046	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7047	08E43373S01	CAP,CER. 0.22uF/50V

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C7048	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7049	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7050	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7061	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7063	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7064	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7065	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C7066	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7067	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7068	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7069	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7070	08E40757S01	CAP,CER.150pF/100V
MAIN-P.W.Board			C7102	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C7103	08E34594S01	CAP,CER 332-K-B1H-CP
MAIN-P.W.Board			C7105	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C7106	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7107	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7108	08E34594S01	CAP,CER 332-K-B1H-CP
MAIN-P.W.Board			C8901	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C8902	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9003	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9102	23E41346S01	CAP,ELY 0.22uF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9303	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9304	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9305	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9306	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9307	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C9308	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C9601	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9602	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9605	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9606	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9607	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9608	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9611	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9612	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9613	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9614	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9661	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9701	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9702	08E36680S01	CAP,CER. CP 1nF
MAIN-P.W.Board			C9703	08E36680S01	CAP,CER. CP 1nF
MAIN-P.W.Board			C9704	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C9705	08E42966S01	CAP,CER. 470nF/50V
MAIN-P.W.Board			C9706	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9708	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9801	08E36114S01	CAP,CER 224-K-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C9802	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9803	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9804	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9805	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9806	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9807	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9808	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C9901	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9902	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9908	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C9909	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C9915	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9931	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9932	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9933	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9934	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			CB2301	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board			CB6501	09E43943S01	CONN,12708HS 26P
MAIN-P.W.Board			CB6502	09E43943S01	CONN,12708HS 26P
MAIN-P.W.Board			CB6503	09E43943S01	CONN,12708HS 26P
MAIN-P.W.Board			CB8001	09E43945S01	CONN,WTB 3P
MAIN-P.W.Board			D1001	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1002	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1003	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D1004	48E45103S01	DIO,ARRAY DAN202UM

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D1701	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D1702	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1703	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D2001	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2002	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2003	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2004	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2005	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2101	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2102	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2103	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2201	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2202	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2203	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2204	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3005	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3007	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3008	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3009	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3010	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3011	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3012	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3601	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3602	48E40242S01	DIODE,KDS135

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			D3603	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3604	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3605	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3606	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3607	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3608	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3651	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3652	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3653	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3654	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3655	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3656	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3657	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3658	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3659	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3660	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3661	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3662	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3701	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3702	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3703	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3704	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3705	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3706	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D3707	48E40242S01	DIODE,KDS135

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			D3708	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4001	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4002	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4003	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4004	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4051	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D4052	48E40242S01	DIODE,KDS135
MAIN-P.W.Board			D5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D5002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D5003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7001	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7021	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7041	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7061	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7101	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D9501	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D9502	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D9605	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9606	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9607	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9608	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9609	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9610	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9611	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9612	48E45104S01	DIO,SHT RB510VM-30FH

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D9613	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9614	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9615	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9616	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9617	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9618	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9619	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9620	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9801	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9802	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9803	48E41413S01	DIODE,SA10LA03
MAIN-P.W.Board			D9804	48E41413S01	DIODE,SA10LA03
MAIN-P.W.Board			D9805	48E41413S01	DIODE,SA10LA03
MAIN-P.W.Board			D9806	48E41413S01	DIODE,SA10LA03
MAIN-P.W.Board			D9901	48E43968S01	DIO,SHOTTKY UCHS30A12
MAIN-P.W.Board			D9902	48E43968S01	DIO,SHOTTKY UCHS30A12
MAIN-P.W.Board			D9903	48E43968S01	DIO,SHOTTKY UCHS30A12
MAIN-P.W.Board			D9904	48E43968S01	DIO,SHOTTKY UCHS30A12
MAIN-P.W.Board			E1001	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1002	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1003	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1004	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1005	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1006	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1007	23E42095S01	CAP,ELY.10uF/35V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E1008	23E42095S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1703	23E41343S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1704	23E41343S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1705	23E41343S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1706	23E41343S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1707	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E2202	23E41344S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3201	23E42803S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E3202	23E42803S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E3203	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3204	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3205	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3206	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3261	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3262	23E44478S01	CAP,ELY.4.7uF/50V
MAIN-P.W.Board			E3601	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3602	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3603	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3604	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3651	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3652	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3701	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3702	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3703	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3704	23E45088S01	CAP,ELY. 22uF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E3705	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3706	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3707	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3708	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3751	23E42158S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3752	23E42158S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3753	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3754	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3755	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E3756	23E45088S01	CAP,ELY. 22uF/50V
MAIN-P.W.Board			E4261	23E45093S01	CAP,ELY. 33uF/10V
MAIN-P.W.Board			E4262	23E45093S01	CAP,ELY. 33uF/10V
MAIN-P.W.Board			E4263	23E45093S01	CAP,ELY. 33uF/10V
MAIN-P.W.Board			E4901	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E4903	23E45089S01	CAP,ELY. 22uF/63V
MAIN-P.W.Board			E5001	23E44468S01	CAP,ELY. 680uF/16V
MAIN-P.W.Board			E5002	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6501	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6502	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E8901	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8902	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E9001	23E41342S01	CAP,ELY.470uF/25V
MAIN-P.W.Board			E9101	23E43962S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E9301	23E45092S01	CAP,ELY. 330uF/35V
MAIN-P.W.Board			E9302	23E45092S01	CAP,ELY. 330uF/35V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E9303	23E45087S01	CAP,ELY. 33uF/25V
MAIN-P.W.Board			E9304	23E45087S01	CAP,ELY. 33uF/25V
MAIN-P.W.Board			E9305	23E43962S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E9306	23E43962S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E9701	23E42343S01	CAP,ELY.330uF/6.3V
MAIN-P.W.Board			E9702	23E41344S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9703	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E9801	23E45090S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9802	23E45090S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9803	23E45090S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9901	23E45091S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			E9902	23E45091S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			F1	65E43983S01	FUSE,30A
MAIN-P.W.Board			F2	65E43983S01	FUSE,30A
MAIN-P.W.Board			F3	65E43983S01	FUSE,30A
MAIN-P.W.Board			F9901	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9902	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9903	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9904	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9905	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9906	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9907	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9908	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			HL9001	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			HL9002	09E39154S01	HOLDER,FUSE

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			IC1001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1801	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1861	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1862	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC2001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC2002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC2003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC3601	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3602	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3603	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3604	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3651	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3652	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC4701	51E39596S01	IC,BA2901FV
MAIN-P.W.Board			IC4702	51E39597S01	IC,BA2903FVM
MAIN-P.W.Board			IC4901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC5001	51E44073S01	IC,AS78L05RTR
MAIN-P.W.Board			IC5002	51E43005S01	IC,BD5260G
MAIN-P.W.Board			IC5003	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5004	51E43972S01	IC,UPD78F0515AGAA2
MAIN-P.W.Board			IC5005	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC7001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7021	51E42366S01	IC,NJM4580R

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC7041	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7061	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7101	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9602	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC9603	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC9604	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC9605	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9801	51E41427S01	IC,LM5109B
MAIN-P.W.Board			IC9802	51E41427S01	IC,LM5109B
MAIN-P.W.Board			JK1001	09E42973S01	CONN,RCA 6P
MAIN-P.W.Board			L4001	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4002	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4003	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4004	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4501	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board			L4502	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board			L5001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L5002	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L5003	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L9001	24E41435S01	COIL,IND. 47uH
MAIN-P.W.Board			L9101	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L9301	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board			L9302	24E42369S01	COIL,IND. 470uH

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			Q1001	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1002	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1003	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1004	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1005	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1006	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1007	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q1008	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board			Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1702	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1703	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1704	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q1705	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2101	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2102	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2103	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2201	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q2202	48E45109S01	TR,DTA114EUAFRAT106
MAIN-P.W.Board			Q3005	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3006	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3007	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3008	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3009	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3010	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3011	48E45106S01	TR,UMT1NFHATN

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			Q3012	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3013	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3014	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3015	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3016	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3102	48E42207S01	TR,BC846
MAIN-P.W.Board			Q3103	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3104	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3105	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3106	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3107	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3202	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3203	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3204	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3205	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3206	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3207	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3208	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3209	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3210	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3211	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3212	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3261	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3262	48E40770S01	TR,DTA144EE

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			Q3263	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3264	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3265	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3266	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3651	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q3652	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q3653	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q3654	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q3655	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3656	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3657	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3658	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3659	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3660	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3661	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3662	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q3701	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3702	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3703	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3704	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3705	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3706	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3707	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3708	48E45112S01	FET,AUIRF6775MTRPbF
MAIN-P.W.Board			Q3751	48E45110S01	FET,BSB165N15NZ3

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			Q3752	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3753	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3754	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3755	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3756	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3757	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q3758	48E45110S01	FET,BSB165N15NZ3
MAIN-P.W.Board			Q4261	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4262	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4263	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4264	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4265	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4266	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q4267	48E45108S01	TR,2SA1576AFRAT106
MAIN-P.W.Board			Q4268	48E45108S01	TR,2SA1576AFRAT106
MAIN-P.W.Board			Q4269	48E45108S01	TR,2SA1576AFRAT106
MAIN-P.W.Board			Q4701	48E42995S01	TR,UMB2N
MAIN-P.W.Board			Q4702	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5001	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q5002	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q5003	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q5004	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5005	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5006	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q7001	48E30976S01	TR,IMZ1AT108-SMT6

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q7021	48E30976S01	TR,IMZ1AT108-SMT6
MAIN-P.W.Board			Q7041	48E30976S01	TR,IMZ1AT108-SMT6
MAIN-P.W.Board			Q7061	48E30976S01	TR,IMZ1AT108-SMT6
MAIN-P.W.Board			Q7101	48E30976S01	TR,IMZ1AT108-SMT6
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9102	48E42998S01	TR,KTB1260
MAIN-P.W.Board			Q9306	48E45114S01	TR,2SCR573DFHGTL
MAIN-P.W.Board			Q9307	48E45113S01	TR,2SAR573DFHGTL
MAIN-P.W.Board			Q9501	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9502	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9503	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9504	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q9505	48E45107S01	TR,2SC4081FRAT106
MAIN-P.W.Board			Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9706	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q9801	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9802	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9803	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9804	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9805	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9806	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9807	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9808	48E45116S01	TR,KTA1552T

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q9809	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9810	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9811	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9812	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9813	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9814	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9815	48E45115S01	TR,KTC3552T
MAIN-P.W.Board			Q9816	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9817	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9818	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9819	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9820	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9901	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9902	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9903	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			Q9904	48E45111S01	FET,AUIRFSL8407
MAIN-P.W.Board			R1001	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1002	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1003	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1004	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1005	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1006	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1007	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1008	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1009	06E43387S01	RES,CF. 12K-1/4W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1010	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1011	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1012	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1013	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1014	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1015	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1016	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1017	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1018	06E43387S01	RES,CF. 12K-1/4W
MAIN-P.W.Board			R1019	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1020	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1021	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1022	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1023	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1024	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1025	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1026	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1027	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1028	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1029	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1030	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1031	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1032	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1033	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1034	06E42227S01	RES,CF. 4.7K-1/16W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1035	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1036	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1037	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1038	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1039	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1040	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1041	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1042	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1043	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1044	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1045	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1046	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1047	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1048	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1049	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1050	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1051	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1052	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1053	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1054	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R1055	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1056	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1057	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1058	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1059	06E35526S01	RES,CF 752-F-1/4-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1060	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1061	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1062	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1063	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1064	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1065	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1066	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R1067	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1068	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1069	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1070	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1071	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1072	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1073	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1074	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1075	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1076	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1077	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1078	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1079	06E41000S01	RES,CF 1.2K-1/10-CP
MAIN-P.W.Board			R1080	06E37276S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R1081	06E41000S01	RES,CF 1.2K-1/10-CP
MAIN-P.W.Board			R1082	06E37276S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R1083	06E37276S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R1084	06E41000S01	RES,CF 1.2K-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1085	06E37276S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R1086	06E41000S01	RES,CF 1.2K-1/10-CP
MAIN-P.W.Board			R1087	06E43919S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1088	06E43919S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1089	06E43919S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1090	06E43919S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1091	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R1092	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1093	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1094	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1095	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1701	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R1702	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1703	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1704	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R1705	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R1706	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1707	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1708	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R1709	06E37225S01	RES,CARBON 1.5K-1/10
MAIN-P.W.Board			R1710	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1711	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1712	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1713	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1714	06E37137S01	RES,CARBON 5.6K-1/10

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1715	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1716	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1717	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R1718	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R1719	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R1720	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R1721	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R1722	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1803	06E37100S01	RES,CARBON 13K-1/16W
MAIN-P.W.Board			R1804	06E37100S01	RES,CARBON 13K-1/16W
MAIN-P.W.Board			R1805	06E37161S01	RES,CARBON 68K-1/16W
MAIN-P.W.Board			R1806	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1861	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1862	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1863	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1864	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1865	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1866	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1867	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1868	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1869	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1870	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1871	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1872	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1873	06E36591S01	RES,CARBON 18K-1/10

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1874	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1875	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R1876	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R2001	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R2002	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2003	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R2004	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2005	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R2006	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2009	06E34552S01	RES,CF 753-F-1/10-CP
MAIN-P.W.Board			R2010	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2011	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2012	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2019	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R2101	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R2102	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R2103	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R2104	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R2105	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R2106	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R2107	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R2108	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R2109	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R2110	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R2111	06E40320S01	RES,CF. 8.2K-1/10W

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R2112	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R2113	06E41381S01	RES,CF. 24K-1/10W
MAIN-P.W.Board			R2124	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R2125	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R2202	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R2203	06E41010S01	RES,CF 56K-1/10-CP
MAIN-P.W.Board			R2301	06E41015S01	RES,CF 1M-1/10-CP
MAIN-P.W.Board			R2302	06E41375S01	RES,CF. 150-1/10W
MAIN-P.W.Board			R2304	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R2305	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3033	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3034	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3035	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3036	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3037	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3038	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3039	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3040	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R3041	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3042	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3043	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3044	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3045	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3046	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3047	06E38536S01	RES,CF. 8.2K-1/4W

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3048	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3049	06E34511S01	RES,CF 561-F-1/16-CP
MAIN-P.W.Board			R3050	06E34511S01	RES,CF 561-F-1/16-CP
MAIN-P.W.Board			R3051	06E34195S01	RES,CF 681-F-1/10-CP
MAIN-P.W.Board			R3052	06E34195S01	RES,CF 681-F-1/10-CP
MAIN-P.W.Board			R3053	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R3054	06E34154S01	RES,CF 271-F-1/16
MAIN-P.W.Board			R3055	06E40823S01	RES,CF. 390-1/10W
MAIN-P.W.Board			R3056	06E40823S01	RES,CF. 390-1/10W
MAIN-P.W.Board			R3057	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3058	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3059	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3060	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3061	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3062	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3063	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3064	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R3065	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R3066	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R3067	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R3068	06E36465S01	RES CARBON 1.2K-1/10
MAIN-P.W.Board			R3073	06E32290S01	RES,CF 363-F-1/10-CP
MAIN-P.W.Board			R3074	06E32290S01	RES,CF 363-F-1/10-CP
MAIN-P.W.Board			R3075	06E32290S01	RES,CF 363-F-1/10-CP
MAIN-P.W.Board			R3076	06E32290S01	RES,CF 363-F-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3079	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3086	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3089	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3090	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3092	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3093	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3094	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3096	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3101	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3102	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3113	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3114	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3115	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R3116	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R3117	06E36467S01	RES CARBON 2.2K-1/10
MAIN-P.W.Board			R3118	06E36467S01	RES CARBON 2.2K-1/10
MAIN-P.W.Board			R3119	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3120	06E37257S01	RES,CARBON 2.4K-1/10
MAIN-P.W.Board			R3122	06E37196S01	RES,CARBON 3K-1/10W
MAIN-P.W.Board			R3123	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3124	06E37275S01	RES,CARBON 3K-1/10W
MAIN-P.W.Board			R3125	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3126	06E37257S01	RES,CARBON 2.4K-1/10
MAIN-P.W.Board			R3127	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3129	06E37227S01	RES,CARBON 1K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3130	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3131	06E40735S01	RES,CF. 620-1/10W
MAIN-P.W.Board			R3132	06E32290S01	RES,CF 363-F-1/10-CP
MAIN-P.W.Board			R3133	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3134	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3135	06E36670S01	RES,CARBON 27K-1/10
MAIN-P.W.Board			R3137	06E36670S01	RES,CARBON 27K-1/10
MAIN-P.W.Board			R3139	06E36591S01	RES,CARBON 18K-1/10
MAIN-P.W.Board			R3140	06E33241S01	RES,CF 334-F-1/10-CP
MAIN-P.W.Board			R3201	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3202	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3203	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3204	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3205	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3206	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3207	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3208	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3209	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3210	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3211	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3212	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3215	06E31154S01	RES.CF.272-J-1/16-CP
MAIN-P.W.Board			R3216	06E31154S01	RES.CF.272-J-1/16-CP
MAIN-P.W.Board			R3217	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3218	06E42132S01	RES,CF. 10K-1/16W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3219	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3220	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3221	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3222	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3223	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3224	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3261	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3262	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3263	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3264	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3265	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3266	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3267	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3268	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3269	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3270	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3301	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3302	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3303	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3304	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3601	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3602	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3603	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3604	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3605	06E35291S01	RES,CF 682-F-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3606	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3607	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3608	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3609	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3610	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3611	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3612	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3613	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3614	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3615	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3616	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3617	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3618	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3619	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3620	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3621	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3622	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3623	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3624	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3625	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3626	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3627	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3628	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3629	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3630	06E41005S01	RES,CF 10K-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R3631	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3632	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3633	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3634	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R3635	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3636	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3637	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R3638	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R3639	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3640	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3641	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R3642	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3647	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3649	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3651	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R3653	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R3654	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R3655	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3656	06E43021S01	RES,CF. 820-1/4W
MAIN-P.W.Board			R3657	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3658	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3659	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3660	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3661	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3662	06E22929S01	RES,CF. 3.3K-1/4W

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3663	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3664	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3665	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3666	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3667	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3668	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R3669	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R3670	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3671	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R3672	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R3674	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3675	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3678	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3679	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R3680	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3683	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3684	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3685	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3686	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3687	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3688	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3689	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3690	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3701	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3702	06E37280S01	RES,CARBON 10-1/4W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3703	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3704	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3705	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3706	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3707	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3708	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3709	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3710	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3711	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3712	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3713	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3714	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3715	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3716	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3717	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3718	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3719	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3720	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3721	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3722	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3723	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3724	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3751	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3752	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3753	06E37280S01	RES,CARBON 10-1/4W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3754	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3755	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3756	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3757	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3758	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3759	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3760	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3761	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3762	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R3763	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3764	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3765	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3766	06E32317S01	RES,CF 754-J-1/16-CP
MAIN-P.W.Board			R3801	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R3802	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R3803	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3804	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3851	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R3852	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R3853	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R3854	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R4001	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R4002	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R4003	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R4004	06E41016S01	RES,CF 0-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4005	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R4006	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R4007	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R4008	06E35526S01	RES,CF 752-F-1/4-CP
MAIN-P.W.Board			R4009	06E37255S01	RES,CARBON 10-1/16W
MAIN-P.W.Board			R4051	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4052	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4053	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4054	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4201	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4202	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4203	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4204	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4205	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4206	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4207	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4208	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4209	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4210	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4251	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4252	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R4261	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4262	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4263	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4264	06E40327S01	RES,CF. 56K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R4265	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4266	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4267	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4268	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4269	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4270	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4271	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4272	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R4273	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4274	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4275	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4701	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4702	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4703	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4704	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4705	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4706	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4707	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4709	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4710	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4711	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4712	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4713	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4714	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4715	06E42297S01	RES,CF. 100K-1/10W

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4716	06E34195S01	RES,CF 681-F-1/10-CP
MAIN-P.W.Board			R4717	06E34552S01	RES,CF 753-F-1/10-CP
MAIN-P.W.Board			R4718	06E40314S01	RES,CF. 1.1K-1/10W
MAIN-P.W.Board			R4721	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4722	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4723	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board			R4724	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board			R4725	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4726	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4904	06E31805S01	RES,CF.753-J-1/16-CP
MAIN-P.W.Board			R4905	06E31156S01	RES.CF.512-J-1/16-CP
MAIN-P.W.Board			R5001	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R5002	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R5003	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5005	06E37262S01	RES,CARBON 470-1/10W
MAIN-P.W.Board			R5007	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5008	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5009	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R5010	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R5011	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5012	06E42959S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R5013	06E37252S01	RES,CARBON 22K-1/10
MAIN-P.W.Board			R5014	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R5015	06E37275S01	RES,CARBON 3K-1/10W
MAIN-P.W.Board			R5016	06E40320S01	RES,CF. 8.2K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R5017	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5018	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5019	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5020	06E36477S01	RES CARBON 33K-1/10
MAIN-P.W.Board			R5021	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R5022	06E36477S01	RES CARBON 33K-1/10
MAIN-P.W.Board			R5023	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R5024	06E36477S01	RES CARBON 33K-1/10
MAIN-P.W.Board			R5025	06E37165S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R5026	06E36670S01	RES,CARBON 27K-1/10
MAIN-P.W.Board			R5027	06E36670S01	RES,CARBON 27K-1/10
MAIN-P.W.Board			R5028	06E40553S01	RES,CF. 2.4K-1/10
MAIN-P.W.Board			R5029	06E36670S01	RES,CARBON 27K-1/10
MAIN-P.W.Board			R5030	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R5031	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R5032	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R5033	06E37109S01	RES,CARBON 4.7K-1/10
MAIN-P.W.Board			R5034	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5036	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5037	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5038	06E36469S01	RES CARBON 5.6K-1/10
MAIN-P.W.Board			R5039	06E42952S01	RES,CF. 510-1/10W
MAIN-P.W.Board			R5040	06E42952S01	RES,CF. 510-1/10W
MAIN-P.W.Board			R5041	06E42952S01	RES,CF. 510-1/10W
MAIN-P.W.Board			R5042	06E40320S01	RES,CF. 8.2K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5043	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5044	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5045	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5046	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5047	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5048	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5049	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5501	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5502	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5503	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5504	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5505	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5506	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5508	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R6503	06E31154S01	RES.CF.272-J-1/16-CP
MAIN-P.W.Board			R6504	06E31154S01	RES.CF.272-J-1/16-CP
MAIN-P.W.Board			R7001	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R7002	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7003	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7004	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7005	06E45082S01	RES,CF. 270k-1/10W
MAIN-P.W.Board			R7006	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7007	06E44066S01	RES,CF. 68K-1/10W
MAIN-P.W.Board			R7008	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7009	06E37110S01	RES,CARBON 10K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7010	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7011	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7012	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7013	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7014	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7016	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7021	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7022	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R7023	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7024	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7025	06E45082S01	RES,CF. 270k-1/10W
MAIN-P.W.Board			R7026	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7027	06E44066S01	RES,CF. 68K-1/10W
MAIN-P.W.Board			R7028	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7029	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7030	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7031	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7032	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7033	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7034	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7036	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7041	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R7042	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7043	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7044	06E37224S01	RES,CARBON 2K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7045	06E45082S01	RES,CF. 270k-1/10W
MAIN-P.W.Board			R7046	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7047	06E44066S01	RES,CF. 68K-1/10W
MAIN-P.W.Board			R7048	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7049	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7050	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7051	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7052	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7053	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7054	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7056	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7061	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7062	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R7063	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7064	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7065	06E45082S01	RES,CF. 270k-1/10W
MAIN-P.W.Board			R7066	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7067	06E44066S01	RES,CF. 68K-1/10W
MAIN-P.W.Board			R7068	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7069	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7070	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7071	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7072	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7073	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R7074	06E37224S01	RES,CARBON 2K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7076	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7101	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R7102	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7103	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R7104	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R7105	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R7106	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R7107	06E35407S01	RES,CF 364-F-1/16-CP
MAIN-P.W.Board			R7108	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R7109	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7110	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R7111	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R7113	06E33657S01	RES,CF,153-F-1/10-CP
MAIN-P.W.Board			R9101	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R9102	06E36587S01	RES,CARBON 24K-1/16
MAIN-P.W.Board			R9105	06E36102S01	RES,CF 303-J-1/10-CP
MAIN-P.W.Board			R9106	06E39638S01	RES,CF. 82K-1/4W
MAIN-P.W.Board			R9107	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9305	06E35236S01	RES,CF 152-J-1/4-CP
MAIN-P.W.Board			R9306	06E32200S01	RES,CF,113-J-1/4-CP
MAIN-P.W.Board			R9307	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R9308	06E41010S01	RES,CF 56K-1/10-CP
MAIN-P.W.Board			R9310	06E35236S01	RES,CF 152-J-1/4-CP
MAIN-P.W.Board			R9311	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R9312	06E41010S01	RES,CF 56K-1/10-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R9313	06E32200S01	RES,CF,113-J-1/4-CP
MAIN-P.W.Board			R9501	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9502	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9503	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9504	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9505	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9506	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9508	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9509	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9510	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9511	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9513	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9601	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R9604	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R9605	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9606	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9607	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9608	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9609	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9613	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9614	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9615	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9616	06E40743S01	RES,CF. 9.1K-1/10W
MAIN-P.W.Board			R9617	06E42132S01	RES,CF. 10K-1/16W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9661	06E40320S01	RES,CF. 8.2K-1/10W
MAIN-P.W.Board			R9701	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R9702	06E36584S01	RES,CARBON 820-1/16
MAIN-P.W.Board			R9703	06E37167S01	RES,CARBON 2.2K-1/10
MAIN-P.W.Board			R9704	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R9705	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R9706	06E37226S01	RES,CARBON 1.2K-1/10
MAIN-P.W.Board			R9707	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R9708	06E37165S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R9709	06E41376S01	RES,CF. 220-1/10W
MAIN-P.W.Board			R9710	06E40733S01	RES,CF. 200-1/10W
MAIN-P.W.Board			R9711	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R9712	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R9713	06E36660S01	RES,CARBON 20K-1/10
MAIN-P.W.Board			R9714	06E31808S01	RES,CF.364-J-1/16-CP
MAIN-P.W.Board			R9715	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9716	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9801	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9802	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9803	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9804	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9805	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9806	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9807	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9808	06E37280S01	RES,CARBON 10-1/4W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9809	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9810	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9811	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9812	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9813	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9814	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9815	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9816	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9817	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9818	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9819	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9820	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9821	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9822	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9823	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9824	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9901	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9902	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9903	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9904	06E38474S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9905	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9906	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9907	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9908	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9911	06E32286S01	RES,CF 434-J-1/4-CP

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9912	06E32286S01	RES,CF 434-J-1/4-CP
MAIN-P.W.Board			R9913	06E43386S01	RES,CF. 68K-1/4W
MAIN-P.W.Board			R9914	06E43386S01	RES,CF. 68K-1/4W
MAIN-P.W.Board			R9931	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9933	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9935	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9937	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			SD4901	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD4902	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD8901	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			SD9302	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9303	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9305	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9306	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SK9001	09E45121S01	POWER SOCKET 3P
MAIN-P.W.Board			SW1	40E45118S01	SW,SLIDE CSE-SK12D2G
MAIN-P.W.Board			T9002	24E45119S01	COIL,CHOKE 180uH
MAIN-P.W.Board			T9901	25E45120S01	TRANS,POWER 4:10:6:6
MAIN-P.W.Board			T9902	25E45120S01	TRANS,POWER 4:10:6:6
MAIN-P.W.Board			TH3801	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3851	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3852	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH5001	48E42173S01	THERMISTOR,100K

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			TH9601	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9605	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9606	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9607	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9608	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9609	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9610	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9611	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9612	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9661	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TML4201	09E45122S01	SPEAKER JACK 4P
MAIN-P.W.Board			TML4202	09E45122S01	SPEAKER JACK 4P
MAIN-P.W.Board			TML4203	09E45122S01	SPEAKER JACK 4P
MAIN-P.W.Board			ZD2001	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD2002	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD2003	48E45097S01	DIO,ZEN UDZVFH-7.5B
MAIN-P.W.Board			ZD2004	48E45097S01	DIO,ZEN UDZVFH-7.5B
MAIN-P.W.Board			ZD2101	48E45099S01	DIO,ZEN UDZVFH-6.8B
MAIN-P.W.Board			ZD3001	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3002	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3003	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3004	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3101	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3102	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD4001	48E45100S01	DIO,ZEN UDZVFH-13B

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD4002	48E45100S01	DIO,ZEN UDZVFH-13B
MAIN-P.W.Board			ZD4003	48E45100S01	DIO,ZEN UDZVFH-13B
MAIN-P.W.Board			ZD4004	48E45100S01	DIO,ZEN UDZVFH-13B
MAIN-P.W.Board			ZD4051	48E44069S01	DIODE,ZENER MM3Z15VC
MAIN-P.W.Board			ZD4052	48E44069S01	DIODE,ZENER MM3Z15VC
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9301	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9302	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9501	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9502	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9503	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9504	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9505	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9506	48E42996S01	DIODE,ZENER HZK30-1L
SUB.FULL-P.W.Board			C1101	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1102	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1103	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1104	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1105	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1106	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1109	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1110	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1201	08E36675S01	CAP,CER. CP 33pF

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.FULL-P.W.Board			C1202	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1203	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1204	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1205	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1206	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1207	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1208	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1209	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1210	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1211	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1212	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1401	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1402	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1403	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1404	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1405	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1406	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1407	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1408	08E36675S01	CAP,CER. CP 33pF
SUB.FULL-P.W.Board			C1501	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1502	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1503	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1504	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1505	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1506	08E42967S01	CAP,FILM 0.33uF/63V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.FULL-P.W.Board			C1507	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1508	08E42967S01	CAP,FILM 0.33uF/63V
SUB.FULL-P.W.Board			C1509	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1510	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1511	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			C1512	08E43373S01	CAP,CER. 0.22uF/50V
SUB.FULL-P.W.Board			CB6551	09E43944S01	CONN,12708WR 26P
SUB.FULL-P.W.Board			CB6552	09E43944S01	CONN,12708WR 26P
SUB.FULL-P.W.Board			D1101	48E36633S01	DIODE,ARRAY DAP202K
SUB.FULL-P.W.Board			D1102	48E36633S01	DIODE,ARRAY DAP202K
SUB.FULL-P.W.Board			D1103	48E36568S01	DIODE,ARRAY DAN202K
SUB.FULL-P.W.Board			D1104	48E36568S01	DIODE,ARRAY DAN202K
SUB.FULL-P.W.Board			E1101	23E42346S01	CAP,ELY.22uF/16V
SUB.FULL-P.W.Board			E1102	23E42346S01	CAP,ELY.22uF/16V
SUB.FULL-P.W.Board			E1109	23E42346S01	CAP,ELY.22uF/16V
SUB.FULL-P.W.Board			E1110	23E42346S01	CAP,ELY.22uF/16V
SUB.FULL-P.W.Board			IC1101	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1102	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1201	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1202	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1401	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1402	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1501	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			IC1502	51E42366S01	IC,NJM4580R
SUB.FULL-P.W.Board			R1101	06E42225S01	RES,CF. 750K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.FULL-P.W.Board			R1102	06E42225S01	RES,CF. 750K-1/10W
SUB.FULL-P.W.Board			R1103	06E42225S01	RES,CF. 750K-1/10W
SUB.FULL-P.W.Board			R1104	06E42225S01	RES,CF. 750K-1/10W
SUB.FULL-P.W.Board			R1105	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.FULL-P.W.Board			R1106	06E37276S01	RES,CARBON 3.9K-1/10
SUB.FULL-P.W.Board			R1107	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.FULL-P.W.Board			R1108	06E37276S01	RES,CARBON 3.9K-1/10
SUB.FULL-P.W.Board			R1109	06E37276S01	RES,CARBON 3.9K-1/10
SUB.FULL-P.W.Board			R1110	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.FULL-P.W.Board			R1111	06E37276S01	RES,CARBON 3.9K-1/10
SUB.FULL-P.W.Board			R1112	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.FULL-P.W.Board			R1113	06E37225S01	RES,CARBON 1.5K-1/10
SUB.FULL-P.W.Board			R1115	06E37225S01	RES,CARBON 1.5K-1/10
SUB.FULL-P.W.Board			R1118	06E37225S01	RES,CARBON 1.5K-1/10
SUB.FULL-P.W.Board			R1120	06E37225S01	RES,CARBON 1.5K-1/10
SUB.FULL-P.W.Board			R1122	06E31154S01	RES.CF.272-J-1/16-CP
SUB.FULL-P.W.Board			R1124	06E31154S01	RES.CF.272-J-1/16-CP
SUB.FULL-P.W.Board			R1142	06E31156S01	RES.CF.512-J-1/16-CP
SUB.FULL-P.W.Board			R1144	06E31156S01	RES.CF.512-J-1/16-CP
SUB.FULL-P.W.Board			R1201	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1202	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1203	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1204	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1205	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1206	06E42961S01	RES,CF. 18K-1/10W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.FULL-P.W.Board			R1207	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1208	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1209	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1210	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1211	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1212	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1213	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1214	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1215	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1216	06E42961S01	RES,CF. 18K-1/10W
SUB.FULL-P.W.Board			R1401	06E37227S01	RES,CARBON 1K-1/10W
SUB.FULL-P.W.Board			R1402	06E37227S01	RES,CARBON 1K-1/10W
SUB.FULL-P.W.Board			R1403	06E37227S01	RES,CARBON 1K-1/10W
SUB.FULL-P.W.Board			R1404	06E37227S01	RES,CARBON 1K-1/10W
SUB.FULL-P.W.Board			R1405	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1406	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1407	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1408	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1409	06E34511S01	RES,CF 561-F-1/16-CP
SUB.FULL-P.W.Board			R1410	06E45080S01	RES,CF. 20K-1/16W
SUB.FULL-P.W.Board			R1411	06E34511S01	RES,CF 561-F-1/16-CP
SUB.FULL-P.W.Board			R1412	06E34511S01	RES,CF 561-F-1/16-CP
SUB.FULL-P.W.Board			R1413	06E45080S01	RES,CF. 20K-1/16W
SUB.FULL-P.W.Board			R1414	06E34511S01	RES,CF 561-F-1/16-CP
SUB.FULL-P.W.Board			R1415	06E45080S01	RES,CF. 20K-1/16W

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.FULL-P.W.Board			R1416	06E45080S01	RES,CF. 20K-1/16W
SUB.FULL-P.W.Board			R1501	06E37275S01	RES,CARBON 3K-1/10W
SUB.FULL-P.W.Board			R1502	06E37275S01	RES,CARBON 3K-1/10W
SUB.FULL-P.W.Board			R1503	06E37275S01	RES,CARBON 3K-1/10W
SUB.FULL-P.W.Board			R1504	06E37275S01	RES,CARBON 3K-1/10W
SUB.FULL-P.W.Board			R1505	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1506	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1507	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1508	06E41016S01	RES,CF 0-1/10-CP
SUB.FULL-P.W.Board			R1509	06E37109S01	RES,CARBON 4.7K-1/10
SUB.FULL-P.W.Board			R1510	06E37109S01	RES,CARBON 4.7K-1/10
SUB.FULL-P.W.Board			R1511	06E37109S01	RES,CARBON 4.7K-1/10
SUB.FULL-P.W.Board			R1512	06E37109S01	RES,CARBON 4.7K-1/10
SUB.FULL-P.W.Board			R1513	06E41011S01	RES,CF 100K-1/10-CP
SUB.FULL-P.W.Board			R1514	06E41011S01	RES,CF 100K-1/10-CP
SUB.FULL-P.W.Board			R1515	06E41011S01	RES,CF 100K-1/10-CP
SUB.FULL-P.W.Board			R1516	06E41011S01	RES,CF 100K-1/10-CP
SUB.FULL-P.W.Board			SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
SUB.FULL-P.W.Board			SW1501	40E41432S01	SW,SLIDE SK-22D15-G6
SUB.FULL-P.W.Board			SW1502	40E41432S01	SW,SLIDE SK-22D15-G6
SUB.FULL-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
SUB.FULL-P.W.Board			VOL1402	18E41507S01	VOL,ROTARY 50KX2
SUB.FULL-P.W.Board			VOL1501	18E42155S01	VOL,ROTARY 20KX4
SUB.FULL-P.W.Board			VOL1502	18E42155S01	VOL,ROTARY 20KX4

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			C1151	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1152	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1153	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1154	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1155	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1156	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1251	08E36675S01	CAP,CER. CP 33pF
SUB.MONO-P.W.Board			C1252	08E36675S01	CAP,CER. CP 33pF
SUB.MONO-P.W.Board			C1253	08E36675S01	CAP,CER. CP 33pF
SUB.MONO-P.W.Board			C1254	08E36675S01	CAP,CER. CP 33pF
SUB.MONO-P.W.Board			C1255	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1256	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1351	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1352	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1353	08E42323S01	CAP,CER. 22pF/50V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			C1354	08E42323S01	CAP,CER. 22pF/50V
SUB.MONO-P.W.Board			C1451	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1452	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1453	08E40234S01	CAP,CER. 10pF/50V
SUB.MONO-P.W.Board			C1454	08E42323S01	CAP,CER. 22pF/50V
SUB.MONO-P.W.Board			C1551	08E42191S01	CAP,FILM 0.1uF/63V
SUB.MONO-P.W.Board			C1552	08E43010S01	CAP,FILM 56nF/63V
SUB.MONO-P.W.Board			C1553	08E38421S01	CAP,CER. 22pF/50V
SUB.MONO-P.W.Board			C1554	08E42120S01	CAP,FILM 220nF/63V
SUB.MONO-P.W.Board			C1555	08E38421S01	CAP,CER. 22pF/50V
SUB.MONO-P.W.Board			C1556	08E42118S01	CAP,FILM 150nF/63V
SUB.MONO-P.W.Board			C1557	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1558	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1651	08E42962S01	CAP,FILM 1.0uF/100V
SUB.MONO-P.W.Board			C1652	08E42967S01	CAP,FILM 0.33uF/63V

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			C1653	08E42967S01	CAP,FILM 0.33uF/63V
SUB.MONO-P.W.Board			C1654	08E42962S01	CAP,FILM 1.0uF/100V
SUB.MONO-P.W.Board			C1655	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1656	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1951	08E43938S01	CAP,FILM 0.01uF/63V
SUB.MONO-P.W.Board			C1952	08E40234S01	CAP,CER. 10pF/50V
SUB.MONO-P.W.Board			C1955	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			C1956	08E43373S01	CAP,CER. 0.22uF/50V
SUB.MONO-P.W.Board			CB6571	09E43944S01	CONN,12708WR 26P
SUB.MONO-P.W.Board			D1151	48E36633S01	DIODE,ARRAY DAP202K
SUB.MONO-P.W.Board			D1152	48E36633S01	DIODE,ARRAY DAP202K
SUB.MONO-P.W.Board			D1153	48E36568S01	DIODE,ARRAY DAN202K
SUB.MONO-P.W.Board			D1154	48E36568S01	DIODE,ARRAY DAN202K
SUB.MONO-P.W.Board			D1450	48E45101S01	DIO,ARRAY DAN217UM
SUB.MONO-P.W.Board			D1451	48E45101S01	DIO,ARRAY DAN217UM

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			E1151	23E42095S01	CAP,ELY.10uF/35V
SUB.MONO-P.W.Board			E1152	23E42095S01	CAP,ELY.10uF/35V
SUB.MONO-P.W.Board			E1153	23E42095S01	CAP,ELY.10uF/35V
SUB.MONO-P.W.Board			E1154	23E42095S01	CAP,ELY.10uF/35V
SUB.MONO-P.W.Board			E1155	23E42334S01	CAP,ELY.22uF/25V
SUB.MONO-P.W.Board			E1156	23E42334S01	CAP,ELY.22uF/25V
SUB.MONO-P.W.Board			E1951	23E43963S01	CAP,ELY.2.2uF/50V
SUB.MONO-P.W.Board			IC1151	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1152	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1251	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1351	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1451	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1551	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1651	51E42366S01	IC,NJM4580R
SUB.MONO-P.W.Board			IC1951	51E42366S01	IC,NJM4580R

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			R1151	06E42225S01	RES,CF. 750K-1/10W
SUB.MONO-P.W.Board			R1152	06E42225S01	RES,CF. 750K-1/10W
SUB.MONO-P.W.Board			R1153	06E42225S01	RES,CF. 750K-1/10W
SUB.MONO-P.W.Board			R1154	06E42225S01	RES,CF. 750K-1/10W
SUB.MONO-P.W.Board			R1155	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.MONO-P.W.Board			R1156	06E37276S01	RES,CARBON 3.9K-1/10
SUB.MONO-P.W.Board			R1157	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.MONO-P.W.Board			R1158	06E37276S01	RES,CARBON 3.9K-1/10
SUB.MONO-P.W.Board			R1159	06E37276S01	RES,CARBON 3.9K-1/10
SUB.MONO-P.W.Board			R1160	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.MONO-P.W.Board			R1161	06E37276S01	RES,CARBON 3.9K-1/10
SUB.MONO-P.W.Board			R1162	06E41000S01	RES,CF 1.2K-1/10-CP
SUB.MONO-P.W.Board			R1163	06E37225S01	RES,CARBON 1.5K-1/10
SUB.MONO-P.W.Board			R1165	06E37225S01	RES,CARBON 1.5K-1/10
SUB.MONO-P.W.Board			R1168	06E37225S01	RES,CARBON 1.5K-1/10

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			R1170	06E37225S01	RES,CARBON 1.5K-1/10
SUB.MONO-P.W.Board			R1172	06E31154S01	RES.CF.272-J-1/16-CP
SUB.MONO-P.W.Board			R1174	06E36621S01	RES,CARBON 6.8K-1/16
SUB.MONO-P.W.Board			R1251	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1252	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1253	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1254	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1255	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1256	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1257	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1258	06E42961S01	RES,CF. 18K-1/10W
SUB.MONO-P.W.Board			R1351	06E36591S01	RES,CARBON 18K-1/10
SUB.MONO-P.W.Board			R1352	06E37110S01	RES,CARBON 10K-1/10W
SUB.MONO-P.W.Board			R1353	06E37110S01	RES,CARBON 10K-1/10W
SUB.MONO-P.W.Board			R1354	06E36591S01	RES,CARBON 18K-1/10

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

SUB.MONO-P.W.Board			R1355	06E36591S01	RES,CARBON 18K-1/10
SUB.MONO-P.W.Board			R1357	06E36591S01	RES,CARBON 18K-1/10
SUB.MONO-P.W.Board			R1359	06E35291S01	RES,CF 682-F-1/10-CP
SUB.MONO-P.W.Board			R1360	06E35243S01	RES,CF 752-F-1/10-CP
SUB.MONO-P.W.Board			R1361	06E40977S01	RES,CF 10-1/10-CP
SUB.MONO-P.W.Board			R1362	06E40977S01	RES,CF 10-1/10-CP
SUB.MONO-P.W.Board			R1450	06E40745S01	RES,CF. 47K-1/10W
SUB.MONO-P.W.Board			R1451	06E36624S01	RES,CARBON 56K-1/10
SUB.MONO-P.W.Board			R1452	06E34511S01	RES,CF 561-F-1/16-CP
SUB.MONO-P.W.Board			R1453	06E45081S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1454	06E34154S01	RES,CF 271-F-1/16
SUB.MONO-P.W.Board			R1455	06E32288S01	RES,CF 622-F-1/10-CP
SUB.MONO-P.W.Board			R1456	06E40316S01	RES,CF. 2K-1/10W
SUB.MONO-P.W.Board			R1457	06E37252S01	RES,CARBON 22K-1/10
SUB.MONO-P.W.Board			R1551	06E42134S01	RES,CF. 1M-1/16W

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

SUB.MONO-P.W.Board			R1552	06E42134S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1553	06E40553S01	RES,CF. 2.4K-1/10
SUB.MONO-P.W.Board			R1555	06E40553S01	RES,CF. 2.4K-1/10
SUB.MONO-P.W.Board			R1556	06E40553S01	RES,CF. 2.4K-1/10
SUB.MONO-P.W.Board			R1557	06E42134S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1558	06E42134S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1651	06E32288S01	RES,CF 622-F-1/10-CP
SUB.MONO-P.W.Board			R1652	06E42134S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1653	06E42134S01	RES,CF. 1M-1/16W
SUB.MONO-P.W.Board			R1654	06E35291S01	RES,CF 682-F-1/10-CP
SUB.MONO-P.W.Board			R1655	06E34814S01	RES,CF 513-F-1/16-CP
SUB.MONO-P.W.Board			R1656	06E44066S01	RES,CF. 68K-1/10W
SUB.MONO-P.W.Board			R1950	06E44067S01	RES,CF. 820K-1/10W
SUB.MONO-P.W.Board			R1951	06E40357S01	RES,CF. 82K-1/10W
SUB.MONO-P.W.Board			R1952	06E41015S01	RES,CF 1M-1/10-CP

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB.MONO-P.W.Board			R1953	06E37109S01	RES,CARBON 4.7K-1/10
SUB.MONO-P.W.Board			R1954	06E44064S01	RES,CF. 43-1/10W
SUB.MONO-P.W.Board			R1955	06E43653S01	RES,CF. 22-1/10W
SUB.MONO-P.W.Board			R1956	06E37228S01	RES,CARBON 510-1/10W
SUB.MONO-P.W.Board			R1957	06E36467S01	RES CARBON 2.2K-1/10
SUB.MONO-P.W.Board			R1958	06E36670S01	RES,CARBON 27K-1/10
SUB.MONO-P.W.Board			R1959	06E41015S01	RES,CF 1M-1/10-CP
SUB.MONO-P.W.Board			R1960	06E40553S01	RES,CF. 2.4K-1/10
SUB.MONO-P.W.Board			SW1352	40E41432S01	SW,SLIDE SK-22D15-G6
SUB.MONO-P.W.Board			VOL1451	18E41439S01	VOL,ROTARY 50KX1
SUB.MONO-P.W.Board			VOL1551	18E42155S01	VOL,ROTARY 20KX4
SUB.MONO-P.W.Board			VOL1651	18E42201S01	VOL,ROTARY 50KX2
SUB.MONO-P.W.Board			VOL1951	18E42212S01	VOL,ROTARY 5K
LED-P.W.Board			C8061	08E45086S01	CAP,CER. 200pF/50V
LED-P.W.Board			C8062	08E45086S01	CAP,CER. 200pF/50V
LED-P.W.Board			C8063	08E45086S01	CAP,CER. 200pF/50V
LED-P.W.Board			C8064	08E45086S01	CAP,CER. 200pF/50V

#1 X-A90V(North American) Only,
\$1 X-A90V(European) Only,
%1 X-A90V(General Foreign) Only,

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

LED-P.W.Board			C8065	08E37118S01	CAP,CER.CP 220pF/50V
LED-P.W.Board			CB8061	09E43945S01	CONN,WTB 3P
LED-P.W.Board			LD8061	48E45096S01	LED,WHT VCEW1151CDS
LED-P.W.Board			LD8062	48E45096S01	LED,WHT VCEW1151CDS
LED-P.W.Board			LD8063	48E45096S01	LED,WHT VCEW1151CDS
LED-P.W.Board			LD8064	48E45096S01	LED,WHT VCEW1151CDS
LED-P.W.Board			LD8065	48E45095S01	LED,RED VFHR1111C
LED-P.W.Board			R8061	06E45083S01	RES,CF. 1.3k-1/4W
LED-P.W.Board			R8063	06E45083S01	RES,CF. 1.3k-1/4W
LED-P.W.Board			R8065	06E45083S01	RES,CF. 1.3k-1/4W
LED-P.W.Board			R8067	06E45083S01	RES,CF. 1.3k-1/4W
LED-P.W.Board			R8069	06E45083S01	RES,CF. 1.3k-1/4W
Miscellaneous			CH8001	09E43939S01	ASSY,LED WIRE 3P

#1 X-A90V(North American) Only,
 \$1 X-A90V(European) Only,
 %1 X-A90V(General Foreign) Only,