


Exploded View (Cabinet)

NOTE : □ General Foreign Model, Chinese Model Only.

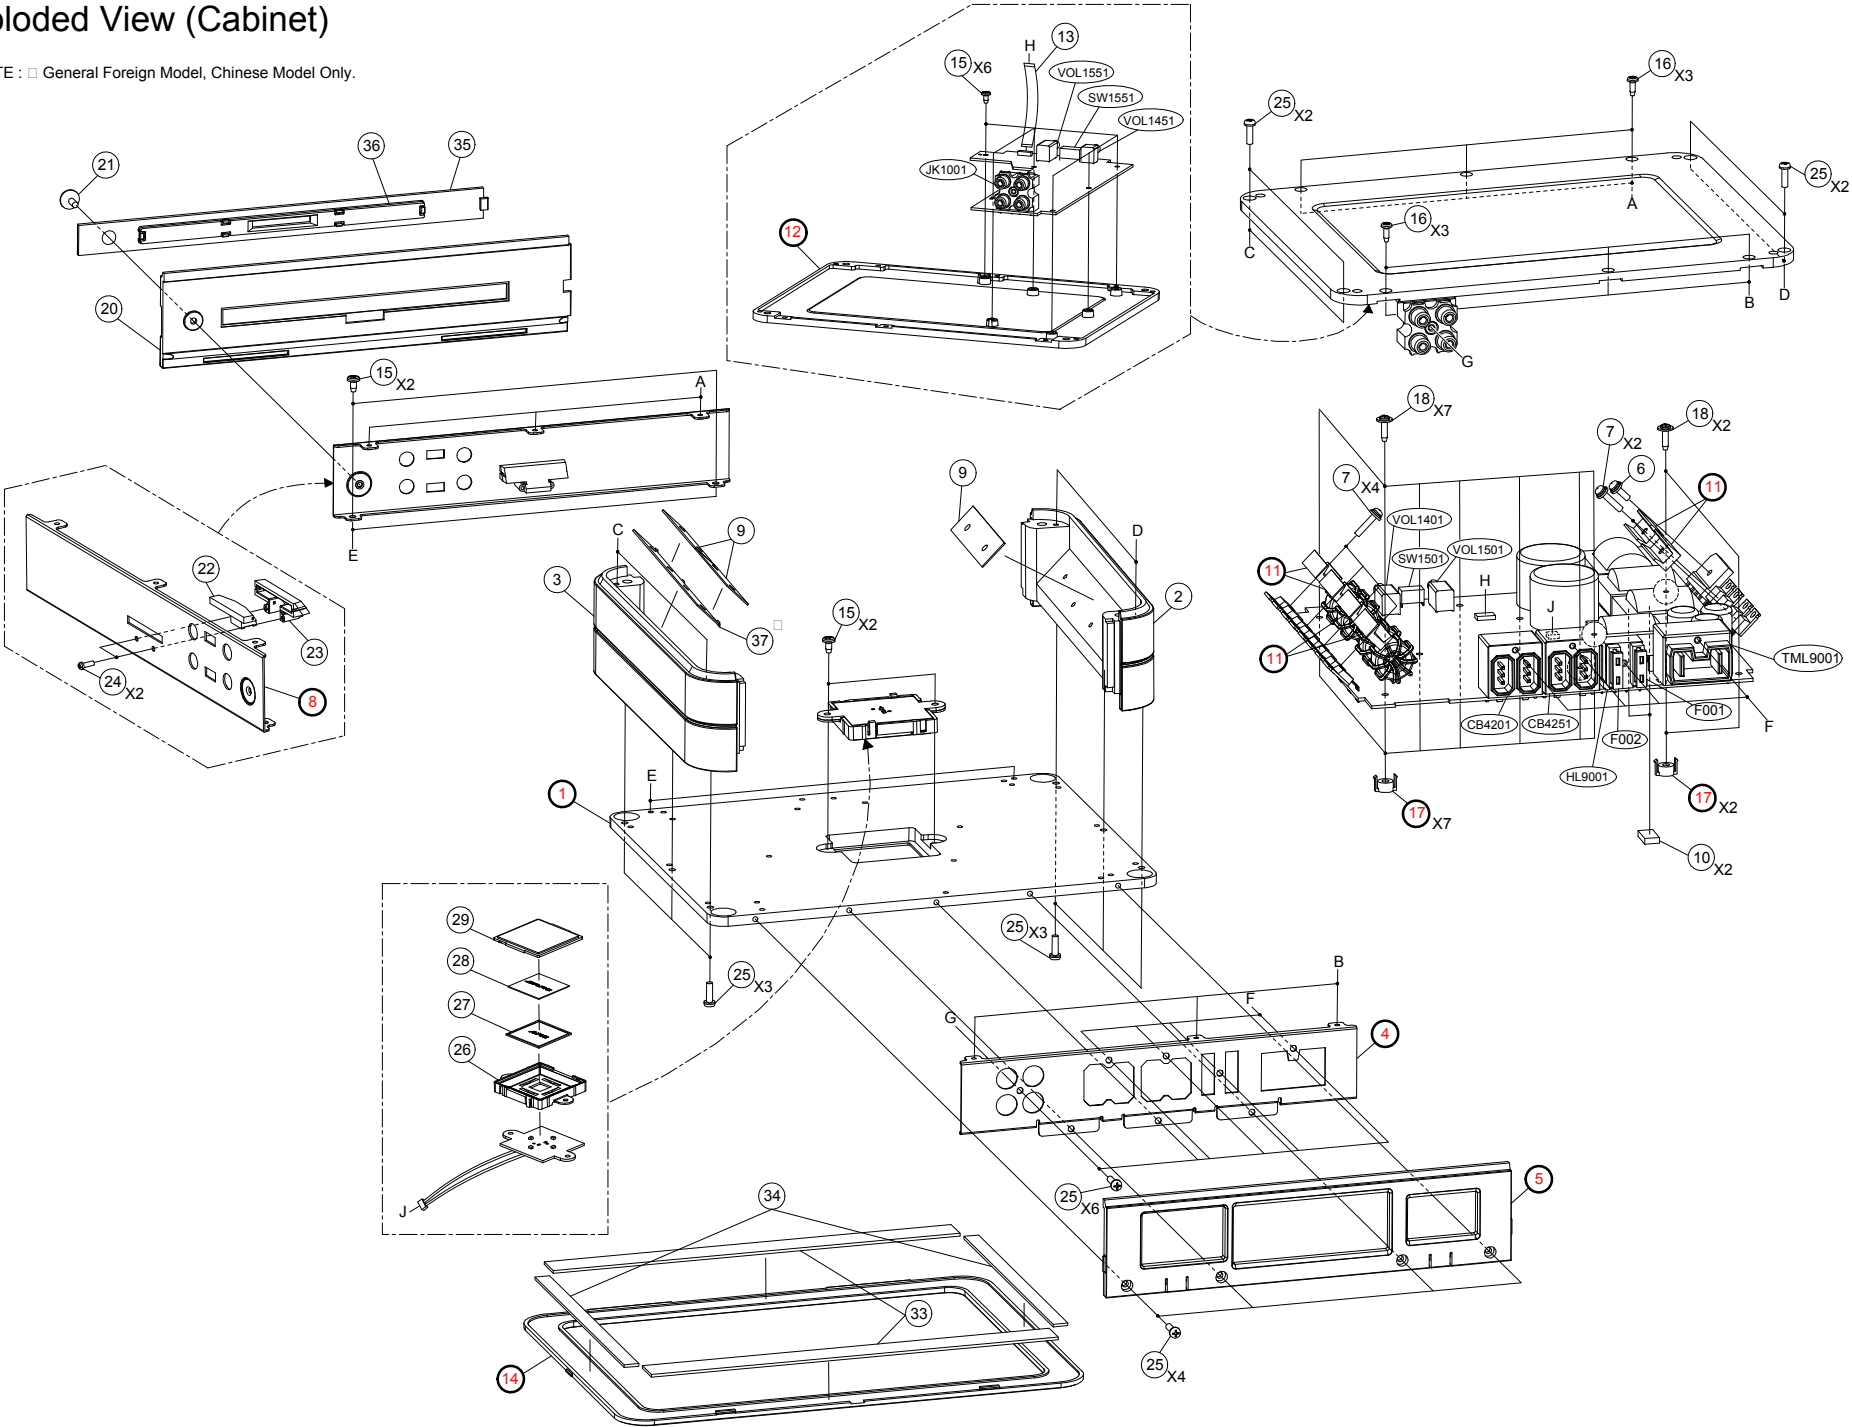

MODEL	Symbol No.	Parts No.	Description
	1	-----	HEAT,SINK MAIN
	2	13E41511S01	PANEL,SIDE-R
	3	13E41459S01	PANEL,SIDE-L
	4	-----	CHAS,REAR
	5	-----	COVER,REAR
	6	03E36210S01	SCR,M3X10(P)(WHT)
	7	03E38094S01	SCR,M3X15.5(WS)
	8	-----	CHAS,FRONT
	9	14E41450S01	INSULATOR,SILPAD-2H
	10	14E39754S01	INSULATOR,GAPPAD-COIL
	11	-----	HEAT,SINK BAR
	12	-----	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	-----	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E41471S01	SCR,M2.6X8(P)(BLK)
	17	-----	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	34E41467S01	IND,COVER DOOR
	23	09E41464S01	HOLDER,IND
	24	03E39164S01	SCR,M2X6(P)(BLK)
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	33E41455S01	PLATE,COVER DOOR
	36	34E41473S01	IND,PLATE COVER DOOR
%1	37	07E41514S01	BKT,SHIELD-M
&1	37	07E41514S01	BKT,SHIELD-M
	CB4201	09E41510S01	CONN,SPK-CON
	CB4251	09E41510S01	CONN,SPK-CON
	F001	65E38096S01	FUSE,AUTO 30A
	F002	65E38096S01	FUSE,AUTO 30A
	HL9001	09E39445S01	HOLDER,FUSE
	JK1001	09E41442S01	CONN,RCA 4P

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,


&1 PDX-F4(Chinese) Only,

Others:Common.


NOTE:The part that has not PART NUMBER will not be supplied.

Exploded View (Cabinet)

NOTE : □ General Foreign Model, Chinese Model Only.

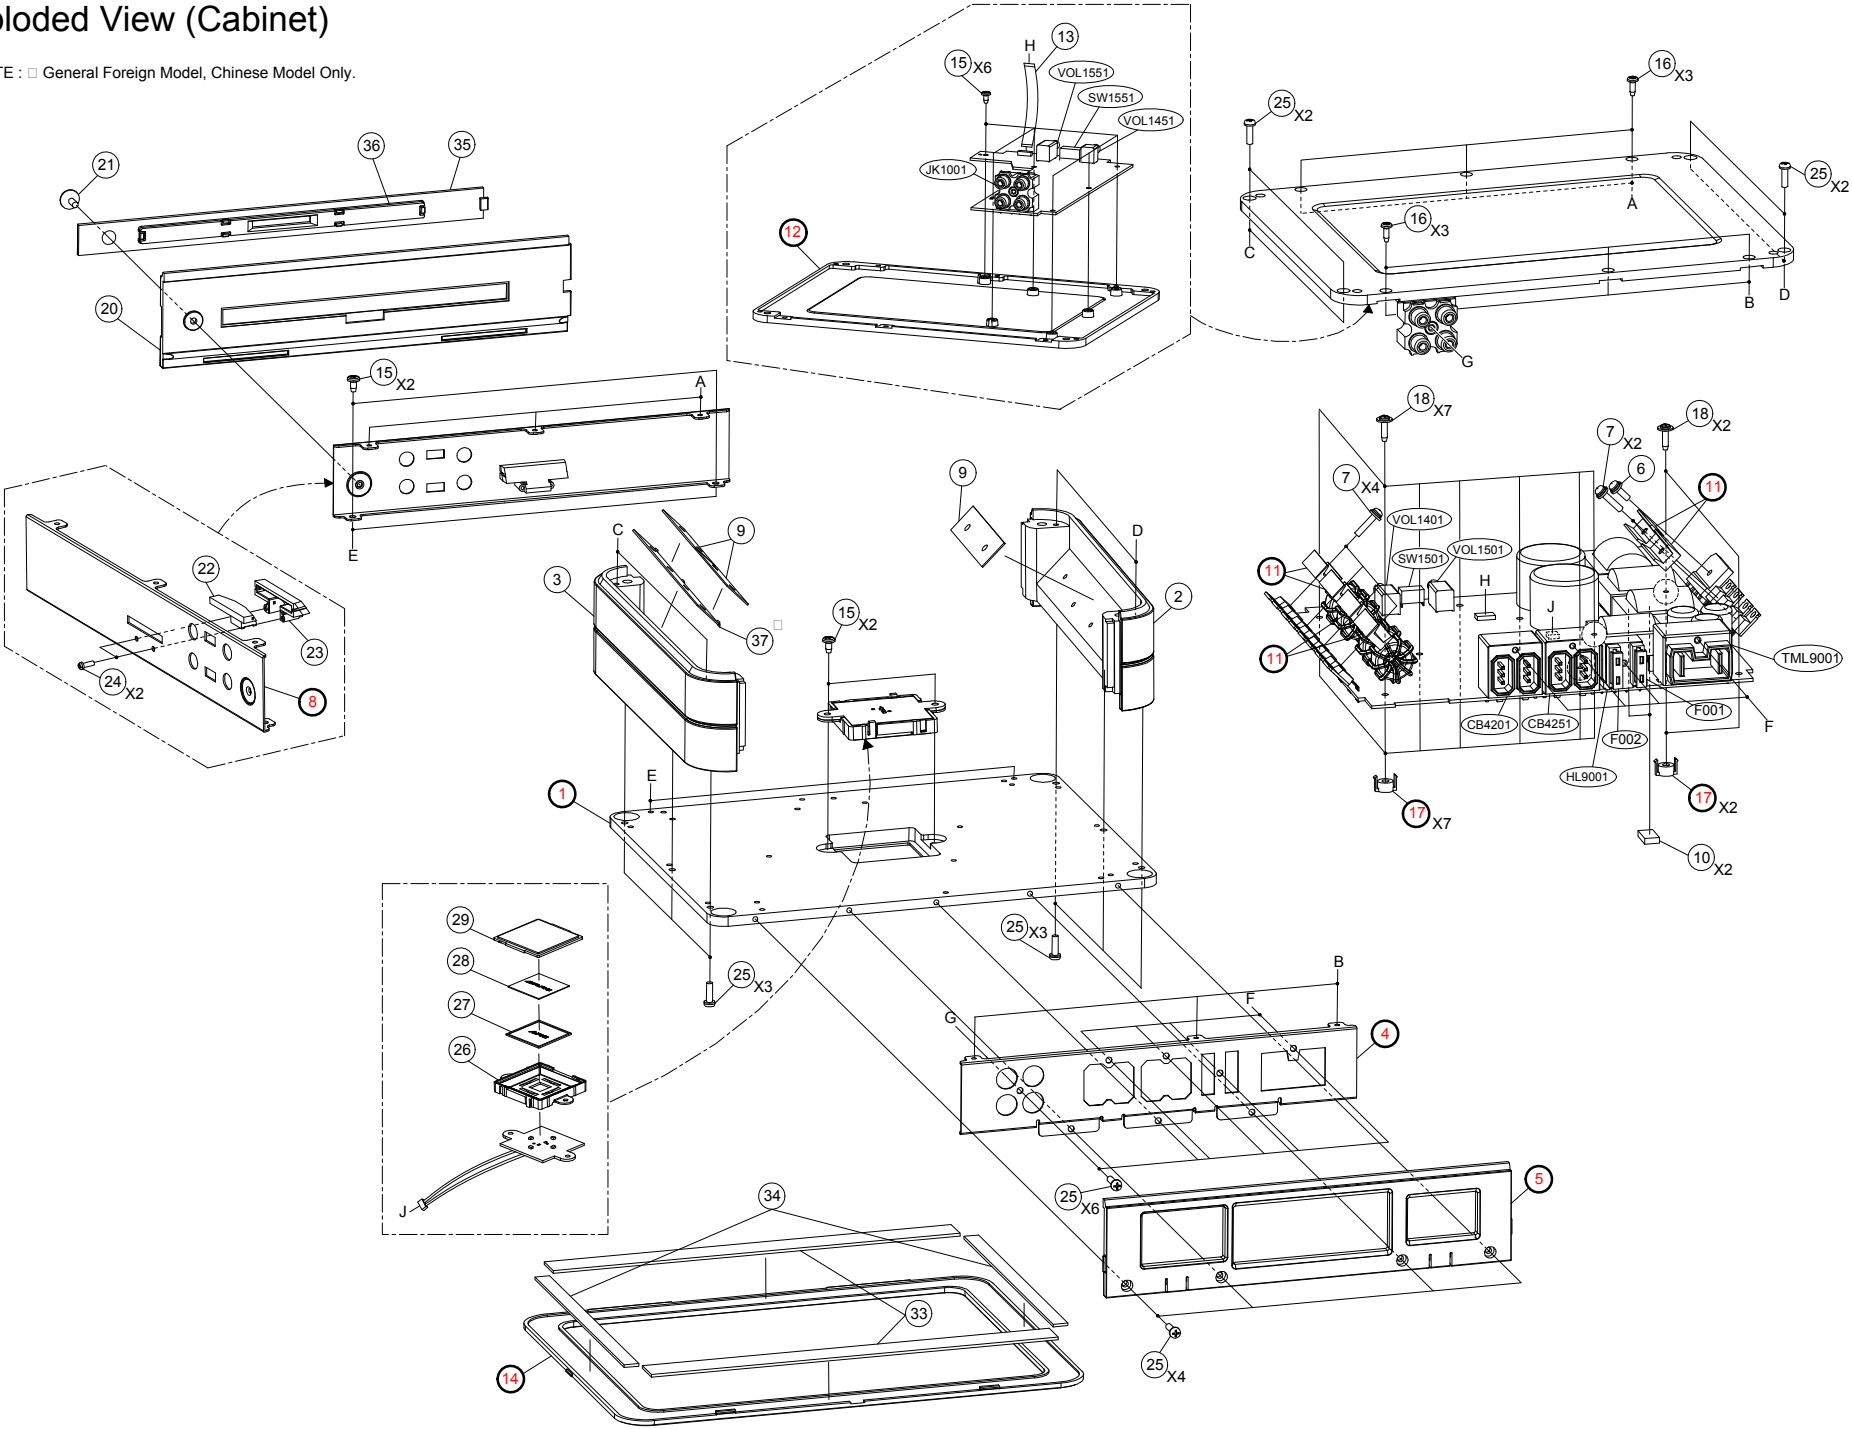

Packing Method View

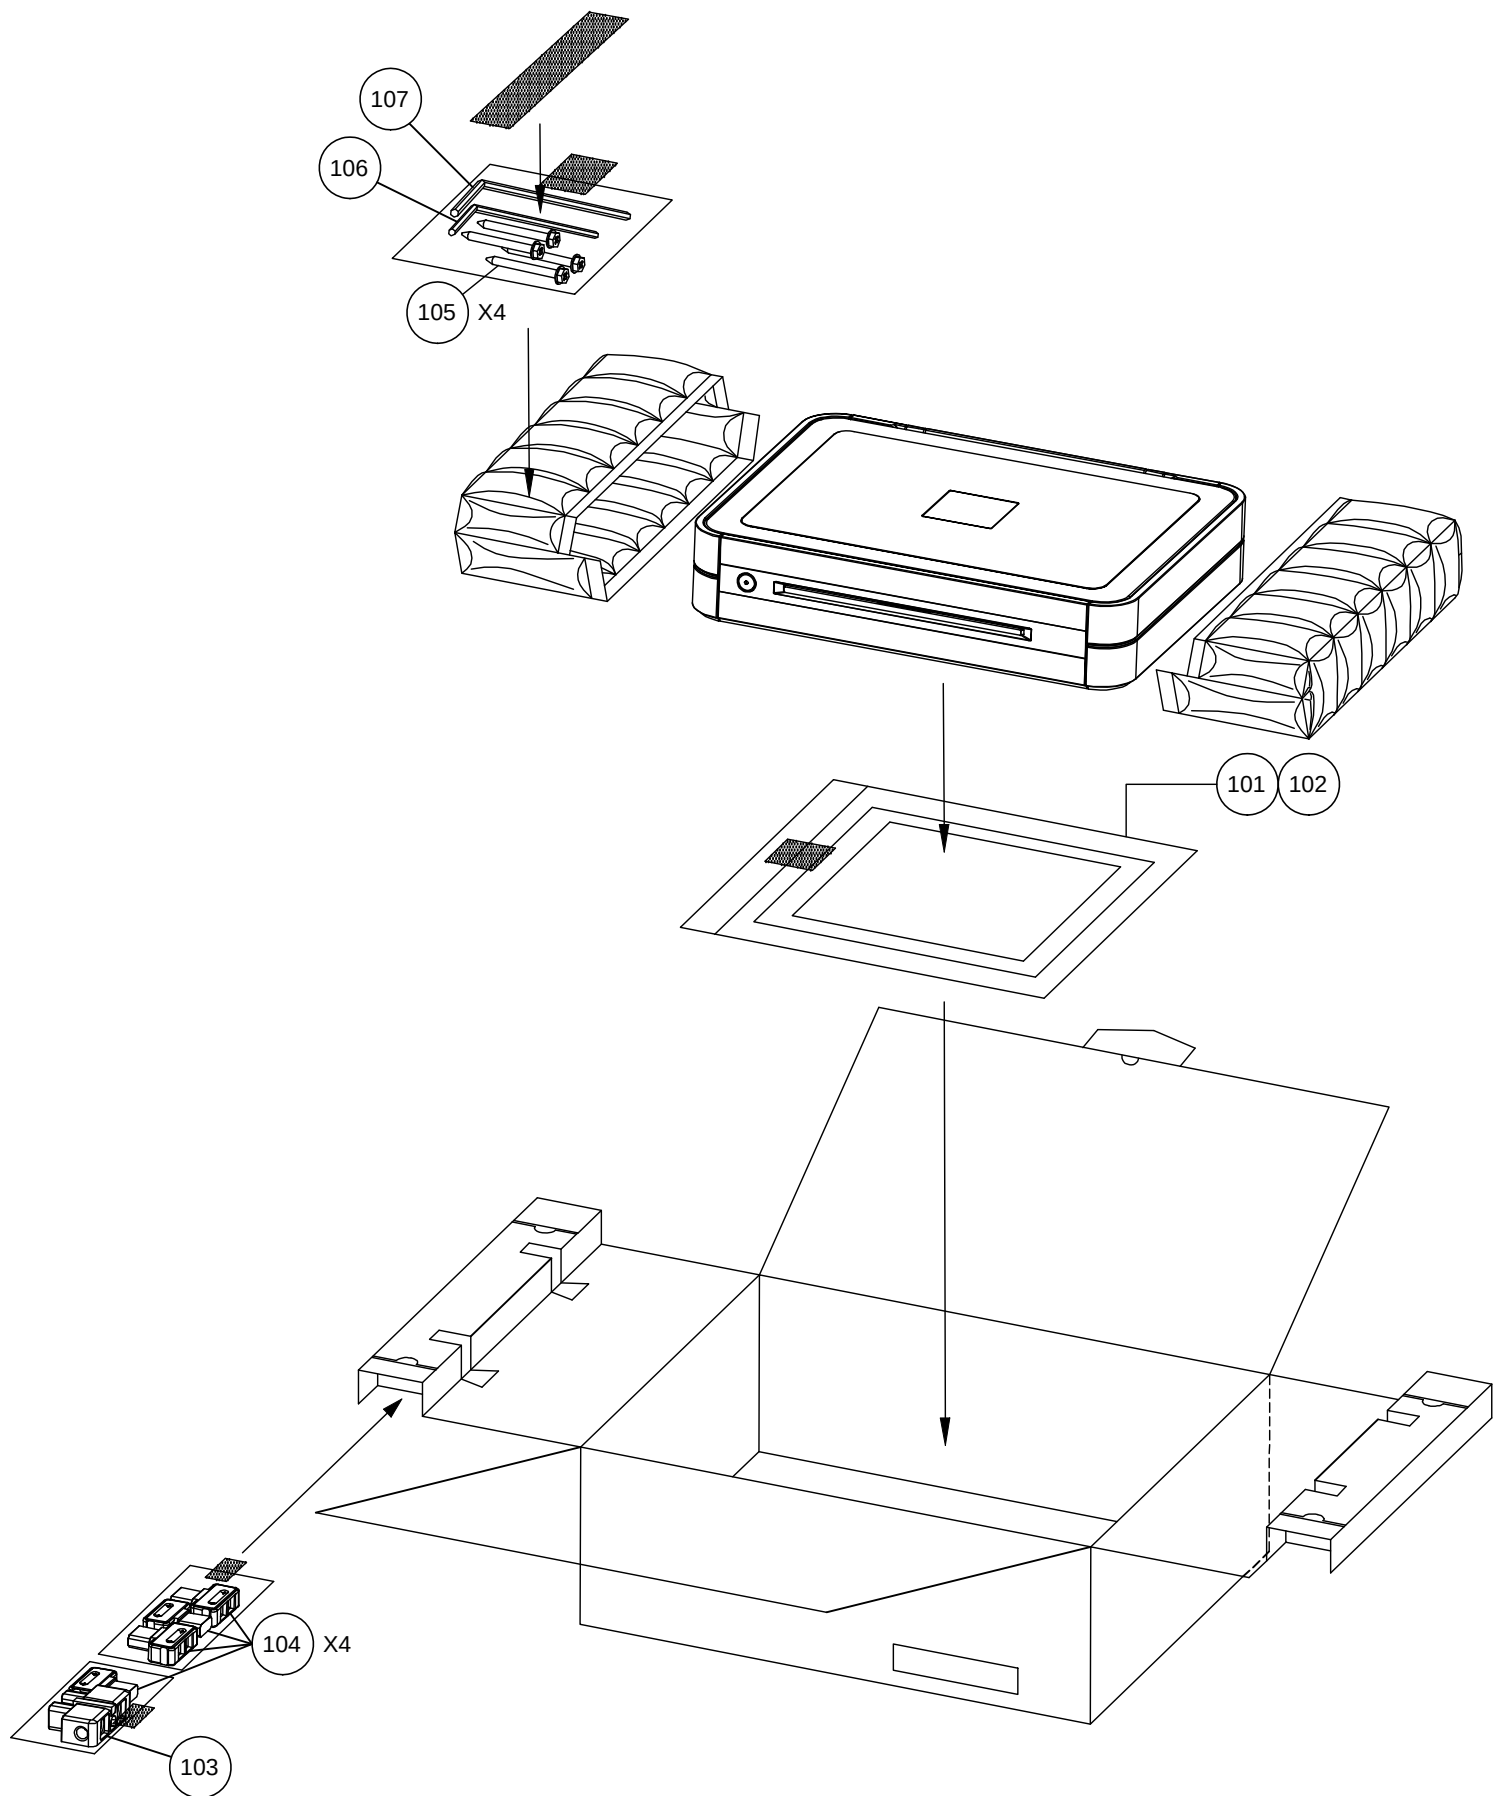

MODEL	Symbol No.	Parts No.	Description
#1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
\$1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
%1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
&1	101	68-16909Z17	MANUAL,OWNER'S(AOCHR)
\$1	102	68-13530Z51	MANUAL,OWNER'S(I,G,S)
	103	09E41508S01	CONN,P-PLUG
	104	09E41474S01	CONN,SPK-PLUG
	105	03E41472S01	SCR,M4X36(HW)(BLK)
	106	03E36691S01	WRENCH,2X2.3
	107	47E35195S01	WRENCH,4X4.6

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1401	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1402	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1403	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1404	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		#1	C1406	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1406	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1406	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	C1406	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		#1	C1408	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1408	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1408	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		&1	C1408	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		#1	C1409	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1409	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1409	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		&1	C1409	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		#1	C1413	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1413	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1413	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	C1413	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			C1501	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1502	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1503	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1504	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1505	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1506	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1507	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1508	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1509	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1510	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1511	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1512	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C2001	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2002	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2003	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2004	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2005	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2006	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2007	08E37267S01	CAP,CER. 0.047uF/25V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2008	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2009	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2010	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C3601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3609	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3614	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3615	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3626	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C3634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C3635	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C3636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C3637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3638	08E37268S01	CAP,CER. 120pF/50V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3701	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3703	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3704	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3705	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3706	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3707	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3708	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3709	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3710	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3711	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3712	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3713	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3714	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3715	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3716	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3717	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3718	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3719	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3720	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3755	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3756	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3757	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3758	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3759	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3760	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3761	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3762	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3763	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3764	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3765	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3766	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4003	08E38112S01	CAP,FILM 1uF/100V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4004	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4053	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4054	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4101	08E37159S01	CAP,CER. 0.047uF/50V
MAIN-P.W.Board			C4103	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4104	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4105	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4106	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4116	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4117	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4118	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4119	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4206	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4207	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4208	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4209	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4210	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4211	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4256	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4257	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4258	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4259	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4260	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4261	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C5001	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5002	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5003	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C5005	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C5006	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5007	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5008	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5009	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5010	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5011	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5012	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5013	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5014	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5015	08E37122S01	CAP,CER. 0.1uF/25V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5016	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5017	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5018	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5019	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5020	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5021	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C5602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C5603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C5606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C5607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C5608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C5609	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5614	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5615	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5626	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C5635	08E38604S01	CAP,CER. 1uF/50V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5638	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C8001	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8002	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8003	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8901	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8902	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C9003	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9301	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9302	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C9303	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9305	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9307	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9308	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9309	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9310	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9311	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9313	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9314	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C9703	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C9704	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9705	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9801	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9901	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board			C9902	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board			C9903	08E41491S01	CAP,CER.4700pF/500V
MAIN-P.W.Board			C9904	08E41491S01	CAP,CER.4700pF/500V
MAIN-P.W.Board			C9905	08E40759S01	CAP,CER.1000pF/100V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9906	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board			C9907	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board			C9908	08E40759S01	CAP,CER.1000pF/100V
MAIN-P.W.Board			CB1401	09E39715S01	CONN,FFC 14P
MAIN-P.W.Board			CB4201	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board			CB4251	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board			CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board			CL5001	91E40781S01	RESONATOR,7.7MHz
MAIN-P.W.Board			D1701	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1702	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1801	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1802	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D2001	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D2002	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2003	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2004	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2005	48E38547S01	DIODE,DAN202U
MAIN-P.W.Board			D2006	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2007	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2008	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2009	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2010	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D3601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3606	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5001	48E39348S01	DIODE,1SR154-400
MAIN-P.W.Board			D5002	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board			D5003	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D5601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D5602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D5603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5606	48E41409S01	DIODE,1SR159

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D5607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D9301	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9302	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9501	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D9502	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1501	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E1502	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E1701	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1702	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1703	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1704	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E3601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5001	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E5002	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E5601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E5604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E5605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E8901	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E8909	23E40369S01	CAP,ELY.470uF/16V
MAIN-P.W.Board			E9101	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9301	23E40765S01	CAP,ELY.330uF/10V
MAIN-P.W.Board			E9302	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9303	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9305	23E40364S01	CAP,ELY.100uF/25V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E9306	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9307	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9308	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9310	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9311	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9312	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9702	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9703	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E9704	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9801	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E9901	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9902	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9903	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9904	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			E9905	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			F001	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			F002	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			F9301	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9901	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9902	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9903	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9904	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9905	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9906	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9907	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9908	65E41448S01	FUSE,15A
MAIN-P.W.Board			HL9001	09E39445S01	HOLDER,FUSE
MAIN-P.W.Board			IC1401	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1501	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1502	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1503	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1504	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2001	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2002	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2003	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC3601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board			IC3602	51E41430S01	IC,BA4580RF
MAIN-P.W.Board			IC3603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3604	51E41426S01	IC,98-1036TR

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC3607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC3608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC4101	51E39596S01	IC,BA2901FV
MAIN-P.W.Board			IC4106	51E41502S01	IC,74VHC00MX_NL
MAIN-P.W.Board			IC4107	51E40343S01	IC,74VHC74MTCX
MAIN-P.W.Board			IC5001	51E36635S01	IC,NJU7222U50
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board			IC5004	51-04615Z01	IC,TMP87C847UG -QT
MAIN-P.W.Board			IC5005	51E39395S01	IC,KIC7S04FU
MAIN-P.W.Board			IC5006	51E41501S01	IC,KIC7S32FU
MAIN-P.W.Board			IC5601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board			IC5602	51E41430S01	IC,BA4580RF
MAIN-P.W.Board			IC5603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC5604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC5607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC5608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9301	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9302	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9303	51E39892S01	IC,NJM78M15DL1A
MAIN-P.W.Board			IC9304	51E39893S01	IC,NJM79M15DL1A
MAIN-P.W.Board			IC9702	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9801	51E34504S01	IC,MC33152D
MAIN-P.W.Board			L4001	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4002	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4051	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4052	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L9001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8002	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8003	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board			Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1702	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1703	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1704	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1705	48E37893S01	TR,DTA114EE
MAIN-P.W.Board			Q1706	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q1707	48E37097S01	TR,DTC114EE

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q1801	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1802	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1803	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1804	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1805	48E37893S01	TR,DTA114EE
MAIN-P.W.Board			Q1806	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q1807	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2001	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2002	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2003	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2004	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q3601	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3602	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3603	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3604	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3605	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3606	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3607	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q3608	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q3609	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3610	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3613	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3617	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3619	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3620	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3621	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3622	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3623	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3624	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3709	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3710	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3711	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3712	48E41500S01	FET,FDP3682

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3759	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3760	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3761	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3762	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q4109	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4110	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4111	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4112	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5001	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5002	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5601	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5602	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5603	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5604	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5605	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5606	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5607	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q5608	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q5609	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5610	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5613	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q5616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q5617	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5619	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5620	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5621	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5622	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5623	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5624	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E36577S01	TR,2SB1238P
MAIN-P.W.Board			Q9102	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9301	48E36597S01	TR,DTA124EKA

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q9302	48E41421S01	TR,IMT17
MAIN-P.W.Board			Q9303	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9304	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9501	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9502	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q9503	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9708	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9901	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9902	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9903	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9904	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			R1401	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R1402	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R1403	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1404	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1405	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1406	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		#1	R1407	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		\$1	R1407	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		%1	R1407	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	R1407	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			R1410	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1411	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		#1	R1415	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		\$1	R1415	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		%1	R1415	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	R1415	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			R1501	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1502	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1503	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1504	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1505	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1506	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1507	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1508	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1509	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1510	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1511	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1512	06E40845S01	RES,CF. 22K-1/10W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1513	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1514	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1515	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1516	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1517	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1518	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1519	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1520	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1521	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1522	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1701	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1702	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1703	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1704	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1705	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1706	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1707	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1708	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1709	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1710	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1711	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1712	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1713	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1714	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1715	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1716	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1717	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1718	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1801	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1802	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1803	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1804	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1805	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1806	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1808	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1809	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R2001	06E37143S01	RES,CF. 24K-1/16W
MAIN-P.W.Board			R2002	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2003	06E37143S01	RES,CF. 24K-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2004	06E36591S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R2005	06E40323S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R2006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R2007	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R2008	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2009	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R2010	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2011	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2012	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2013	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2014	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R2015	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2016	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2017	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2018	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2019	06E36591S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R2020	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R2021	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R2022	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R2026	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3604	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3611	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3619	06E34195S01	RES,CF. 680-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3624	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3625	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3643	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3655	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3658	06E36464S01	RES,CF. 0-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3661	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3665	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3671	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R3683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R3684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R3691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R3692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R3697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R3700	06E40321S01	RES,CF. 10K-1/10W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3701	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3702	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3705	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3706	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R3707	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3708	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3709	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3710	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3711	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3712	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3713	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3714	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3715	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3716	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3717	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3718	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3719	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3720	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3721	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3722	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3723	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3724	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3725	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R3726	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R3727	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3728	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3729	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R3730	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3731	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3733	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R3734	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R3751	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3752	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3753	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3754	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3759	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3760	06E41490S01	RES,CF. 10-1/4W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3761	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3762	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3763	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3764	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3765	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3766	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3767	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3768	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3769	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3770	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3771	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3772	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3773	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3774	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R4105	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R4106	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R4108	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4110	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4112	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4114	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4117	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4118	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4119	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4120	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4125	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4126	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4127	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4128	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4137	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4138	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4139	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4140	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5001	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5002	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R5003	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R5004	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5005	06E40317S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board			R5006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5007	06E40315S01	RES,CF. 1.2K-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5008	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5009	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R5010	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5012	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5013	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5014	06E32288S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R5015	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5016	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5017	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5018	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5019	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R5020	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5021	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5022	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5604	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R5609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R5610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5611	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5619	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5624	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5625	06E40737S01	RES,CF. 820-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R5631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R5632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5643	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5655	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5658	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5661	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5665	06E40321S01	RES,CF. 10K-1/10W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R5671	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R5672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R5675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R5676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R5683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R5684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R5691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R5692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R5698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R5699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5700	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5701	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5702	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R5703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5705	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R5706	06E40316S01	RES,CF. 2K-1/10W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5707	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5708	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5709	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R5710	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5711	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5713	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R5714	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R8002	06E41387S01	RES,CF. 680-1/4W
MAIN-P.W.Board			R8003	06E39850S01	RES,CF. 2K-1/4W
MAIN-P.W.Board			R8004	06E40750S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board			R9101	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9102	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9103	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9104	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9105	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9106	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board			R9107	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9301	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9302	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R9303	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R9304	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9305	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9306	06E36672S01	RES,CF. 39K-1/16W
MAIN-P.W.Board			R9307	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R9308	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9309	06E41488S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R9310	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R9311	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R9312	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R9313	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9314	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R9315	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R9316	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R9317	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R9318	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9319	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9320	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R9324	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9325	06E36555S01	RES,CF. 33-1/4W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9326	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9327	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9501	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9502	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9503	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9504	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9505	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9506	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9508	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9601	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R9602	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R9711	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R9712	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R9718	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9719	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9721	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R9722	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R9723	06E41385S01	RES,CF. 360K-1/16W
MAIN-P.W.Board			R9724	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9725	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9726	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R9727	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R9728	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R9729	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R9730	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9731	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9732	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9901	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9902	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9903	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9904	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9905	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9906	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9907	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9908	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9909	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9910	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9911	06E36622S01	RES,CF. 100K-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9912	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9913	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9914	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9915	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9916	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9917	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9918	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9919	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9920	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			SD9301	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SD9302	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SD9303	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board			T9001	25E41504S01	COIL,CHOKE 200uH
MAIN-P.W.Board			T9301	25E41505S01	TRANS,MINI
MAIN-P.W.Board			T9901	25E41503S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			T9902	25E41506S01	COIL,CHOKE 200u
MAIN-P.W.Board			T9903	25E41503S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			TH2002	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH3701	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3702	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3751	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3752	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH5001	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH9601	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TML9001	09E41509S01	CONN,P-CON
MAIN-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1501	18E41440S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			ZD2001	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD3601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD3602	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD3603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3606	48E41407S01	DIODE,ZENER VDZ15B

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD3701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3705	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3706	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3707	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3708	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD5601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD5602	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD5603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5606	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
SUB-P.W.Board			C1001	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1002	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1003	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1004	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1005	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1006	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1007	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1008	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1101	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1102	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1103	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1104	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1105	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1106	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1107	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1108	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1109	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1110	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1111	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1112	08E37267S01	CAP,CER. 0.047uF/25V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			C1113	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1114	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1115	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1116	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1201	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1202	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1203	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1204	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1205	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1206	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1207	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1208	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1209	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1210	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1211	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1212	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1213	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1214	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1215	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1216	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1451	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1452	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1453	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board			C1454	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board			C1551	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1552	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1553	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1554	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1555	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1556	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1557	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1558	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1559	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1560	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1561	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1562	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			CB1551	09E39715S01	CONN,FFC 14P
SUB-P.W.Board			D1101	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1102	48E38037S01	DIODE,1PS226

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			D1103	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1104	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1105	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1106	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1107	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1108	48E38037S01	DIODE,1PS226
SUB-P.W.Board			E1101	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1102	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1103	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1104	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1105	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1106	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1107	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1108	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1503	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board			E1504	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board			IC1101	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1102	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1103	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1104	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1201	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1202	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1451	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1551	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1552	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1553	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1554	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			JK1001	09E41442S01	CONN,RCA 4P
SUB-P.W.Board			R1101	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1102	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1103	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1104	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1105	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1106	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1107	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1108	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1109	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1110	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1111	06E41489S01	RES,CF. 120ohm-1/4W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1112	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1113	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1114	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1115	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1116	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1117	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1118	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1119	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1120	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1121	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1122	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1123	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1124	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1125	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1126	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1127	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1128	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1129	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1130	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1131	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1132	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1133	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1134	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1135	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1136	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1137	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1138	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1139	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1140	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1201	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1202	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1203	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1204	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1205	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1206	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1207	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1208	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1209	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1210	06E36591S01	RES,CF. 18K-1/16W

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1211	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1212	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1213	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1214	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1215	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1216	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1451	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1452	06E40318S01	RES,CF. 5.6K-1/10W
SUB-P.W.Board			R1453	06E40318S01	RES,CF. 5.6K-1/10W
SUB-P.W.Board			R1454	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1455	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1456	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1551	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1552	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1553	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1554	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1555	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1556	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1557	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1558	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1559	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1560	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1561	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1562	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1563	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1564	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1565	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1566	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1567	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1568	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1569	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1570	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1571	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1572	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
SUB-P.W.Board			VOL1451	18E41507S01	VOL,ROTARY 50KX2
SUB-P.W.Board			VOL1551	18E41440S01	VOL,ROTARY 20KX4
LED-P.W.Board			C8101	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			C8102	08E37118S01	CAP,CER. 220pF/50V

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
LED-P.W.Board			C8103	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			C8104	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			LD8101	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8102	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8103	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8104	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			R8102	06E38034S01	RES,CF. 1K-1/4W
LED-P.W.Board			R8104	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous			CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
	1	-----	HEAT,SINK MAIN
	2	13E41511S01	PANEL,SIDE-R
	3	13E41459S01	PANEL,SIDE-L
	4	-----	CHAS,REAR
	5	-----	COVER,REAR
	6	03E36210S01	SCR,M3X10(P)(WHT)
	7	03E38094S01	SCR,M3X15.5(WS)
	8	-----	CHAS,FRONT
	9	14E41450S01	INSULATOR,SILPAD-2H
	10	14E39754S01	INSULATOR,GAPPAD-COIL
	11	-----	HEAT,SINK BAR
	12	-----	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	-----	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E41471S01	SCR,M2.6X8(P)(BLK)
	17	-----	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	34E41467S01	IND,COVER DOOR
	23	09E41464S01	HOLDER,IND
	24	03E39164S01	SCR,M2X6(P)(BLK)
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	33E41455S01	PLATE,COVER DOOR
	36	34E41473S01	IND,PLATE COVER DOOR
%1	37	07E41514S01	BKT,SHIELD-M
&1	37	07E41514S01	BKT,SHIELD-M
	CB4201	09E41510S01	CONN,SPK-CON
	CB4251	09E41510S01	CONN,SPK-CON
	F001	65E38096S01	FUSE,AUTO 30A
	F002	65E38096S01	FUSE,AUTO 30A
	HL9001	09E39445S01	HOLDER,FUSE
	JK1001	09E41442S01	CONN,RCA 4P

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	TML9001	09E41509S01	CONN,P-CON
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E41440S01	VOL,ROTARY 20KX4
	VOL1551	18E41440S01	VOL,ROTARY 20KX4

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	TML9001	09E41509S01	CONN,P-CON
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E41440S01	VOL,ROTARY 20KX4
	VOL1551	18E41440S01	VOL,ROTARY 20KX4

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.