


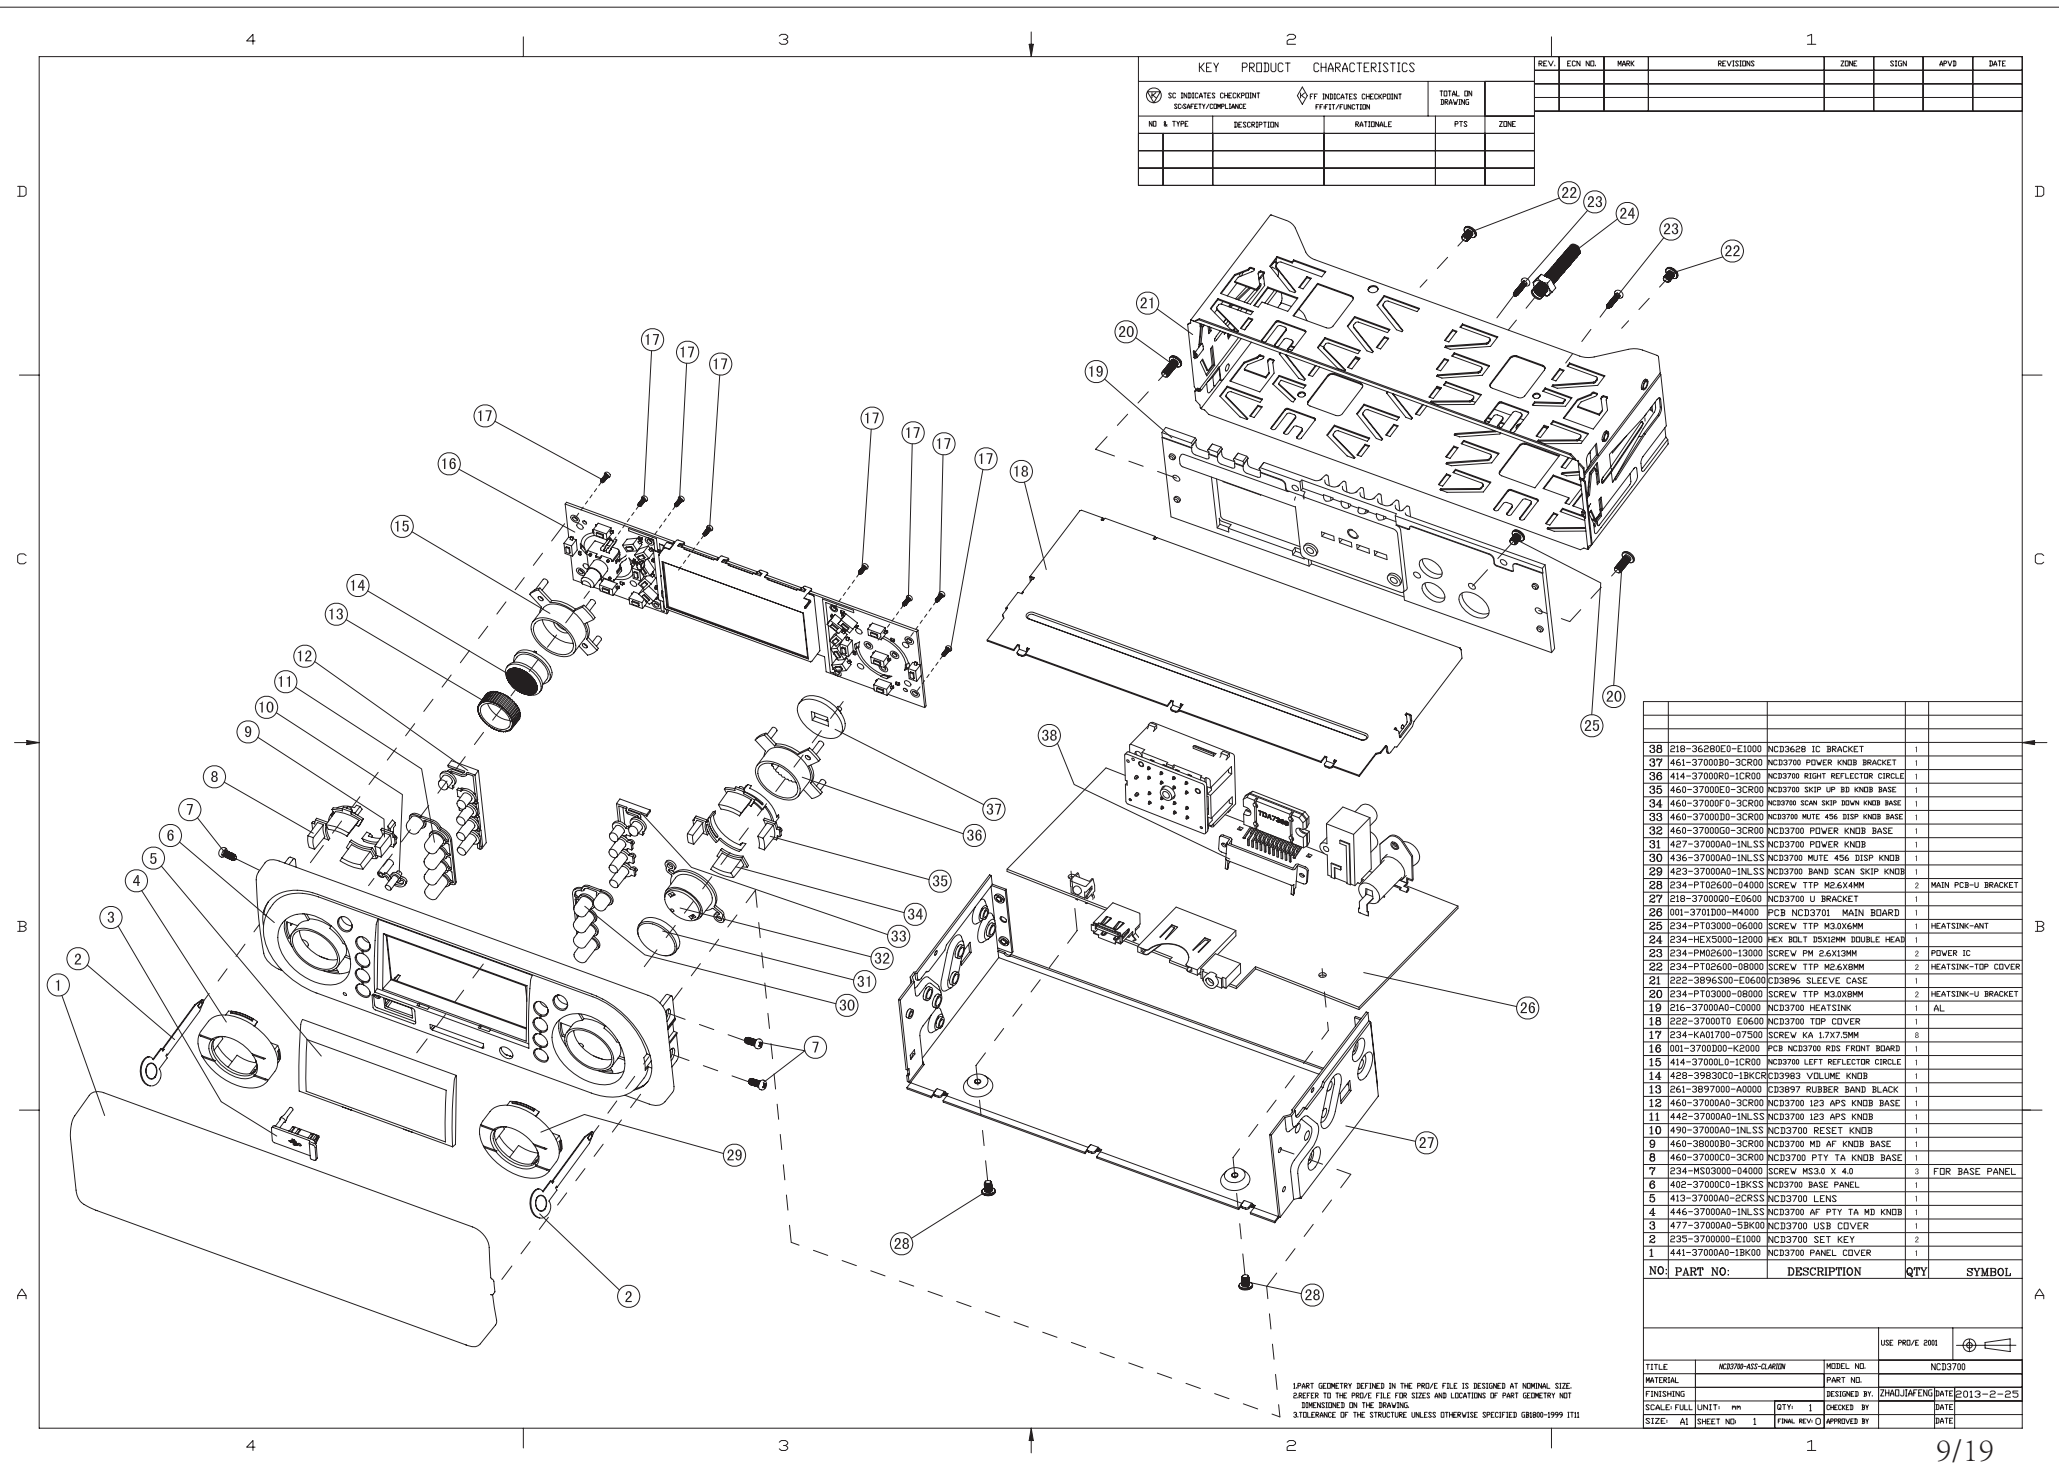

BOM LIST

Item number	Item name	Qty	BOM Position
K02-NCD3700-130409-00A	NCD-3700 ROHS CAR NCD PLAYER[CLARION UO-10W3348AM-02]-MX-6203C2		
C02-NCD3700-6203C2-SM4	NCD-3700 AM FM MP3 2OUT U/M/AUX 40X4 7388+8104GW BISO	1	
056-3001000-03500	DVD-3001 BROAD WIRE L=35mm 0.12MMX96	1	
212-5209000-14S00	SPRING WASHER ID=5.2x9.0x1.4T WHA-SM05089HC8-C8	1	SET:1
214-37000B0-05F00	NCD-3700 MAIN-FIBRE [T=0.5mm] FOR 2/W TU bao	1	
216-37000A0-C0000	NCD-3700 HEATSINK-A [AL] 2OUT W/2 HOLE SAND FOR ALIA	1	
218-3300E00-E1000	CD-3300 IC-BRACKET [EGI] T=-1.0MM	1	
218-37000Q0-E0600	NCD-3700 U-BRACKET 178x79.8x49.3 [SECC] THK=0.6MM FOR KRS8104LW	1	
222-37000T0-E0600	NCD-3700 TOP-COVER 178x79.8x6.9 [SECC] THK=0.6MM	1	
234-HEX5000-12000	HEX BOLT D5x12mm DOUBLE HEAD [CARBON ST D.Zn]	1	CARBON STEEL D.Zn (WHITE)
234-MS03000-04000	SCREW: MS 3.0 X 4.0 (5.5x1x4)	3	BASE PANEL:3
234-PA03000-10000	TAPTYPE SCREW PA 3.0 x 10 MM TS WHITE	1	LINE SOCKET:1
234-PM02600-13000	MACHINE SCREW PM 2.6 x 13.0 MM (C) NICKLE ROUND HEAD	2	POWER IC:2
234-PT02600-04000	TAP TYPE MACHINE SCREW (C) TTP M2.6 x 4.0 MM ROUND HEAD NICKLE	1	MAIN PCB+U-BRACKET:1
234-PT02600-08000	TAP TYPE MACHINE SCREW TTP M2.6 x 8.0 MM ROUND HEAD NICKLE	2	HEAT-SINK+TOP COVERX2
234-PT03000-06000	TAP TYPE SCREW-[C] TTP M3.0 x 6.0 MM NICKLE ROUND	1	HEAT SINK+ANT:1
234-PT03000-08000	TAP TYPE"C" SCREW TTP M3.0 x 8.0 MM NICKLE ROUND HE	2	HEAT-SINK+SIDE CHASSIS:2
H01-3701D00-M40000-SM1	NCD-3700 AM FM MP3 2OUT U/M/AUX 40X4 7388+8104GW HISEM	1	
002-0703500-T0000	IC KIA7035AP 3.5V RESET [TO92] KEC	1	IC3.
002-0738800-J0600	IC TDA7388 4X41W(MAX) POWER AMP FOR CAR AUD [ST] [HZIP25-P]	1	U2.
003-0127300-A0300	TR-PNP KTA1273-Y HI-CURRENT -30V, 2A HFE=160-320 [TO92L] KEC	2	Q12.817.
004-0400100-00000	RECTIFIER DIODE 1N4001 50V 1A [DO41]	2	D1.802.
006-0720000-40000	CRYSTAL 7.2MHz [HC-49US] +/-30PPM LC=20PF	1	XT601.
006-2700000-40000	CRYSTAL 27.000MHZ HC-49U/S 20PF 30PPM AGBTT4FA-27.000MLF	1	XT1.
006-37M0500-204S0	CRYSTAL37.05MHz [HC-49/S] 20PPM LC=20PF 2PIN FOR ST7703 TUNER	1	CON4X.
010-181MT23-28000	AMOR-TOROID 180uH/1A Load(Min) 8A, D23xH23mm DIP TYPE W/BASE BRK	1	L801.
011-A100F00-20000	RES 1/2W ±5% 10 OHM	1	R854.
011-A330F00-20000	RES 1/2W ±5% 33 OHM	1	RA7.
012-1107C00-30100	MINI E-CAP [5x7] 100uF 16V 20% 105C	4	CPE6.C617.EC21.24.
012-1476C00-30100	MINI E-CAP [5x7] 47uF 16V 20% 105C	9	C618.813.EC5.2.7.8.10.11.15.
012-2107D00-30100	MINI E-CAP [6x7] 100uF 25V +/- 20% 105C	2	CM3.C835.
012-4105F00-30100	MINI E-CAP [4x5] 1uF 50V ±20% 105C	4	C6.7.624.625.
012-B106C00-30100	MINI E-CAP [4x7] 10uF 16V +/-20% 105C	1	EC4.
012-B226C00-30100	MINI E-CAP [4x7] 22uF 16V 20% 105C	2	EC3.C1.
012-E477B00-30100	MINIE-CAP [6x12] 470uF 10V 20% 105C	1	EC1.
012-Q228D00-30100	E-CAP [13x21] 2200uF 25V 20% 105C	1	C810.
22-C101000-10000	PLUG TYPE FUSE 10A 32V RED COLOUR	1	

028-0350700-B5D00	3.5 STEREO PHONE JACK PJ-368-5P NO SW 5PDIP TYPE BLACK	1	CON7.
029-FUSBA00-00C00	USB-A-90 SOCKET L-DIP TYPE [C2680]	1	CON2.
029-JAS0050-A0000	ANT JACK SINGLE HOLE ANGLE PCB TYPE JAS-005-IT (HOLE=11.5MM)120C	1	AT1.
036-C010000-1600A	16PIN FPC CONN PT=1.0MM TYPE-A[1.0-B-16P] FOR MV NCD-37XX	1	CON8.
046-002260B-00000	RCA 2P AV-SKT (WHITE+RED) PT=14MM HI-TEMP 150C PCB TYPE	1	J4.
S01-3701D00-M40000-SM1	NCD-3700 AM FM MP3 2OUT U/M/AUX 40X4 7388+8104GW SMTSEM	1	
001-3701D00-M4000	PCB NCD-3701 MAIN BOARD W/8104GW [REV-0-A]FR-4,1.1T SPRAY	1	
002-0111700-U1250	IC LD1117AL-A (ADJ) 1A LDO REG 1.25~10V [SOT223]	1	U4.
002-0111700-U3300	IC UTC LD1117AL- 3.3V-A 1A LDO [SOT223] UTC	1	U1.
002-7703000-R044D	IC TDA7703 highly Integrated TUNER FOR AM FM carradio [LQFP44]	1	U01.
002-8104GW0-R128D	IC SPHE8104GW MPEG A/V PROCESSOR CD SERVO WMA [LQFP128]	1	U9.
002-EM63616-U050D	IC 16M (16Mx1) SDRAM EM636165 3.3V 143MHz [TSOP50] EtronTech	1	U7.
002-EN25T80-G008A	IC EN25T80-75HCP 8MB FLASH CFEON T80-75HCP[SOP8]	1	U5.
002-HT75501-C0030	IC HT7550-1 5.0V 100mA [SOT-89] HOLTEK	1	IC802.
002-MC78M18-G003A	IC MC78M18CDT 18V [DPAK-3] SMD ON	1	U8.
002-PT12913-N020D	IC PT12913-X AUDIO PROCESSOR [SSOP20]	1	IC2.
002-RA5731A-H064D	IC RA5731-W01 MCU V03.00.6 W/SOFTWARE[QFP64]FOR 8104GW NCD MODE	1	IC602.
002-TD15070-E0050	SMT IC TD1507T5 5V3A 150KHz PWM DC/DC CON [TO2525L]TECHCODE	1	U6.
003-001203S-S0000	SMT TR-NPN SRC1203S W/2x22K BIAS RES 40V 100mA [SOT-23] AUK	3	Q8.9.10.
003-0150400-B0300	SMT PNPKTA1504S-GR /2SA1980SF [SOT-23F] 50V 0.15A (AUK)	2	Q7.16.
003-0387500-G0000	SMT TR-NPN KTC3875S/2SC-5343S/F [SOT-23] 50V 0.15A	9	Q5.13.14.15.601.801.803.804.816.
003-0390400-S0000	SMD TR-NPN MMBT3904 60V 200mA [SOT23] DIODES	1	Q6.
003-0855000-S0000	SMT TR-PNP 8550-S [SOT-23] -30V 0.7A 1W HFE=110	1	Q4.
003-KRA106S-S0000	SMT PNP-TR KRA106S W/4.7/47K RES [SOT-23] MARK"PF"	1	Q809.
003-TD123SF-S0000	SMT NPN-TR STD123SF LOW ON RESISTANCE 20V,1A [SOT23] AUK HFE>150	1	Q11.
004-L4148L0-S0000	SMT DIODE [SOD-80] LL4148 VR=75V VF=1.0V IF=150mA	11	D3.5.8.9.601.602.612.614.621.624.626.
004-RN731V0-S0000	SMT-DIODE SWITCHING RN731V 50V 50mA [SOD323]	2	DA3.4.
004-S240000-SKD00	SMD QuadSCHOTTKY BARRIER DIODE S24 40V 2.0A [DO-214AC]	1	D4.
005-000560A-S0000	SMD ROUND ZENER DIODE TCLLZ5V6 5.6V [LL34]	1	ZD802.
005-000560B-S0000	SMD ZENER DIODE TDZ5.6 5.6V [0805] TUMD2 ROHM	1	DA2.
005-0006100-S0000	SMT ZENER DIODE RSA6.1EN 6.1V 5PIN ESD Protection diode[SOT-353]	3	TEST4.TEST111.TEST112.
005-001000A-S0000	SMD ROUND ZENER DIODE BZV55-C10 10V 115 [SOD80C] 1/2W	1	ZD1.
010-150KS13-20400	SMT CHIP INDUCTOR 15uH +/-10% 400mA 0.7RDC [CL322513T-150K-N]	1	LA2.
010-1R0KS08-00000	CHIP INDUCTOR [0805] 1uH +/-10% 50mA DCR<=0.4R [CL201209T-1R0K-N]	4	L1.2.3.7
010-330KS13-20300	SMT CHIP INDUCTOR 33uH +/-10% 300mA 0.7RDC [CL322513T-330K-N]	1	LA9.
010-3R3KS06-20000	SMT CHIP INDUCTOR [0603] 3.3uH +/-10% 15mA [CL160808T-3R3K-N]	1	LA1.
010-470MS65-20400	SMT POW INDUCTOR 47uH+/-20% DCR0.12+/-30% 2.3A[CER8065B-470M-RB]	1	L4.
010-H010600-00000	SMT CHIP-INDUCTOR [0805] 10uH 10% (25mA MAX) CL201209T-100-N	1	LA15.
010-R22JS08-20000	SMT INDUCTOR COIL [0805] 220nH +/-5% 400mA 0.70DCR C2012C-R22J-RC	2	LA3.4.
011-B000A00-20000	CHIP RES [0603] 0 OHM ±5%	13	R5.7.16.17.19.36.39.52.54.56.91.BD1.2.

011-B100A00-20000	CHIP RES [0603] 10 OHM 5%	1	LA11.
011-B101A00-20000	CHIP RES [0603] 100 OHM 5%	7	R70.119.120.RA4.10.11.12.
011-B102A00-20000	CHIP RES [0603] 1K OHM 5%	11	R3.6.41.48.49.63.723.724.824.831.RA2.
011-B103A00-20000	CHIP RES [0603] 10K OHM 5%	24	RA9.R2.11.13.14.18.20.23.26.27.29.35.37.38.42. 46.53.631.632.809.810.813.820.832.
011-B104A00-20000	CHIP RES [0603] 100K OHM 5%	1	R21.
011-B105A00-20000	CHIP RES [0603] 1M OHM 5%	8	R612.613.616.617.618.619.624.637.
011-B123A00-20000	CHIP RES [0603] 12K OHM 5%	2	R9.10.
011-B152A00-20000	CHIP RES [0603] 1.5K OHM 5%	1	RA5.
011-B153A00-20000	CHIP RES [0603] 15K OHM 5 %	2	R403.404.
011-B183A00-20000	CHIP RES [0603] 18K OHM 5%	4	.R182.183.841.844.
011-B184A00-20000	CHIP RES [0603] 180K OHM 5%	4	R814.815.816.817.
011-B220A00-20000	CHIP RES [0603] 22 OHM 5%	3	R61.62.327.
011-B221A00-20000	CHIP RES [0603] 220 OHM 5%	1	RA3.
011-B222A00-20000	CHIP RES [0603] 2.2K OHM 5%	8	R30.301.302.615.RA1.35.36.65.
011-B223A00-20000	CHIP RES [0603] 22K OHM 5%	8	R34.44.50.51.92.625.633.634.
011-B224A00-20000	CHIP RES [0603] 220K OHM 5%	7	R31.71.72.73.116.627.628.
011-B273A00-20000	CHIP RES [0603] 27K OHM ±5%	1	R830.
011-B330A00-20000	CHIP RES [0603] 33 OHM ±5%	1	R40.
011-B331A00-20000	CHIP RES [0603] 330 OHM 5%	1	R15.
011-B332A00-20000	CHIP RES [0603] 3.3K OHM 5%	2	R25.323.
011-B334A00-20000	CHIP RES [0603] 330K OHM 5%	2	R308.607.
011-B472A00-20000	CHIP RES [0603] 4.7K OHM 5%	16	R4.8.12.22.24.28.33.43.58.59.60.64.69.87.88.840.
011-B473A00-20000	CHIP RES [0603] 47K OHM 5%	14	R1.32.57.68.95.96.97.113.307.608.641.825.RA37. .38.
011-B479A00-20000	CHIP RES [0603] 4.7 OHM ±5%	3	LA6.8.14.
011-B514A00-20000	CHIP RES [0603] 510K OHM ±5%	1	R626.
011-B561A00-20000	CHIP RES [0603] 560 OHM 5%	2	R74.78.
011-B562A00-20000	CHIP RES [0603] 5.6K OHM 5%	6	R45.801.802.803.804.818.
011-B681A00-20000	CHIP RES [0603] 680 OHM 5%	1	RA6.
011-B682A00-20000	CHIP RES [0603] 6.8K OHM ±5%	2	R303.304.
011-B823A00-20000	CHIP RES [0603] 82K OHM 5%	2	R55.107
011-E150A04-20000	CHIP RES NETWORK [0603] 4X 15 OHM +/-5% 4D03	4	RN1.2.3.4.
011-S229A00-20000	CHIP RES [0805] 2.2 OHM ±5%	1	R114.
011-S820A00-20000	CHIP RES [0805] 82 OHM ±5%	1	R620.
013-D106L00-50A00	CHIP TAN CAP 10uF 10V 20% [A SIZE] F931A106MAA	2	C17.19.
014-B080C00-200NP	CHIP CAP [0603] 8PF 50V +/-0.5P NPO	1	CA5.
014-B101C00-400NP	CHIP CAP [0603] 101P (100PF) 50V +/-5% NPO	1	C817.
014-B102C00-50000	CHIP CAP [0603] 102P (0.001uF) 50V +/-10%	6	C603.604.805.806.807.808.
014-B103C00-50000	CHIP CAP [0603] 103P X7R (0.01uF) 50V ±10%	6	CA4.7.8.13.22.29.
014-B104C00-80000	CHIP CAP [0603] 104P (0.1uF) 50V +80-20%	44	C2.9.11.12.13.20.22.23.28.68.607.663.664.818.8 33.837.R614.CA9.16.20.24.27.32.33.35.BC5.9.10 .13.14.16.19.21.25.26.28.31.33.34.36.41.42.45.46 .

014-B105B00-80000	MULTI LAYER CHIP CAP [0603] 105P (1uF) 16V +80-20% Y5V	24	CA10.12.14.17.18.19.25.26.31.C4.10.16.21.26.27 .30.630.801.802.803.804.820.832.BC40
014-B151C00-50000	CHIP CAP [0603] 151P (150PF) 50V +/-10%	1	CA23.
014-B152C00-50000	CHIP CAP [0603] 152P (.0015) 50V 10%	2	C403.404.
014-B200C00-400NP	CHIP CAP [0603] 20PF 50V +/-5% NPO	3	CA36.37.CA6.
014-B223C00-80000	CHIP CAP [0603] 223P (0.022uF) 50V +80-20%	1	C605.
014-B224B00-80000	CHIP CAP [0603] 224P (0.22uF) 25V +80-20%	2	C609.610.
014-B225G00-50000	CHIP CAP [0603] X5R 225P (2.2uF) 10V +/-10%	13	CA11.30.34. C18.31.32.301.302.401.402.611.709.710.
014-B270C00-400NP	CHIP CAP [0603] 27PF 50V +/-5% NPO	2	C601.602.
014-B330C00-400NP	CHIP CAP [0603] 33PF 50V +/-5% NPO	2	C3.25.
014-B470C00-400NP	CHIP CAP [0603] 47PF 50V +/-5% NPO	1	CA2.
014-B472C00-50000	CHIP CAP [0603] 472P (0.0047) 50V 10%	6	CA3.15.C14.15.33.34.
014-B474A00-80000	CHIP CAP [0603] 474P (0.47uF) 16V +80-20%	2	CA28.C814.
014-B820C00-400NP	CHIP CAP [0603] 82PF 50V +/-5% NPO	1	CA21.
014-B821C00-50000	CHIP CAP [0603] 821P (820PF) 50V 10%	1	CA1.
014-S105A00-80000	CHIP CAP [0805] 105P (1uF) 16V +80-20%	1	C811.
029-ZSD0030-A0000	SMD SD/MMC CARD SOCKET [ZSD003-10-006]	1	J1.
057-121N300-0805A	CHIP BEAD [0805] TI201209U121 120± 25% 3.0A 0.06R	2	LA16.18.
057-121T000-S0200	CHIP BEAD [0603] R=120R/100MHz DCR=0.25, 0.5A(MAX)	12	LA5.7.10.12.13.20.21.22.23.L5.6.11.
H04-3300D00-C90000-003	CD-3300 ISO BOARD (W/POWER ANT) HISEM	1	
001-3300D00-C9000	PCB CD-3300 ISO SOCKET (FOR NO TOROID) FR-4,1.6t,2oz COPPER FOIL	1	
004-1N5404A-00000	DIODE-RECTIFIER 1N5404, 400V 3A [DO-201AD] PACKING	1	
036-K025000-12000	PCB CONNECTOR 12PIN PT=2.5mm 90° [RIGHT ANGLE]	1	
263-3300000-A00WE	TERMINAL-FUSE	2	COPPER NICKEL
263-3300000-B00WE	CD-3300 ISO SOCKET - TERMINAL-CONTACT [COPPER]	11	
263-3300001-C00WE	CD-3300 ISO SOCKET-TERMINAL -{ 1 } [COPPER] 0.6MM	1	
485-3300A00-8BK00	CD3300 ISO CONNECTOR-FIXER {30%FIBER+NYLON66} BLACK	1	FLAME RETARDANT AND 30% GLASSFIBER REINFORCED NYLON 66 (BLACK)
F02-NCD3700-K20000-002	NCD-3700 FRONT W/TB1061 LCD(WHE/BLU)NO REMOTE 8104GW FOR CLARION	1	
227-3700000-WE000	NCD-3700 POWER-KNOB-SPONGE [WHITE T=3.0MM]	1	
234-KA01700-07500	SCREW KA 1.7 x 7.5 {NICKLE}	8	
261-3897000-A0000	CD-3897 RUBBER-BAND [RUBBER] BLACK	1	
402-37000C0-1BKSS	NCD-3700 BASE PANEL [ABS 777+UV] SPRAY (NO REMOTE HOLE)	1	
413-37000A0-2CRSS	NCD-3700 LENS [PMMA] SCREEN	1	
414-37000L0-1CR00	NCD-3700 {LEFT} - REFLECTOR-CIRCLE [ABS 758] CLEAR	1	
414-37000R0-1CR00	NCD-3700 {RIGHT} - REFLECTOR-CIRCLE [ABS 758] CLEAR	1	
423-37000A0-1NLSS	NCD-3700 {BAND-SCAN-SKIP} - KNOB [ABS 777]SPRAY/LASER CUT	1	
427-37000A0-1NLSS	NCD-3700 {POWER} - KNOB [ABS 777] SPRAY/LASER CUT	1	
428-39830C0-1BKCR	CD-3983 [VOLUME]-KNOB [ABS+UV] CHROME FOR CLARION BRAND	1	
436-37000A0-1NLSS	NCD-3700 {MUTE-456-DISP} - KNOB [ABS 777] SPRAY/LASER CUT	1	
442-37000A0-1NLSS	NCD-3700 {123-APS} - KNOB [ABS 777] SPRAY/LASER CUT	1	
446-37000A0-1NLSS	NCD-3700 {AF-PTY-TA-MD} - KNOB [ABS 777] SPRAY/LASER CUT	1	

460-37000A0-3CR00	NCD-3700 {123-APS} KNOB BASE [PC] CLEAR	1	
460-37000B0-3CR00	NCD-3700 {MD-AF} - KNOB BASE [PC] CLEAR	1	
460-37000C0-3CR00	NCD-3700 {PTY-TA} - KNOB BASE [PC] CLEAR	1	
460-37000D0-3CR00	NCD-3700 {MUTE-456-DISP} - KNOB BASE [PC] CLEAR	1	
460-37000E0-3CR00	NCD-3700 {SKIP-UP-BD} - KNOB BASE [PC] CLEAR	1	
460-37000F0-3CR00	NCD-3700 {SCAN-SKIP-DOWN} - KNOB BASE [PC] CLEAR	1	
460-37000G0-3CR00	NCD-3700 {POWER} - KNOB BASE [PC] CLEAR	1	
461-37000B0-3CR00	NCD-3700 {POWER} - KNOB-BRACKET [PC] CLEAR	1	
477-37000A0-5BK00	NCD-3700 {USB} - COVER [PVC] BLACK	1	
490-37000A0-1NLSS	NCD-3700 {RESET} - KNOB [ABS 777] SPRAY/LASER CUT	1	
H03-3700D00-K20000-001	NCD-3700 FRONT W/TB1061 LCD (WHITE/BLUE) NO REMOTE W/8104LW HISEM	1	
008-TB10610-TN054	LCD DISP TB1061BMTTN-A1 54P L63.6XW31.5MM FOR CD-7613 YEEBO	1	
031-F065100-16530	16PIN-FFC L=65 (3+50 W/8MM HARD PET) PT=1.0 FOR NCD-7620 CNH	1	
038-6792400-62000	ZERBA CONNECTOR 67.9X2.4 H=6.2 PT=0.1 FOR CD-7607	1	
049-EC1211A-F1750	12MM ENCODER VOL NO/SW 24DET/12PUS (H=17.5)[EC121102X1B-HA1-018]	1	
218-7607A01-J0250	CD-7607 LCD BRACKET [IRON 0.4T]	1	
245-3300000-D0000	LED FILTER-"T-SHAPE" 20x12MM [0.1T/TRACING FILM]	2	
245-3304000-BK010	CD-3304 LCD-SEMICIRCULAR-BLACK-PAPER(W/ADHESIVE) T=0.1MM	1	
245-7607100-A01SS	CD-7607 LCD-FILTER-{BIG} 72.2X29 [FILM 0.1T] SILK SCREEN BLA	1	
246-7606C00-P1000	CD-7606 SIDE-REFLECTIONAL-PAPER	1.5	
246-7607A02-WE010	CD-7607 LCD RREFLECTOR [PET] 72.2X29X0.1T	1	
414-760750A-2CRSS	CD-7607 LCD-REFLECTOR [PMMA HIGH TEMPERA] SCREEN CLEAR	1	
S03-3700D00-K20000-001	NCD-3700 FRONT W/TB1061 LCD (WHITE/BLUE) NO REMOTE W/8104L SMTSEM	1	
001-3700D00-K2000	PCB NCD-3700 FRONT BOARD W/8104LW [REV-2]94V0 T=1.2MM GOLD	1	
001-7607D00-A6000	PCB CD-7607 LED PCB BOARD [REV-0] 0.6THK FR4 SPRAY SOLDER	1	
002-CT6523L-H064D	IC CT6523(L) LCD DRIVER [LQFP-64] THK=1.4MM PTC	1	U1.
011-C221A00-20000	CHIP RES [1206] 220 OHM ±5%	1	R80.
011-C561A00-20000	CHIP RES [1206] 560 OHM ±5%	1	R81.
011-S000A00-20000	CHIP RES [0805] 0 OHM 5%	1	R78.
011-S102A00-20000	CHIP RES [0805] 1K OHM 5%	4	R1.2.56.68.
011-S152A00-20000	CHIP RES [0805] 1.5K OHM ±5%	2	R57.69.
011-S181A00-20000	CHIP RES [0805] 180 OHM ±5%	2	R63.84.
011-S221A00-20000	CHIP RES [0805] 220 OHM ±5%	2	R52.64.
011-S222A00-20000	CHIP RES [0805] 2.2K OHM 5%	2	R58.70.
011-S331A00-20000	CHIP RES [0805] 330 OHM ±5%	2	R53.65.
011-S332A00-20000	CHIP RES [0805] 3.3K OHM ±5%	2	R59.71.
011-S471A00-20000	CHIP RES [0805] 470 OHM 5%	2	R54.66.
011-S472A00-20000	CHIP RES [0805] 4.7K OHM ±5%	3	R60.72.77.
011-S473A00-20000	CHIP RES [0805] 47K OHM ±5%	1	R82.
011-S513A00-20000	CHIP RES [0805] 51K OHM ±5%	1	R62.

011-S681A00-20000	CHIP RES [0805] 680 OHM +/-5%	8	R48.49.51.55.67.73.74.75.
011-S822A00-20000	CHIP RES [0805] 8.2K OHM ±5%	1	R61.
014-S681C00-50000	CHIP CAP [0805] 681P (680PF) 50V 10%	1	C15.
023-D000000-BE000	SMT LED [0603] BLUE (460-475nm) 80-120mcd 2.7-3.2V 20MA 120DEG	14	
023-F203032-WEK3A	SMT LED 2.0x3.0x1.3 WHITE 1900-2300mcd 3.0-3.4V 30mA 140deg	1	
025-TA02S00-43000	SMT TACT SW 2PIN 6x3.5mm H=4.3mm Force=200g w/FIXED PIN	20	
P02-NCD3700-130409-00A	NCD-3700 AM FM[CLARION UO-10W3348AM-02]-6203C2 PACKING	1	
029-MX20016-ANT00	MX2-0016 ANTENNA ADAPTERφ10.5X46	1	
034-A080400-2000A	ISO CON 8P [A] PLUG W/ 4X200 POW WIRE NORMAL(NEW)	1	
034-A080800-2000A	ISO 8P[B]PLUG W/8X200MM #20 SPK WIRE NORMAL(NEW)	1	
212-5209000-14S00	SPRING WASHER ID=5.2x9.0x1.4T WHA-SM05089HC8-C8	2	
212-5210000-05P00	PLATE WASHER (φ5.2) ID=5.2x10x0.5T WHA-FM051005SG-C8	2	
217-1001E00-E1200	MOUNTING STRIP [EGI-1.2T]	1	
222-3896S00-E0600	CD-3896 SLEEVE-CASE [EGI-0.6]	1	
230-100BKNP-10000	NP PLASTIC TIE WIRE L=100mm FOR PACKING	2	
233-N050W00-H0000	HEX NUT: M5 NUT-M0580794SG-C8	1	
234-PA05000-16000	SCREW TS 5.0 x 16.0 MM PA NICKLE TYPE-A TIP	1	
235-3700000-E1000	NCD-3700 SET-KEY [EGI] T=1.0MM	2	
301-0C02500-08000	POLY BAG OPEN 2.5"x8"XT0.04	1	
301-0C06600-10500	POLY BAG 6-5/8" X 10-1/2" X 0.04MM THK [PE]	1	
301-4265280-0PL04	ROHS POLY BAG 265x280x0.04MM W/ RED PE-LD 04	1	
303-NCD3700-00000	NCD-3700 POLYFOAM L142XW76XH47.5 16±2g [LEFT+RIGHT] FOR CAR AUDIO	2	
304-370003B-130319A	GIFT BOX NCD-3700 AM FM[CLARION UO-10W3348AM-02]	1	
305-370003B-130318A	I/M NCD-3700 AM FM[CLARION UO-10W3348AM-02]	1	
306-370003B-130409A	CARTON 10PCS NCD-3700 AM FM[CLARION UO-10W3348AM-02]	1	
307-200X270-110920A	SERVICE CARD 200X270 FOR WI-110920	1	
308-370003B-130318A	TOP LABEL NCD-3700 AM FM[CLARION UO-10W3348AM-02]	1	
310-035X035-130318A	CARTON T SERIAL NO LABEL 35X35 NCD-3700 [CLARION UO-10W3348AM-02]	2	
310-067X015-130318A	SERIAL NO LABEL 67X15 NCD-3700[CLARION UO-10W3348AM-02]	3	
310-067X015-130318B	SERIAL NO LABEL 67X15 NCD-3700 AM FM[CLARION UO-10W3348AM-02]	1	
311-134X182-130318A	1YEAR WARRANTY CARD 134X182 NCD-3700[CLARION UO-10W3348AM-02]	1	
311-175X144-130318A	WARRANTY CARD 175X144 NCD-3700[CLARION UO-10W3348AM-02]	1	
315-052X050-110920A	WIRE CONNECTION LABEL 52X50 NCD-3700[CLARION UO-10W3348AM-01]	1	
315-090X021-WAR001A	WARRANTY LABEL 90X21 FOR WI-110920	1	
319-0000000-01500	SILICA GEL 1.5g±0.2g	1	
441-37000B0-1BK00	NCD-3700 PANEL-COVER [ABS 777+UV] BLACK	1	