Exploded View (Cabinet)

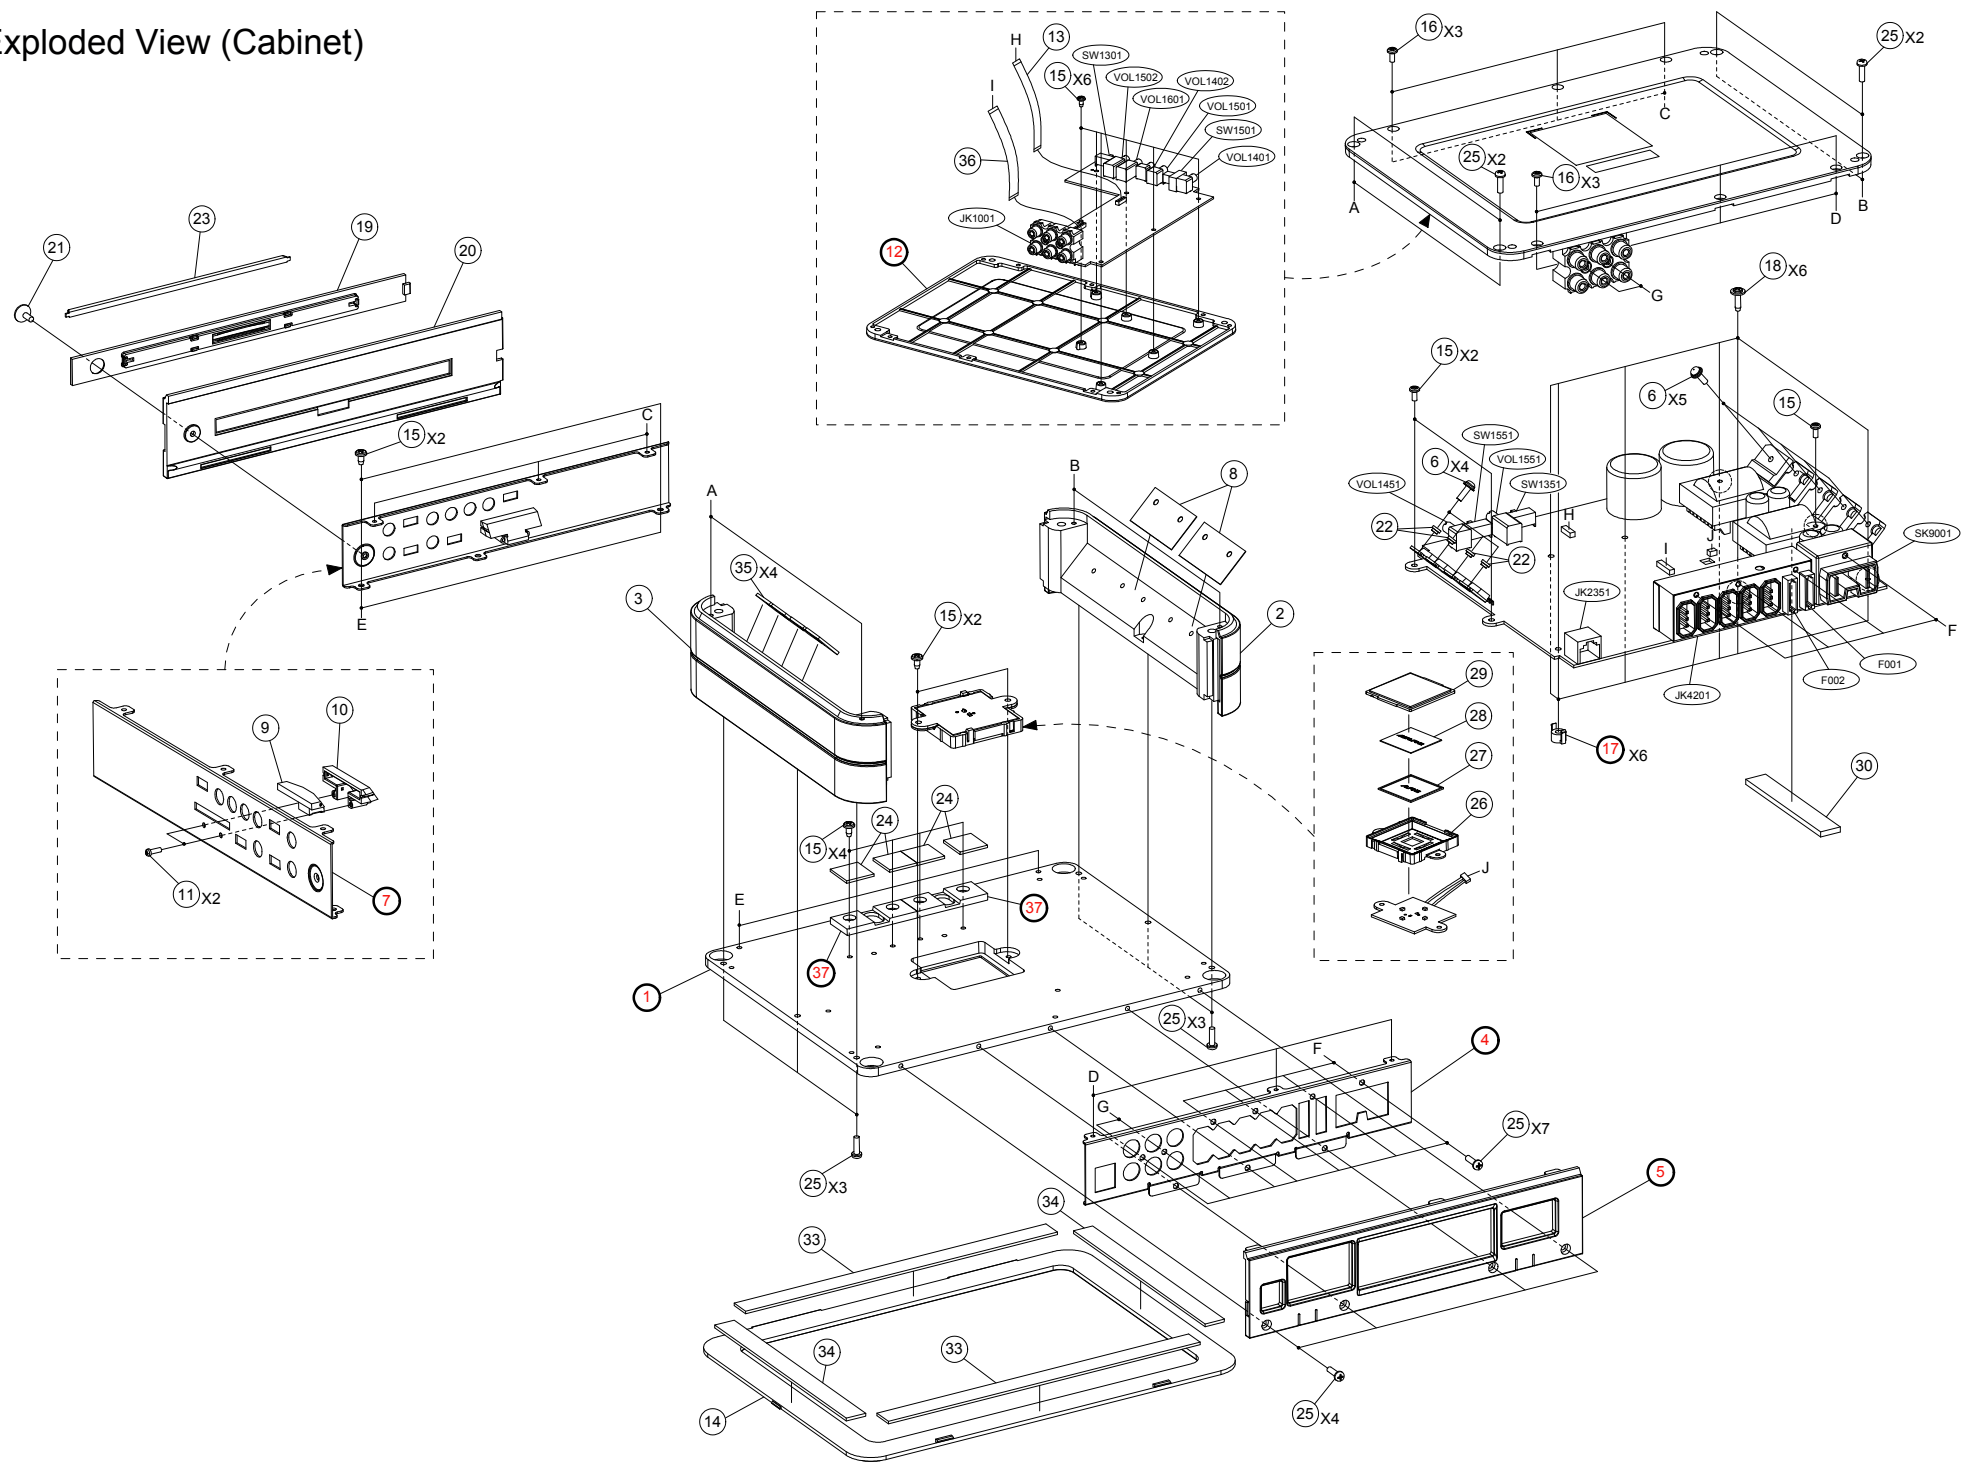

MODEL	Symbol No.	Parts No.	Description
	1	- - - - - - - - -	HEAT,SINK MAIN
	2	13E42975S01	SIDE PANEL R
	3	13E42974S01	SIDE PANEL L
	4	- - - - - - - - -	CHAS,REAR
	5	- - - - - - - - -	COVER,REAR
	6	03E37973S01	SCR,M3X12(WS)
	7	- - - - - - - - -	CHAS,FRONT
	8	14E42978S01	INS,SILPAD
	9	34E41467S01	IND,COVER DOOR
	10	09E41464S01	HOLDER,IND
	11	03E39164S01	SCR,M2X6(P)(BLK)
	12	- - - - - - - - -	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	15E41453S01	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E40129S01	SCR,M2.6X6(B)(BLK)
	17	- - - - - - - - -	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	19	33E41455S01	PLATE,COVER DOOR
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	48E42990S01	TR,PMAL205A
	23	34E41473S01	IND,PLATE COVER DOOR
	24	14E42150S01	INS,GAPPAD-FET
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	30	14E42977S01	INS,GAP PAD
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	14E42976S01	Aluminium oxide wafer
	36	30E42989S01	CABLE,FLAT 30P
	37	- - - - - - - - -	HEATSINK,SUB
	F001	65E43007S01	FUSE,40A
	F002	65E43007S01	FUSE,40A
	JK1001	09E42973S01	CONN,RCA 6P
	JK2351	09E42970S01	CONN,JACK 6P
	JK4201	09E42971S01	CONN,WTB 14P
	SK9001	09E41446S01	CONN,P-CON
	SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1351	40E41432S01	SW,SLIDE SK-22D15-G6

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

MODEL	Symbol No.	Parts No.	Description
	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1402	18E41439S01	VOL,ROTARY 50KX1
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E42201S01	VOL,ROTARY 50KX2
	VOL1502	18E42155S01	VOL,ROTARY 20KX4
	VOL1551	18E42979S01	VOL,ROTARY 50KX4
	VOL1601	18E42980S01	VOL,ROTARY 100KX4

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

Packing Method View

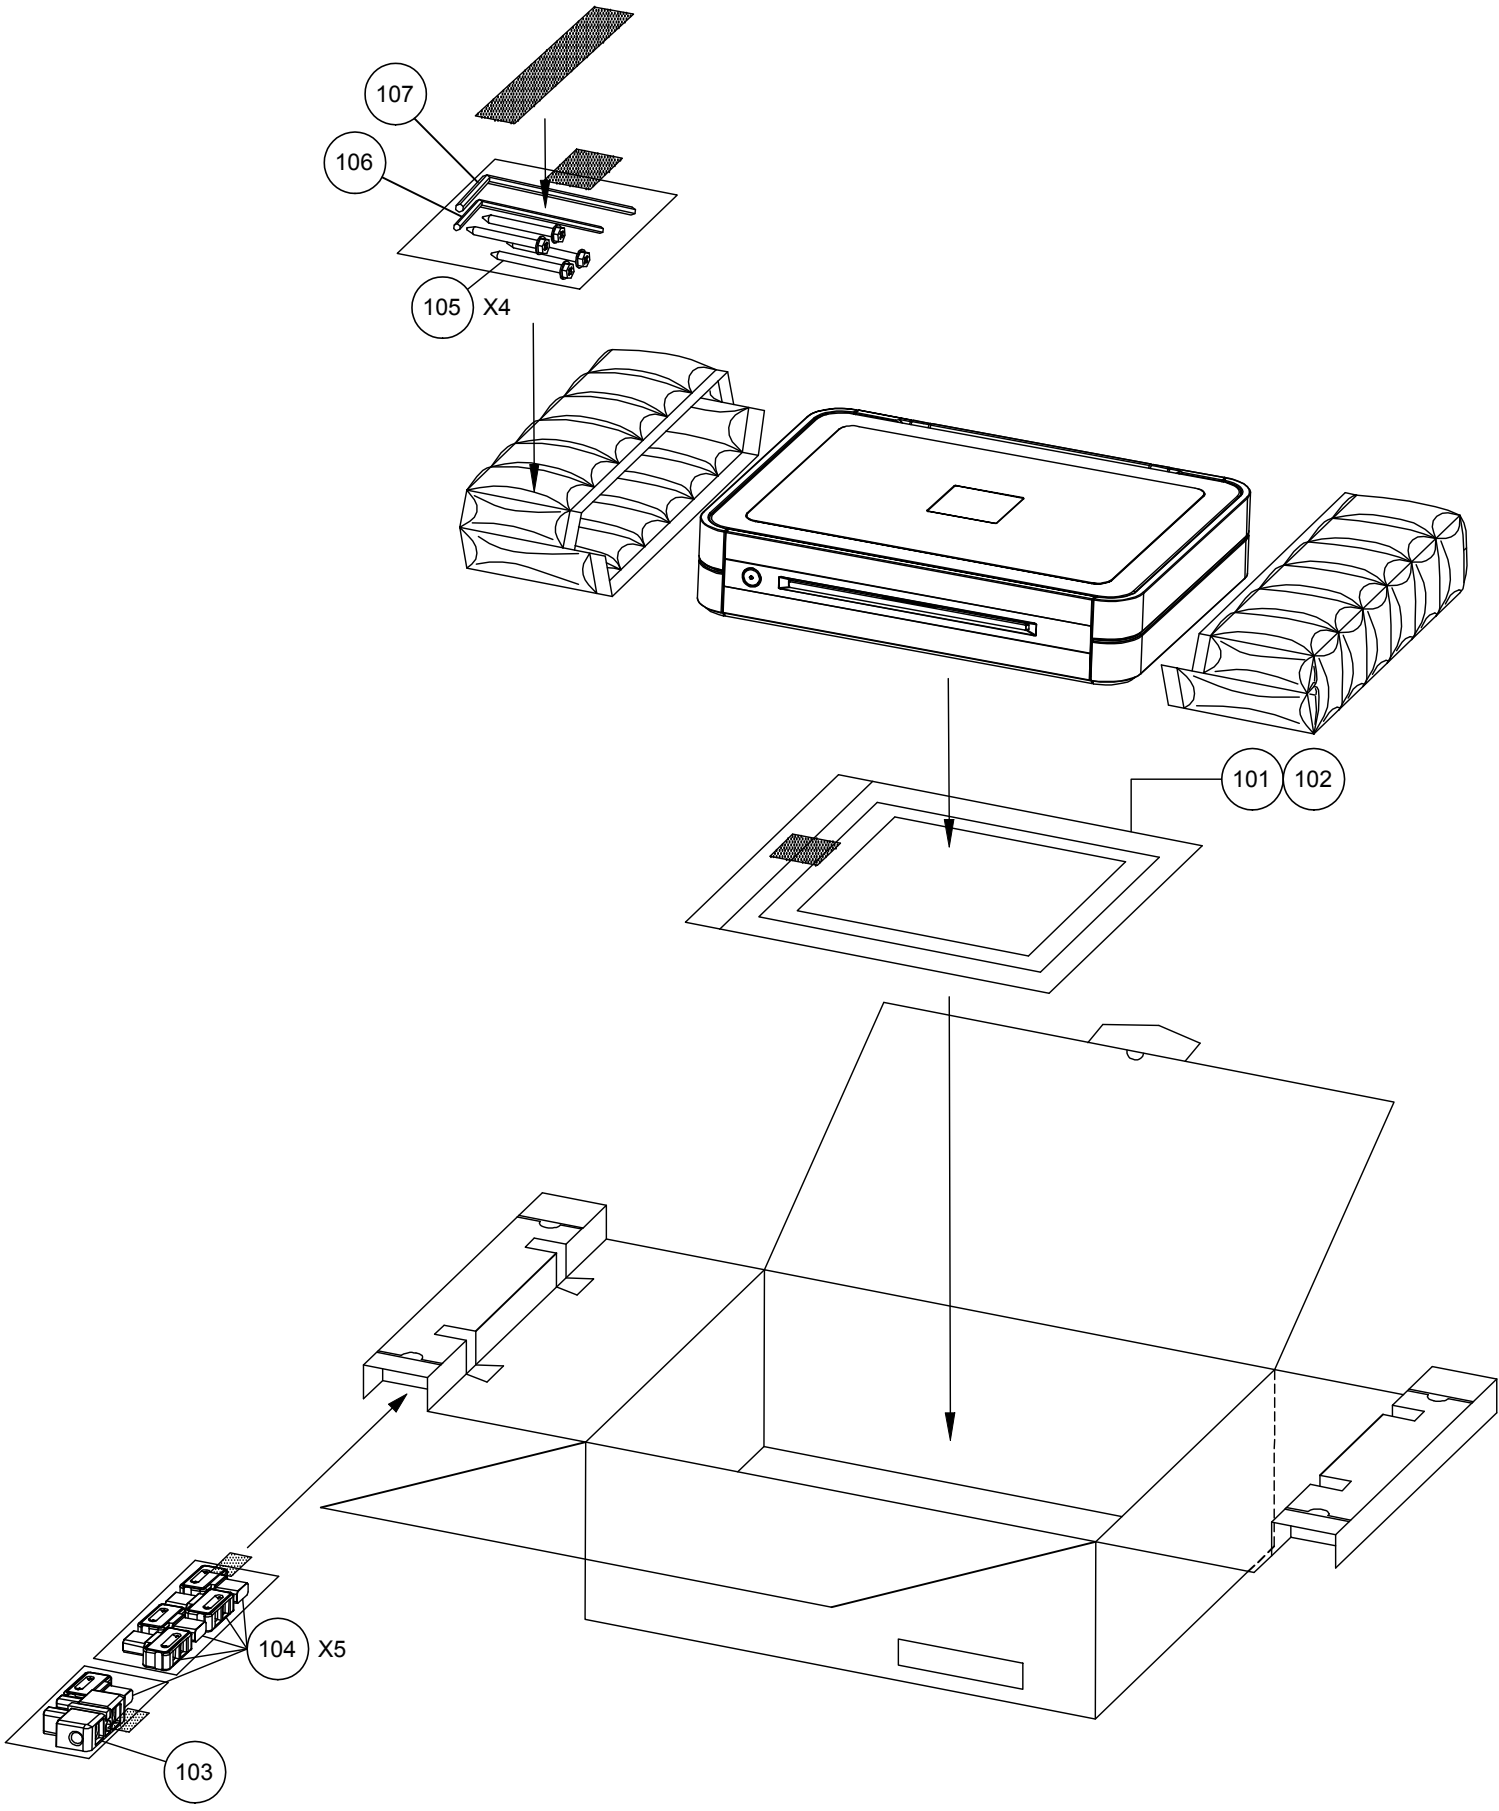

MODEL	Symbol No.	Parts No.	Description
	101	68-21057Z20	MANUAL,OWNER'S
$1	102	68-21057Z21	MANUAL,OWNER'S (I/G/S)
	103	09E41475S01	CONN,P-PLUG
	104	09E41474S01	CONN,SPK-PLUG
	105	03E41472S01	SCR,M4X36(HW)(BLK)
	106	03E36691S01	WRENCH,2X2.3
	107	47E35195S01	WRENCH,4X4.6

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1451	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1452	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1453	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1454	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1551	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1552	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1553	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1554	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1555	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1556	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1557	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1558	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1559	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1560	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1561	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C1562	08E37266S01	CAP,CER. 0.015uF/50V
MAIN-P.W.Board			C2351	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C2352	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C3001	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3002	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3003	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3004	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3005	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3006	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3007	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3008	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3009	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3010	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3011	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3012	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3013	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3101	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3102	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3103	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3104	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3105	08E41393S01	CAP,CER.1200pF/50V
MAIN-P.W.Board			C3106	08E41393S01	CAP,CER.1200pF/50V
MAIN-P.W.Board			C3107	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3108	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3109	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3110	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3111	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3112	08E41492S01	CAP,CER.2700pF/50V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3113	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3114	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3115	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3116	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3117	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3118	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3119	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3120	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3201	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3202	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3203	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3204	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3205	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3206	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3207	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3208	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3601	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3602	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3603	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C3604	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C3605	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3606	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3607	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3608	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3609	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3610	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3701	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3702	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3703	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3704	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3705	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3706	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C3707	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3708	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3709	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C3710	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3711	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C3712	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C3713	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3714	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3715	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3716	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3801	08E42138S01	CAP,CER. 0.1uF/16V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3802	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3803	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3804	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C4001	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4002	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4003	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4004	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4007	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4008	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4009	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4010	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4013	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4014	08E42962S01	CAP,FILM 1.0uF/100V
MAIN-P.W.Board			C4015	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4016	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4202	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4204	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4206	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4208	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4209	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4210	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4211	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4212	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4705	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C4706	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C4707	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4708	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4709	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4710	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4711	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4712	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4905	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C4906	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C4907	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4908	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C4909	08E34594S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C4910	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C4911	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5001	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5002	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5003	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5004	08E42965S01	CAP,CER. 22nF/16V
MAIN-P.W.Board			C5005	08E42138S01	CAP,CER. 0.1uF/16V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5006	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5007	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5008	08E41391S01	CAP,CER. 0.47uF/25V
MAIN-P.W.Board			C5009	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5010	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5011	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5012	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5013	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5014	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5015	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5017	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5018	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5019	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5020	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5021	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5022	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5023	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5024	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C5025	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5026	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5027	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C5028	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5501	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5502	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5503	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5504	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5505	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5506	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C6501	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C6502	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C6503	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C6504	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7001	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7002	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7003	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7004	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7005	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7006	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7007	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7008	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7009	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7010	08E41029S01	CAP,CER. 330pF/50V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C7011	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7012	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7013	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7014	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7015	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7016	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7050	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7052	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7053	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7054	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7055	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7056	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C7057	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7058	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7059	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7060	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7061	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7062	08E41029S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C7063	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7064	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7065	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7066	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C7101	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7102	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7103	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7104	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7105	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7106	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7107	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7108	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7109	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7110	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7111	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7112	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7113	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7114	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7115	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7116	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7117	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7118	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7121	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7122	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7151	08E38046S01	CAP,CER. 820pF/50V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C7152	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7153	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7154	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7155	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7156	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7157	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7158	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7159	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7160	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7161	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C7162	08E37151S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C7163	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7164	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C7165	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7166	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7167	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7168	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C7171	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7172	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7601	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7602	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7603	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7604	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7605	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7606	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7607	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7608	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7609	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7610	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7611	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7651	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7652	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7653	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7654	08E36470S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C7655	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7656	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7657	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7658	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7659	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7660	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C7701	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7702	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7703	08E41036S01	CAP,CER. 1uF/16V

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C7704	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7705	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7706	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7707	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7708	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7709	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7710	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7711	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7712	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7713	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C7714	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C7750	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C7751	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7752	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7753	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7754	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7755	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7756	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7757	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7758	08E42963S01	CAP,CER.100pF/100V
MAIN-P.W.Board			C7759	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7760	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7761	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7762	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C7763	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C8001	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8002	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8003	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8901	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8902	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9003	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9303	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9304	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9305	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9306	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9307	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9308	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9401	08E42964S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C9402	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9403	23E41346S01	CAP,CER. 0.22uF/50V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9404	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9601	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9602	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9603	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9701	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9702	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9703	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9704	08E41390S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9705	08E42966S01	CAP,CER. 470nF/50V
MAIN-P.W.Board			C9706	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9707	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9708	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9719	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9725	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9726	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9801	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9802	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9803	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9804	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9805	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9806	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9807	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9808	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9901	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9902	08E41023S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9908	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9909	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9915	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9917	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C9918	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C9929	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C9931	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9932	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9933	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9934	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			CB6501	09E42112S01	CONN,FFC 30P
MAIN-P.W.Board			CB6502	09E42235S01	CONN,FFC 14P
MAIN-P.W.Board			CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board			D3001	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3002	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3603	48E40918S01	DIODE,KDS160

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D3604	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3605	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3606	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4004	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4005	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D5001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D5002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7001	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D7002	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D7051	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D7052	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D7601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7603	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7604	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7605	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7606	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7651	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7652	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7653	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7654	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7655	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7656	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9501	48E38547S01	DIODE,DAN202U
MAIN-P.W.Board			D9502	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D9801	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9802	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E3001	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3002	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3605	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3606	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3609	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3610	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3701	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3702	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3703	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3704	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E4901	23E39871S01	CAP,ELY. 100uF/16V

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E5001	23E41397S01	CAP,ELY.47uF/16V
MAIN-P.W.Board			E5002	23E42985S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6501	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6502	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6503	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6504	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E7001	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E7002	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E7051	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E7052	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E7605	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7606	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7609	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7610	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7655	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7656	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7659	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7660	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E7701	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7702	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7703	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7704	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7751	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7752	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7753	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E7754	23E42983S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E8901	23E39866S01	CAP,ELY. 100uF/25V
MAIN-P.W.Board			E8902	23E41397S01	CAP,ELY.47uF/16V
MAIN-P.W.Board			E9001	23E39865S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9101	23E40767S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E9301	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E9302	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E9303	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E9304	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E9305	23E42982S01	CAP,ELY.3.3uF/50V
MAIN-P.W.Board			E9306	23E42982S01	CAP,ELY.3.3uF/50V
MAIN-P.W.Board			E9701	23E40333S01	CAP,ELY. 330uF/10V
MAIN-P.W.Board			E9702	23E42984S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9703	23E40761S01	CAP,ELY.33uF/16V
MAIN-P.W.Board			E9801	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9802	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9803	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9804	23E42796S01	CAP,ELY.2200uF/25V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E9805	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9806	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9901	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			E9902	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			F001	65E43007S01	FUSE,40A
MAIN-P.W.Board			F002	65E43007S01	FUSE,40A
MAIN-P.W.Board			F9901	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9902	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9903	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9904	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9905	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9906	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9907	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9908	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9909	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9910	65E41480S01	FUSE,20A
MAIN-P.W.Board			IC1451	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1551	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC1552	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC3001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC3101	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC3201	51E40342S01	IC,74VHC00MTCX
MAIN-P.W.Board			IC3202	51E40342S01	IC,74VHC00MTCX
MAIN-P.W.Board			IC3601	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3602	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC4703	51E39597S01	IC,BA2903FVM
MAIN-P.W.Board			IC4704	51E39596S01	IC,BA2901FV
MAIN-P.W.Board			IC4902	51E43006S01	IC,LM5008SD
MAIN-P.W.Board			IC5001	51E36474S01	IC,NJM78L05UA
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E43004S01	IC,UPD78F0515AGAA
MAIN-P.W.Board			IC5004	51E43005S01	IC,BD5260G
MAIN-P.W.Board			IC7001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7051	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7101	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7151	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC7601	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC7602	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC7651	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC7652	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9401	51E36642S01	IC,NJM2360AM
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC9702	51E39597S01	IC,BA2903FVM
MAIN-P.W.Board			IC9801	51E41427S01	IC,LM5109B
MAIN-P.W.Board			IC9802	51E41427S01	IC,LM5109B
MAIN-P.W.Board			JK2351	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board			JK4201	09E42971S01	CONN,WTB 14P
MAIN-P.W.Board			L4001	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4002	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4003	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4004	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4005	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board			L4006	24E42987S01	COIL,7G23B /10uH
MAIN-P.W.Board			L4902	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board			L5001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L5002	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L5003	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L9001	24E41435S01	COIL,IND. 47uH
MAIN-P.W.Board			L9101	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			L9301	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board			L9302	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board			L9401	24E42988S01	COIL,IND. 220uH
MAIN-P.W.Board			LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8002	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8003	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board			Q3001	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3002	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3003	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3004	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3005	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q3006	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3007	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q3008	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3009	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q3010	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q3011	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q3012	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q3101	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3102	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q3103	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q3104	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q3105	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3106	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3202	48E43003S01	TR,UMD3N

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3203	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3204	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q3205	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3206	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q3207	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3208	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q3209	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3210	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q3211	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3212	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q3701	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3702	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3703	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3704	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3705	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3706	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3707	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3708	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3709	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3710	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3711	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3712	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q4701	48E42995S01	TR,UMB2N
MAIN-P.W.Board			Q4702	48E42995S01	TR,UMB2N
MAIN-P.W.Board			Q5001	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5002	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5003	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5004	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q5005	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q5006	48E42994S01	TR,UMH11N
MAIN-P.W.Board			Q7001	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7002	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7003	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7004	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q7005	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7006	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q7007	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7008	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7009	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7010	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q7011	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7012	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q7051	48E41424S01	TR,UMT2N

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q7052	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7053	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7054	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q7055	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7056	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q7057	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7058	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7059	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7060	48E39356S01	TR,2SA1576A
MAIN-P.W.Board			Q7061	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7062	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q7101	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q7102	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7103	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7104	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q7105	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7106	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7151	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q7152	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7153	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7154	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q7155	48E41424S01	TR,UMT2N
MAIN-P.W.Board			Q7161	48E41422S01	TR,UMX2N
MAIN-P.W.Board			Q7601	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7602	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q7603	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7604	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7605	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7606	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7607	48E39882S01	TR,2SA1579
MAIN-P.W.Board			Q7701	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7702	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7703	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7704	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7751	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7752	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7753	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q7754	48E42169S01	FET,IRF6665TR
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9102	48E42998S01	TR,KTB1260
MAIN-P.W.Board			Q9306	48E43000S01	TR,KTC5103D

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q9307	48E42999S01	TR,KTA1385D
MAIN-P.W.Board			Q9401	48E42994S01	TR,UMH11N
MAIN-P.W.Board			Q9404	48E42435S01	TR,2SC4672
MAIN-P.W.Board			Q9405	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q9406	48E42998S01	TR,KTB1260
MAIN-P.W.Board			Q9501	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9502	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9503	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9504	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q9505	48E37898S01	TR,2SC4081R
MAIN-P.W.Board			Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9702	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q9703	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q9704	48E37893S01	TR,DTA114EE
MAIN-P.W.Board			Q9705	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q9706	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q9801	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q9802	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q9803	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q9804	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q9805	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q9806	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q9807	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q9808	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q9901	48E41417S01	FET,IRFP4004
MAIN-P.W.Board			Q9902	48E41417S01	FET,IRFP4004
MAIN-P.W.Board			Q9903	48E41417S01	FET,IRFP4004
MAIN-P.W.Board			Q9904	48E41417S01	FET,IRFP4004
MAIN-P.W.Board			R1451	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1452	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1453	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R1454	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R1455	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1456	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1551	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1552	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1553	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1554	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1555	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1556	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1557	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1558	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1559	06E37227S01	RES,CF. 1K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1560	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1561	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1562	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1563	06E38535S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1564	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1565	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1566	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1567	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1568	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R3001	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R3002	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R3003	06E42954S01	RES,CF. 160-1/16W
MAIN-P.W.Board			R3004	06E42954S01	RES,CF. 160-1/16W
MAIN-P.W.Board			R3005	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3006	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3007	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R3008	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R3009	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R3010	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R3011	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3012	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3013	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3014	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3015	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R3016	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R3017	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R3018	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R3019	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3020	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3021	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3022	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3023	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3024	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3025	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3026	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3027	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3028	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3029	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3030	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3031	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3032	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3033	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3034	06E40736S01	RES,CF. 680-1/10W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3035	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3036	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3101	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3102	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3103	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3104	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3105	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3106	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3107	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3108	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3109	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3110	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3111	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3112	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3113	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3114	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3115	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3116	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3117	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board			R3118	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board			R3119	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board			R3120	06E42958S01	RES,CF. 9.1K-1/4W
MAIN-P.W.Board			R3121	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3122	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3123	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R3124	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R3125	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R3126	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R3127	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3128	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3129	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3130	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3131	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3132	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3137	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R3138	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R3139	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R3140	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R3201	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3202	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3203	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3204	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3205	06E40992S01	RES,CF. 100-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3206	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3207	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3208	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3209	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3210	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3211	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3212	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3213	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3214	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3215	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3216	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3217	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3218	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3602	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3603	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3605	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3606	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3607	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R3608	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R3609	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R3610	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R3611	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3612	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3613	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R3614	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3615	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R3616	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3617	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3618	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3619	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3620	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3621	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3622	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3625	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3626	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3627	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3628	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3701	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3702	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3703	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3704	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3705	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3706	06E42133S01	RES,CF. 100K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3707	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3708	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3709	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3710	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3711	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3712	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3801	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3802	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3803	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3804	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R4001	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4002	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4003	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4004	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4005	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4006	06E37100S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R4703	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4704	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4705	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4706	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4709	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4710	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4712	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4713	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4715	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R4716	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R4717	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R4719	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board			R4720	06E42955S01	RES,CF. 360-1/16W
MAIN-P.W.Board			R4721	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4722	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4723	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4724	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4725	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4726	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4727	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4728	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4729	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4730	06E42956S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4731	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board			R4732	06E42957S01	RES,CF. 0.01-2W
MAIN-P.W.Board			R4910	06E35394S01	RES,CF. 180K-1/16W
MAIN-P.W.Board			R4911	06E37165S01	RES,CF. 3.9K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4912	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R4913	06E41014S01	RES,CF 330K-1/16-CP
MAIN-P.W.Board			R4914	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R4915	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R4916	06E35394S01	RES,CF. 180K-1/16W
MAIN-P.W.Board			R4917	06E38407S01	RES,CF. 1.2K-1/4W
MAIN-P.W.Board			R5001	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5002	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5003	06E37262S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R5004	06E42959S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R5005	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R5006	06E37275S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R5007	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5009	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5011	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5012	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5013	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5014	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5015	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5016	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R5017	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board			R5018	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board			R5019	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5020	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5021	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5022	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5023	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board			R5024	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R5025	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R5026	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R5027	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R5028	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R5029	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R5030	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5031	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R5032	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R5033	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R5034	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R5035	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R5036	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R5037	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5038	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5039	06E37165S01	RES,CF. 3.9K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5040	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R5041	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R7001	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7003	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7005	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7006	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7007	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7008	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7009	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7010	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7011	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7012	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7013	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R7014	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7015	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7016	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7017	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7018	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7019	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7020	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7021	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7022	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7023	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R7024	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R7025	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7026	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R7027	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7028	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R7029	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7030	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R7031	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7032	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7033	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7034	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7035	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7036	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7037	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7038	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7039	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7040	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R7041	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R7042	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7043	06E42183S01	RES,CF. 560-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7044	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7045	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R7046	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7047	06E42953S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R7051	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7052	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7053	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7054	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7055	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7056	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7057	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7058	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R7059	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7060	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7061	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7062	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R7063	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R7064	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7065	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7066	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7067	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7068	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7069	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7070	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7071	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7072	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7073	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7074	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R7075	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7076	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R7077	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7078	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R7079	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7080	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R7081	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7082	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7084	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7085	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7086	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R7087	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7088	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R7089	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7090	06E42953S01	RES,CF. 20K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7091	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R7092	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7093	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R7094	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7095	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R7096	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7101	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7103	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7104	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7105	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7106	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7107	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7108	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7109	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R7110	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7111	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7112	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7113	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7114	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7115	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7117	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7118	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7119	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7120	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7121	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7122	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7123	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R7124	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7125	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7126	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7127	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7128	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7151	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7153	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7154	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7155	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7156	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7157	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7158	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7159	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R7160	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7161	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7162	06E37110S01	RES,CF. 10K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7163	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7164	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7165	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7167	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7168	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7169	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7170	06E37247S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7171	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7172	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R7173	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R7174	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7175	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R7176	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7177	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7178	06E37229S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7201	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7202	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7203	06E35163S01	RES,CF 132-F-1/16-CP
MAIN-P.W.Board			R7204	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7207	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7208	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R7603	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R7604	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R7605	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R7606	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R7607	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R7608	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R7609	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R7610	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R7611	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7612	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7613	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R7614	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7615	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R7616	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7617	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7618	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7619	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R7620	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R7621	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R7622	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R7623	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7624	06E40841S01	RES,CF. 22K-1/10W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7625	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7626	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7627	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7628	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7629	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7630	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7631	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7632	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7633	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7634	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7635	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7636	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7637	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7638	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7639	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7640	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7641	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7642	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7643	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7644	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7645	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7646	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R7647	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7648	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7651	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R7652	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R7653	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R7654	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R7657	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R7658	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R7659	06E37093S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R7660	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R7661	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7662	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7663	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R7664	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7665	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R7666	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7667	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7668	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R7669	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R7670	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R7671	06E35290S01	RES,CF. 6.2K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7672	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R7701	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7702	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7705	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7706	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7707	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7708	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7709	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7710	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7711	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7712	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7751	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7752	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7753	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7754	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R7755	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7756	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7757	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7758	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R7759	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7760	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7761	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R7762	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9101	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board			R9102	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9103	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9104	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9105	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9106	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9107	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9305	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board			R9306	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board			R9307	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R9308	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R9309	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board			R9310	06E31151S01	RES,CF. 1.3K-J-1/16
MAIN-P.W.Board			R9311	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R9312	06E41015S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R9401	06E40977S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R9402	06E37275S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R9403	06E37264S01	RES,CF. 39K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9404	06E34592S01	RES,CF 161-J-1/16-CP
MAIN-P.W.Board			R9405	06E42960S01	RES,CF. 0.39-1/4W
MAIN-P.W.Board			R9406	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9407	06E35522S01	RES,CF. 1.6K-1/4W
MAIN-P.W.Board			R9408	06E35522S01	RES,CF. 1.6K-1/4W
MAIN-P.W.Board			R9409	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9410	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9411	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R9501	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9502	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9503	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9504	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9505	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9506	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9508	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9509	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9510	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9511	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9513	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9601	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R9602	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R9604	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R9701	06E41005S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9702	06E36584S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R9703	06E37167S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R9704	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R9705	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9706	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R9707	06E37170S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R9708	06E37165S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board			R9709	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R9710	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R9711	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R9712	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R9713	06E36660S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R9714	06E31808S01	RES,CF. 360K-1/16W
MAIN-P.W.Board			R9715	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9716	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9717	06E40330S01	RES,CF. 150K-1/16W
MAIN-P.W.Board			R9719	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9720	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9721	06E42132S01	RES,CF. 10K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9722	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R9723	06E40999S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9724	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R9725	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9726	06E37109S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9727	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9729	06E35242S01	RES,CF. 4.3K-1/16W
MAIN-P.W.Board			R9801	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9802	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9803	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9804	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9805	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9806	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9807	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9808	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9809	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9810	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9811	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9812	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9901	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9902	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9903	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9904	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9905	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9906	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9907	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9908	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9911	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9912	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9913	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9914	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9919	06E40979S01	RES,CF. 22-1/16W
MAIN-P.W.Board			R9920	06E40979S01	RES,CF. 22-1/16W
MAIN-P.W.Board			R9931	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9933	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9935	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9937	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			SD4901	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD4903	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			SD8901	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			SD9302	48E40860S01	DIO,SHOTTKY□@RB160M

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			SD9303	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9305	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9306	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9401	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9402	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD9901	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SK9001	09E41446S01	CONN,P-CON
MAIN-P.W.Board			SW1351	40E41432S01	SW,SLIDE SK-22D15-G6
MAIN-P.W.Board			SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board			T9901	48E42991S01	TRANS,POWER AP11209L
MAIN-P.W.Board			T9902	48E42991S01	TRANS,POWER AP11209L
MAIN-P.W.Board			TH3801	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3803	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3804	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH5001	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9601	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9602	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9603	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			VOL1451	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1551	18E42979S01	VOL,ROTARY 50KX4
MAIN-P.W.Board			ZD3101	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD3102	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD3601	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD3602	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD3701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD4001	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4002	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4003	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4004	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4005	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4006	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD7101	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD7102	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD7151	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD7152	48E42992S01	DIODE,ZENER KDZ3.3V
MAIN-P.W.Board			ZD7601	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD7602	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD7651	48E42997S01	DIODE,ZENER UDZS13B

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD7652	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD7701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7751	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7752	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7753	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD7754	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9301	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9302	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9503	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9504	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9505	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9506	48E42996S01	DIODE,ZENER HZK30-1L
SUB-P.W.Board			C1001	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1002	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1003	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1004	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1005	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1006	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1007	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1008	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1009	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1010	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1011	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1012	08E42139S01	CAP,CER.100pF/50V
SUB-P.W.Board			C1109	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board			C1110	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board			C1111	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board			C1112	08E37118S01	CAP,CER. 220pF/50V
SUB-P.W.Board			C1113	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1114	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1115	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1116	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1117	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1118	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1119	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1120	08E36114S01	CAP,CER. 0.22uF/16V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			C1121	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1122	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1123	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1124	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1201	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1202	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1203	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1204	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1205	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1206	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1207	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1208	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1209	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1210	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1211	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1212	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1213	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1214	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1215	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1216	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1217	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1218	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1219	08E42969S01	CAP,CER.1uF/25V
SUB-P.W.Board			C1220	08E42969S01	CAP,CER.1uF/25V
SUB-P.W.Board			C1301	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1302	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1303	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1304	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1305	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1306	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1307	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1308	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1401	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1404	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1405	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1407	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1408	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1409	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1410	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1501	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1502	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1503	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board			C1504	08E38540S01	CAP,CER. 0.15uF/16V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			C1505	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board			C1506	08E38540S01	CAP,CER. 0.15uF/16V
SUB-P.W.Board			C1507	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1508	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1509	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1510	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1511	08E42116S01	CAP,FILM 47nF/63V
SUB-P.W.Board			C1512	08E42967S01	CAP,FILM 0.33uF/63V
SUB-P.W.Board			C1513	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board			C1514	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board			C1515	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1516	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1517	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1518	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1519	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1520	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1601	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board			C1602	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board			C1603	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board			C1604	08E42968S01	CAP,FILM 1.5uF/50V
SUB-P.W.Board			C1605	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1606	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1801	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1802	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1803	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1804	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1805	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1806	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1807	08E42117S01	CAP,FILM 68nF/63V
SUB-P.W.Board			C1808	08E42118S01	CAP,FILM 150nF/63V
SUB-P.W.Board			C1809	08E42323S01	CAP,CER. 22pF/50V
SUB-P.W.Board			C1810	08E36680S01	CAP,CER. 1000pF/50V
SUB-P.W.Board			C2001	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2002	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2003	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C2004	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2005	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2006	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C2007	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2008	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2009	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C2101	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2102	08E36114S01	CAP,CER. 0.22uF/16V

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			C2103	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C2104	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2105	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2106	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C2107	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2108	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C2109	08E42325S01	CAP,CER. 0.01uF/50V
SUB-P.W.Board			C6551	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C6552	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C6553	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C6554	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			CB6551	09E42235S01	CONN,FFC 14P
SUB-P.W.Board			CB6552	09E42112S01	CONN,FFC 30P
SUB-P.W.Board			D1101	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1102	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1103	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1104	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1105	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1106	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1107	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1108	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1109	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1110	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1111	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1112	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D1201	48E40918S01	DIODE,KDS160
SUB-P.W.Board			D1202	48E40918S01	DIODE,KDS160
SUB-P.W.Board			D1701	48E40918S01	DIODE,KDS160
SUB-P.W.Board			D1702	48E41411S01	DIODE,DAP202U
SUB-P.W.Board			D1703	48E41411S01	DIODE,DAP202U
SUB-P.W.Board			D2001	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2002	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2003	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2004	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2005	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2101	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2102	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2103	48E40918S01	DIODE,KDS160
SUB-P.W.Board			D2104	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2105	48E40918S01	DIODE,KDS160
SUB-P.W.Board			D2106	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2107	48E42526S01	DIODE,DAN217U
SUB-P.W.Board			D2108	48E40918S01	DIODE,KDS160

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			E1101	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1102	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1103	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1104	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1105	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1106	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1107	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1108	23E39767S01	CAP,ELY. 1uF/50V
SUB-P.W.Board			E1109	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board			E1110	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board			E1111	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board			E1112	23E39766S01	CAP,ELY. 2.2uF/50V
SUB-P.W.Board			E1701	23E42985S01	CAP,ELY.22uF/16V
SUB-P.W.Board			E1702	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board			E1703	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board			E1704	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board			E1705	23E39769S01	CAP,ELY. 10uF/16V
SUB-P.W.Board			E1801	23E42985S01	CAP,ELY.22uF/16V
SUB-P.W.Board			E6551	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board			E6552	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board			E6553	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board			E6554	23E41398S01	CAP,ELY.22uF/16V
SUB-P.W.Board			IC1101	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1102	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1103	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1104	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1105	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1106	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1201	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1202	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1203	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1301	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1302	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1401	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1402	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1501	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1502	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1503	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1504	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1601	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1801	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1802	51E42366S01	IC,NJM4580R
SUB-P.W.Board			IC1803	51E42366S01	IC,NJM4580R

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			IC2001	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			IC2002	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			IC2003	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			IC2101	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			IC2102	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			IC2103	51E39598S01	IC,BA4560RFVM
SUB-P.W.Board			JK1001	09E42973S01	CONN,RCA 6P
SUB-P.W.Board			Q1301	48E43002S01	TR,UM6K31N
SUB-P.W.Board			Q1302	48E43002S01	TR,UM6K31N
SUB-P.W.Board			Q1303	48E43002S01	TR,UM6K31N
SUB-P.W.Board			Q1304	48E43002S01	TR,UM6K31N
SUB-P.W.Board			Q1701	48E42172S01	TR,IMX25
SUB-P.W.Board			Q1702	48E42172S01	TR,IMX25
SUB-P.W.Board			Q1703	48E43003S01	TR,UMD3N
SUB-P.W.Board			Q1704	48E37188S01	TR,DTC144EE
SUB-P.W.Board			Q1705	48E39389S01	TR,KTC2875
SUB-P.W.Board			Q2101	48E41051S01	TR,2SC2412K
SUB-P.W.Board			Q2102	48E41051S01	TR,2SC2412K
SUB-P.W.Board			Q2103	48E37188S01	TR,DTC144EE
SUB-P.W.Board			Q2104	48E37188S01	TR,DTC144EE
SUB-P.W.Board			R1101	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1102	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1103	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1104	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1105	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1106	06E36561S01	RES,CF. 120-1/16W
SUB-P.W.Board			R1107	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1108	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1109	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1110	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1111	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1112	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1113	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1114	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1115	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1116	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1117	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1118	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1119	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1120	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1121	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1122	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1123	06E37252S01	RES,CF. 22K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1124	06E37252S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1125	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1126	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1127	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1128	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1129	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1130	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1131	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1132	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1133	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1134	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1135	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1136	06E38591S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1149	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1150	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1151	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1152	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1153	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1154	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1155	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1156	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1157	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1158	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1159	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1160	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1201	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1202	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1203	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1204	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1205	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1206	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1207	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1208	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1209	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1210	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1211	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1212	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1213	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1214	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1215	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1216	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1217	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1218	06E38535S01	RES,CF. 18K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1219	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1220	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1221	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1222	06E42961S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1223	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1224	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1225	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1226	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1227	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1228	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1229	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board			R1230	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board			R1303	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board			R1304	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board			R1305	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board			R1306	06E42385S01	RES,CF. 470K-1/16W
SUB-P.W.Board			R1307	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1308	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1309	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1310	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1311	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1312	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1313	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1314	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1315	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1316	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1317	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1318	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1319	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1320	06E40977S01	RES,CF. 10-1/16W
SUB-P.W.Board			R1401	06E35163S01	RES,CF 132-F-1/16-CP
SUB-P.W.Board			R1402	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board			R1403	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board			R1404	06E34155S01	RES,CF. 750-1/16W
SUB-P.W.Board			R1405	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1406	06E41005S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1407	06E37224S01	RES,CF. 2K-1/16W
SUB-P.W.Board			R1408	06E37224S01	RES,CF. 2K-1/16W
SUB-P.W.Board			R1409	06E35388S01	RES,CF. 24K-1/16W
SUB-P.W.Board			R1410	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1411	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1501	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1502	06E38535S01	RES,CF. 18K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1503	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1504	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1505	06E38535S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1506	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1507	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1508	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1509	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1510	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1511	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1512	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1513	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1514	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1515	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1516	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1517	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1518	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1519	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1520	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1521	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1522	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1523	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1524	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1525	06E40552S01	RES,CF. 1.6K-1/16
SUB-P.W.Board			R1526	06E37169S01	RES,CF. 1.8K-1/16W
SUB-P.W.Board			R1527	06E35240S01	RES,CF. 2.2K-1/16W
SUB-P.W.Board			R1528	06E37169S01	RES,CF. 1.8K-1/16W
SUB-P.W.Board			R1529	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1530	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1601	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1602	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1603	06E37093S01	RES,CF. 5.6K-1/16W
SUB-P.W.Board			R1604	06E37093S01	RES,CF. 5.6K-1/16W
SUB-P.W.Board			R1605	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1606	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1607	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1608	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1701	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1702	06E37225S01	RES,CF. 1.5K-1/16W
SUB-P.W.Board			R1703	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1704	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board			R1705	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1706	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1707	06E42132S01	RES,CF. 10K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1708	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1709	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1710	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1711	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1712	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1713	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1714	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1715	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1716	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1717	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board			R1718	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board			R1719	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board			R1720	06E35367S01	RES,CF. 5.6K-1/4W
SUB-P.W.Board			R1721	06E41011S01	RES,CF. 100K-1/16W
SUB-P.W.Board			R1722	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1801	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1802	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1803	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1804	06E37226S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1805	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1806	06E37110S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R1807	06E37225S01	RES,CF. 1.5K-1/16W
SUB-P.W.Board			R2001	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board			R2002	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2004	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board			R2005	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2007	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2008	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2009	06E37109S01	RES,CF. 4.7K-1/16W
SUB-P.W.Board			R2010	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2012	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2101	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R2102	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R2103	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2104	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board			R2105	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board			R2106	06E34170S01	RES,CF. 430-1/16W
SUB-P.W.Board			R2107	06E35291S01	RES,CF. 6.8K-1/16W
SUB-P.W.Board			R2108	06E41377S01	RES,CF. 270-1/16W
SUB-P.W.Board			R2109	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2110	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2111	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board			R2112	06E37105S01	RES,CF. 3.3K-1/16W

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R2113	06E34170S01	RES,CF. 430-1/16W
SUB-P.W.Board			R2114	06E35291S01	RES,CF. 6.8K-1/16W
SUB-P.W.Board			R2115	06E41377S01	RES,CF. 270-1/16W
SUB-P.W.Board			R2116	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2117	06E37227S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R2118	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2119	06E38592S01	RES,CF. 16K-1/16W
SUB-P.W.Board			R2120	06E37105S01	RES,CF. 3.3K-1/16W
SUB-P.W.Board			R2121	06E40733S01	RES,CF. 200-1/16W
SUB-P.W.Board			R2122	06E35290S01	RES,CF. 6.2K-1/16W
SUB-P.W.Board			R2123	06E42183S01	RES,CF. 560-1/16W
SUB-P.W.Board			R2124	06E42287S01	RES,CF. 47K-1/16W
SUB-P.W.Board			R2125	06E41513S01	RES,CF. 240-1/16W
SUB-P.W.Board			R2126	06E41374S01	RES,CF. 110-1/16W
SUB-P.W.Board			R2127	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R2128	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R2129	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R2130	06E42132S01	RES,CF. 10K-1/16W
SUB-P.W.Board			R2301	06E41016S01	RES,CF. 0-1/16W
SUB-P.W.Board			R2302	06E41382S01	RES,CF. 51K-1/16W
SUB-P.W.Board			R2303	06E41375S01	RES,CF. 150-1/16W
SUB-P.W.Board			R2304	06E42134S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R6551	06E42297S01	RES,CF. 100K-1/10W
SUB-P.W.Board			R6552	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board			R8001	06E41387S01	RES,CF. 680-1/4W
MAIN-P.W.Board			R8003	06E39850S01	RES,CF. 2K-1/4W
MAIN-P.W.Board			R8004	06E40750S01	RES,CF. 1.1K-1/4W
SUB-P.W.Board			SW1301	40E41432S01	SW,SLIDE SK-22D15-G6
SUB-P.W.Board			SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
SUB-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
SUB-P.W.Board			VOL1402	18E41439S01	VOL,ROTARY 50KX1
SUB-P.W.Board			VOL1501	18E42201S01	VOL,ROTARY 50KX2
SUB-P.W.Board			VOL1502	18E42155S01	VOL,ROTARY 20KX4
SUB-P.W.Board			VOL1601	18E42980S01	VOL,ROTARY 100KX4
LED-P.W.Board			C8021	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board			C8022	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board			C8023	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board			C8024	08E40754S01	CAP,CER.180pF/50V
LED-P.W.Board			LD8021	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8022	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8023	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8024	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			R8022	06E38034S01	RES,CF. 1K-1/4W

Mark Model Code

#1 PDX-V9(North American) Only,

$1 PDX-V9(European) Only,

%1 PDX-V9(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
LED-P.W.Board			R8024	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous			CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code
#1 PDX-V9(North American) Only,
$1 PDX-V9(European) Only,
%1 PDX-V9(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied