



Exploded View (Cabinet) (1/4)

NOTE : The place of the connection of (A) as shown in (),
is mentioned in the "Exploded View (Cabinet) (3/4)".

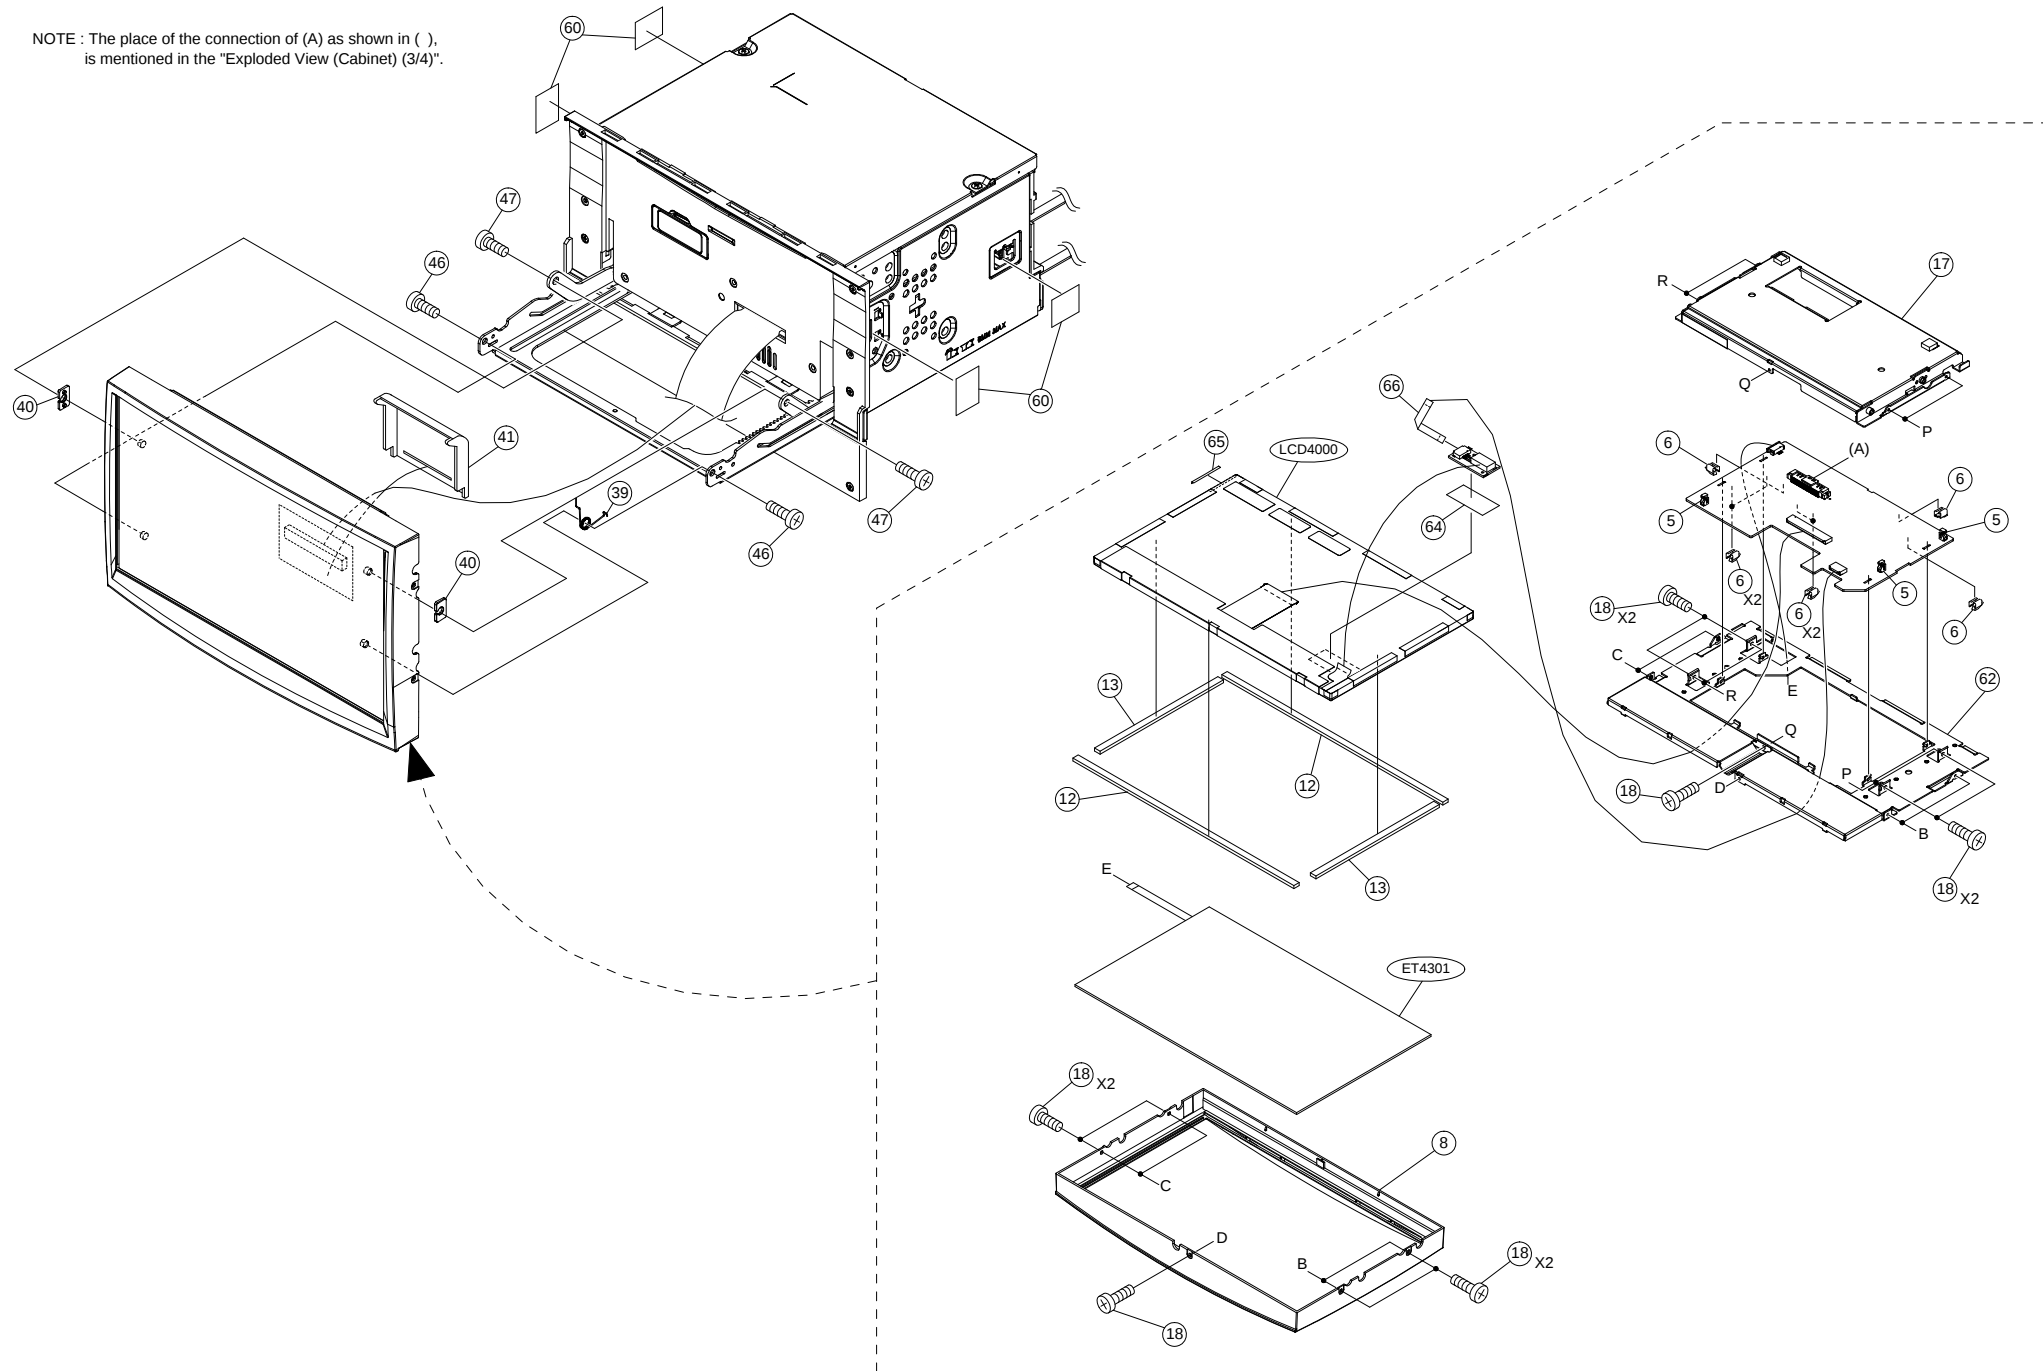


Exploded View (Cabinet) (2/4)

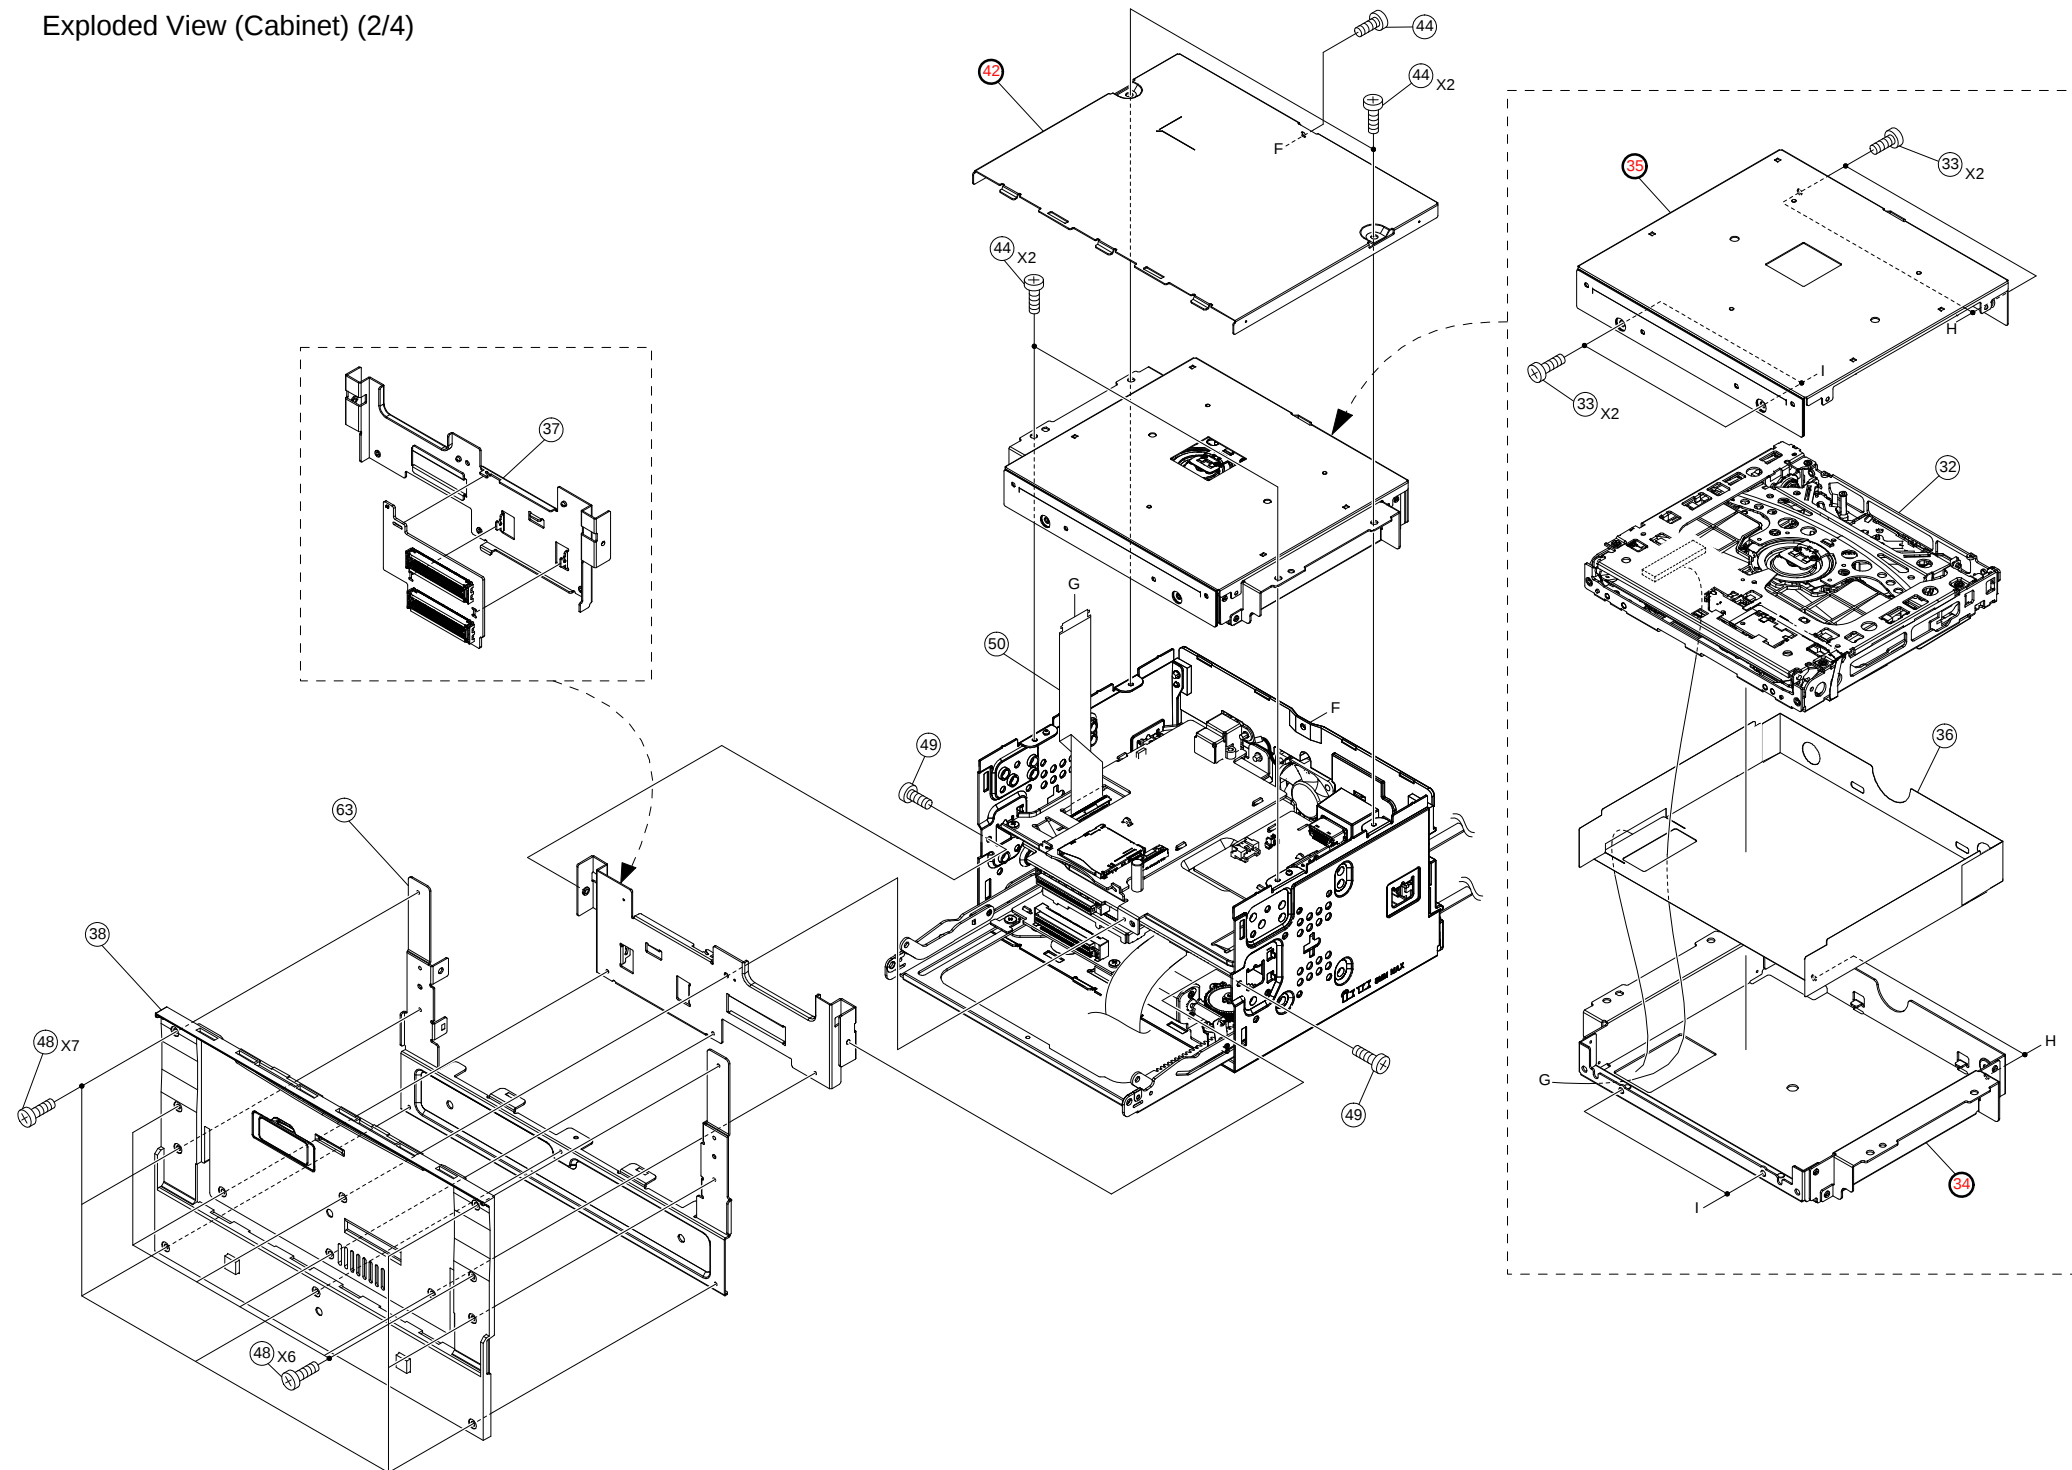


Exploded View (Cabinet) (3/4)

NOTE : The place of the connection of (A) as shown in (),
is mentioned in the "Exploded View (Cabinet) (1/4)".

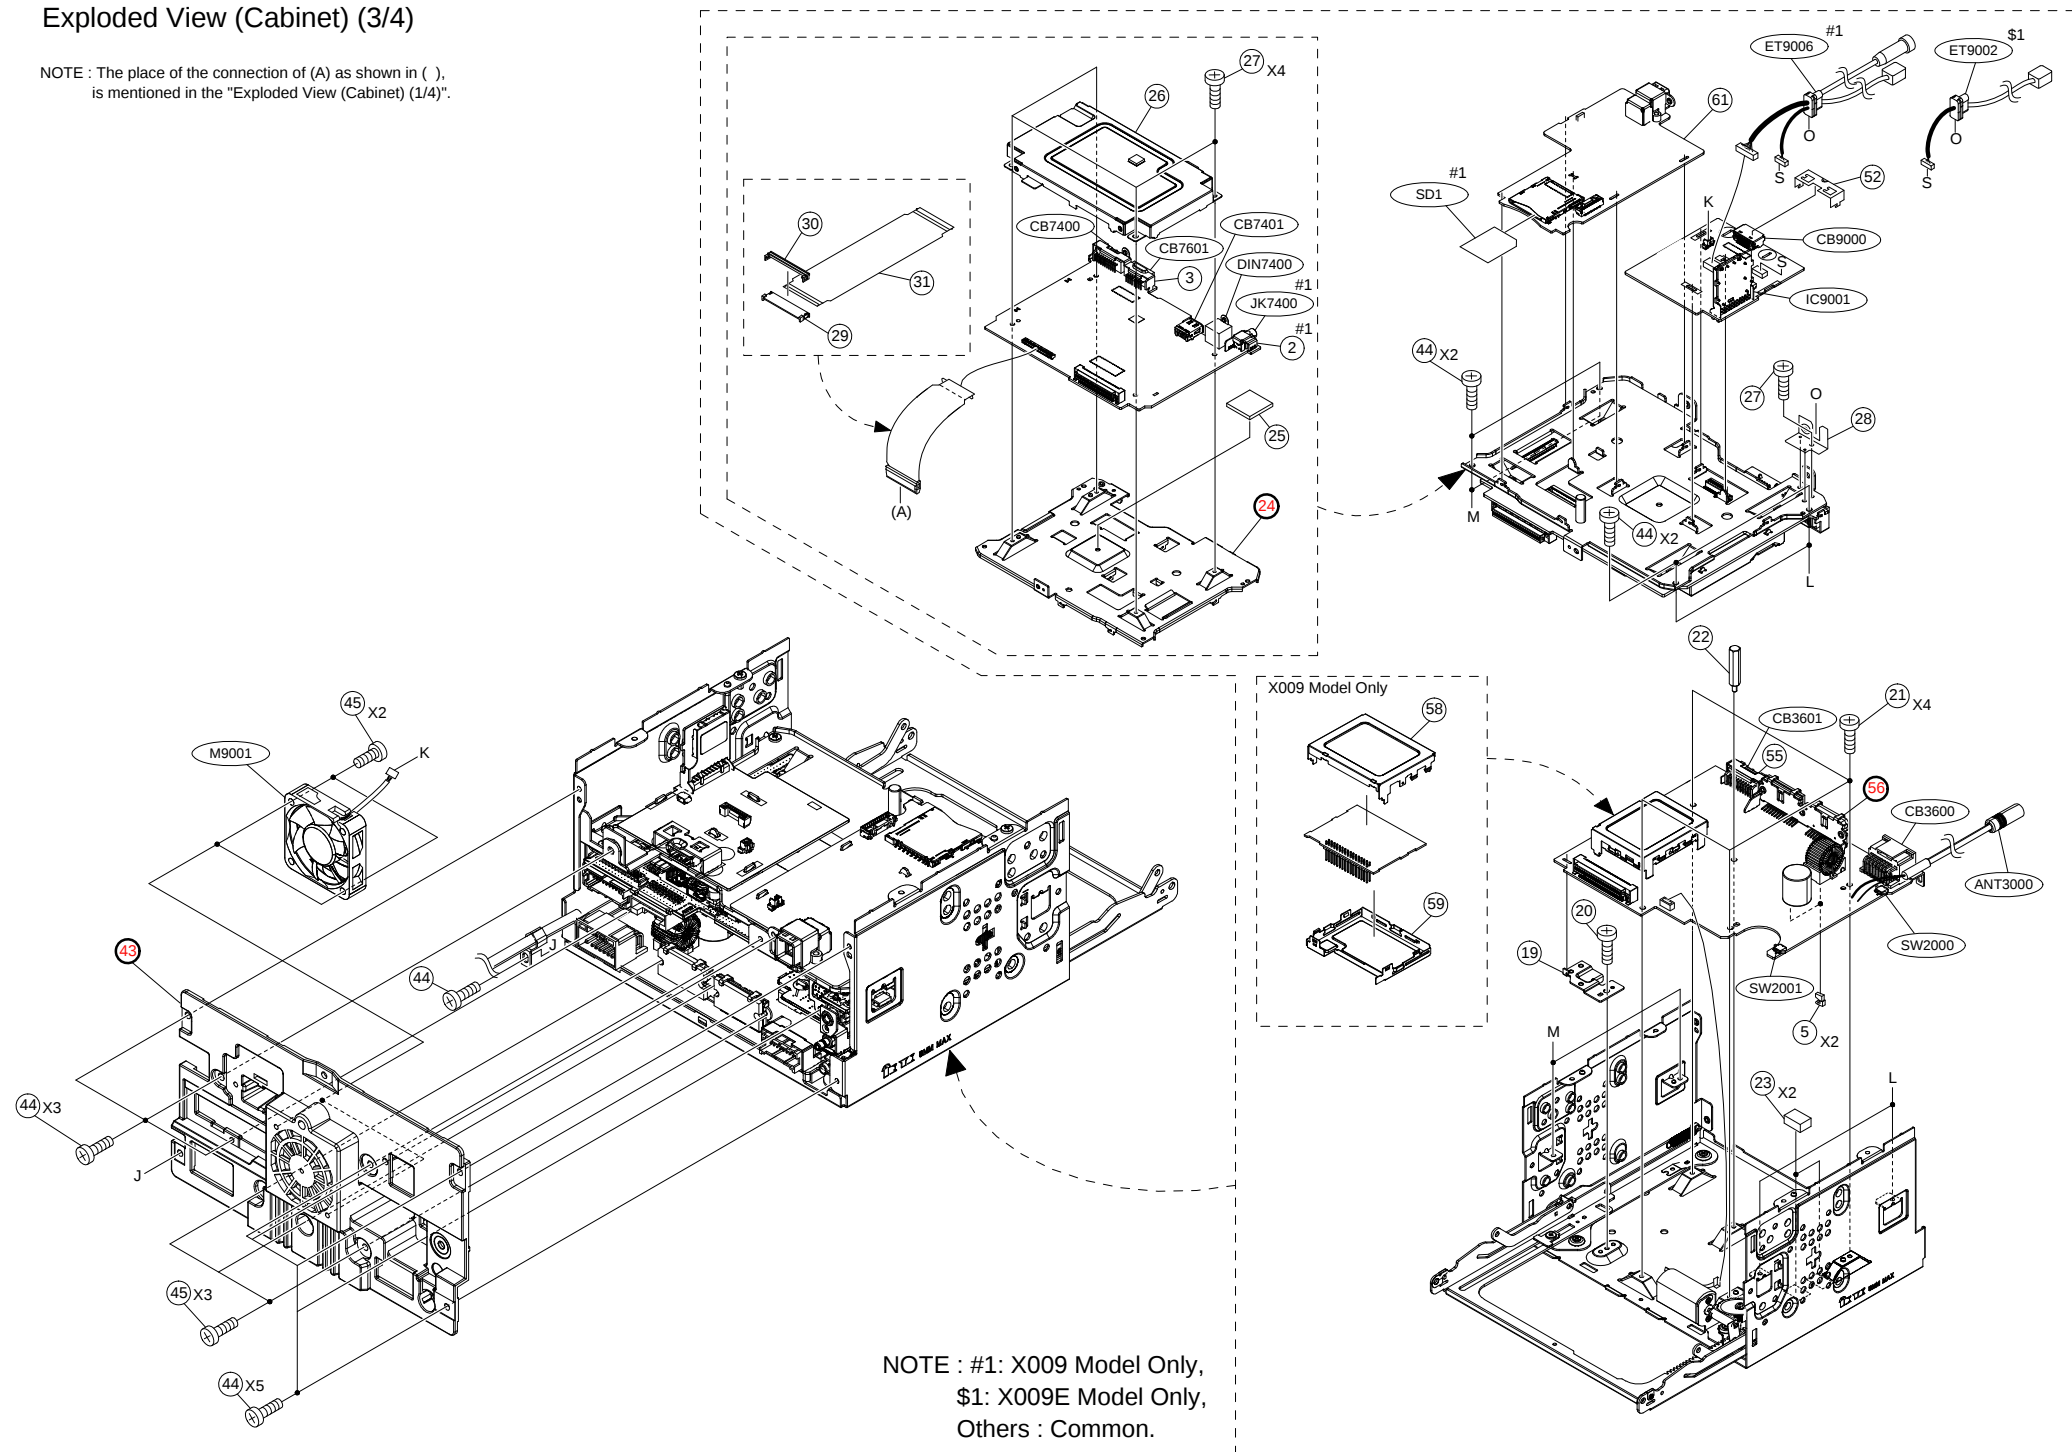

Exploded View (Cabinet) (4/4)

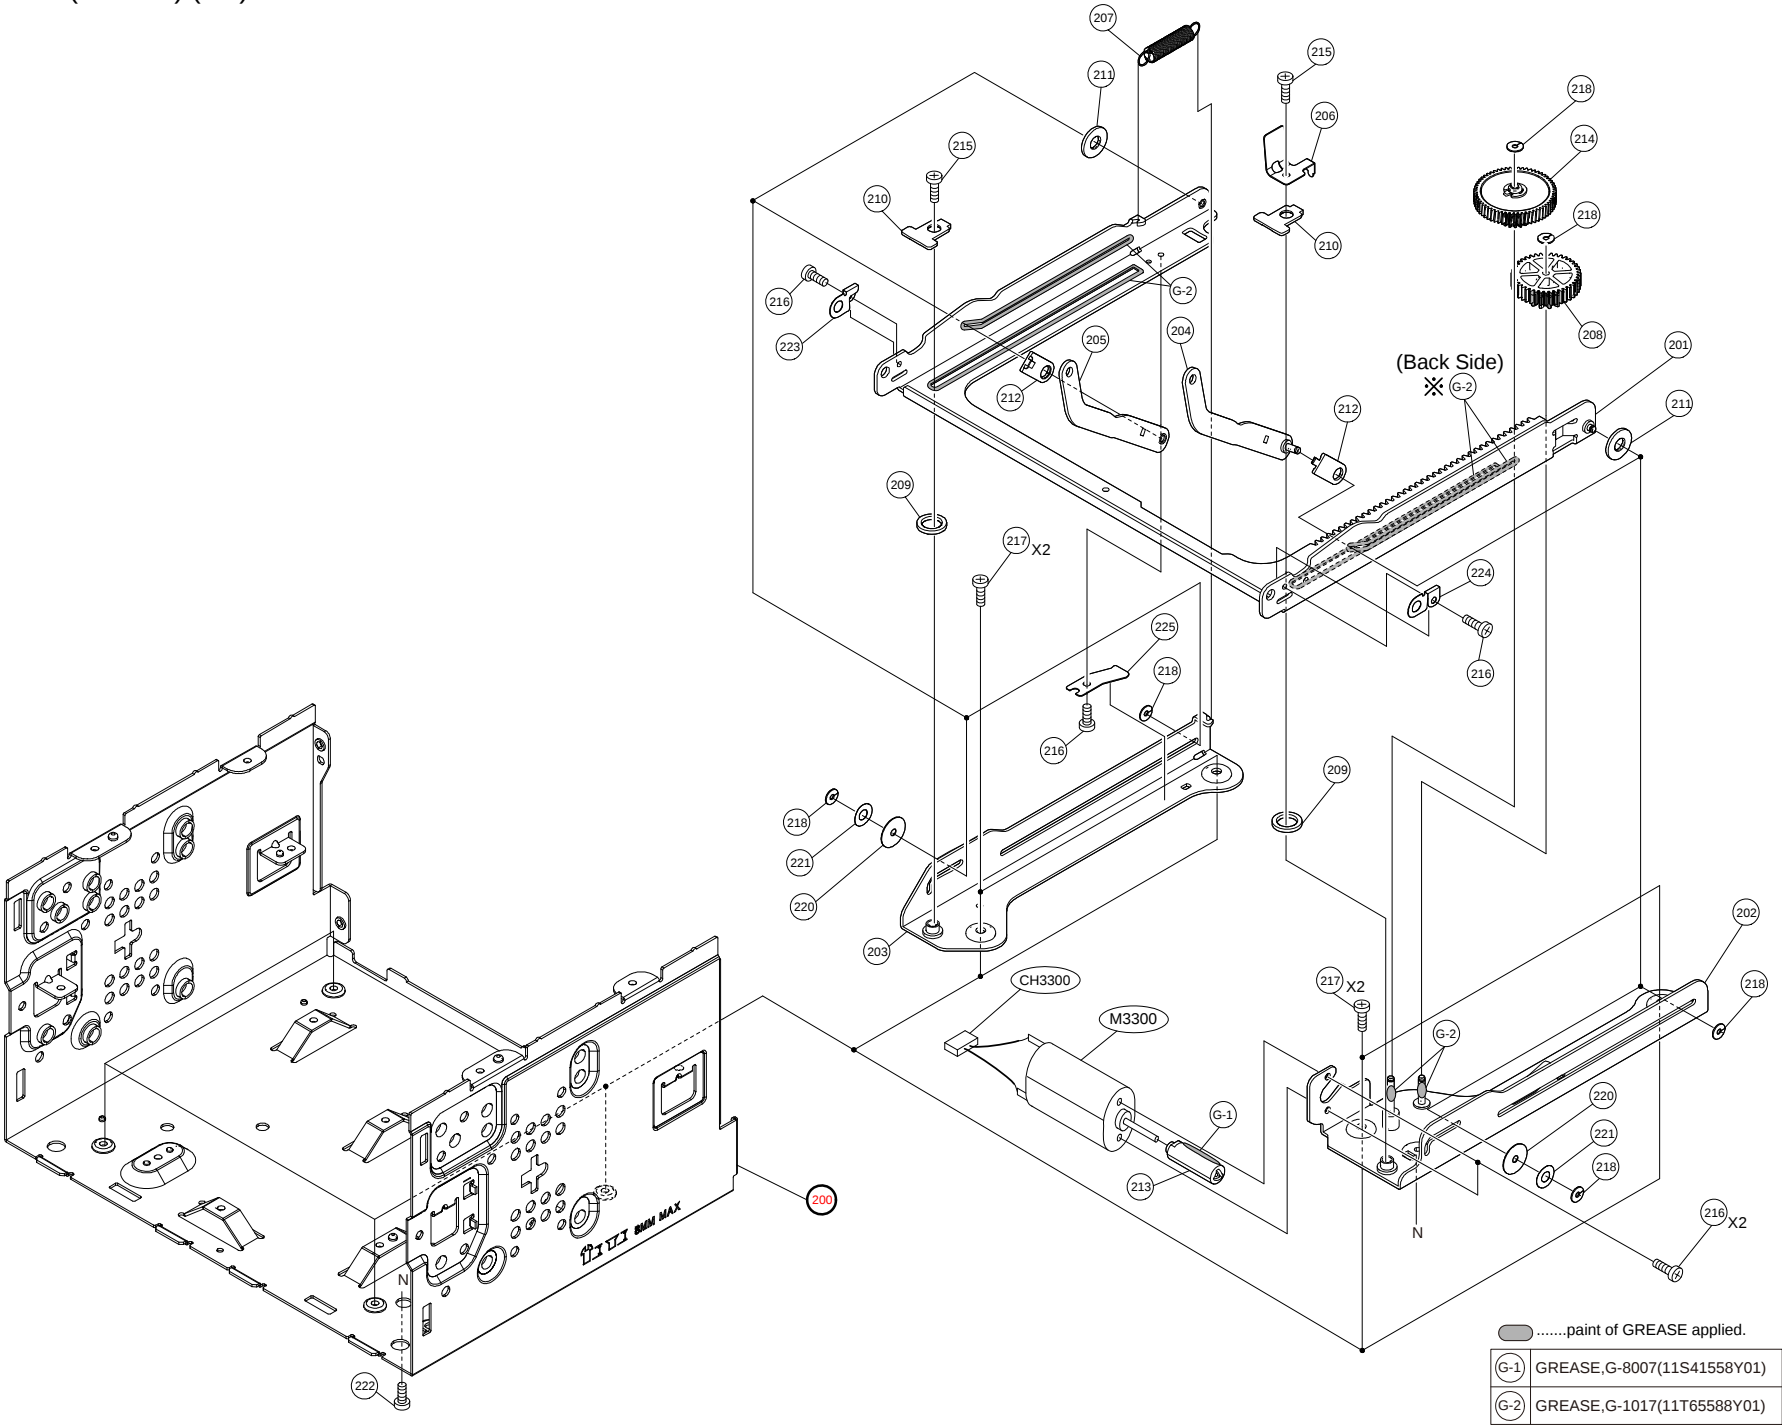

MODEL	Symbol No.	Parts No.	Description
#1	2	07-26976Z01	BKT,CONN JAC
	3	07-28124Z01	BKT,CONN 20 PIN
	5	29-16141Z01	OG-453070 -E5
	6	29T45687Y01	CONTACT,OG363050 -E5
	8	EN-23812Z02	NOSE,MONITOR ASSY
	12	14-28478Z23	INS,CVR 205X2XT0.5
	13	14-28478Z24	INS,CVR 112X2XT0.5
	17	07-28956Z03	BKT,MONITOR ASSY
	18	03-00712Z74	SCR,MCH 2X5 ZBEA
	19	07-22184Z01	BKT,LOWER
	20	03S60822Y10	SCR,S-T 2.6X5 ZN A
	21	03S60822Y13	SCR,S-T 2.6X6 ZN A
	22	47-21828Z01	SHAFT,CHAS BASE
	23	75-20737Z02	65TSV 7-1(KD)H L=10
	24	-----	CHAS,MID ASSY
	25	75-04227Z07	RIG3150-1.5-30-30
	26	26-27372Z01	SHIELD,ERATO
	27	03S60822Y13	SCR,S-T 2.6X6 ZN A
	28	07-26979Z01	BKT,CONN OPT
	29	15-17985Z01	COVER,501783-5009
	30	15-17986Z01	COVER,501784-5009
	31	84-17275Z01	FPC,X05 DTV-DISP
	32	DV-24927Z01	DV53U11V
	33	03-00340Z23	SCR,S-T 2.6X5 ZB A
	34	-----	BKT,DVD BOTTOM
	35	-----	BKT,DVD TOP ASSY
	36	14-27376Z01	INS,DVD MECH
	37	07-25055Z02	BKT,ESC FRONT
#1	38	EN-28339Z01	ESC,FRONT ASSY
\$1	38	EN-28339Z02	ESC,FRONT ASSY
	39	41-12155Z01	SPRING,NOSE
	40	43-05906Z02	BUSH,MONITOR
	41	15-19593Z01	COVER,DISPLAY FPC
	42	-----	COVER,TOP
#1	43	-----	HEAT,SINK US
\$1	43	-----	HEAT,SINK AP
	44	03S60822Y13	SCR,S-T 2.6X6 ZN A
	45	03S60822Y22	SCR,S-T 2.6X14 ZN A

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

MODEL	Symbol No.	Parts No.	Description
	46	03-10059Z01	SCR,MCH 2X3.5 ZNCA
	47	03S60820Y84	SCR,MCH 2X3.5 ZNEA
	48	03-00712Z74	SCR,MCH 2X5 ZBEA
	49	03S70694Y12	SCR,TPG 2.6X8 ZB A
	50	30-26200Z05	MPCP0.5X50P_F1X143
	52	07-26977Z01	BKT,CONN HDMI
	55	07-25056Z01	BKT,CONN PREOUT
	56	-----	BKT,IC PWR SYS
#1	58	26-19568Z01	SHIELD,HD TOP
#1	59	26-20673Z01	SHIELD,HD BTM
	60	54-22523Z01	LABEL,CHAS
	61	84-27588Z01	ASSY,NAVI,BDAL304A
	62	07-24194Z02	BKT,MONITOR SUB ASSY
	63	07-28331Z01	BKT,ESC
	64	14-28478Z25	INS,CVR 29X11.5XT0.9
	65	14-28478Z26	INS,CVR 25X6XT0.045
	66	30-26200Z07	MPCP0.5X10P_F1X62
	200	-----	CHAS,BASE
	201	07-09019Z03	ASSY,RIV BKT SLIDER
	202	07-09020Z02	ASSY,RIV BASE R
	203	07-09071Z01	ASSY,RIV BASE L
	204	07-09022Z02	ASSY,RIV ARM R
	205	07-09021Z02	ASSY,RIV ARM L
	206	41-05899Z01	SPRING,WORM
	207	41-08834Z01	SPRING,SLIDER
	208	44-05901Z01	GEAR,DRIVE
	209	43-05902Z01	BUSH,SLIDER LOW
	210	43-26582Z01	BUSH,SLIDER UP
	211	43-05904Z01	BUSH,SLIDER REAR
	212	43-05905Z01	BUSH,ARM
	213	44-02799Z03	GEAR,WORM
	214	44-11960Z01	GEAR,CLUTCH ASSY
	215	03S60820Y18	SCR,MCH 2X3.5 ZNSA
	216	03S60827Y13	SCR,P-L 2X2.2 ZN A
	217	03S94385F13	SCR,NYLOK M2.6X3
	218	04B41345P23	WASH,1.7X5X0.35
	220	04B41345P72	WAS,LOC 2.3X10X0.25
	221	04A10161Y09	WAS,SPR 3.4X7.4X0.06

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

MODEL	Symbol No.	Parts No.	Description
	222	03-00712Z31	SCR,MCH 2X2 ZBNA
	223	41-12842Z01	SPRING,MONITOR GND L
	224	41-12843Z01	SPRING,MONITOR GND R
	225	41-05886Z01	SPRING,CHAS
	ANT3000	09-17241Z02	ASSY,ANID-0116-02A
	CB3600	09T35473Y16	WTB,F169B001-16 -DB
	CB3601	09-07665Z04	WTB,S20B-PADSS-1 -DB
	CB7400	09-07665Z05	WTB,S24B-PADSS-1 -DB
	CB7401	09-20295Z01	SKT,67643-3910 -DB
	CB7601	09-25106Z06	WTB,S20B-PUDSS-1 -DB
	CB9000	09-25213Z01	WTB,TCX3400-011187-T
	CH3300	09-07002Z01	ASSY,ANIA-0001-01A
	DIN7400	09T75435Y01	DIN,TCS7722-01211-DB
	ET4301	40-23896Z01	ASSY,EMU601G2A630
\$1	ET9002	09-28037Z01	ASSY,ANID-0191-01A
#1	ET9006	09-28038Z01	ASSY,ANID-0190-01A
	IC9001	51-23994Z02	ASSY,UGZZC-G04A -DB
#1	JK7400	09-26733Z01	JAC,LGY6502-0900F-DB
	LCD4000	65-24027Z01	ASSY,CLAA090LC41CW
	M3300	59-02037Z01	MOTOR,FF-180SH-13260
	M9001	59-14185Z02	MOTOR,ASB0412MA-9F1B
#1	SD1	82-28084Z01	BMAH4GMDF93SD_US
	SW2000	40T15494Y14	SW,DETCT SPVG2106-E6
	SW2001	40T15494Y15	SW,DETCT SPVG1107-E6

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)


IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

Exploded View
(DVD Deck Mechanism)
(DV53U11V)

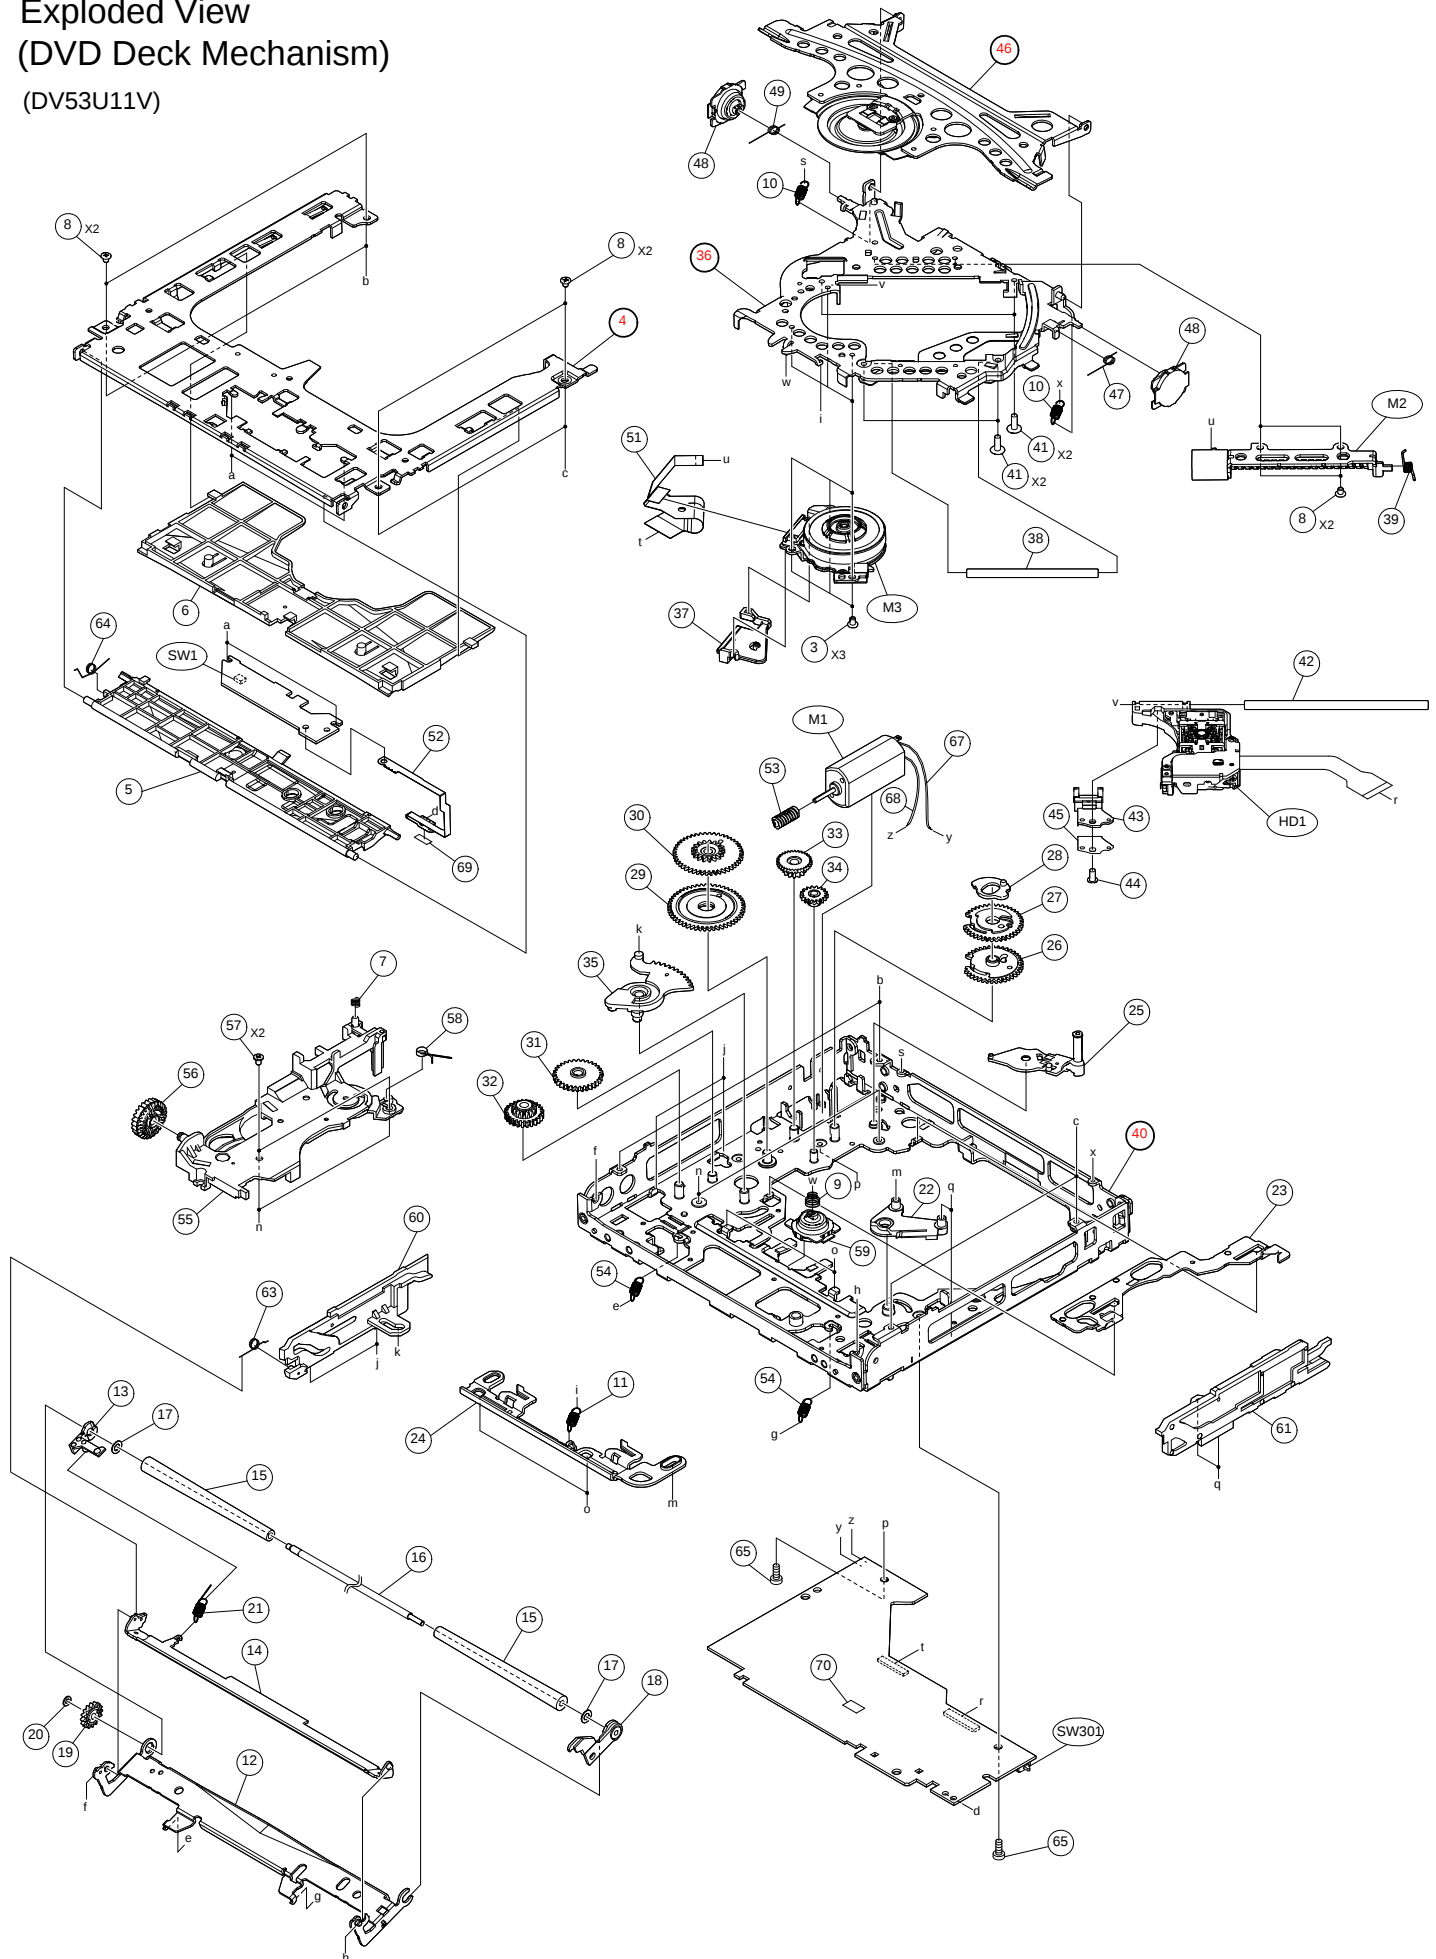

MODEL	Symbol No.	Parts No.	Description
	3	03-14213Z02	SCR,TRU-STAR M2X2.5
	4	-----	ASY,RIV.C-TOP DV-U
	5	15-25574Z01	GUIDE,SW3 DV-U
	6	15-16047Z02	GUIDE, TOP DV-U
	7	41-16671Z01	SPG,LOAD REAR DV-U
	8	03-14213Z01	SCR,TRU-STAR M2X2
	9	41-17131Z01	SPG,DRIVE FL DV-U
	10	41-17129Z01	SPG,DRIVE R DV-U
	11	41-17130Z01	SPG,DRIVE FR DV-U
	12	07-25286Z01	ARM,DISC GUIDE4 DV-U
	13	43-16049Z03	BUSH,ROLLER L DV-U
	14	07-21975Z02	ARM,SHUTTER DV-U
	15	49-13192Z02	ROLLER,DV-U
	16	47-17138Z03	SHAFT,ROLLER DV-U
	17	04S40075G09	WASH,2.6X4.7X0.25
	18	43-16050Z03	BUSH,ROLLER R DV-U
	19	44-16048Z02	GEAR,ROLLER DV-U
	20	04B41345P52	WASH,1.6X3.5X0.25
	21	41-17128Z01	SPG,SHUTTER DV-U
	22	45-26674Z01	LEVER,SLIDE R2 DV-U
	23	45-16043Z02	SLIDER,LCK REAR DV-U
	24	45-16042Z02	SLIDER,LINK DV-U
	25	45-16054Z02	LEVER,TRG DV-U
	26	44-16061Z02	GEAR,TRG LOWER DV-U
	27	44-16062Z02	GEAR,TRG UPPER DV-U
	28	45-18171Z03	LEVER,TRG LINK 2
	29	44-16056Z02	GEAR,LOAD B DV-U
	30	44-16063Z02	GEAR,B DV-U
	31	44-16057Z02	GEAR,LOAD C DV-U
	32	44-16058Z03	GEAR,LOAD D DV-U
	33	44-16055Z03	GEAR,LOAD A DV-U
	34	44-16060Z02	GEAR,A DV-U
	35	45-16053Z02	LEVER,GEAR MAIN DV-U
	36	-----	ASY,RIV.C-PICK DV-U
	37	07-25288Z01	BKT,FPC DRI MTR DV-U
	38	47-17137Z01	SHAFT,SUB DV-U
	39	41-17134Z01	SPG,ADJ MAIN O DV-U
	40	-----	ASY,RIV.C-BASE DV-U
	41	03-01599Z14	SCR,MCH 2X5.3 NN
	42	47-17136Z01	SHAFT,MAIN DV-U
	43	41-23795Z01	SPG,NUT3 DV-U
	44	03S60823Y54	SCR,P-T 2X4 ZN A
	45	07-23796Z01	BKT,SPG NUT DV-U

Model Code
X008U



NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
	46	-----	ASY,RIV.A-CLAMP DV-U
	47	41-17126Z01	SPG,CLAMP R DV-U
	48	75-17121Z01	DAMPER,DV-U
	49	41-17125Z01	SPG,CLAMP L DV-U
	51	84-25804Z01	FPC,DRIVE2 DV-U
	52	84-25805Z01	FPC,SENSOR2
	53	44-16066Z03	GEAR,WORM DV-U
	54	41-17132Z01	SPG,ROLLER DV-U
	55	07-16682Z02	BKT,MOTOR DV-U
	56	44-16059Z03	GEAR,LOAD E DV-U
	57	03-14213Z04	SCR,TRU-STAR M2X3 ZB
	58	41-17133Z01	SPG,LEV TRG DV-U
	59	75-17121Z01	DAMPER,DV-U
	60	45-16051Z02	SLIDER,LOCK L DV-U
	61	45-16052Z02	SLIDER,LOCK R DV-U
	63	41-19752Z01	SPG,SLID LOCK L DV-U
	64	41-19753Z01	SPG,GUIDE SW-2 DV-U
	65	03-14213Z04	SCR,TRU-STAR M2X3 ZB
	67	30-08172Z12	ATFA-0353 RED 69-2-2
	68	30-08172Z11	ATFA-0353 BLK 59-2-2
	69	14-27348Z01	TAPE,5000NS 3X9
	70	43-28999Z01	SPACER,PWB DV-U
	HD1	EP-24971Z01	ED21A98L
	M1	59-17572Z01	MOTOR,FF-050SB-12150
	M2	59-25874Z01	MOTOR,MSGN020L01
	M3	59-25849Z01	MOTOR,BWL2N01PA
	SW1	40-08552Z01	SW,DETCT SPVR1101-E5
	SW301	40-24933Z01	SW,DETCT SPVT1102-E6

Model Code
X008U

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

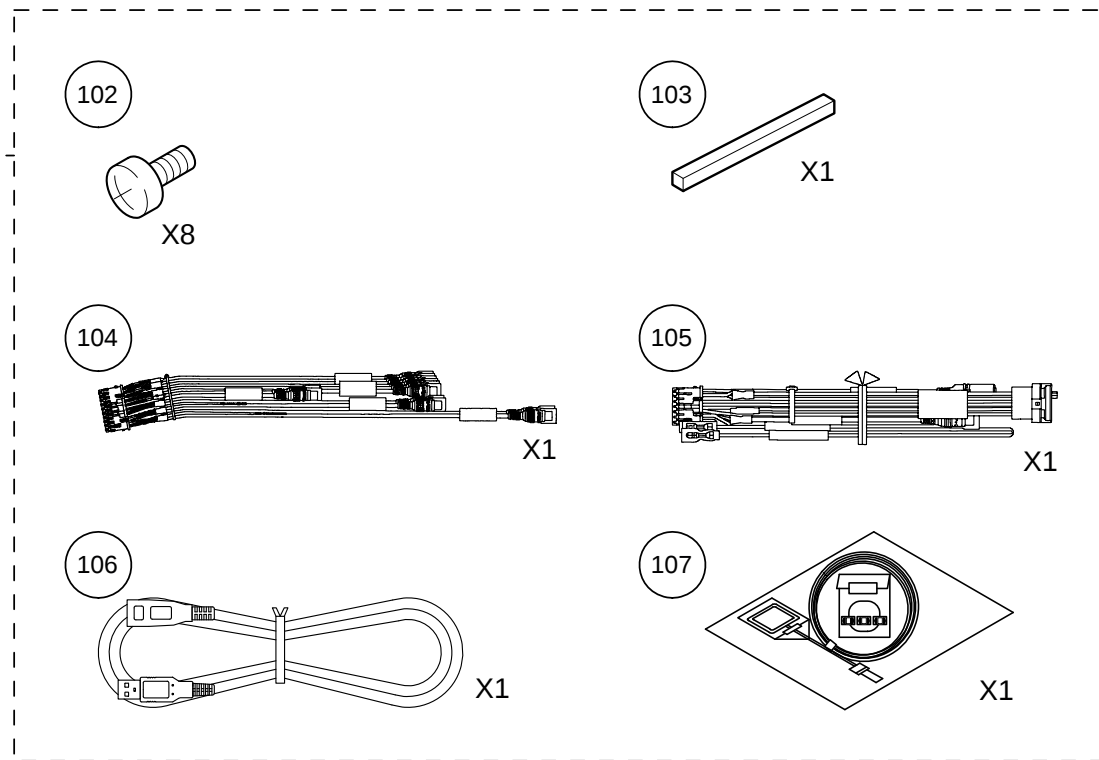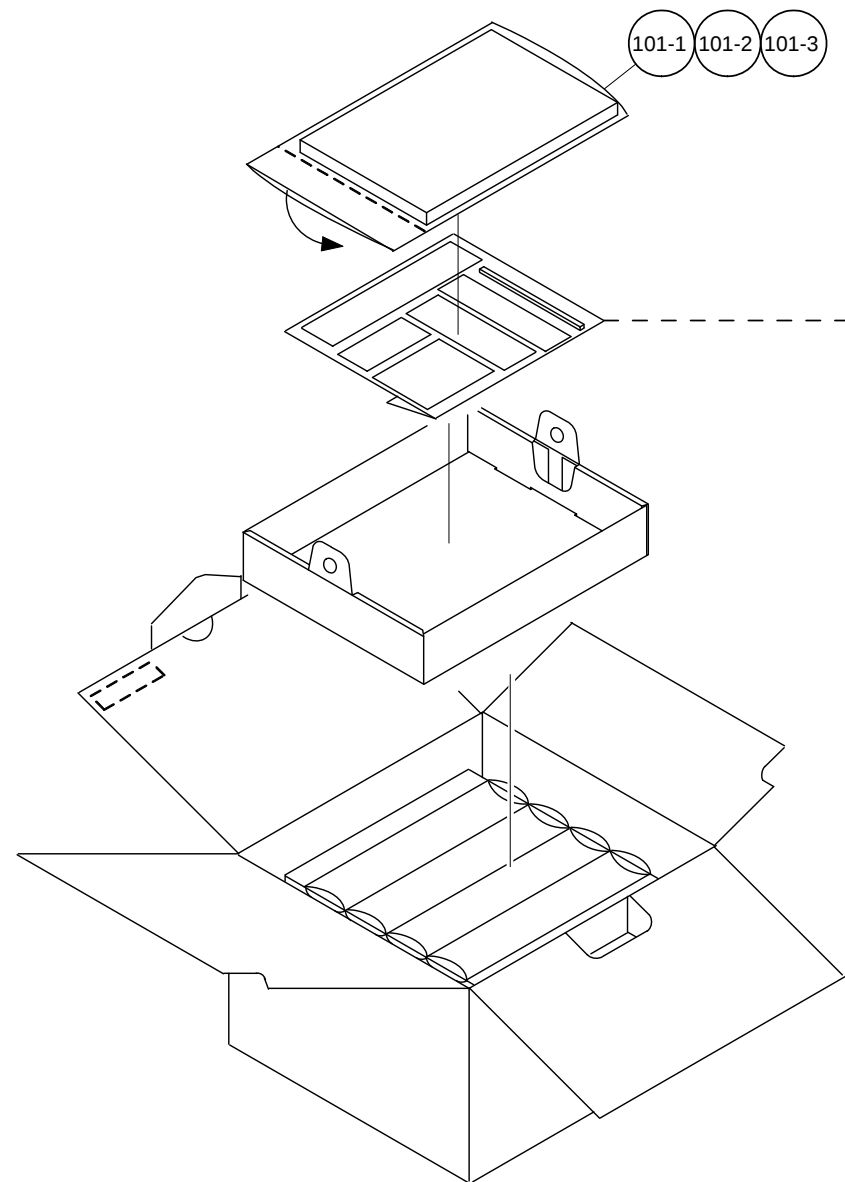

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

#1	101-1	68-10334Z69	O/M CD-ROM DDA
\$1	101-1	68-24567Z66	O/M AOAP DDA
#1	101-2	68-24567Z62	C/N QRG AOAM
\$1	101-2	68-24567Z67	C/N QRG AOAP
#1	101-3	68-24567Z64	C/N NAVI AOAM
	102	03S60820Y17	SCR,MCH 5X8 ZN A
	103	75-10072Z07	CUS,RUB 214X10XT8
	104	09-19948Z02	ASSY,AD0066-02A
#1	105	09-19807Z10	ASSY,ANIC-0071-10A
\$1	105	09-19807Z08	ASSY,ANIC-0071-08A
	106	09-28398Z01	ASSY,AF TO AM 1.5M
	107	85-11368Z02	ASSY,YOP-5225AL03

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6000	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6001	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6002	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6003	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6004	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6005	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6006	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6007	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6008	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6009	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6010	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6011	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6012	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6013	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6014	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6020	08S35349Y15	CAP,CER 474K-B1A -CP
ERATO-P.W.Board			C6200	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C6201	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6202	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6203	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6204	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C6205	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C6206	08S45539Y01	CAP,CER 102KX7R2J-CP
ERATO-P.W.Board			C6207	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6208	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6209	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C6210	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C6211	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C6212	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C6213	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6214	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C6215	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C6216	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6217	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6218	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6219	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6220	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6221	08S35349Y16	CAP,CER 105K-B1A -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6222	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6223	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6224	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C6225	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C6226	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6227	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6228	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6229	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6230	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6231	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6232	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6233	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6234	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6235	08S45676W85	CAP,CER 104K-B1C -CP
ERATO-P.W.Board			C6236	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6237	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6238	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C6239	08S45231Y17	CAP,CER 22RJ-CH1H-CP
ERATO-P.W.Board			C6240	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C6280	08S75335Y06	CAP,CER 47RJ-CG2J-CP
ERATO-P.W.Board			C6281	08S45539Y01	CAP,CER 102KX7R2J-CP
ERATO-P.W.Board			C6282	08S75335Y06	CAP,CER 47RJ-CG2J-CP
ERATO-P.W.Board			C6400	08S45231Y09	CAP,CER 6R0D-CH1H-CP
ERATO-P.W.Board			C6401	08S45231Y10	CAP,CER 7R0D-CH1H-CP
ERATO-P.W.Board			C6402	08S45231Y09	CAP,CER 6R0D-CH1H-CP
ERATO-P.W.Board			C6403	08S45231Y09	CAP,CER 6R0D-CH1H-CP
ERATO-P.W.Board			C6404	08S45231Y11	CAP,CER 8R0D-CH1H-CP
ERATO-P.W.Board			C6405	08S45231Y10	CAP,CER 7R0D-CH1H-CP
ERATO-P.W.Board			C6409	08S35349Y21	CAP,CER 104K-B1H -CP
ERATO-P.W.Board			C6701	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6702	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6703	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6704	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6705	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6706	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6707	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6708	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6709	08S45232Y21	CAP,CER 104K-B1A-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6710	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6711	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6712	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6713	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6714	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6715	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6716	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6717	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6718	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6719	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6720	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6721	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6722	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6723	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6724	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6725	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6726	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6727	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6728	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6729	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6730	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6731	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6732	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6733	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6734	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6735	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6736	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6737	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6738	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6739	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6740	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6741	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6742	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6743	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6744	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6745	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6746	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6747	08S35349Y17	CAP,CER 225K-B0J -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6748	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6749	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6750	08-13830Z01	CAP,CER 476MX6S0G-CP
ERATO-P.W.Board			C6751	08-13830Z01	CAP,CER 476MX6S0G-CP
ERATO-P.W.Board			C6752	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6753	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6754	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6755	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6756	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6757	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6758	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6759	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6760	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6761	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6762	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6763	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6764	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6765	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6766	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6767	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6768	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6769	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6770	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6771	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6772	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6773	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6774	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6775	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6776	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6777	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6778	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6779	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6780	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6781	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6782	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6783	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6784	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6785	08S45232Y11	CAP,CER 103K-B1C -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6786	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6787	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6788	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6789	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C6790	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6791	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6792	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C6793	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6794	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6795	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6796	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6797	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6798	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6799	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6800	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6801	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6802	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6803	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6804	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6805	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6806	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6807	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6808	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6809	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6810	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6811	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6812	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6813	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6814	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6815	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6816	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6817	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6818	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6819	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6820	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6821	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6822	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6823	08S45232Y21	CAP,CER 104K-B1A-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6824	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6825	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6826	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6827	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6828	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6829	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6830	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6831	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6832	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6833	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6834	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6835	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6836	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6837	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6838	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6839	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6840	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6841	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6842	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6843	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6844	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6845	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6846	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6847	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6848	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6849	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6850	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6851	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6852	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6853	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6854	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6855	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6856	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6857	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C6858	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6859	08S35349Y17	CAP,CER 225K-B0J -CP
ERATO-P.W.Board			C6860	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C6861	08S35374W12	CAP,CER 106K-B0J -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C6862	08S35374W11	CAP,CER 475K-B0J -CP
ERATO-P.W.Board			C6863	08S35349Y15	CAP,CER 474K-B1A -CP
ERATO-P.W.Board			C6864	08S45231Y17	CAP,CER 22RJ-CH1H-CP
ERATO-P.W.Board			C7001	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7002	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7003	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7004	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7006	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C7200	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7201	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7202	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7203	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C7205	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7206	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7207	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7208	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7209	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7210	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7211	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7212	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7391	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7402	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7408	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C7409	08S65670Y04	CAP,CER 475KX5R1E-CP
ERATO-P.W.Board			C7410	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7412	08S45677W44	CAP,CER.221J-CH1H-CP
ERATO-P.W.Board			C7413	08S45677W44	CAP,CER.221J-CH1H-CP
ERATO-P.W.Board			C7414	08S45677W44	CAP,CER.221J-CH1H-CP
ERATO-P.W.Board			C7415	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board		#1	C7417	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board		#1	C7418	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board		#1	C7420	08S75335Y01	CAP,CER 101K-CH2J-CP
ERATO-P.W.Board		#1	C7422	08S75335Y01	CAP,CER 101K-CH2J-CP
ERATO-P.W.Board			C7423	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7424	08S45231Y31	CAP,CER 331J-CH1H-CP
ERATO-P.W.Board			C7425	08S45539Y04	CAP,CER 103KX7R2J-CP
ERATO-P.W.Board			C7426	08S45676W65	CAP,CER.222K-B1H -CP
ERATO-P.W.Board			C7427	08S45676W85	CAP,CER 104K-B1C -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C7428	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C7429	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7430	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C7431	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board		#1	C7432	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board		#1	C7433	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board		#1	C7434	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board		#1	C7435	08S45539Y04	CAP,CER 103KX7R2J-CP
ERATO-P.W.Board			C7440	08S45677W60	CAP,CER 102J-CH1H-CP
ERATO-P.W.Board			C7481	08S45539Y01	CAP,CER 102KX7R2J-CP
ERATO-P.W.Board			C7482	08S75335Y06	CAP,CER 47RJ-CG2J-CP
ERATO-P.W.Board			C7483	08S45539Y01	CAP,CER 102KX7R2J-CP
ERATO-P.W.Board			C7484	08S45539Y01	CAP,CER 102KX7R2J-CP
ERATO-P.W.Board			C7486	08S75335Y01	CAP,CER 101K-CH2J-CP
ERATO-P.W.Board			C7600	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7616	08S45676W65	CAP,CER.222K-B1H -CP
ERATO-P.W.Board			C7617	08S45676W65	CAP,CER.222K-B1H -CP
ERATO-P.W.Board			C7618	08S45676W73	CAP,CER.103K-B1H -CP
ERATO-P.W.Board			C7619	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7620	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7621	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7622	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7624	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7626	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7627	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7628	08S35349Y08	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7629	08S45676W73	CAP,CER.103K-B1H -CP
ERATO-P.W.Board			C7700	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7702	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7703	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7704	08S45232Y12	CAP,CER 153K-B1C -CP
ERATO-P.W.Board			C7705	08S45676W74	CAP,CER 123K-B1H -CP
ERATO-P.W.Board			C7706	08S45232Y01	CAP,CER 221K-B1H -CP
ERATO-P.W.Board			C7707	08S45232Y07	CAP,CER 222K-B1H -CP
ERATO-P.W.Board			C7708	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7709	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C7710	08S65670Y07	CAP,CER 105KX5R1H-CP
ERATO-P.W.Board			C7711	08S45232Y12	CAP,CER 153K-B1C -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C7712	08S45676W74	CAP,CER 123K-B1H -CP
ERATO-P.W.Board			C7713	08S45231Y31	CAP,CER 331J-CH1H-CP
ERATO-P.W.Board			C7714	08S45232Y07	CAP,CER 222K-B1H -CP
ERATO-P.W.Board			C7715	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7716	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7717	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board			C7719	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board			C7721	08S45231Y25	CAP,CER 101J-CH1H-CP
ERATO-P.W.Board			C7722	08S45231Y25	CAP,CER 101J-CH1H-CP
ERATO-P.W.Board			C7725	08S45232Y12	CAP,CER 153K-B1C -CP
ERATO-P.W.Board			C7726	08S45676W74	CAP,CER 123K-B1H -CP
ERATO-P.W.Board			C7727	08S45232Y01	CAP,CER 221K-B1H -CP
ERATO-P.W.Board			C7728	08S45232Y07	CAP,CER 222K-B1H -CP
ERATO-P.W.Board			C7729	08S45232Y21	CAP,CER 104K-B1A-CP
ERATO-P.W.Board			C7730	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C7731	08S65670Y07	CAP,CER 105KX5R1H-CP
ERATO-P.W.Board			C7732	08S45232Y12	CAP,CER 153K-B1C -CP
ERATO-P.W.Board			C7733	08S45676W74	CAP,CER 123K-B1H -CP
ERATO-P.W.Board			C7734	08S45231Y31	CAP,CER 331J-CH1H-CP
ERATO-P.W.Board			C7735	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7736	08S35349Y16	CAP,CER 105K-B1A -CP
ERATO-P.W.Board			C7737	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board			C7739	08S45676W67	CAP,CER.332K-B1H -CP
ERATO-P.W.Board			C7741	08S45231Y25	CAP,CER 101J-CH1H-CP
ERATO-P.W.Board			C7742	08S45231Y25	CAP,CER 101J-CH1H-CP
ERATO-P.W.Board			C7745	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7746	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7747	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7748	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C7749	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7750	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7751	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7752	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7753	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7754	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7755	08S35374W12	CAP,CER 106K-B0J -CP
ERATO-P.W.Board			C7756	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7757	08S65669Y03	CAP,CER 224KX7R1H-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			C7758	08S45232Y11	CAP,CER 103K-B1C -CP
ERATO-P.W.Board			C7759	08S65670Y07	CAP,CER 105KX5R1H-CP
ERATO-P.W.Board			C7760	08S45231Y25	CAP,CER 101J-CH1H-CP
ERATO-P.W.Board			C7761	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7762	08S45232Y09	CAP,CER 472K-B1E -CP
ERATO-P.W.Board			C7767	08S45676W69	CAP,CER.472K-B1H -CP
ERATO-P.W.Board			C7768	08S45676W69	CAP,CER.472K-B1H -CP
ERATO-P.W.Board			C7769	08S45676W69	CAP,CER.472K-B1H -CP
ERATO-P.W.Board			C7770	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C7771	08S45676W69	CAP,CER.472K-B1H -CP
ERATO-P.W.Board			C7772	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C8000	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C8001	08S65669Y03	CAP,CER 224KX7R1H-CP
ERATO-P.W.Board			C8002	08S65670Y06	CAP,CER 226KX5R1A-CP
ERATO-P.W.Board			C8003	08S35374W11	CAP,CER 475K-B0J -CP
ERATO-P.W.Board			C8007	08S45231Y08	CAP,CER 5R0C-CH1H-CP
ERATO-P.W.Board			C8008	08S45231Y09	CAP,CER 6R0D-CH1H-CP
ERATO-P.W.Board			C8009	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8010	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8011	08S45231Y24	CAP,CER 82RJ-CH1H-CP
ERATO-P.W.Board			C8012	08S45231Y24	CAP,CER 82RJ-CH1H-CP
ERATO-P.W.Board			C8013	08S45231Y17	CAP,CER 22RJ-CH1H-CP
ERATO-P.W.Board			C8015	08S45231Y24	CAP,CER 82RJ-CH1H-CP
ERATO-P.W.Board			C8016	08S45232Y05	CAP,CER 102K-B1H -CP
ERATO-P.W.Board			C8017	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8018	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8019	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8020	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8021	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8022	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			C8023	08S45232Y17	CAP,CER 104K-B0J -CP
ERATO-P.W.Board			CB6000	09-14451Z04	FFC,502790-5091 -EQ
ERATO-P.W.Board			CB7200	09-09769Z01	FFC,FH12-50S-0.5 -ER
ERATO-P.W.Board			CB7201	09-24994Z07	BTB,IMSA9984S-50Y-EK
ERATO-P.W.Board			CB7400	09-07665Z05	WTB,S24B-PADSS-1 -DB
ERATO-P.W.Board			CB7401	09-20295Z01	SKT,67643-3910 -DB
ERATO-P.W.Board			CB7600	09-12836Z01	FFC,51441-2072 -E9
ERATO-P.W.Board			CB7601	09-25106Z06	WTB,S20B-PUDSS-1 -DB

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			CH7200	09-06714Z08	BTB,DY01-080S-BT -EJ
ERATO-P.W.Board			CH7201	09-24995Z05	BTB,IMSA9985S-140YEZ
ERATO-P.W.Board			D7200	48-09688Z01	DIO,S3G -E5
ERATO-P.W.Board			D7401	48T75527Y01	DIO,1SR154-400 -E1
ERATO-P.W.Board			D7403	48-08988Z01	VST,EZJZ0V800AA -CP
ERATO-P.W.Board			D7404	48-08988Z01	VST,EZJZ0V800AA -CP
ERATO-P.W.Board			D7405	48-05164Z01	DIO,1SS352-TPH3 -CP
ERATO-P.W.Board			D7600	48-17624Z01	DIO,DA3J102D0L -CP
ERATO-P.W.Board			D7601	48-17623Z01	DIO,DA2J10100L -CP
ERATO-P.W.Board			D7700	48T75527Y01	DIO,1SR154-400 -E1
ERATO-P.W.Board			D7706	48T75527Y01	DIO,1SR154-400 -E1
ERATO-P.W.Board			DIN7400	09T75435Y01	DIN,TCS7722-01211-DB
ERATO-P.W.Board			E6001	23S75244Y19	CAP,ELY 101-1C -E6
ERATO-P.W.Board			E6200	23S65134W34	CAP,ELY 47R-1C(6)-E6
ERATO-P.W.Board			E6201	23S65134W34	CAP,ELY 47R-1C(6)-E6
ERATO-P.W.Board			E6202	23S65134W34	CAP,ELY 47R-1C(6)-E6
ERATO-P.W.Board			E6203	23S75244Y03	CAP,ELY 101-0J -E3
ERATO-P.W.Board			E6700	23T65679Y06	CAP,CD 68R-0G -E2
ERATO-P.W.Board			E6701	23T65679Y06	CAP,CD 68R-0G -E2
ERATO-P.W.Board			E6702	23T65679Y06	CAP,CD 68R-0G -E2
ERATO-P.W.Board			E6703	23T65679Y01	CAP,CD 101-0D -E2
ERATO-P.W.Board			E6704	23T65679Y29	CAP,CD 101-0G -E2
ERATO-P.W.Board			E7201	23S75244Y19	CAP,ELY 101-1C -E6
ERATO-P.W.Board			E7202	23S75244Y03	CAP,ELY 101-0J -E3
ERATO-P.W.Board			E7203	23S75244Y19	CAP,ELY 101-1C -E6
ERATO-P.W.Board			E7206	23S75244Y18	CAP,ELY 47R-1C -E3
ERATO-P.W.Board			E7400	23S65134W24	CAP,ELY 221-1A(8)-E6
ERATO-P.W.Board			E7700	23T65114Y27	CAP,FK 33R-1E-D -E6
ERATO-P.W.Board			E7701	23-12290Z22	CAP,FP 331-1C-F -EA
ERATO-P.W.Board			E7702	23-12290Z30	CAP,FP 331-1E-F -EA
ERATO-P.W.Board			E7703	23-12290Z22	CAP,FP 331-1C-F -EA
ERATO-P.W.Board			E7704	23-12290Z22	CAP,FP 331-1C-F -EA
ERATO-P.W.Board			E7705	23-12290Z30	CAP,FP 331-1E-F -EA
ERATO-P.W.Board			E7706	23-12290Z22	CAP,FP 331-1C-F -EA
ERATO-P.W.Board			E7707	23T65114Y01	CAP,FK 47R-1E-D -E6
ERATO-P.W.Board			E7713	23S75244Y19	CAP,ELY 101-1C -E6
ERATO-P.W.Board			IC6000	51-25379Z01	BU17101AKV-ME2 -QE6
ERATO-P.W.Board			IC6200	51-12745Z01	BH7073G-TR -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			IC6201	51-12745Z01	BH7073G-TR -CP
ERATO-P.W.Board			IC6202	51-18961Z01	ML86V7665TBZ03A -QT
ERATO-P.W.Board			IC6203	51T75516Y07	BA15BC0FP-E2 -NE5
ERATO-P.W.Board			IC6204	51-19189Z01	NJM41050V-TE1 -SE2
ERATO-P.W.Board			IC6400	51-17013Z01	MN2WS0090DMCUB -BT
ERATO-P.W.Board			IC6701	51-28527Z01	H5PS1G63KFR-S5C -BT
ERATO-P.W.Board			IC6702	51-28527Z01	H5PS1G63KFR-S5C -BT
ERATO-P.W.Board			IC7001	51-26850Z01	MFI337S3959 -CP
ERATO-P.W.Board		#1	IC7002	83-29082Z08	V1000BDAL422AERATO
ERATO-P.W.Board		\$1	IC7002	83-29082Z10	V1000BDAP417AERATO
ERATO-P.W.Board			IC7002	51-23599Z01	MX29GL256FHT2I-90QST
ERATO-P.W.Board			IC7003	51-20753Z01	MR48V256A-TA -ST
ERATO-P.W.Board			IC7004	51-20290Z01	MX25L6406EM2I-12GSE6
ERATO-P.W.Board			IC7006	51-02830Z01	BA7810HFP -NEA
ERATO-P.W.Board			IC7201	51-01544Z01	BA00HC5FP-E2 -NE5
ERATO-P.W.Board			IC7402	51T25183Y03	TC7SET08FU,JF-L -CP
ERATO-P.W.Board			IC7403	51-12745Z01	BH7073G-TR -CP
ERATO-P.W.Board			IC7404	51T65212Y01	BA8275F-E2 -SE2
ERATO-P.W.Board		#1	IC7405	51T15185Y02	TC7SH08FU,JF-L -CP
ERATO-P.W.Board		#1	IC7407	51T25183Y03	TC7SET08FU,JF-L -CP
ERATO-P.W.Board			IC7600	51T15185Y02	TC7SH08FU,JF-L -CP
ERATO-P.W.Board			IC7700	51-20097Z02	AN33012UB-VB -SE6
ERATO-P.W.Board			IC7701	51-20097Z02	AN33012UB-VB -SE6
ERATO-P.W.Board			IC7702	51T25259Y03	BA00ASFP-E2 -NE5
ERATO-P.W.Board			IC7704	51-04315Z34	BU4216G-TR -CP
ERATO-P.W.Board			IC7800	51-21187Z01	TPS2032QDRQ1 -SE2
ERATO-P.W.Board			IC8000	51-04432Z03	BD12KA5FP-E2 -NE5
ERATO-P.W.Board			IC8001	51-24238Z01	MN864779CTUB -BT
ERATO-P.W.Board		#1	JK7400	09-26733Z01	JAC,LGY6502-0900F-DB
ERATO-P.W.Board			L6000	24-17231Z01	IND,NR8040 47RM -E6
ERATO-P.W.Board			L6001	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6002	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6200	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6201	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6202	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6203	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6204	24T95456W08	FBI,BLM18BD182SH1-CP
ERATO-P.W.Board			L6701	24-06212Z07	FBI,BLM15BD601SH1-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			L6702	24-10967Z20	IND,LBM2016 4R7J -CP
ERATO-P.W.Board			L6703	24T65067Y02	FBI,MMZ1005S601AT-CP
ERATO-P.W.Board			L6704	24T95456W27	FBI,BLM18PG181SH1-CP
ERATO-P.W.Board			L6705	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L6706	24T95456W27	FBI,BLM18PG181SH1-CP
ERATO-P.W.Board			L6707	24T65067Y02	FBI,MMZ1005S601AT-CP
ERATO-P.W.Board			L7400	24-06212Z08	FBI,BLM15BD102SH1-CP
ERATO-P.W.Board			L7600	24T25164Y28	IND,FSLM2520 18RJ-CP
ERATO-P.W.Board			L7601	24T25164Y28	IND,FSLM2520 18RJ-CP
ERATO-P.W.Board			L7602	24T25164Y28	IND,FSLM2520 18RJ-CP
ERATO-P.W.Board			L7700	24-25206Z01	IND,SFCB1280T33RM-EA
ERATO-P.W.Board			L7701	24-25206Z01	IND,SFCB1280T33RM-EA
ERATO-P.W.Board			L7702	24-08610Z05	IND,DS106C2 33RM -EA
ERATO-P.W.Board			L7703	24-08610Z03	IND,DS106C2 10RM -EA
ERATO-P.W.Board			L7704	24T95459W01	FBI,BLM41PG600SH1-E1
ERATO-P.W.Board			L8000	24-06212Z01	FBI,BLM15AG601SH1-CP
ERATO-P.W.Board			L8001	24-06212Z01	FBI,BLM15AG601SH1-CP
ERATO-P.W.Board			L8002	24-06212Z07	FBI,BLM15BD601SH1-CP
ERATO-P.W.Board			L8003	24-06212Z05	FBI,BLM15BB121SH1-CP
ERATO-P.W.Board			L8004	24-06212Z01	FBI,BLM15AG601SH1-CP
ERATO-P.W.Board			L8005	24-06212Z01	FBI,BLM15AG601SH1-CP
ERATO-P.W.Board			PS6000	48-27319Z01	POLY,SW1812L150/24E2
ERATO-P.W.Board		#1	PS7401	48-27319Z01	POLY,SW1812L150/24E2
ERATO-P.W.Board			Q6000	48-17707Z01	TR,DSA700300L -E2
ERATO-P.W.Board			Q6001	48-13000Z04	TR,LTC123JUBFS8-TLCP
ERATO-P.W.Board			Q6200	48T15656Y01	TR,2SC4617-TL -CP
ERATO-P.W.Board			Q6201	48T15656Y01	TR,2SC4617-TL -CP
ERATO-P.W.Board			Q7403	48-24996Z01	FET,SSM6N35FU-85L-CP
ERATO-P.W.Board			Q7701	48-20288Z01	FET,MTM981400BBF -E2
ERATO-P.W.Board			Q7702	48-20288Z01	FET,MTM981400BBF -E2
ERATO-P.W.Board			Q7705	48-20288Z01	FET,MTM981400BBF -E2
ERATO-P.W.Board			Q7706	48-20288Z01	FET,MTM981400BBF -E2
ERATO-P.W.Board			R6000	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6001	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6002	06S15594Y23	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6003	06S15594Y23	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6004	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6008	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6010	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6016	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6017	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6018	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6020	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6021	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6023	06S15594Y23	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6024	06S45674W33	RES,RK 101J 1/10 -CP
ERATO-P.W.Board			R6025	06S45674W33	RES,RK 101J 1/10 -CP
ERATO-P.W.Board			R6026	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6027	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6034	06S70072F45	RES,CP .471-J-1/4-CP
ERATO-P.W.Board			R6036	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6037	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6039	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6040	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6041	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6042	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6044	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R6045	06S45674W33	RES,RK 101J 1/10 -CP
ERATO-P.W.Board			R6200	06S70072F25	RES,CP .68R-J-1/4-CP
ERATO-P.W.Board			R6201	06S15615Y93	RES,RK 683J 1/16 -CP
ERATO-P.W.Board			R6203	06S70072F41	RES,CP .331-J-1/4-CP
ERATO-P.W.Board			R6204	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6205	06S15593Y13	RES,RK 33RF 1/10 -CP
ERATO-P.W.Board			R6206	06S15615Y93	RES,RK 683J 1/16 -CP
ERATO-P.W.Board			R6208	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6209	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6210	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6211	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6212	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6213	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6214	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6215	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6217	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6218	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6219	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6220	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6221	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6224	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6225	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6226	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6227	06T25178Y46	RES,RK 43RF 1/4 -CP
ERATO-P.W.Board			R6228	06S15615Y67	RES,RK 562J 1/16 -CP
ERATO-P.W.Board			R6229	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6230	06S15593Y13	RES,RK 33RF 1/10 -CP
ERATO-P.W.Board			R6231	06T25178Y46	RES,RK 43RF 1/4 -CP
ERATO-P.W.Board			R6232	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R6233	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R6234	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R6235	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R6236	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R6239	06S70072F41	RES,CP .331-J-1/4-CP
ERATO-P.W.Board			R6240	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6241	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6242	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6243	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6244	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6245	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6246	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6247	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6400	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6402	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6404	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6405	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6407	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6409	06S45674W89	RES,RK 223J 1/10 -CP
ERATO-P.W.Board			R6410	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6411	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R6412	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6413	06S15615Y31	RES,RK 181J 1/16 -CP
ERATO-P.W.Board			R6414	06S15615Y31	RES,RK 181J 1/16 -CP
ERATO-P.W.Board			R6415	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6416	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6417	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6418	06S15615Y65	RES,RK 472J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6420	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6421	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6422	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6423	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6424	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6426	06S15615Y57	RES,RK 222J 1/16 -CP
ERATO-P.W.Board			R6427	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6428	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6429	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6430	06S15615Y57	RES,RK 222J 1/16 -CP
ERATO-P.W.Board			R6431	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6432	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6433	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6434	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6435	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6436	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R6437	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6438	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6439	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6440	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6441	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6443	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6444	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6445	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6446	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6450	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6451	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6452	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6454	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R6459	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6460	06S65415Y66	RES,RK 622F 1/16 -CP
ERATO-P.W.Board			R6461	06S15615Y73	RES,RK 103J 1/16 -CP
ERATO-P.W.Board			R6462	06S65415Y66	RES,RK 622F 1/16 -CP
ERATO-P.W.Board			R6463	06S15615Y73	RES,RK 103J 1/16 -CP
ERATO-P.W.Board			R6464	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6465	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6466	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6467	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6468	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6469	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6470	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6471	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6472	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6473	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6474	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6475	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6476	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6477	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6478	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6479	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6480	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6481	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6482	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6483	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6484	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6486	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6487	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6488	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6489	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6490	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6491	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6492	06S15616Y22	RES,RK 105J 1/16 -CP
ERATO-P.W.Board			R6493	06S15616Y22	RES,RK 105J 1/16 -CP
ERATO-P.W.Board			R6494	06S15616Y22	RES,RK 105J 1/16 -CP
ERATO-P.W.Board			R6495	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6496	06S15615Y53	RES,RK 152J 1/16 -CP
ERATO-P.W.Board			R6497	06S15615Y42	RES,RK 511J 1/16 -CP
ERATO-P.W.Board			R6498	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R6499	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R6500	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R6501	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6502	06S15615Y28	RES,RK 131J 1/16 -CP
ERATO-P.W.Board			R6503	06S15615Y37	RES,RK 331J 1/16 -CP
ERATO-P.W.Board			R6504	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6505	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6507	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6508	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6509	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6510	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6511	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6512	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6513	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6514	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6515	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6516	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6517	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6518	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6519	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6520	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6521	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6522	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6523	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6524	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6525	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6526	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6527	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6528	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6529	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6530	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6531	06S15615Y29	RES,RK 151J 1/16 -CP
ERATO-P.W.Board			R6532	06S15615Y29	RES,RK 151J 1/16 -CP
ERATO-P.W.Board			R6533	06S15615Y29	RES,RK 151J 1/16 -CP
ERATO-P.W.Board			R6534	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6535	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6536	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6537	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6539	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6540	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6541	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6542	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6543	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6544	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R6704	06S15593Y29	RES,RK 151F 1/10 -CP
ERATO-P.W.Board			R6705	06S15593Y13	RES,RK 33RF 1/10 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6706	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6707	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6708	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6709	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6710	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6711	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6712	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6713	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6714	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6715	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6716	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6717	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6718	06S15615Y39	RES,RK 391J 1/16 -CP
ERATO-P.W.Board			R6719	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6720	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R6721	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6722	06S15615Y31	RES,RK 181J 1/16 -CP
ERATO-P.W.Board			R6723	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6724	06S15593Y29	RES,RK 151F 1/10 -CP
ERATO-P.W.Board			R6725	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6726	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6727	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6728	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6729	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6730	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6731	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6732	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6733	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6734	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6735	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6736	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6737	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6738	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6739	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6740	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6741	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6742	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6743	06S15615Y23	RES,RK 82RJ 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R6744	06S15615Y23	RES,RK 82RJ 1/16 -CP
ERATO-P.W.Board			R6745	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6746	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6747	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6748	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6749	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R6750	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6751	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6752	06S65415Y65	RES,RK 301F 1/16 -CP
ERATO-P.W.Board			R6753	06S65415Y64	RES,RK 75RF 1/16 -CP
ERATO-P.W.Board			R6754	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R6755	06S15615Y73	RES,RK 103J 1/16 -CP
ERATO-P.W.Board			R6756	06S15615Y73	RES,RK 103J 1/16 -CP
ERATO-P.W.Board			R6761	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6762	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R6763	06S65415Y17	RES,RK 221F 1/16 -CP
ERATO-P.W.Board			R6764	06S65415Y17	RES,RK 221F 1/16 -CP
ERATO-P.W.Board			R6765	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6766	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6767	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6768	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R6769	06S65415Y38	RES,RK 123F 1/16 -CP
ERATO-P.W.Board			R6770	06S65415Y36	RES,RK 822F 1/16 -CP
ERATO-P.W.Board			R6771	06S65415Y31	RES,RK 332F 1/16 -CP
ERATO-P.W.Board			R6772	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R6773	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6774	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R6780	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R6782	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7000	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7001	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7002	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7004	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7005	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7006	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7008	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7009	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7010	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7011	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7012	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7013	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7014	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7015	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7016	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7017	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7018	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7019	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7020	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7021	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7022	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7023	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7024	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7025	06S15615Y73	RES,RK 103J 1/16 -CP
ERATO-P.W.Board			R7027	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7029	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7030	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7031	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7032	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7033	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7034	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7035	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7036	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7037	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7038	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7039	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7040	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7041	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7042	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7043	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7044	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7047	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7050	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7051	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7054	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7056	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7057	06S15615Y09	RES,RK 22RJ 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7058	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7060	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7061	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7062	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7063	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7066	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7078	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7084	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7086	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7094	06S15615Y61	RES,RK 332J 1/16 -CP
ERATO-P.W.Board			R7108	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7200	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7201	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7202	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7203	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7204	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7205	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7206	06S15593Y65	RES,RK 472F 1/10 -CP
ERATO-P.W.Board			R7207	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R7208	06S15615Y97	RES,RK 104J 1/16 -CP
ERATO-P.W.Board			R7209	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7210	06S15593Y62	RES,RK 362F 1/10 -CP
ERATO-P.W.Board			R7211	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7212	06S45674W74	RES,RK 512J 1/10 -CP
ERATO-P.W.Board			R7213	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7216	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7218	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7219	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7220	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7221	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7222	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7223	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7224	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7225	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7226	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7227	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7228	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7229	06S15615Y13	RES,RK 33RJ 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7230	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7231	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7232	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7233	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7234	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7235	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7236	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7237	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7238	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7239	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7240	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7241	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R7244	06S15593Y99	RES,RK 124F 1/10 -CP
ERATO-P.W.Board			R7245	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7247	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7249	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7250	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7251	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7252	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7253	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7254	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7255	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R7256	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7257	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R7258	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7260	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7261	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7262	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7266	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7267	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7268	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7269	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7270	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7271	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7272	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7273	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7274	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7275	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7276	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7277	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7278	06S65415Y31	RES,RK 332F 1/16 -CP
ERATO-P.W.Board			R7279	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7280	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7281	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7282	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7286	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7287	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7288	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7289	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7290	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7291	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7292	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7293	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7294	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7295	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7296	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7298	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7300	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7302	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7303	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7304	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7305	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7306	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7307	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7310	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7318	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7319	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7320	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7321	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7322	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7323	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7324	06S15615Y97	RES,RK 104J 1/16 -CP
ERATO-P.W.Board			R7326	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7327	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7328	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7329	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7330	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7331	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7332	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7333	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7334	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7335	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7337	06S15593Y91	RES,RK 563F 1/10 -CP
ERATO-P.W.Board			R7338	06S15594Y12	RES,RK 394F 1/10 -CP
ERATO-P.W.Board			R7343	06S15615Y09	RES,RK 22RJ 1/16 -CP
ERATO-P.W.Board			R7355	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7356	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7357	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7391	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7400	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7401	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board		#1	R7409	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board		#1	R7410	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board		#1	R7411	06S70072F51	RES,CP .821-J-1/4-CP
ERATO-P.W.Board		#1	R7412	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7414	06S35083Y08	RES,RK 39RF 1/4 -CP
ERATO-P.W.Board			R7415	06T25178Y44	RES,RK 36RF 1/4 -CP
ERATO-P.W.Board			R7417	06S70072F41	RES,CP .331-J-1/4-CP
ERATO-P.W.Board			R7418	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R7419	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R7420	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R7421	06S35083Y81	RES,RK 30RF 1/4 -CP
ERATO-P.W.Board			R7422	06T25178Y46	RES,RK 43RF 1/4 -CP
ERATO-P.W.Board			R7423	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7425	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7426	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7427	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7428	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7429	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7430	06S70072F51	RES,CP .821-J-1/4-CP
ERATO-P.W.Board			R7431	06S70072F51	RES,CP .821-J-1/4-CP
ERATO-P.W.Board			R7439	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7440	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7444	06S35083Y81	RES,RK 30RF 1/4 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7445	06T25178Y46	RES,RK 43RF 1/4 -CP
ERATO-P.W.Board			R7446	06S70072F29	RES,CP .101-J-1/4-CP
ERATO-P.W.Board			R7447	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7448	06S35083Y25	RES,RK 102F 1/4 -CP
ERATO-P.W.Board			R7449	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7452	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7453	06S15615Y61	RES,RK 332J 1/16 -CP
ERATO-P.W.Board			R7454	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7455	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R7456	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R7457	06S35083Y13	RES,RK 101F 1/4 -CP
ERATO-P.W.Board			R7460	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7461	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7462	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			R7600	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7601	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R7602	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7634	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7635	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7637	06S70072F53	RES,CP .102-J-1/4-CP
ERATO-P.W.Board			R7642	06S70072F29	RES,CP .101-J-1/4-CP
ERATO-P.W.Board		#1	R7646	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board		\$1	R7649	06S45675W43	RES,RK JUMPER1/10-CP
ERATO-P.W.Board			R7700	06S15593Y92	RES,RK 623F 1/10 -CP
ERATO-P.W.Board			R7701	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7702	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7703	06S15593Y77	RES,RK 153F 1/10 -CP
ERATO-P.W.Board			R7705	06S15593Y57	RES,RK 222F 1/10 -CP
ERATO-P.W.Board			R7706	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7707	06S15594Y12	RES,RK 394F 1/10 -CP
ERATO-P.W.Board			R7709	06S15616Y06	RES,RK 224J 1/16 -CP
ERATO-P.W.Board			R7710	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7711	06-25919Z16	RES,RK 134F 1/16 -CP
ERATO-P.W.Board			R7712	06S15615Y99	RES,RK 124J 1/16 -CP
ERATO-P.W.Board			R7713	06S65415Y43	RES,RK 333F 1/16 -CP
ERATO-P.W.Board			R7714	06S65415Y27	RES,RK 152F 1/16 -CP
ERATO-P.W.Board			R7715	06S65415Y39	RES,RK 153F 1/16 -CP
ERATO-P.W.Board			R7716	06-12372Z02	RES,RK R015F 1/5 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7717	06S70072F33	RES,CP .151-J-1/4-CP
ERATO-P.W.Board			R7718	06S15593Y39	RES,RK 391F 1/10 -CP
ERATO-P.W.Board			R7721	06S15615Y37	RES,RK 331J 1/16 -CP
ERATO-P.W.Board			R7722	06S15615Y37	RES,RK 331J 1/16 -CP
ERATO-P.W.Board			R7723	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7724	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7728	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7729	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7730	06S15615Y35	RES,RK 271J 1/16 -CP
ERATO-P.W.Board			R7731	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7734	06S65415Y37	RES,RK 103F 1/16 -CP
ERATO-P.W.Board			R7735	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7737	06S15616Y06	RES,RK 224J 1/16 -CP
ERATO-P.W.Board			R7738	06S65415Y44	RES,RK 393F 1/16 -CP
ERATO-P.W.Board			R7739	06S65415Y25	RES,RK 102F 1/16 -CP
ERATO-P.W.Board			R7740	06-25919Z16	RES,RK 134F 1/16 -CP
ERATO-P.W.Board			R7741	06S15615Y99	RES,RK 124J 1/16 -CP
ERATO-P.W.Board			R7742	06S65415Y37	RES,RK 103F 1/16 -CP
ERATO-P.W.Board			R7743	06S65415Y39	RES,RK 153F 1/16 -CP
ERATO-P.W.Board			R7744	06S65415Y49	RES,RK 104F 1/16 -CP
ERATO-P.W.Board			R7745	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7749	06S15615Y65	RES,RK 472J 1/16 -CP
ERATO-P.W.Board			R7751	06S15615Y37	RES,RK 331J 1/16 -CP
ERATO-P.W.Board			R7752	06S15593Y67	RES,RK 562F 1/10 -CP
ERATO-P.W.Board			R7753	06S15615Y37	RES,RK 331J 1/16 -CP
ERATO-P.W.Board			R7754	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7755	06-12372Z02	RES,RK R015F 1/5 -CP
ERATO-P.W.Board			R7756	06S45674W47	RES,RK 391J 1/10 -CP
ERATO-P.W.Board			R7759	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7760	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7761	06S15615Y35	RES,RK 271J 1/16 -CP
ERATO-P.W.Board			R7762	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7765	06S45674W51	RES,RK 561J 1/10 -CP
ERATO-P.W.Board			R7769	06S45674W49	RES,RK 471J 1/10 -CP
ERATO-P.W.Board			R7770	06S45674W49	RES,RK 471J 1/10 -CP
ERATO-P.W.Board			R7780	06S65415Y41	RES,RK 223F 1/16 -CP
ERATO-P.W.Board			R7781	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7784	06S15593Y90	RES,RK 513F 1/10 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			R7785	06S15593Y76	RES,RK 133F 1/10 -CP
ERATO-P.W.Board			R7786	06S45675W06	RES,RK 104J 1/10 -CP
ERATO-P.W.Board			R7787	06S35095Y08	RES,RK JUMPER 1/4-CP
ERATO-P.W.Board			R7800	06S15616Y23	RES,RK JUMPER1/16-CP
ERATO-P.W.Board			R7805	06S15593Y41	RES,RK 471F 1/10 -CP
ERATO-P.W.Board			R7806	06S15593Y57	RES,RK 222F 1/10 -CP
ERATO-P.W.Board			R7807	06S15593Y73	RES,RK 103F 1/10 -CP
ERATO-P.W.Board			R7810	06S15615Y49	RES,RK 102J 1/16 -CP
ERATO-P.W.Board			R7814	06S15594Y01	RES,RK 134F 1/10 -CP
ERATO-P.W.Board			R8000	06S15615Y25	RES,RK 101J 1/16 -CP
ERATO-P.W.Board			R8001	06S15593Y70	RES,RK 752F 1/10 -CP
ERATO-P.W.Board			R8002	06S15593Y95	RES,RK 823F 1/10 -CP
ERATO-P.W.Board			R8019	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R8020	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R8025	06S65415Y14	RES,RK 121F 1/16 -CP
ERATO-P.W.Board			R8026	06S15615Y13	RES,RK 33RJ 1/16 -CP
ERATO-P.W.Board			R8028	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R8029	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R8030	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R8031	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R8032	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R8033	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R8034	06S15615Y19	RES,RK 56RJ 1/16 -CP
ERATO-P.W.Board			R8035	06S15615Y89	RES,RK 473J 1/16 -CP
ERATO-P.W.Board			R8036	06S15616Y22	RES,RK 105J 1/16 -CP
ERATO-P.W.Board			R8037	06S45674W57	RES,RK 102J 1/10 -CP
ERATO-P.W.Board			R8038	06S15615Y81	RES,RK 223J 1/16 -CP
ERATO-P.W.Board			RA6200	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA6201	06S15771Y15	RES,ARYEXB28V151J-CP
ERATO-P.W.Board			RA6202	06S15771Y15	RES,ARYEXB28V151J-CP
ERATO-P.W.Board			RA6404	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6405	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6406	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6407	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6408	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6409	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6410	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6411	06S15771Y10	RES,ARYEXB28V56RJ-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			RA6412	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6413	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA6481	06S15771Y07	RES,ARYEXB28V33RJ-CP
ERATO-P.W.Board			RA6482	06S15771Y07	RES,ARYEXB28V33RJ-CP
ERATO-P.W.Board			RA6701	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA6703	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA6704	06S15771Y07	RES,ARYEXB28V33RJ-CP
ERATO-P.W.Board			RA6705	06S15771Y07	RES,ARYEXB28V33RJ-CP
ERATO-P.W.Board			RA6706	06S15771Y07	RES,ARYEXB28V33RJ-CP
ERATO-P.W.Board			RA7200	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA7201	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA7202	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA7203	06S15771Y05	RES,ARYEXB28V22RJ-CP
ERATO-P.W.Board			RA7600	06S15771Y41	RES,ARYEXB28V223J-CP
ERATO-P.W.Board			RA8000	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA8001	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA8002	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			RA8003	06S15771Y10	RES,ARYEXB28V56RJ-CP
ERATO-P.W.Board			SD7400	48T75102Y01	DIO,SHT RSX301L-30E1
ERATO-P.W.Board			SD7601	48T75102Y01	DIO,SHT RSX301L-30E1
ERATO-P.W.Board			SD7602	48T75102Y01	DIO,SHT RSX301L-30E1
ERATO-P.W.Board			SD7603	48T75102Y01	DIO,SHT RSX301L-30E1
ERATO-P.W.Board			SD7700	48T45286Y01	DIO,SHT RB050L-40-E1
ERATO-P.W.Board			SD7701	48T45138Y01	DIO,SHT STPS5H100BE5
ERATO-P.W.Board			SD7702	48T45286Y01	DIO,SHT RB050L-40-E1
ERATO-P.W.Board			SD7703	48T45286Y01	DIO,SHT RB050L-40-E1
ERATO-P.W.Board			SD7800	48T45286Y01	DIO,SHT RB050L-40-E1
ERATO-P.W.Board			VR7700	18-12468Z11	VAR,EVM2NSX80 224-CP
ERATO-P.W.Board			XL6400	91-17642Z09	XTL,NX3225SA 27.0-CP
ERATO-P.W.Board			XL6401	91-17642Z10	XTL,NX3225SA 33.0-CP
ERATO-P.W.Board			XL6402	91-17642Z07	XTL,NX3225SA 24NS-CP
ERATO-P.W.Board			XL8000	91-17642Z09	XTL,NX3225SA 27.0-CP
ERATO-P.W.Board			Z6400	91T15509Y07	EMI,BK1608HM601 -CP
ERATO-P.W.Board			Z6401	91T15509Y07	EMI,BK1608HM601 -CP
ERATO-P.W.Board			Z6402	91T15509Y07	EMI,BK1608HM601 -CP
ERATO-P.W.Board			Z6700	91T75196Y22	EMI,BK1005LL121 -CP
ERATO-P.W.Board			Z6701	91T15509Y07	EMI,BK1608HM601 -CP
ERATO-P.W.Board			Z6702	24-06212Z07	FBI,BLM15BD601SH1-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
ERATO-P.W.Board			Z7400	91T75196Y01	EMI,BK1005HM102 -CP
ERATO-P.W.Board			Z7401	91-18210Z01	EMI,EXC24CE900U -CP
ERATO-P.W.Board			ZD7400	48-21149Z19	DIO,ZEN DZ2J051L0LCP
ERATO-P.W.Board			ZD7401	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board			ZD7402	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board		#1	ZD7406	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board			ZD7407	48-01607Z52	DIO,ZEN LUDZ16B -CP
ERATO-P.W.Board			ZD7408	48T55242Y02	DIO,ZEN PTZ30B -E1
ERATO-P.W.Board		#1	ZD7411	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board			ZD7600	48-06525Z07	DIO,ZEN UDZS 3.9B-CP
ERATO-P.W.Board			ZD7601	48-09840Z01	DIO,ZEN PESD1CAN -CP
ERATO-P.W.Board			ZD7602	48-06525Z07	DIO,ZEN UDZS 3.9B-CP
ERATO-P.W.Board			ZD7603	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board			ZD7604	48-16145Z22	DIO,ZEN PZU5.6B2 -CP
ERATO-P.W.Board			ZD7800	48-25907Z01	DIO,ZEN PESD5V0F1-CP
ERATO-P.W.Board			ZD7801	48-25907Z01	DIO,ZEN PESD5V0F1-CP
ERATO-P.W.Board			ZD8000	48-16145Z20	DIO,ZEN PZU5.1B3 -CP
AUDIO-P.W.Board			ANT3000	09-17241Z02	ASSY,ANID-0116-02A
AUDIO-P.W.Board			C2000	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2001	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2002	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2003	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2004	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2005	08S35374W11	CAP,CER 475K-B0J -CP
AUDIO-P.W.Board			C2006	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2011	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2012	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2013	08S45231Y18	CAP,CER 27RJ-CH1H-CP
AUDIO-P.W.Board			C2014	08S45231Y17	CAP,CER 22RJ-CH1H-CP
AUDIO-P.W.Board			C2017	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2018	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2019	08S45231Y19	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2023	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2024	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2025	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2026	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2027	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2028	08S45232Y05	CAP,CER 102K-B1H -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2029	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2030	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2031	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2032	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2033	08S45232Y17	CAP,CER 104K-B0J -CP
AUDIO-P.W.Board			C2034	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2035	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2201	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2202	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2203	08S45232Y01	CAP,CER 221K-B1H -CP
AUDIO-P.W.Board			C2208	08S35349Y11	CAP,CER 223K-B1H -CP
AUDIO-P.W.Board			C2209	08S35349Y11	CAP,CER 223K-B1H -CP
AUDIO-P.W.Board			C2210	08S35349Y11	CAP,CER 223K-B1H -CP
AUDIO-P.W.Board			C2211	08S35349Y11	CAP,CER 223K-B1H -CP
AUDIO-P.W.Board			C2212	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2213	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2214	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2215	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2216	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2217	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2218	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2219	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2220	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2221	08S65667Y02	CAP,CER 334KX5R1A-CP
AUDIO-P.W.Board			C2223	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2224	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2225	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2226	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2227	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2228	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2229	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2230	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2231	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C2232	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2233	08S45677W07	CAP,CER.5R0C-CH1H-CP
AUDIO-P.W.Board			C2234	08S45677W06	CAP,CER 4ROC-CH1H-CP
AUDIO-P.W.Board			C2235	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2236	08S65667Y02	CAP,CER 334KX5R1A-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2237	08S65667Y02	CAP,CER 334KX5R1A-CP
AUDIO-P.W.Board			C2238	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2239	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2240	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2241	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2242	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2243	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2244	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2245	08S35374W11	CAP,CER 475K-B0J -CP
AUDIO-P.W.Board			C2246	08S35374W11	CAP,CER 475K-B0J -CP
AUDIO-P.W.Board			C2247	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2249	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2250	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2251	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2252	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2253	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2254	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2255	08S35374W10	CAP,CER 225K-B1A -CP
AUDIO-P.W.Board			C2256	08S35374W10	CAP,CER 225K-B1A -CP
AUDIO-P.W.Board			C2257	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2258	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C2259	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2261	08S45231Y38	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C2262	08S65667Y01	CAP,CER 224KX5R1C-CP
AUDIO-P.W.Board			C2263	08S65667Y01	CAP,CER 224KX5R1C-CP
AUDIO-P.W.Board			C2264	08S45231Y28	CAP,CER 181J-CH1H-CP
AUDIO-P.W.Board			C2265	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2266	08S65670Y04	CAP,CER 475KX5R1E-CP
AUDIO-P.W.Board			C2267	08S45231Y28	CAP,CER 181J-CH1H-CP
AUDIO-P.W.Board			C2268	08S65128F90	CAP,CER 473K-B1H -CP
AUDIO-P.W.Board			C2269	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2270	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2276	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2278	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2279	08S35374W12	CAP,CER 106K-B0J -CP
AUDIO-P.W.Board			C2285	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2286	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2287	08S65676Y03	CAP,CER 225KX7R1C-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2288	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2289	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2290	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2291	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2292	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2293	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2294	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2295	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2296	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2297	08S35374W12	CAP,CER 106K-B0J -CP
AUDIO-P.W.Board			C2298	08S65676Y03	CAP,CER 225KX7R1C-CP
AUDIO-P.W.Board			C2299	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2300	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2301	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2302	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2400	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2401	08S65676Y08	CAP,CER 106K-X7R1ACP
AUDIO-P.W.Board			C2402	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2403	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2404	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2405	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2406	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2407	08S35374W10	CAP,CER 225K-B1A -CP
AUDIO-P.W.Board			C2409	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C2410	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board		#1	C2411	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2413	08S45231Y25	CAP,CER 101J-CH1H-CP
AUDIO-P.W.Board		#1	C2414	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2415	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2416	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2417	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2418	08S45231Y25	CAP,CER 101J-CH1H-CP
AUDIO-P.W.Board		#1	C2419	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2420	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board		#1	C2422	08S45231Y25	CAP,CER 101J-CH1H-CP
AUDIO-P.W.Board			C2424	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2425	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2426	08S65670Y03	CAP,CER 335KX5R1E-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2427	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2428	08S65676Y08	CAP,CER 106K-X7R1ACP
AUDIO-P.W.Board			C2429	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2430	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2431	08S65670Y01	CAP,CER 106KX5R1C-CP
AUDIO-P.W.Board			C2432	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2433	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2434	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2435	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2436	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2437	08S65670Y02	CAP,CER 225KX5R1E-CP
AUDIO-P.W.Board			C2438	08S35374W11	CAP,CER 475K-B0J -CP
AUDIO-P.W.Board			C2439	08S35374W12	CAP,CER 106K-B0J -CP
AUDIO-P.W.Board			C2440	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2441	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2442	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2443	08S45231Y17	CAP,CER 22RJ-CH1H-CP
AUDIO-P.W.Board			C2444	08S65674Y05	CAP,CER 105KX5R1C-CP
AUDIO-P.W.Board			C2445	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2446	08S65674Y05	CAP,CER 105KX5R1C-CP
AUDIO-P.W.Board			C2447	08S65670Y01	CAP,CER 106KX5R1C-CP
AUDIO-P.W.Board			C2448	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2449	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2450	08S65676Y07	CAP,CER 225K-X7R1ECP
AUDIO-P.W.Board			C2451	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2452	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2453	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2454	08S65674Y05	CAP,CER 105KX5R1C-CP
AUDIO-P.W.Board			C2455	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C2456	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2457	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2458	08T65463Y01	CAP,CER 335K-B1A -CP
AUDIO-P.W.Board			C2463	08S45231Y08	CAP,CER 5R0C-CH1H-CP
AUDIO-P.W.Board			C2464	08S45231Y08	CAP,CER 5R0C-CH1H-CP
AUDIO-P.W.Board			C2465	08S45231Y08	CAP,CER 5R0C-CH1H-CP
AUDIO-P.W.Board			C2466	08S45231Y08	CAP,CER 5R0C-CH1H-CP
AUDIO-P.W.Board			C2600	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2601	08S45231Y17	CAP,CER 22RJ-CH1H-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2602	08S45677W20	CAP,CER.22RJ-CH1H-CP
AUDIO-P.W.Board			C2603	08S45677W24	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2604	08S45677W24	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2605	08S45677W24	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2606	08S45677W24	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2607	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2608	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2609	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2610	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2611	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2612	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2613	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2614	08S45677W24	CAP,CER 33RJ-CH1H-CP
AUDIO-P.W.Board			C2616	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C2617	08S35349Y16	CAP,CER 105K-B1A -CP
AUDIO-P.W.Board			C2618	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2619	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2620	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2621	08S35374W08	CAP,CER 474K-B1C -CP
AUDIO-P.W.Board			C2622	08S35374W11	CAP,CER 475K-B0J -CP
AUDIO-P.W.Board			C2623	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2624	08S65670Y03	CAP,CER 335KX5R1E-CP
AUDIO-P.W.Board			C2625	08S65670Y06	CAP,CER 226KX5R1A-CP
AUDIO-P.W.Board			C2626	08S65670Y06	CAP,CER 226KX5R1A-CP
AUDIO-P.W.Board		#1	C2800	08S65670Y07	CAP,CER 105KX5R1H-CP
AUDIO-P.W.Board			C2801	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board		#1	C2802	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2803	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C2804	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2805	08S65670Y04	CAP,CER 475KX5R1E-CP
AUDIO-P.W.Board			C2806	08S65670Y04	CAP,CER 475KX5R1E-CP
AUDIO-P.W.Board			C2807	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2808	08S45231Y31	CAP,CER 331J-CH1H-CP
AUDIO-P.W.Board			C2809	08S45231Y31	CAP,CER 331J-CH1H-CP
AUDIO-P.W.Board			C2810	08S45231Y25	CAP,CER 101J-CH1H-CP
AUDIO-P.W.Board			C2811	08S35349Y11	CAP,CER 223K-B1H -CP
AUDIO-P.W.Board			C2812	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2813	08S65669Y03	CAP,CER 224KX7R1H-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C2815	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2816	08S65676Y08	CAP,CER 106K-X7R1ACP
AUDIO-P.W.Board			C2817	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C2818	08S65670Y07	CAP,CER 105KX5R1H-CP
AUDIO-P.W.Board		#1	C2819	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C3000	08S45231Y16	CAP,CER 18RJ-CH1H-CP
AUDIO-P.W.Board			C3002	08S45677W16	CAP,CER.15RJ-CH1H-CP
AUDIO-P.W.Board			C3003	08S45231Y13	CAP,CER 10RD-CH1H-CP
AUDIO-P.W.Board			C3004	08S45231Y18	CAP,CER 27RJ-CH1H-CP
AUDIO-P.W.Board			C3005	08S45231Y38	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3006	08S65128F57	CAP,CER.102K-B1H -CP
AUDIO-P.W.Board			C3007	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C3008	08S45676W73	CAP,CER.103K-B1H -CP
AUDIO-P.W.Board			C3009	08S45232Y13	CAP,CER 223K-B1C -CP
AUDIO-P.W.Board			C3010	08S45676W93	CAP,CER 224K-B1A -CP
AUDIO-P.W.Board			C3011	08S45231Y38	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3012	08S45232Y08	CAP,CER 332K-B1H -CP
AUDIO-P.W.Board			C3013	08S45232Y13	CAP,CER 223K-B1C -CP
AUDIO-P.W.Board			C3015	08S45676W68	CAP,CER.392K-B1H -CP
AUDIO-P.W.Board			C3016	08S45231Y38	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3019	08S45231Y16	CAP,CER 18RJ-CH1H-CP
AUDIO-P.W.Board			C3021	08S45231Y17	CAP,CER 22RJ-CH1H-CP
AUDIO-P.W.Board			C3024	08S45231Y24	CAP,CER 82RJ-CH1H-CP
AUDIO-P.W.Board			C3025	08S65667Y01	CAP,CER 224KX5R1C-CP
AUDIO-P.W.Board			C3026	08S45232Y21	CAP,CER 104K-B1A-CP
AUDIO-P.W.Board			C3027	08S65670Y06	CAP,CER 226KX5R1A-CP
AUDIO-P.W.Board			C3100	08S45677W60	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3101	08S45677W12	CAP,CER.10RD-CH1H-CP
AUDIO-P.W.Board			C3103	08S45231Y21	CAP,CER 47RJ-CH1H-CP
AUDIO-P.W.Board			C3104	08S35350Y04	CAP,CER 105K-B1C -CP
AUDIO-P.W.Board			C3105	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C3106	08S45677W60	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3200	08S45677W60	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3203	08S45677W60	CAP,CER 102J-CH1H-CP
AUDIO-P.W.Board			C3300	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3400	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3401	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3402	08S35349Y16	CAP,CER 105K-B1A -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			C3403	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3404	08S65676Y08	CAP,CER 106K-X7R1ACP
AUDIO-P.W.Board			C3405	08S45539Y04	CAP,CER 103KX7R2J-CP
AUDIO-P.W.Board			C3406	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3407	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3408	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3411	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3412	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3413	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3415	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3417	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3418	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3419	08S65677Y06	CAP,CER 226MX7R1C-CP
AUDIO-P.W.Board			C3420	08S65676Y08	CAP,CER 106K-X7R1ACP
AUDIO-P.W.Board			C3421	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3500	08S45232Y05	CAP,CER 102K-B1H -CP
AUDIO-P.W.Board			C3501	08S45677W36	CAP,CER.101J-CH1H-CP
AUDIO-P.W.Board			C3502	08S45676W85	CAP,CER 104K-B1C -CP
AUDIO-P.W.Board			C3510	08S65128F88	CAP,CER 104K-B1H -CP
AUDIO-P.W.Board			C3600	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			C3601	08S45539Y04	CAP,CER 103KX7R2J-CP
AUDIO-P.W.Board			C3602	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3603	08S45539Y04	CAP,CER 103KX7R2J-CP
AUDIO-P.W.Board			C3604	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3606	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3607	08S75335Y06	CAP,CER 47RJ-CG2J-CP
AUDIO-P.W.Board			C3608	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3609	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3610	08S45539Y01	CAP,CER 102KX7R2J-CP
AUDIO-P.W.Board			C3611	08S45539Y04	CAP,CER 103KX7R2J-CP
AUDIO-P.W.Board			C3612	08S75335Y06	CAP,CER 47RJ-CG2J-CP
AUDIO-P.W.Board			C3615	08S65128F88	CAP,CER 104K-B1H -CP
AUDIO-P.W.Board		#1	C3616	08S65669Y03	CAP,CER 224KX7R1H-CP
AUDIO-P.W.Board			CB3300	09T25436Y02	WTB,53253-0270 -DB
AUDIO-P.W.Board			CB3600	09T35473Y16	WTB,F169B001-16 -DB
AUDIO-P.W.Board			CB3601	09-07665Z04	WTB,S20B-PADSS-1 -DB
AUDIO-P.W.Board			CH3202	09-24995Z05	BTB,IMSA9985S-140YEZ
AUDIO-P.W.Board			D2200	48-05164Z01	DIO,1SS352-TPH3 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			D2400	48-07016Z01	DIO,KDS181-RTK -CP
AUDIO-P.W.Board			D2401	48-07016Z01	DIO,KDS181-RTK -CP
AUDIO-P.W.Board			D2402	48-07016Z01	DIO,KDS181-RTK -CP
AUDIO-P.W.Board			D2600	48-05965Z01	DIO,1SS361-L -CP
AUDIO-P.W.Board			D2601	48-07016Z01	DIO,KDS181-RTK -CP
AUDIO-P.W.Board			D2800	48T63462F01	DIO,DAN202K-96 -CP
AUDIO-P.W.Board			D2802	48-19711Z01	DIO,BAV99W -CP
AUDIO-P.W.Board			D2803	48-05965Z01	DIO,1SS361-L -CP
AUDIO-P.W.Board			D3000	48-17547Z01	DIO,DA3J101F0L -CP
AUDIO-P.W.Board			D3401	48T75527Y01	DIO,1SR154-400 -E1
AUDIO-P.W.Board			D3500	48-07015Z01	DIO,KDS160-RTK -CP
AUDIO-P.W.Board			D3510	48-05965Z01	DIO,1SS361-L -CP
AUDIO-P.W.Board			E2000	23T75543Y01	CAP,MVA 331-0J -E6
AUDIO-P.W.Board			E2200	23S75244Y20	CAP,ELY 221-1C -E6
AUDIO-P.W.Board			E2201	23S75244Y04	CAP,ELY 221-0J -E6
AUDIO-P.W.Board			E2202	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E2203	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E2204	23S75244Y28	CAP,ELY 101-1E -E6
AUDIO-P.W.Board			E2205	23S75244Y20	CAP,ELY 221-1C -E6
AUDIO-P.W.Board			E2206	23S75244Y27	CAP,ELY 47R-1E -E6
AUDIO-P.W.Board			E2207	23S75244Y27	CAP,ELY 47R-1E -E6
AUDIO-P.W.Board			E2208	23S75244Y30	CAP,ELY 331-1E -EA
AUDIO-P.W.Board			E2210	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E2211	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E2212	23S75244Y02	CAP,ELY 47R-0J -E2
AUDIO-P.W.Board			E2213	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E2214	23T75234Y19	CAP,MAR 101-1C-H63E6
AUDIO-P.W.Board			E2400	23T75234Y07	CAP,MAR 47R-1C-F55E6
AUDIO-P.W.Board			E2401	23T75234Y07	CAP,MAR 47R-1C-F55E6
AUDIO-P.W.Board			E2402	23T75234Y05	CAP,MAR 10R-1C-D55E2
AUDIO-P.W.Board			E2403	23T75234Y15	CAP,MAR 3R3-1H-D55E2
AUDIO-P.W.Board			E2404	23T75234Y15	CAP,MAR 3R3-1H-D55E2
AUDIO-P.W.Board			E2405	23T75234Y15	CAP,MAR 3R3-1H-D55E2
AUDIO-P.W.Board			E2406	23S65134W44	CAP,ELY 22R-1E(6)-E6
AUDIO-P.W.Board			E2407	23T75234Y15	CAP,MAR 3R3-1H-D55E2
AUDIO-P.W.Board			E2408	23T75234Y19	CAP,MAR 101-1C-H63E6
AUDIO-P.W.Board			E2409	23T75234Y07	CAP,MAR 47R-1C-F55E6
AUDIO-P.W.Board			E2410	23S65134W44	CAP,ELY 22R-1E(6)-E6

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			E2418	23T75234Y19	CAP,MAR 101-1C-H63E6
AUDIO-P.W.Board			E2601	23T75234Y07	CAP,MAR 47R-1C-F55E6
AUDIO-P.W.Board			E2602	23T65114Y25	CAP,FK 10R-1E-B -E2
AUDIO-P.W.Board			E2603	23S75244Y18	CAP,ELY 47R-1C -E3
AUDIO-P.W.Board			E2607	23S75244Y17	CAP,ELY 22R-1C -E2
AUDIO-P.W.Board			E2608	23T75234Y05	CAP,MAR 10R-1C-D55E2
AUDIO-P.W.Board			E2609	23T75234Y05	CAP,MAR 10R-1C-D55E2
AUDIO-P.W.Board			E2610	23S75244Y17	CAP,ELY 22R-1C -E2
AUDIO-P.W.Board			E2611	23T75234Y05	CAP,MAR 10R-1C-D55E2
AUDIO-P.W.Board			E2612	23T75234Y05	CAP,MAR 10R-1C-D55E2
AUDIO-P.W.Board			E3000	23S75244Y18	CAP,ELY 47R-1C -E3
AUDIO-P.W.Board			E3300	23S65134W45	CAP,ELY 33R-1E(6)-E6
AUDIO-P.W.Board			E3400	23T75543Y01	CAP,MVA 331-0J -E6
AUDIO-P.W.Board			E3401	23S75244Y19	CAP,ELY 101-1C -E6
AUDIO-P.W.Board			E3404	23T75234Y19	CAP,MAR 101-1C-H63E6
AUDIO-P.W.Board			E3406	23T65114Y25	CAP,FK 10R-1E-B -E2
AUDIO-P.W.Board			E3407	23S75244Y20	CAP,ELY 221-1C -E6
AUDIO-P.W.Board			E3408	23S75244Y30	CAP,ELY 331-1E -EA
AUDIO-P.W.Board			E3410	23S75244Y25	CAP,ELY 22R-1E -E3
AUDIO-P.W.Board			E3411	23S75244Y31	CAP,ELY 471-1E -EA
AUDIO-P.W.Board			E3414	23S65134W15	CAP,ELY 331-0J(8)-E6
AUDIO-P.W.Board			E3600	23-19876Z04	CAP,CST 472-1E +
AUDIO-P.W.Board		#1	E3601	23S75244Y19	CAP,ELY 101-1C -E6
AUDIO-P.W.Board			IC2000	51-16703Z01	BR24S64FVM-W-TR -SE1
AUDIO-P.W.Board		#1	IC2001	83-29082Z11	V1000BDAL422ABU
AUDIO-P.W.Board		\$1	IC2001	83-29082Z13	V1000BDAP417ABU
AUDIO-P.W.Board			IC2001	51-27016Z01	MTP,MN103LF20RXW -QT
AUDIO-P.W.Board			IC2002	51-04315Z01	BU4228G-TR -CP
AUDIO-P.W.Board			IC2200	51-15650Z01	SAF7741HV/N115 -QT
AUDIO-P.W.Board			IC2201	51T55517Y01	NJU7223DL118-TE1-NE5
AUDIO-P.W.Board			IC2202	51T15647Y01	NJM4558V-TE2 -SE2
AUDIO-P.W.Board			IC2203	51-07902Z02	NJM2871BF33-TE1 -CP
AUDIO-P.W.Board			IC2204	51-26533Z01	AK4104ET -SE5
AUDIO-P.W.Board			IC2400	51-13600Z01	TDA7717 -QT
AUDIO-P.W.Board			IC2401	51-18799Z01	AK4386VT-E2 -SE2
AUDIO-P.W.Board			IC2402	51-22154Z01	NJW1240V-TE2 -SE9
AUDIO-P.W.Board			IC2403	51-05314Z01	BA4560RFVM-TR -SE1
AUDIO-P.W.Board			IC2404	51-11419Z01	74HC4066PW,118 -SE2

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			IC2405	51T93340F02	NJM2060V-TE2 -SE2
AUDIO-P.W.Board			IC2600	51-25497Z01	STPA002 -ZS
AUDIO-P.W.Board			IC2601	51-18799Z01	AK4386VT-E2 -SE2
AUDIO-P.W.Board			IC2602	51-05314Z01	BA4560RFVM-TR -SE1
AUDIO-P.W.Board			IC2800	51-02032Z01	TC7SET02FU-TE85L -CP
AUDIO-P.W.Board			IC2801	51T15192Y02	TC74VHC14FT,K-EL-SE5
AUDIO-P.W.Board			IC2802	51T15194Y02	TC74VHCT08AFT,K -SE5
AUDIO-P.W.Board			IC2803	51T15614Y01	TC74HC4051AFT-EL-SE5
AUDIO-P.W.Board			IC2804	51-12745Z01	BH7073G-TR -CP
AUDIO-P.W.Board			IC3000	51-15831Z01	TEF7000 -LT
AUDIO-P.W.Board			IC3001	51T25141Y02	TC7SHU04FU(J)-85L-CP
AUDIO-P.W.Board			IC3002	51-27637Z01	SI4749-C10-AMR -LE2
AUDIO-P.W.Board			IC3300	51-14227Z01	BD6221HFP-TR -NE9
AUDIO-P.W.Board			IC3401	51-13711Z02	TB2920AHQ -ZS
AUDIO-P.W.Board			IC3403	51-05862Z01	NJM2845DL1-33-TE1NE5
AUDIO-P.W.Board			IC3500	51-20765Z36	S-1009N42H-M5T2U -CP
AUDIO-P.W.Board			L2000	24-06212Z08	FBI,BLM15BD102SH1-CP
AUDIO-P.W.Board			L2200	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2201	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2202	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2203	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2204	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2205	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2206	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2207	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2208	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2209	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2210	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2211	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2212	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2213	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2214	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2215	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2216	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2217	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L2400	24T25164Y28	IND,FSLM2520 18RJ-CP
AUDIO-P.W.Board			L2401	24T25164Y41	IND,FSLM2520 221J-CP
AUDIO-P.W.Board			L2800	24T65067Y02	FBI,MMZ1005S601AT-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			L3000	24T55476Y02	IND,LLQ2012 R27J -CP
AUDIO-P.W.Board			L3001	24T25164Y18	IND,FSLM2520 2R7J-CP
AUDIO-P.W.Board			L3002	24T25164Y16	IND,FSLM2520 1R8J-CP
AUDIO-P.W.Board			L3003	24T55476Y13	IND,LLQ2012 R22J -CP
AUDIO-P.W.Board			L3004	24-17733Z02	IND,NLCV32T-331K -CP
AUDIO-P.W.Board			L3005	24-17733Z02	IND,NLCV32T-331K -CP
AUDIO-P.W.Board			L3007	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L3008	24T55476Y13	IND,LLQ2012 R22J -CP
AUDIO-P.W.Board			L3010	24-06212Z01	FBI,BLM15AG601SH1-CP
AUDIO-P.W.Board			L3011	24T55488Y35	IND,LLQ1608 R18J -CP
AUDIO-P.W.Board			L3012	24-06212Z01	FBI,BLM15AG601SH1-CP
AUDIO-P.W.Board			L3100	24T25164Y21	IND,FSLM2520 4R7J-CP
AUDIO-P.W.Board			L3101	24T25164Y05	IND,FSLM2520 R22J-CP
AUDIO-P.W.Board			L3401	24-06212Z03	FBI,BLM15AG121SH1-CP
AUDIO-P.W.Board			L3402	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			L3404	24T95456W11	FBI,BLM18AG601SH1-CP
AUDIO-P.W.Board			Q2000	48-12999Z04	TR,LTA124EUBFS8-TLCP
AUDIO-P.W.Board			Q2002	48-24996Z01	FET,SSM6N35FU-85L-CP
AUDIO-P.W.Board			Q2400	48T75180Y04	TR,IMH23-T110 -CP
AUDIO-P.W.Board			Q2401	48T75180Y04	TR,IMH23-T110 -CP
AUDIO-P.W.Board			Q2402	48T75180Y04	TR,IMH23-T110 -CP
AUDIO-P.W.Board			Q2403	48T25737Y02	TR,UMD3N-TR -CP
AUDIO-P.W.Board			Q2404	48-13000Z05	TR,LTC124EUBFS8-TLCP
AUDIO-P.W.Board			Q2405	48T75180Y04	TR,IMH23-T110 -CP
AUDIO-P.W.Board			Q2600	48T25737Y02	TR,UMD3N-TR -CP
AUDIO-P.W.Board			Q2601	48-13000Z05	TR,LTC124EUBFS8-TLCP
AUDIO-P.W.Board			Q2602	48T25737Y02	TR,UMD3N-TR -CP
AUDIO-P.W.Board			Q2603	48-20093Z01	TR,DMC561010R -CP
AUDIO-P.W.Board			Q2604	48-13000Z05	TR,LTC124EUBFS8-TLCP
AUDIO-P.W.Board			Q2605	48T75180Y04	TR,IMH23-T110 -CP
AUDIO-P.W.Board			Q2606	48-13000Z05	TR,LTC124EUBFS8-TLCP
AUDIO-P.W.Board			Q2607	48-13000Z05	TR,LTC124EUBFS8-TLCP
AUDIO-P.W.Board			Q2800	48-13000Z01	TR,LTC114EUBFS8-TLCP
AUDIO-P.W.Board			Q2801	48T63420F01	TR,2SA1037AK-146 -CP
AUDIO-P.W.Board			Q2802	48-12999Z01	TR,LTA114EUBFS8-TLCP
AUDIO-P.W.Board			Q2803	48T63417F03	TR,C2412K-BR-96 -CP
AUDIO-P.W.Board			Q2804	48-13000Z07	TR,LTC144EUBFS8-TLCP
AUDIO-P.W.Board		#1	Q2805	48T94606F03	TR,DTC124EUA-T106-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			Q3100	48T90478F02	TR,2SC3356-R24-T1-CP
AUDIO-P.W.Board		#1	Q3200	48T25737Y02	TR,UMD3N-TR -CP
AUDIO-P.W.Board		#1	Q3201	48-19949Z01	TR,DRC5143X -CP
AUDIO-P.W.Board			Q3400	48T94606F08	TR,DTC143EUA-T106-CP
AUDIO-P.W.Board			Q3401	48-17872Z01	TR,2PA1576Q -CP
AUDIO-P.W.Board			Q3402	48T25737Y01	TR,UMD2N-TR -CP
AUDIO-P.W.Board			Q3500	48T25737Y01	TR,UMD2N-TR -CP
AUDIO-P.W.Board			Q3501	48-04929Z03	TR,KRC103S-RTK -CP
AUDIO-P.W.Board			Q3510	48T25737Y01	TR,UMD2N-TR -CP
AUDIO-P.W.Board			R2000	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2001	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2003	06S15615Y63	RES,RK 392J 1/16 -CP
AUDIO-P.W.Board			R2004	06S15615Y63	RES,RK 392J 1/16 -CP
AUDIO-P.W.Board			R2006	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2007	06S45674W97	RES,RK 473J 1/10 -CP
AUDIO-P.W.Board			R2008	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2009	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2011	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2012	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2013	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2014	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2015	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2016	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2017	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2018	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2019	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2021	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2023	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2024	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2025	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2026	06S45674W81	RES,RK 103J 1/10 -CP
AUDIO-P.W.Board			R2027	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2028	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2029	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2030	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2031	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2033	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2035	06S15615Y25	RES,RK 101J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2036	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2037	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2038	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2039	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2040	06S45674W61	RES,RK 152J 1/10 -CP
AUDIO-P.W.Board			R2041	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2042	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2043	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2044	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2045	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2046	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2047	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2048	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2049	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2050	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2051	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2052	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2053	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board		#1	R2054	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2055	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2056	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2057	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2059	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2060	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2061	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2062	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2063	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2064	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2065	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2066	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2068	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2069	06S45674W61	RES,RK 152J 1/10 -CP
AUDIO-P.W.Board			R2070	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2071	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2072	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2073	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2074	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2075	06S15615Y25	RES,RK 101J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2076	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2077	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2078	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2079	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2080	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2081	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2082	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2083	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2084	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2085	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2086	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2087	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2088	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2090	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2091	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2094	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2095	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2096	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2097	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2098	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2099	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2100	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2101	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2102	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2103	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2104	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2105	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2107	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2108	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board		#1	R2110	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2111	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2112	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2113	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2114	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2115	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2116	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2117	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2118	06S15615Y25	RES,RK 101J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2119	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2120	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board		#1	R2121	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2122	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2123	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2124	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2125	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2126	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2127	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2128	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2129	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2130	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2131	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2132	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2133	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2134	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2135	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2138	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2139	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2140	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2141	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2142	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2144	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2146	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2147	06S45674W73	RES,RK 472J 1/10 -CP
AUDIO-P.W.Board			R2148	06S45674W89	RES,RK 223J 1/10 -CP
AUDIO-P.W.Board			R2149	06S45674W89	RES,RK 223J 1/10 -CP
AUDIO-P.W.Board			R2150	06S45674W73	RES,RK 472J 1/10 -CP
AUDIO-P.W.Board		#1	R2151	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board		#1	R2153	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board		#1	R2154	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board		#1	R2155	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board		#1	R2156	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2157	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2159	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2160	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2166	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2167	06S45674W73	RES,RK 472J 1/10 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2168	06S45674W73	RES,RK 472J 1/10 -CP
AUDIO-P.W.Board			R2169	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2170	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2171	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2200	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2202	06S15593Y66	RES,RK 512F 1/10 -CP
AUDIO-P.W.Board			R2203	06S15593Y94	RES,RK 753F 1/10 -CP
AUDIO-P.W.Board			R2204	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2205	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2206	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2207	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2208	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2209	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2210	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2211	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2212	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2213	06S15615Y65	RES,RK 472J 1/16 -CP
AUDIO-P.W.Board			R2214	06S15615Y65	RES,RK 472J 1/16 -CP
AUDIO-P.W.Board			R2215	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2216	06S45674W57	RES,RK 102J 1/10 -CP
AUDIO-P.W.Board			R2217	06S45674W31	RES,RK 82RJ 1/10 -CP
AUDIO-P.W.Board			R2218	06S45674W31	RES,RK 82RJ 1/10 -CP
AUDIO-P.W.Board			R2219	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2220	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2221	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2222	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2223	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2224	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2225	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2226	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2227	06S45674W09	RES,RK 10RJ 1/10 -CP
AUDIO-P.W.Board			R2228	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2231	06S45674W09	RES,RK 10RJ 1/10 -CP
AUDIO-P.W.Board			R2232	06S15593Y68	RES,RK 622F 1/10 -CP
AUDIO-P.W.Board			R2233	06S15593Y94	RES,RK 753F 1/10 -CP
AUDIO-P.W.Board			R2234	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2238	06S15593Y95	RES,RK 823F 1/10 -CP
AUDIO-P.W.Board			R2240	06S45675W43	RES,RK JUMPER1/10-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2241	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2242	06S65415Y23	RES,RK 681F 1/16 -CP
AUDIO-P.W.Board			R2243	06S65415Y45	RES,RK 473F 1/16 -CP
AUDIO-P.W.Board			R2244	06S65415Y45	RES,RK 473F 1/16 -CP
AUDIO-P.W.Board			R2245	06S65415Y23	RES,RK 681F 1/16 -CP
AUDIO-P.W.Board			R2246	06S65415Y35	RES,RK 682F 1/16 -CP
AUDIO-P.W.Board			R2247	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2248	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2250	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2251	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2252	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board		#1	R2253	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2254	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2255	06S65415Y31	RES,RK 332F 1/16 -CP
AUDIO-P.W.Board			R2256	06S65415Y31	RES,RK 332F 1/16 -CP
AUDIO-P.W.Board			R2257	06S15616Y06	RES,RK 224J 1/16 -CP
AUDIO-P.W.Board			R2258	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2259	06S15616Y06	RES,RK 224J 1/16 -CP
AUDIO-P.W.Board			R2260	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2261	06S15593Y19	RES,RK 56RF 1/10 -CP
AUDIO-P.W.Board			R2264	06S15615Y33	RES,RK 221J 1/16 -CP
AUDIO-P.W.Board			R2265	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2266	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2267	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2268	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board		#1	R2269	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2272	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2273	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2274	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2275	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board		#1	R2276	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2277	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2278	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board		#1	R2279	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2280	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2281	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2282	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2283	06S15615Y09	RES,RK 22RJ 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2285	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2286	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2287	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2288	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2289	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2290	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2291	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2292	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2293	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2294	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2295	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2296	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2297	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2298	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2299	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2300	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2301	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2302	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2303	06S65415Y48	RES,RK 823F 1/16 -CP
AUDIO-P.W.Board			R2304	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2305	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2306	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2307	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R2308	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2309	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2310	06S15615Y09	RES,RK 22RJ 1/16 -CP
AUDIO-P.W.Board			R2400	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2401	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2402	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2403	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2404	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2405	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2406	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2407	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2408	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2409	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2410	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2411	06S70072F29	RES,CP .101-J-1/4-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2412	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2413	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2414	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2415	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2416	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2417	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2418	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2419	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board			R2420	06S15593Y67	RES,RK 562F 1/10 -CP
AUDIO-P.W.Board			R2422	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board		#1	R2423	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board		#1	R2424	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board		#1	R2425	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board		#1	R2426	06S70072F53	RES,CP .102-J-1/4-CP
AUDIO-P.W.Board			R2427	06S45674W81	RES,RK 103J 1/10 -CP
AUDIO-P.W.Board			R2428	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2429	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2430	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2431	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2432	06S45674W57	RES,RK 102J 1/10 -CP
AUDIO-P.W.Board			R2433	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2434	06S15593Y73	RES,RK 103F 1/10 -CP
AUDIO-P.W.Board			R2435	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board			R2436	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board			R2437	06S15593Y95	RES,RK 823F 1/10 -CP
AUDIO-P.W.Board			R2438	06S15615Y49	RES,RK 102J 1/16 -CP
AUDIO-P.W.Board			R2439	06S65415Y59	RES,RK 684F 1/16 -CP
AUDIO-P.W.Board			R2440	06S15593Y89	RES,RK 473F 1/10 -CP
AUDIO-P.W.Board			R2441	06S45675W19	RES,RK 364J 1/10 -CP
AUDIO-P.W.Board			R2442	06S15593Y48	RES,RK 911F 1/10 -CP
AUDIO-P.W.Board			R2443	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board			R2444	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2445	06S45674W57	RES,RK 102J 1/10 -CP
AUDIO-P.W.Board			R2446	06S45674W57	RES,RK 102J 1/10 -CP
AUDIO-P.W.Board			R2447	06S45674W97	RES,RK 473J 1/10 -CP
AUDIO-P.W.Board			R2448	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2449	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2450	06S15615Y89	RES,RK 473J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2451	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2452	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2453	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2454	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2455	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R2456	06S64995F37	RES,RK 221J 1/8 -CP
AUDIO-P.W.Board			R2457	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2458	06S64995F29	RES,RK 101J 1/8 -CP
AUDIO-P.W.Board			R2459	06S15593Y81	RES,RK 223F 1/10 -CP
AUDIO-P.W.Board			R2461	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2462	06S15593Y48	RES,RK 911F 1/10 -CP
AUDIO-P.W.Board			R2463	06S15593Y48	RES,RK 911F 1/10 -CP
AUDIO-P.W.Board			R2464	06S15593Y48	RES,RK 911F 1/10 -CP
AUDIO-P.W.Board			R2469	06S15593Y25	RES,RK 101F 1/10 -CP
AUDIO-P.W.Board			R2470	06S15593Y25	RES,RK 101F 1/10 -CP
AUDIO-P.W.Board			R2471	06S15593Y25	RES,RK 101F 1/10 -CP
AUDIO-P.W.Board			R2472	06S15593Y25	RES,RK 101F 1/10 -CP
AUDIO-P.W.Board			R2500	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2600	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2601	06S65415Y38	RES,RK 123F 1/16 -CP
AUDIO-P.W.Board			R2602	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2603	06S45675W06	RES,RK 104J 1/10 -CP
AUDIO-P.W.Board			R2604	06S45675W06	RES,RK 104J 1/10 -CP
AUDIO-P.W.Board			R2605	06S65415Y38	RES,RK 123F 1/16 -CP
AUDIO-P.W.Board			R2606	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2607	06S45674W65	RES,RK 222J 1/10 -CP
AUDIO-P.W.Board			R2608	06S15615Y61	RES,RK 332J 1/16 -CP
AUDIO-P.W.Board			R2609	06S15615Y73	RES,RK 103J 1/16 -CP
AUDIO-P.W.Board			R2610	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2611	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R2612	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2614	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2615	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2616	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2617	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R2618	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2619	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2620	06S45674W41	RES,RK 221J 1/10 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2621	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2622	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2623	06S15593Y68	RES,RK 622F 1/10 -CP
AUDIO-P.W.Board			R2624	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2625	06S45675W03	RES,RK 753J 1/10 -CP
AUDIO-P.W.Board			R2626	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2627	06S70072F29	RES,CP .101-J-1/4-CP
AUDIO-P.W.Board			R2628	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2629	06S70072F37	RES,CP .221-J-1/4-CP
AUDIO-P.W.Board			R2630	06S15593Y93	RES,RK 683F 1/10 -CP
AUDIO-P.W.Board			R2631	06S15615Y77	RES,RK 153J 1/16 -CP
AUDIO-P.W.Board			R2632	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2633	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R2634	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R2635	06S45674W41	RES,RK 221J 1/10 -CP
AUDIO-P.W.Board			R2636	06S45674W33	RES,RK 101J 1/10 -CP
AUDIO-P.W.Board			R2637	06S45674W81	RES,RK 103J 1/10 -CP
AUDIO-P.W.Board			R2800	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2801	06S15615Y61	RES,RK 332J 1/16 -CP
AUDIO-P.W.Board			R2802	06S45674W65	RES,RK 222J 1/10 -CP
AUDIO-P.W.Board			R2803	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2804	06S45675W22	RES,RK 474J 1/10 -CP
AUDIO-P.W.Board			R2805	06S35083Y08	RES,RK 39RF 1/4 -CP
AUDIO-P.W.Board			R2806	06S35083Y82	RES,RK 36RF 1/4 -CP
AUDIO-P.W.Board			R2808	06S35083Y19	RES,RK 331F 1/4 -CP
AUDIO-P.W.Board			R2809	06S15615Y33	RES,RK 221J 1/16 -CP
AUDIO-P.W.Board		#1	R2810	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board		#1	R2811	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2812	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R2813	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board			R2814	06S15615Y65	RES,RK 472J 1/16 -CP
AUDIO-P.W.Board			R2815	06S35083Y43	RES,RK 333F 1/4 -CP
AUDIO-P.W.Board			R2816	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board			R2817	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2818	06S15615Y65	RES,RK 472J 1/16 -CP
AUDIO-P.W.Board			R2819	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board			R2821	06S35083Y13	RES,RK 101F 1/4 -CP
AUDIO-P.W.Board			R2822	06S35083Y13	RES,RK 101F 1/4 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R2823	06S45674W87	RES,RK 183J 1/10 -CP
AUDIO-P.W.Board			R2824	06S45674W87	RES,RK 183J 1/10 -CP
AUDIO-P.W.Board			R2825	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R2826	06S15615Y81	RES,RK 223J 1/16 -CP
AUDIO-P.W.Board			R3000	06S65415Y15	RES,RK 151F 1/16 -CP
AUDIO-P.W.Board			R3001	06S45348Y38	RES,RK 474F 1/4 -CP
AUDIO-P.W.Board			R3002	06S45348Y38	RES,RK 474F 1/4 -CP
AUDIO-P.W.Board			R3004	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R3006	06S65415Y32	RES,RK 392F 1/16 -CP
AUDIO-P.W.Board			R3007	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R3010	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R3011	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R3017	06S45674W97	RES,RK 473J 1/10 -CP
AUDIO-P.W.Board			R3018	06S45674W97	RES,RK 473J 1/10 -CP
AUDIO-P.W.Board			R3019	06S65415Y59	RES,RK 684F 1/16 -CP
AUDIO-P.W.Board			R3020	06S15616Y43	RES,RK 106J 1/16 -CP
AUDIO-P.W.Board			R3022	06S15615Y65	RES,RK 472J 1/16 -CP
AUDIO-P.W.Board			R3023	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R3024	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R3025	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R3042	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board		\$1	R3044	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board		#1	R3046	06S45675W43	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R3047	06S15615Y89	RES,RK 473J 1/16 -CP
AUDIO-P.W.Board			R3100	06S65415Y41	RES,RK 223F 1/16 -CP
AUDIO-P.W.Board			R3101	06S65415Y35	RES,RK 682F 1/16 -CP
AUDIO-P.W.Board			R3103	06S65415Y05	RES,RK 22RF 1/16 -CP
AUDIO-P.W.Board			R3104	06S15593Y19	RES,RK 56RF 1/10 -CP
AUDIO-P.W.Board			R3105	06S35083Y19	RES,RK 331F 1/4 -CP
AUDIO-P.W.Board		#1	R3200	06S45674W97	RES,RK 473J 1/10 -CP
AUDIO-P.W.Board			R3201	06S15594Y23	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R3202	06S15594Y23	RES,RK JUMPER1/10-CP
AUDIO-P.W.Board			R3400	06S15593Y53	RES,RK 152F 1/10 -CP
AUDIO-P.W.Board			R3401	06S65415Y31	RES,RK 332F 1/16 -CP
AUDIO-P.W.Board			R3403	06S15593Y67	RES,RK 562F 1/10 -CP
AUDIO-P.W.Board			R3404	06S65415Y37	RES,RK 103F 1/16 -CP
AUDIO-P.W.Board			R3405	06S15593Y51	RES,RK 122F 1/10 -CP
AUDIO-P.W.Board			R3407	06S45675W43	RES,RK JUMPER1/10-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			R3408	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board			R3410	06S15593Y82	RES,RK 243F 1/10 -CP
AUDIO-P.W.Board			R3411	06S15593Y59	RES,RK 272F 1/10 -CP
AUDIO-P.W.Board			R3413	06S15615Y25	RES,RK 101J 1/16 -CP
AUDIO-P.W.Board			R3414	06S15593Y96	RES,RK 913F 1/10 -CP
AUDIO-P.W.Board			R3416	06S15593Y85	RES,RK 333F 1/10 -CP
AUDIO-P.W.Board			R3418	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board			R3419	06S15593Y66	RES,RK 512F 1/10 -CP
AUDIO-P.W.Board			R3420	06S15593Y90	RES,RK 513F 1/10 -CP
AUDIO-P.W.Board			R3425	06S70072F77	RES,CP .103-J-1/4-CP
AUDIO-P.W.Board			R3426	06S15593Y71	RES,RK 822F 1/10 -CP
AUDIO-P.W.Board			R3427	06S15593Y85	RES,RK 333F 1/10 -CP
AUDIO-P.W.Board			R3428	06S15593Y98	RES,RK 114F 1/10 -CP
AUDIO-P.W.Board			R3431	06S15593Y67	RES,RK 562F 1/10 -CP
AUDIO-P.W.Board			R3500	06S35083Y37	RES,RK 103F 1/4 -CP
AUDIO-P.W.Board			R3501	06S35083Y41	RES,RK 223F 1/4 -CP
AUDIO-P.W.Board			R3502	06S15615Y59	RES,RK 272J 1/16 -CP
AUDIO-P.W.Board			R3503	06S35083Y41	RES,RK 223F 1/4 -CP
AUDIO-P.W.Board			R3504	06S35083Y44	RES,RK 393F 1/4 -CP
AUDIO-P.W.Board			R3505	06S35084Y48	RES,RK 823F 1/8 -CP
AUDIO-P.W.Board			R3510	06S70072F69	RES,CP .472-J-1/4-CP
AUDIO-P.W.Board			R3511	06S35095Y03	RES,RK 473J 1/4 -CP
AUDIO-P.W.Board			R3600	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R3601	06S15616Y23	RES,RK JUMPER1/16-CP
AUDIO-P.W.Board			R3608	06S15593Y96	RES,RK 913F 1/10 -CP
AUDIO-P.W.Board		#1	R3609	06S15593Y69	RES,RK 682F 1/10 -CP
AUDIO-P.W.Board		\$1	R3613	06S35095Y08	RES,RK JUMPER 1/4-CP
AUDIO-P.W.Board			SA3000	48-00954Z03	VST,CSA30-401Q-T -CP
AUDIO-P.W.Board			SW2000	40T15494Y14	SW,DETCT SPVG2106-E6
AUDIO-P.W.Board			SW2001	40T15494Y15	SW,DETCT SPVG1107-E6
AUDIO-P.W.Board			T3600	25T45058Y01	CHOKE,ALD-14-8-D -DB
AUDIO-P.W.Board			TML3000	29-16141Z01	OG-453070 -E5
AUDIO-P.W.Board			TML3001	29-16141Z01	OG-453070 -E5
AUDIO-P.W.Board			VT3100	24-13705Z02	IND,CBM63C 261 -E6
AUDIO-P.W.Board			XL2000	91-16024Z06	XTL,AT-41CD2 12.0-E9
AUDIO-P.W.Board			XL2200	91-17642Z04	XTL,NX3225SA 41.6-CP
AUDIO-P.W.Board			XL3000	91-16093Z01	XTL,NX3215SA 32.7-E1
AUDIO-P.W.Board			Z2201	91T15509Y08	EMI,BK1608HM102 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
AUDIO-P.W.Board			Z2202	91T15509Y07	EMI,BK1608HM601 -CP
AUDIO-P.W.Board			Z2203	91T15509Y07	EMI,BK1608HM601 -CP
AUDIO-P.W.Board			Z2204	91T15509Y07	EMI,BK1608HM601 -CP
AUDIO-P.W.Board			Z2205	91T15509Y04	EMI,BK1608HM121 -CP
AUDIO-P.W.Board			ZD3500	48-07043Z37	DIO,ZEN KDZ11V -CP
AUDIO-P.W.Board			ZD3501	48-21149Z26	DIO,ZEN DZ2J062M0LCP
AUDIO-P.W.Board			ZD3510	48-01607Z08	DIO,ZEN LUDZ3.9B -CP
AUDIO-P.W.Board			ZD3600	48-21879Z01	DIO,ZEN SM5S24A -EA
AUDIO-P.W.Board			ZD3607	48-06525Z23	DIO,ZEN UDZS 18B -CP
AUDIO-P.W.Board			ZD3608	48-06525Z23	DIO,ZEN UDZS 18B -CP
AUDIO-P.W.Board			ZD3609	48-16292Z01	DIO,ZEN RSB16X3N -CP
AUDIO-P.W.Board			ZD3610	48-06525Z23	DIO,ZEN UDZS 18B -CP
AUDIO-P.W.Board			ZD3611	48-06525Z23	DIO,ZEN UDZS 18B -CP
DISPLAY-P.W.Board			C4000	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4001	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4002	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4004	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4005	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4006	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4007	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4008	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4009	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4010	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4011	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4012	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4013	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4014	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4015	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4016	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4017	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4018	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4019	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4020	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4021	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4022	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4023	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4024	08S35349Y12	CAP,CER 105K-B0J -CP
DISPLAY-P.W.Board			C4025	08S65669Y03	CAP,CER 224KX7R1H-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			C4026	08S65676Y09	CAP,CER 475KX7R1H-CP
DISPLAY-P.W.Board			C4101	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4102	08S45231Y24	CAP,CER 82RJ-CH1H-CP
DISPLAY-P.W.Board			C4103	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4104	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4105	08S45232Y05	CAP,CER 102K-B1H -CP
DISPLAY-P.W.Board			C4107	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4108	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4109	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4110	08S65671Y04	CAP,CER 106KX5R1H-CP
DISPLAY-P.W.Board			C4111	08S45676W73	CAP,CER.103K-B1H -CP
DISPLAY-P.W.Board			C4112	08S35349Y11	CAP,CER 223K-B1H -CP
DISPLAY-P.W.Board			C4113	08S45232Y17	CAP,CER 104K-B0J -CP
DISPLAY-P.W.Board			C4114	08S35349Y17	CAP,CER 225K-B0J -CP
DISPLAY-P.W.Board			C4115	08S65671Y04	CAP,CER 106KX5R1H-CP
DISPLAY-P.W.Board			C4116	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4117	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4118	08S65671Y04	CAP,CER 106KX5R1H-CP
DISPLAY-P.W.Board			C4119	08S65670Y01	CAP,CER 106KX5R1C-CP
DISPLAY-P.W.Board			C4132	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4133	08S45676W83	CAP,CER 473K-B1C -CP
DISPLAY-P.W.Board			C4134	08S45677W50	CAP,CER 391J-CH1H-CP
DISPLAY-P.W.Board			C4136	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4137	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4138	08S65128F88	CAP,CER 104K-B1H -CP
DISPLAY-P.W.Board			C4139	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4143	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4144	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4146	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4147	08S65670Y09	CAP,CER 106KX5R1E-CP
DISPLAY-P.W.Board			C4148	08S65669Y03	CAP,CER 224KX7R1H-CP
DISPLAY-P.W.Board			C4301	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4306	08S35374W12	CAP,CER 106K-B0J -CP
DISPLAY-P.W.Board			C4307	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4319	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4320	08S35374W12	CAP,CER 106K-B0J -CP
DISPLAY-P.W.Board			C4321	08S45232Y21	CAP,CER 104K-B1A-CP
DISPLAY-P.W.Board			C4322	08S45232Y21	CAP,CER 104K-B1A-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			C4324	08S45231Y19	CAP,CER 33RJ-CH1H-CP
DISPLAY-P.W.Board			C4326	08S35349Y15	CAP,CER 474K-B1A -CP
DISPLAY-P.W.Board			C4327	08S45232Y11	CAP,CER 103K-B1C -CP
DISPLAY-P.W.Board			C4328	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4329	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4330	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			C4331	08S45676W85	CAP,CER 104K-B1C -CP
DISPLAY-P.W.Board			CB4000	09-16224Z03	FFC,FH28-60S-0.5SHEZ
DISPLAY-P.W.Board			CB4001	09-10492Z02	FFC,501864-5090 -EZ
DISPLAY-P.W.Board			CB4100	09-16224Z01	FFC,FH28-10S-0.5SHE9
DISPLAY-P.W.Board			CB4301	09-05352Z01	FFC,52271-0469 -E9
DISPLAY-P.W.Board			D4100	48-19711Z01	DIO,BAV99W -CP
DISPLAY-P.W.Board			E4100	23S65134W45	CAP,ELY 33R-1E(6)-E6
DISPLAY-P.W.Board			E4101	23S65134W45	CAP,ELY 33R-1E(6)-E6
DISPLAY-P.W.Board			E4102	23T75543Y08	CAP,MVA 101-1CF55-E6
DISPLAY-P.W.Board			E4103	23T75234Y21	CAP,MAR 33R-1E-F55E6
DISPLAY-P.W.Board			E4104	23S65134W45	CAP,ELY 33R-1E(6)-E6
DISPLAY-P.W.Board			E4106	23T75543Y08	CAP,MVA 101-1CF55-E6
DISPLAY-P.W.Board			E4302	23S65134W13	CAP,ELY 101-0J(6)-E6
DISPLAY-P.W.Board			IC4100	51-27977Z01	BD81A04AEFV-ME2 -SE5
DISPLAY-P.W.Board			IC4101	51-14365Z01	LT1946AEMS8E -SE2
DISPLAY-P.W.Board			IC4102	51T25259Y03	BA00ASFP-E2 -NE5
DISPLAY-P.W.Board			IC4103	51T25259Y03	BA00ASFP-E2 -NE5
DISPLAY-P.W.Board			IC4104	51-05314Z01	BA4560RFVM-TR -SE1
DISPLAY-P.W.Board			IC4300	51-25380Z01	BU17102AKV-ME2 -QE6
DISPLAY-P.W.Board			L4100	24-05547Z06	IND,SLF10145-H22RMEA
DISPLAY-P.W.Board			L4101	24T95456W27	FBI,BLM18PG181SH1-CP
DISPLAY-P.W.Board			L4102	24T45379Y04	IND,D53LC 4R7M -E2
DISPLAY-P.W.Board			L4300	24-06212Z07	FBI,BLM15BD601SH1-CP
DISPLAY-P.W.Board			L4301	24-06212Z07	FBI,BLM15BD601SH1-CP
DISPLAY-P.W.Board			Q4000	48-09581Z04	TR,KTA1505S-GRRTK-CP
DISPLAY-P.W.Board			Q4001	48-13000Z04	TR,LTC123JUBFS8-TLCP
DISPLAY-P.W.Board			Q4002	48-13000Z04	TR,LTC123JUBFS8-TLCP
DISPLAY-P.W.Board			Q4003	48-13000Z04	TR,LTC123JUBFS8-TLCP
DISPLAY-P.W.Board			Q4004	48-20288Z01	FET,MTM981400BBF -E2
DISPLAY-P.W.Board			Q4005	48-13000Z01	TR,LTC114EUBFS8-TLCP
DISPLAY-P.W.Board			Q4100	48T45388Y01	TR,2SA1797-T100 -E2
DISPLAY-P.W.Board			Q4101	48-13000Z03	TR,LTC114YUBFS8-TLCP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			Q4102	48T75205Y01	TR,FMC2A-T148 -CP
DISPLAY-P.W.Board			Q4103	48T63417F03	TR,C2412K-BR-96 -CP
DISPLAY-P.W.Board			Q4104	48T94581F01	TR,2SA1576A-T106 -CP
DISPLAY-P.W.Board			Q4300	48-13000Z06	TR,LTC143XUBFS8-TLCP
DISPLAY-P.W.Board			Q4301	48-13000Z04	TR,LTC123JUBFS8-TLCP
DISPLAY-P.W.Board			Q4302	48T94606F67	TR,DTA123YUA-T106-CP
DISPLAY-P.W.Board			Q4303	48-12999Z05	TR,LTA143XUBFS8-TLCP
DISPLAY-P.W.Board			Q4304	48-12999Z04	TR,LTA124EUBFS8-TLCP
DISPLAY-P.W.Board			R4000	06S65415Y12	RES,RK 82RF 1/16 -CP
DISPLAY-P.W.Board			R4001	06S65415Y10	RES,RK 56RF 1/16 -CP
DISPLAY-P.W.Board			R4002	06S65415Y13	RES,RK 101F 1/16 -CP
DISPLAY-P.W.Board			R4003	06S65415Y19	RES,RK 331F 1/16 -CP
DISPLAY-P.W.Board			R4004	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4005	06S65415Y18	RES,RK 271F 1/16 -CP
DISPLAY-P.W.Board			R4006	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4007	06S15615Y49	RES,RK 102J 1/16 -CP
DISPLAY-P.W.Board			R4008	06S65415Y19	RES,RK 331F 1/16 -CP
DISPLAY-P.W.Board			R4009	06S65415Y12	RES,RK 82RF 1/16 -CP
DISPLAY-P.W.Board			R4010	06S65415Y18	RES,RK 271F 1/16 -CP
DISPLAY-P.W.Board			R4011	06S65415Y12	RES,RK 82RF 1/16 -CP
DISPLAY-P.W.Board			R4012	06S65415Y18	RES,RK 271F 1/16 -CP
DISPLAY-P.W.Board			R4014	06S65415Y21	RES,RK 471F 1/16 -CP
DISPLAY-P.W.Board			R4015	06S65415Y14	RES,RK 121F 1/16 -CP
DISPLAY-P.W.Board			R4016	06S65415Y10	RES,RK 56RF 1/16 -CP
DISPLAY-P.W.Board			R4017	06S65415Y13	RES,RK 101F 1/16 -CP
DISPLAY-P.W.Board			R4018	06S65415Y08	RES,RK 39RF 1/16 -CP
DISPLAY-P.W.Board			R4019	06S65415Y12	RES,RK 82RF 1/16 -CP
DISPLAY-P.W.Board			R4020	06S65415Y14	RES,RK 121F 1/16 -CP
DISPLAY-P.W.Board			R4021	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4023	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4024	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4025	06S65415Y17	RES,RK 221F 1/16 -CP
DISPLAY-P.W.Board			R4026	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4027	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4029	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4030	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4031	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4032	06S65415Y15	RES,RK 151F 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			R4033	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4034	06S15615Y25	RES,RK 101J 1/16 -CP
DISPLAY-P.W.Board			R4035	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4036	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4037	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4038	06S15615Y73	RES,RK 103J 1/16 -CP
DISPLAY-P.W.Board			R4039	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4041	06S65415Y16	RES,RK 181F 1/16 -CP
DISPLAY-P.W.Board			R4043	06S15615Y63	RES,RK 392J 1/16 -CP
DISPLAY-P.W.Board			R4044	06S70072F77	RES,CP .103-J-1/4-CP
DISPLAY-P.W.Board			R4045	06S70072F43	RES,CP .391-J-1/4-CP
DISPLAY-P.W.Board			R4048	06S15615Y73	RES,RK 103J 1/16 -CP
DISPLAY-P.W.Board			R4050	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4051	06S65415Y18	RES,RK 271F 1/16 -CP
DISPLAY-P.W.Board			R4052	06S15615Y69	RES,RK 682J 1/16 -CP
DISPLAY-P.W.Board			R4055	06S15615Y69	RES,RK 682J 1/16 -CP
DISPLAY-P.W.Board			R4061	06S65415Y23	RES,RK 681F 1/16 -CP
DISPLAY-P.W.Board			R4100	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4101	06S65415Y25	RES,RK 102F 1/16 -CP
DISPLAY-P.W.Board			R4103	06S15615Y73	RES,RK 103J 1/16 -CP
DISPLAY-P.W.Board			R4104	06S15593Y75	RES,RK 123F 1/10 -CP
DISPLAY-P.W.Board			R4105	06S15593Y77	RES,RK 153F 1/10 -CP
DISPLAY-P.W.Board			R4106	06S15593Y27	RES,RK 121F 1/10 -CP
DISPLAY-P.W.Board			R4108	06S15593Y52	RES,RK 132F 1/10 -CP
DISPLAY-P.W.Board			R4109	06S15593Y82	RES,RK 243F 1/10 -CP
DISPLAY-P.W.Board			R4110	06S70072F21	RES,CP .47R-J-1/4-CP
DISPLAY-P.W.Board			R4111	06S70072F21	RES,CP .47R-J-1/4-CP
DISPLAY-P.W.Board			R4114	06S15593Y52	RES,RK 132F 1/10 -CP
DISPLAY-P.W.Board			R4115	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4117	06S15615Y42	RES,RK 511J 1/16 -CP
DISPLAY-P.W.Board			R4118	06S15593Y91	RES,RK 563F 1/10 -CP
DISPLAY-P.W.Board			R4119	06S65415Y13	RES,RK 101F 1/16 -CP
DISPLAY-P.W.Board			R4120	06S65415Y40	RES,RK 183F 1/16 -CP
DISPLAY-P.W.Board			R4121	06S65415Y29	RES,RK 222F 1/16 -CP
DISPLAY-P.W.Board			R4122	06S70072F62	RES,CP .242-J-1/4-CP
DISPLAY-P.W.Board			R4123	06S70072F62	RES,CP .242-J-1/4-CP
DISPLAY-P.W.Board			R4124	06S15593Y91	RES,RK 563F 1/10 -CP
DISPLAY-P.W.Board			R4125	06S65415Y37	RES,RK 103F 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			R4126	06S15593Y96	RES,RK 913F 1/10 -CP
DISPLAY-P.W.Board			R4127	06S15593Y96	RES,RK 913F 1/10 -CP
DISPLAY-P.W.Board			R4128	06S65415Y48	RES,RK 823F 1/16 -CP
DISPLAY-P.W.Board			R4129	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4130	06S70072F29	RES,CP .101-J-1/4-CP
DISPLAY-P.W.Board			R4131	06S15615Y97	RES,RK 104J 1/16 -CP
DISPLAY-P.W.Board			R4132	06S15615Y82	RES,RK 243J 1/16 -CP
DISPLAY-P.W.Board			R4133	06S15615Y71	RES,RK 822J 1/16 -CP
DISPLAY-P.W.Board			R4134	06S15593Y89	RES,RK 473F 1/10 -CP
DISPLAY-P.W.Board			R4135	06S15594Y11	RES,RK 364F 1/10 -CP
DISPLAY-P.W.Board			R4136	06S15593Y98	RES,RK 114F 1/10 -CP
DISPLAY-P.W.Board			R4137	06S15593Y69	RES,RK 682F 1/10 -CP
DISPLAY-P.W.Board			R4138	06S15593Y74	RES,RK 113F 1/10 -CP
DISPLAY-P.W.Board			R4139	06S15615Y82	RES,RK 243J 1/16 -CP
DISPLAY-P.W.Board			R4141	06S65415Y37	RES,RK 103F 1/16 -CP
DISPLAY-P.W.Board			R4142	06S45675W43	RES,RK JUMPER1/10-CP
DISPLAY-P.W.Board			R4143	06S65415Y48	RES,RK 823F 1/16 -CP
DISPLAY-P.W.Board			R4144	06S65415Y33	RES,RK 472F 1/16 -CP
DISPLAY-P.W.Board			R4145	06S65415Y48	RES,RK 823F 1/16 -CP
DISPLAY-P.W.Board			R4146	06S15593Y52	RES,RK 132F 1/10 -CP
DISPLAY-P.W.Board			R4148	06S35095Y08	RES,RK JUMPER 1/4-CP
DISPLAY-P.W.Board			R4149	06S45674W01	RES,RK 2R2J 1/10 -CP
DISPLAY-P.W.Board			R4150	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4152	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4153	06S70072F77	RES,CP .103-J-1/4-CP
DISPLAY-P.W.Board			R4154	06S65415Y29	RES,RK 222F 1/16 -CP
DISPLAY-P.W.Board			R4156	06S15593Y79	RES,RK 183F 1/10 -CP
DISPLAY-P.W.Board			R4158	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4161	06S15594Y12	RES,RK 394F 1/10 -CP
DISPLAY-P.W.Board			R4163	06S65415Y29	RES,RK 222F 1/16 -CP
DISPLAY-P.W.Board			R4182	06S15594Y19	RES,RK 754F 1/10 -CP
DISPLAY-P.W.Board			R4300	06S35083Y29	RES,RK 222F 1/4 -CP
DISPLAY-P.W.Board			R4301	06S15593Y25	RES,RK 101F 1/10 -CP
DISPLAY-P.W.Board			R4302	06S35083Y49	RES,RK 104F 1/4 -CP
DISPLAY-P.W.Board			R4303	06S35083Y08	RES,RK 39RF 1/4 -CP
DISPLAY-P.W.Board			R4304	06S35083Y01	RES,RK 10RF 1/4 -CP
DISPLAY-P.W.Board			R4305	06S15593Y25	RES,RK 101F 1/10 -CP
DISPLAY-P.W.Board			R4306	06S35083Y29	RES,RK 222F 1/4 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			R4307	06S35083Y49	RES,RK 104F 1/4 -CP
DISPLAY-P.W.Board			R4311	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4312	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4313	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4314	06S65415Y07	RES,RK 33RF 1/16 -CP
DISPLAY-P.W.Board			R4319	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4320	06S15615Y49	RES,RK 102J 1/16 -CP
DISPLAY-P.W.Board			R4321	06S35083Y84	RES,RK 51RF 1/4 -CP
DISPLAY-P.W.Board			R4322	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4323	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4333	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4335	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4336	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4337	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4338	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4339	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4346	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4347	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4348	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4349	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4350	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4351	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4352	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4353	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4355	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4356	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4357	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4358	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4360	06S15615Y81	RES,RK 223J 1/16 -CP
DISPLAY-P.W.Board			R4361	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4362	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4363	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4364	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4365	06S15615Y09	RES,RK 22RJ 1/16 -CP
DISPLAY-P.W.Board			R4394	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4395	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4396	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4397	06S15616Y23	RES,RK JUMPER1/16-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
DISPLAY-P.W.Board			R4398	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4399	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4400	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4401	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4402	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4403	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4404	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4405	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4406	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4407	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4408	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4409	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4410	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			R4411	06S15616Y23	RES,RK JUMPER1/16-CP
DISPLAY-P.W.Board			SD4100	48T45286Y01	DIO,SHT RB050L-40-E1
DISPLAY-P.W.Board			SD4101	48-20962Z01	DIO,SHT DB2440400LE1
DISPLAY-P.W.Board			TH4100	48T75219Y02	TMT,NCPI8WB473F1S-CP
DISPLAY-P.W.Board			TML4000	29-16141Z01	OG-453070 -E5
DISPLAY-P.W.Board			TML4001	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4003	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4004	29-16141Z01	OG-453070 -E5
DISPLAY-P.W.Board			TML4005	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4006	29-16141Z01	OG-453070 -E5
DISPLAY-P.W.Board			TML4007	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4008	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4009	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			TML4010	29T45687Y01	CONTACT,OG363050 -E5
DISPLAY-P.W.Board			Z4300	24-06212Z06	FBI,BLM15BB221SH1-CP
DISPLAY-P.W.Board			ZD4101	48-06525Z13	DIO,ZEN UDZS 6.8B-CP
DISPLAY-P.W.Board			ZD4300	48-06525Z11	DIO,ZEN UDZS 5.6B-CP
DISPLAY-P.W.Board			ZD4301	48-06525Z11	DIO,ZEN UDZS 5.6B-CP
DISPLAY-P.W.Board			ZD4302	48-06525Z11	DIO,ZEN UDZS 5.6B-CP
DISPLAY-P.W.Board			ZD4303	48-06525Z11	DIO,ZEN UDZS 5.6B-CP
BT-P.W.Board			C9000	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board			C9001	08S45539Y01	CAP,CER 102KX7R2J-CP
BT-P.W.Board			C9002	08S45539Y01	CAP,CER 102KX7R2J-CP
BT-P.W.Board			C9003	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board			C9004	08S45676W80	CAP,CER 223K-B1E -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
BT-P.W.Board			C9005	08S65670Y01	CAP,CER 106KX5R1C-CP
BT-P.W.Board			C9006	08S65670Y01	CAP,CER 106KX5R1C-CP
BT-P.W.Board		#1	C9007	08S35350Y03	CAP,CER 224K-B1C -CP
BT-P.W.Board			C9008	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board			C9010	08S65670Y06	CAP,CER 226KX5R1A-CP
BT-P.W.Board			C9011	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board			C9012	08S45232Y05	CAP,CER 102K-B1H -CP
BT-P.W.Board			C9013	08S45232Y05	CAP,CER 102K-B1H -CP
BT-P.W.Board			C9020	08S65674Y05	CAP,CER 105KX5R1C-CP
BT-P.W.Board		#1	C9021	08S45677W36	CAP,CER.101J-CH1H-CP
BT-P.W.Board		#1	C9022	08S45677W36	CAP,CER.101J-CH1H-CP
BT-P.W.Board		#1	C9023	08S45677W36	CAP,CER.101J-CH1H-CP
BT-P.W.Board		#1	C9024	08S45539Y04	CAP,CER 103KX7R2J-CP
BT-P.W.Board		#1	C9025	08S45676W65	CAP,CER.222K-B1H -CP
BT-P.W.Board		#1	C9026	08S45676W65	CAP,CER.222K-B1H -CP
BT-P.W.Board		#1	C9027	08S45676W65	CAP,CER.222K-B1H -CP
BT-P.W.Board			C9028	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board			C9029	08S65669Y03	CAP,CER 224KX7R1H-CP
BT-P.W.Board		#1	C9030	08S65670Y09	CAP,CER 106KX5R1E-CP
BT-P.W.Board			CB9000	09-25213Z01	WTB,TCX3400-011187-T
BT-P.W.Board			CB9001	09T85454W02	WTB,53398-0271-E6
BT-P.W.Board			CB9002	09T15548Y03	WTB,SM(3)B-SRSS -E2
BT-P.W.Board			CB9005	09-24985Z03	BTB,IMSA9984B-50Y-EK
BT-P.W.Board		#1	CB9006	09-16961Z09	WTB,A1257WV0-10PS-ED
BT-P.W.Board			D9000	48-05164Z01	DIO,1SS352-TPH3 -CP
BT-P.W.Board			E9000	23S65134W45	CAP,ELY 33R-1E(6)-E6
BT-P.W.Board			E9001	23S75244Y03	CAP,ELY 101-OJ -E3
BT-P.W.Board			E9002	23S75244Y03	CAP,ELY 101-OJ -E3
BT-P.W.Board			IC9000	51T25183Y03	TC7SET08FU,JF-L -CP
BT-P.W.Board			IC9001	51-23994Z02	ASSY,UGZZC-G04A -DB
BT-P.W.Board			IC9002	51-04432Z01	BD15KA5FP-E2 -NE5
BT-P.W.Board		#1	IC9003	51-04637Z01	TC74ACT04FT-EL -SE5
BT-P.W.Board			L9000	24T95456W10	FBI,BLM18AG221SH1-CP
BT-P.W.Board		#1	PS9000	48-27319Z01	POLY,SW1812L150/24E2
BT-P.W.Board			Q9000	48T25737Y02	TR,UMD3N-TR -CP
BT-P.W.Board			Q9001	48T25737Y02	TR,UMD3N-TR -CP
BT-P.W.Board			Q9002	48-20989Z01	TR,DSC700300L -E2
BT-P.W.Board			R9000	06S35095Y08	RES,RK JUMPER 1/4-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
BT-P.W.Board			R9002	06S70072F29	RES,CP .101-J-1/4-CP
BT-P.W.Board			R9003	06S70072F29	RES,CP .101-J-1/4-CP
BT-P.W.Board			R9004	06S70072F53	RES,CP .102-J-1/4-CP
BT-P.W.Board			R9005	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9006	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9007	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9008	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9009	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9010	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9011	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9012	06-25919Z44	RES,RK 5R1F 1/16 -CP
BT-P.W.Board			R9013	06S15615Y81	RES,RK 223J 1/16 -CP
BT-P.W.Board			R9014	06S70072F17	RES,CP .33R-J-1/4-CP
BT-P.W.Board			R9015	06S45675W23	RES,RK 514J 1/10 -CP
BT-P.W.Board			R9016	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9017	06S70072F29	RES,CP .101-J-1/4-CP
BT-P.W.Board			R9018	06S15615Y25	RES,RK 101J 1/16 -CP
BT-P.W.Board			R9019	06S15615Y09	RES,RK 22RJ 1/16 -CP
BT-P.W.Board			R9020	06S15615Y09	RES,RK 22RJ 1/16 -CP
BT-P.W.Board			R9021	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9022	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9023	06S45674W69	RES,RK 332J 1/10 -CP
BT-P.W.Board			R9024	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9025	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9026	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9027	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9028	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9029	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9030	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9031	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9032	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9033	06S45674W33	RES,RK 101J 1/10 -CP
BT-P.W.Board			R9034	06S45674W39	RES,RK 181J 1/10 -CP
BT-P.W.Board			R9036	06S15616Y23	RES,RK JUMPER1/16-CP
BT-P.W.Board			R9037	06S65415Y42	RES,RK 273F 1/16 -CP
BT-P.W.Board			R9038	06S15615Y65	RES,RK 472J 1/16 -CP
BT-P.W.Board			R9039	06S15615Y73	RES,RK 103J 1/16 -CP
BT-P.W.Board			R9040	06S15615Y89	RES,RK 473J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
BT-P.W.Board			R9041	06S15615Y89	RES,RK 473J 1/16 -CP
BT-P.W.Board			R9042	06S70072F47	RES,CP .561-J-1/4-CP
BT-P.W.Board			R9043	06S45674W01	RES,RK 2R2J 1/10 -CP
BT-P.W.Board			R9044	06S70072F05	RES,CP .10R-J-1/4-CP
BT-P.W.Board			R9045	06S45675W43	RES,RK JUMPER1/10-CP
BT-P.W.Board		#1	R9046	06S45674W97	RES,RK 473J 1/10 -CP
BT-P.W.Board		#1	R9047	06S70072F53	RES,CP .102-J-1/4-CP
BT-P.W.Board		#1	R9048	06S70072F53	RES,CP .102-J-1/4-CP
BT-P.W.Board		#1	R9049	06S70072F53	RES,CP .102-J-1/4-CP
BT-P.W.Board		#1	R9050	06S45674W97	RES,RK 473J 1/10 -CP
BT-P.W.Board		#1	R9051	06S45674W97	RES,RK 473J 1/10 -CP
BT-P.W.Board		\$1	R9054	06S45675W43	RES,RK JUMPER1/10-CP
BT-P.W.Board		#1	R9055	06S45675W43	RES,RK JUMPER1/10-CP
BT-P.W.Board			Z9000	91-24457Z01	EMI,EXC24CG900U -CP
BT-P.W.Board			Z9001	91-24457Z01	EMI,EXC24CG900U -CP
BT-P.W.Board			Z9002	91-24457Z01	EMI,EXC24CG900U -CP
BT-P.W.Board			Z9003	91-24457Z01	EMI,EXC24CG900U -CP
BT-P.W.Board			ZD9001	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9002	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9003	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9004	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9005	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9006	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9007	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9008	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9009	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9010	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board			ZD9011	48-25907Z01	DIO,ZEN PESD5V0F1-CP
BT-P.W.Board		#1	ZD9016	48-21149Z23	DIO,ZEN DZ2J056M0LCP
BT-P.W.Board		#1	ZD9017	48-21149Z23	DIO,ZEN DZ2J056M0LCP
BT-P.W.Board		#1	ZD9018	48-21149Z23	DIO,ZEN DZ2J056M0LCP
BT-P.W.Board			ZD9019	48-16145Z36	DIO,ZEN PZU9.1B1 -CP
HD-P.W.Board(X009)		#1	C3850	08S45231Y05	CAP,CER 2R0C-CK1H-CP
HD-P.W.Board(X009)		#1	C3851	08S45677W04	CAP,CER.2R0C-CH1H-CP
HD-P.W.Board(X009)		#1	C3852	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3853	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3854	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3855	08S45676W93	CAP,CER 224K-B1A -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
HD-P.W.Board(X009)		#1	C3856	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3857	08S65668Y05	CAP,CER 224KX5R1A-CP
HD-P.W.Board(X009)		#1	C3858	08S65668Y05	CAP,CER 224KX5R1A-CP
HD-P.W.Board(X009)		#1	C3859	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3860	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3861	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3862	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3863	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3864	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3865	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3866	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3867	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3868	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3869	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3870	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3871	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3872	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3873	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3874	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3875	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3876	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3877	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3878	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3879	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3880	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3881	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3882	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3883	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3884	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3885	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3886	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3887	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3888	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3889	08S65667Y05	CAP,CER 105KX5R1A-CP
HD-P.W.Board(X009)		#1	C3890	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3891	08S65667Y05	CAP,CER 105KX5R1A-CP
HD-P.W.Board(X009)		#1	C3892	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3893	08S35374W12	CAP,CER 106K-B0J -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
HD-P.W.Board(X009)		#1	C3894	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3895	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3896	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3897	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3898	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3899	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3901	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3902	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3903	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3904	08S45676W93	CAP,CER 224K-B1A -CP
HD-P.W.Board(X009)		#1	C3905	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3906	08S65676Y08	CAP,CER 106K-X7R1ACP
HD-P.W.Board(X009)		#1	C3907	08S65676Y02	CAP,CER 475KX7R1A-CP
HD-P.W.Board(X009)		#1	C3908	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3909	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3910	08S45232Y21	CAP,CER 104K-B1A-CP
HD-P.W.Board(X009)		#1	C3911	08S35374W12	CAP,CER 106K-B0J -CP
HD-P.W.Board(X009)		#1	C3912	08S45231Y38	CAP,CER 102J-CH1H-CP
HD-P.W.Board(X009)		#1	CB3850	09-19687Z01	PIN,IMSA9210B-20Z-DB
HD-P.W.Board(X009)		#1	E3850	23-09405Z06	CAP,CX 391-0D -E2
HD-P.W.Board(X009)		#1	E3851	23-09405Z12	CAP,CX 151-0J -E2
HD-P.W.Board(X009)		#1	E3852	23-09405Z12	CAP,CX 151-0J -E2
HD-P.W.Board(X009)		#1	IC3850	51-04432Z03	BD12KA5FP-E2 -NE5
HD-P.W.Board(X009)		#1	IC3851	51-17563Z02	SAF3560HV/V1100 -QT
HD-P.W.Board(X009)		#1	IC3852	83-22687Z65	V5.001G500MHD RADIO
HD-P.W.Board(X009)		#1	IC3852	51-18520Z01	MX25L8035EM21-10G-ST
HD-P.W.Board(X009)		#1	IC3853	51-22669Z02	MD56V62161M-75TAL-ST
HD-P.W.Board(X009)		#1	L3850	24T95456W11	FBI,BLM18AG601SH1-CP
HD-P.W.Board(X009)		#1	L3851	24T95456W31	FBI,BLM18PG471SH1-CP
HD-P.W.Board(X009)		#1	L3852	24T95456W01	FBI,BLM18PG300SH1-CP
HD-P.W.Board(X009)		#1	L3853	24T95456W01	FBI,BLM18PG300SH1-CP
HD-P.W.Board(X009)		#1	L3854	24T95456W01	FBI,BLM18PG300SH1-CP
HD-P.W.Board(X009)		#1	L3855	24T95456W31	FBI,BLM18PG471SH1-CP
HD-P.W.Board(X009)		#1	R3850	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3851	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3854	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3855	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3856	06S15616Y23	RES,RK JUMPER1/16-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
HD-P.W.Board(X009)		#1	R3857	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3858	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3860	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3861	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3862	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3863	06S45675W43	RES,RK JUMPER1/10-CP
HD-P.W.Board(X009)		#1	R3864	06S45675W43	RES,RK JUMPER1/10-CP
HD-P.W.Board(X009)		#1	R3865	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3866	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3867	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3868	06S65415Y37	RES,RK 103F 1/16 -CP
HD-P.W.Board(X009)		#1	R3869	06S65415Y37	RES,RK 103F 1/16 -CP
HD-P.W.Board(X009)		#1	R3870	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3871	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3872	06S65415Y37	RES,RK 103F 1/16 -CP
HD-P.W.Board(X009)		#1	R3873	06S65415Y37	RES,RK 103F 1/16 -CP
HD-P.W.Board(X009)		#1	R3874	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3875	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3876	06S65415Y31	RES,RK 332F 1/16 -CP
HD-P.W.Board(X009)		#1	R3877	06S65415Y31	RES,RK 332F 1/16 -CP
HD-P.W.Board(X009)		#1	R3878	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3879	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3880	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3881	06S45675W43	RES,RK JUMPER1/10-CP
HD-P.W.Board(X009)		#1	R3882	06S65415Y09	RES,RK 47RF 1/16 -CP
HD-P.W.Board(X009)		#1	R3883	06S15615Y13	RES,RK 33RJ 1/16 -CP
HD-P.W.Board(X009)		#1	R3884	06S65415Y09	RES,RK 47RF 1/16 -CP
HD-P.W.Board(X009)		#1	R3885	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3886	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3887	06S15616Y23	RES,RK JUMPER1/16-CP
HD-P.W.Board(X009)		#1	R3900	06S45674W53	RES,RK 681J 1/10 -CP
HD-P.W.Board(X009)		#1	RA3850	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3851	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3852	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3853	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3854	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3855	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3856	06S15771Y07	RES,ARYEXB28V33RJ-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
HD-P.W.Board(X009)		#1	RA3857	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	RA3858	06S15771Y07	RES,ARYEXB28V33RJ-CP
HD-P.W.Board(X009)		#1	XL3850	91-17642Z15	XTL,NX3225SA 28.2-CP
ESC-P.W.Board			C1001	08S45677W42	CAP,CER.181J-CH1H-CP
ESC-P.W.Board			C1002	08S65669Y03	CAP,CER 224KX7R1H-CP
ESC-P.W.Board			CB1001	09-19907Z01	BTB,IMSA9984B-140YEZ
ESC-P.W.Board			CB1002	09-19907Z01	BTB,IMSA9984B-140YEZ
ESC-P.W.Board			LD1001	48-17569Z02	LED,BLU SMLA12BC7TCP
ESC-P.W.Board			Q1001	48-13000Z04	TR,LTC123JUBFS8-TLCP
ESC-P.W.Board			R1001	06S45674W45	RES,RK 331J 1/10 -CP
ESC-P.W.Board			ZD1001	48-06525Z07	DIO,ZEN UDZS 3.9B-CP
BL.IF-P.W.Board			CB4800	09-05209Z05	FFC,IMSA9617S-08Y-E9
BL.IF-P.W.Board			CB4801	09-16224Z01	FFC,FH28-10S-0.5SHE9
Miscellaneous			CH3300	09-07002Z01	ASSY,ANIA-0001-01A
Miscellaneous			ET4301	40-23896Z01	ASSY,EMU601G2A630
Miscellaneous		\$1	ET9002	09-28037Z01	ASSY,ANID-0191-01A
Miscellaneous		#1	ET9006	09-28038Z01	ASSY,ANID-0190-01A
Miscellaneous			LCD4000	65-24027Z01	ASSY,CLAA090LC41CW
Miscellaneous			M3300	59-02037Z01	MOTOR,FF-180SH-13260
Miscellaneous			M9001	59-14185Z02	MOTOR,ASB0412MA-9F1B
Miscellaneous		#1	SD1	82-28084Z01	BMAH4GMDF93SD_US
MAIN(DV53U11V)- P.W.Board			C206	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C207	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C208	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C209	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C210	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C211	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C215	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C216	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C219	08S45232Y11	CAP,CER 103K-B1C -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN(DV53U11V)- P.W.Board			C301	08S45231Y06	CAP,CER 3R0C-CJ1H-CP
MAIN(DV53U11V)- P.W.Board			C302	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C305	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C306	08S45231Y13	CAP,CER 10RD-CH1H-CP
MAIN(DV53U11V)- P.W.Board			C307	08S45232Y15	CAP,CER 473K-B1A -CP
MAIN(DV53U11V)- P.W.Board			C308	08S45232Y01	CAP,CER 221K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C309	08S45232Y01	CAP,CER 221K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C310	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C311	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C315	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C316	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C317	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C318	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C319	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C320	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C324	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C325	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C326	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C327	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C328	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN(DV53U11V)-			C329	08S65668Y04	CAP,CER 104KX5R1A-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

P.W.Board					
MAIN(DV53U11V)- P.W.Board			C330	08S45231Y38	CAP,CER 102J-CH1H-CP
MAIN(DV53U11V)- P.W.Board			C331	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C332	08S45231Y38	CAP,CER 102J-CH1H-CP
MAIN(DV53U11V)- P.W.Board			C333	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C335	08S35374W12	CAP,CER 106K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C338	08S35374W12	CAP,CER 106K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C351	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C352	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C353	08S35374W12	CAP,CER 106K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C354	08S35374W12	CAP,CER 106K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C356	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN(DV53U11V)- P.W.Board			C360	08S35374W10	CAP,CER 225K-B1A -CP
MAIN(DV53U11V)- P.W.Board			C402	08S45232Y15	CAP,CER 473K-B1A -CP
MAIN(DV53U11V)- P.W.Board			C701	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C702	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C709	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN(DV53U11V)- P.W.Board			C710	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN(DV53U11V)- P.W.Board			C711	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN(DV53U11V)- P.W.Board			C712	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C716	08S45676W85	CAP,CER 104K-B1C -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN(DV53U11V)- P.W.Board			C717	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C718	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C719	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN(DV53U11V)- P.W.Board			C723	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C724	08S45676W85	CAP,CER 104K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C729	08S35349Y16	CAP,CER 105K-B1A -CP
MAIN(DV53U11V)- P.W.Board			C801	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C810	08S35374W11	CAP,CER 475K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C811	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN(DV53U11V)- P.W.Board			C812	08S45232Y10	CAP,CER 682K-B1E -CP
MAIN(DV53U11V)- P.W.Board			C831	08S35374W12	CAP,CER 106K-B0J -CP
MAIN(DV53U11V)- P.W.Board			C841	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN(DV53U11V)- P.W.Board			CB100	09-28272Z01	FFC,FH52-50S-0.5SHEQ
MAIN(DV53U11V)- P.W.Board			CB301	09T75287Y24	FFC,IMSA9631S-24Y-ED
MAIN(DV53U11V)- P.W.Board			CB701	09T75287Y24	FFC,IMSA9631S-24Y-ED
MAIN(DV53U11V)- P.W.Board			CL300	91-19150Z03	OSC,CER CSTCW22M6-CP
MAIN(DV53U11V)- P.W.Board			IC300	83-25323Z48	V6.920DV53U11V
MAIN(DV53U11V)- P.W.Board			IC300	51-17737Z01	TC94A96MFG -QT
MAIN(DV53U11V)- P.W.Board			IC700	51-24963Z01	BD8217EFV-E2 -SED
MAIN(DV53U11V)- P.W.Board			IC800	51-23593Z04	BD00GA5EEFJ-ME2 -SE2
MAIN(DV53U11V)-			IC803	51-23593Z05	BD00IA5EEFJ-ME2 -SE2

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

P.W.Board					
MAIN(DV53U11V)- P.W.Board			PT302	48-14634Z01	PHTTR,SML810TB-T86CP
MAIN(DV53U11V)- P.W.Board			PT304	48-14634Z01	PHTTR,SML810TB-T86CP
MAIN(DV53U11V)- P.W.Board			Q301	48-17707Z02	TR,DSA7003S0L -E2
MAIN(DV53U11V)- P.W.Board			Q302	48-17707Z02	TR,DSA7003S0L -E2
MAIN(DV53U11V)- P.W.Board			Q303	48-17549Z01	TR,DSC500100L -CP
MAIN(DV53U11V)- P.W.Board			Q304	48-17549Z01	TR,DSC500100L -CP
MAIN(DV53U11V)- P.W.Board			Q360	48-17707Z02	TR,DSA7003S0L -E2
MAIN(DV53U11V)- P.W.Board			Q361	48-13000Z06	TR,LTC143XUBFS8-TLCP
MAIN(DV53U11V)- P.W.Board			R110	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R111	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R112	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R113	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R114	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R115	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R116	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R120	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R122	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R123	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R124	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R125	06S15615Y73	RES,RK 103J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN(DV53U11V)- P.W.Board			R126	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R301	06S15615Y67	RES,RK 562J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R302	06-02713Z21	RES,RK 333D 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R303	06-02713Z23	RES,RK 473D 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R304	06S15593Y60	RES,RK 302F 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R305	06S45675W07	RES,RK 114J 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R306	06S45675W11	RES,RK 164J 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R307	06S65415Y61	RES,RK 105F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R308	06S15615Y37	RES,RK 331J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R309	06S15615Y41	RES,RK 471J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R310	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R311	06S65415Y49	RES,RK 104F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R312	06S65415Y49	RES,RK 104F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R313	06S15615Y55	RES,RK 182J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R314	06S15615Y55	RES,RK 182J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R322	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R323	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R326	06S35083Y01	RES,RK 10RF 1/4 -CP
MAIN(DV53U11V)- P.W.Board			R327	06S65415Y36	RES,RK 822F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R332	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)-			R333	06S15615Y73	RES,RK 103J 1/16 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

P.W.Board					
MAIN(DV53U11V)- P.W.Board			R337	06S70072F21	RES,CP .47R-J-1/4-CP
MAIN(DV53U11V)- P.W.Board			R339	06S15615Y71	RES,RK 822J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R340	06S15615Y67	RES,RK 562J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R341	06S15615Y53	RES,RK 152J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R342	06S15615Y51	RES,RK 122J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R345	06S15616Y18	RES,RK 684J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R346	06S15615Y97	RES,RK 104J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R348	06S15615Y59	RES,RK 272J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R360	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R361	06S45674W47	RES,RK 391J 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R362	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R717	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN(DV53U11V)- P.W.Board			R718	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN(DV53U11V)- P.W.Board			R719	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN(DV53U11V)- P.W.Board			R720	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN(DV53U11V)- P.W.Board			R721	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN(DV53U11V)- P.W.Board			R731	06S65415Y43	RES,RK 333F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R734	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R735	06S15593Y25	RES,RK 101F 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R736	06S35083Y15	RES,RK 151F 1/4 -CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN(DV53U11V)- P.W.Board			R741	06S65522Y07	RES,RK R33F 1/4 -CP
MAIN(DV53U11V)- P.W.Board			R742	06S65522Y07	RES,RK R33F 1/4 -CP
MAIN(DV53U11V)- P.W.Board			R820	06S15615Y61	RES,RK 332J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R831	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R833	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R841	06S45675W05	RES,RK 913J 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R842	06S45674W75	RES,RK 562J 1/10 -CP
MAIN(DV53U11V)- P.W.Board			R850	06S65415Y40	RES,RK 183F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R851	06S65415Y31	RES,RK 332F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R861	06S65415Y43	RES,RK 333F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			R862	06S65415Y44	RES,RK 393F 1/16 -CP
MAIN(DV53U11V)- P.W.Board			RA101	06S15771Y07	RES,ARYEXB28V33RJ-CP
MAIN(DV53U11V)- P.W.Board			RA102	06S15771Y07	RES,ARYEXB28V33RJ-CP
MAIN(DV53U11V)- P.W.Board			RA103	06S15771Y07	RES,ARYEXB28V33RJ-CP
MAIN(DV53U11V)- P.W.Board			RA104	06S15771Y07	RES,ARYEXB28V33RJ-CP
MAIN(DV53U11V)- P.W.Board			RA105	06S15771Y12	RES,ARYEXB28V82RJ-CP
MAIN(DV53U11V)- P.W.Board			RA300	06S15771Y21	RES,ARY 471J 4 -CP
MAIN(DV53U11V)- P.W.Board			SD301	48-16034Z01	DIO,SHT RB751V40 -CP
MAIN(DV53U11V)- P.W.Board			SD302	48-16034Z01	DIO,SHT RB751V40 -CP
MAIN(DV53U11V)- P.W.Board			SW301	40-24933Z01	SW,DETCT SPVT1102-E6
MAIN(DV53U11V)-			TH301	48T75201Y03	TMT,NCP15XH103F0S-CP

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
P.W.Board					
SW(DV53U11V)- P.W.Board			LD300	48-14635Z02	LED,SML-S13RT-T68-CP
SW(DV53U11V)- P.W.Board			LD304	48-14635Z02	LED,SML-S13RT-T68-CP
SW(DV53U11V)- P.W.Board			R329	06S15593Y43	RES,RK 561F 1/10 -CP
SW(DV53U11V)- P.W.Board			R351	06S15593Y43	RES,RK 561F 1/10 -CP
SW(DV53U11V)- P.W.Board			SW1	40-08552Z01	SW,DETCT SPVR1101-E5
Miscellaneous			HD1	EP-24971Z01	ED21A98L
Miscellaneous			M1	59-17572Z01	MOTOR,FF-050SB-12150
Miscellaneous			M2	59-25874Z01	MOTOR,MSGN020L01
Miscellaneous			M3	59-25849Z01	MOTOR,BWL2N01PA

Mark Model Code

#1 X009 Only,

\$1 X009E Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

IC7002(*) :51-23599Z01(MX29GL256FHT2I-90QST)

IC2001(*) :51-27016Z01(MTP,MN103LF20RXW -QT)

IC3852(*) :51-18520Z01(MX25L8035EM21-10G-ST)

DV53U11V:IC300(*) :51-17737Z01(TC94A96MFG -QT)

Software is not written in to the part indicated with (*).