Exploded View (Cabinet)

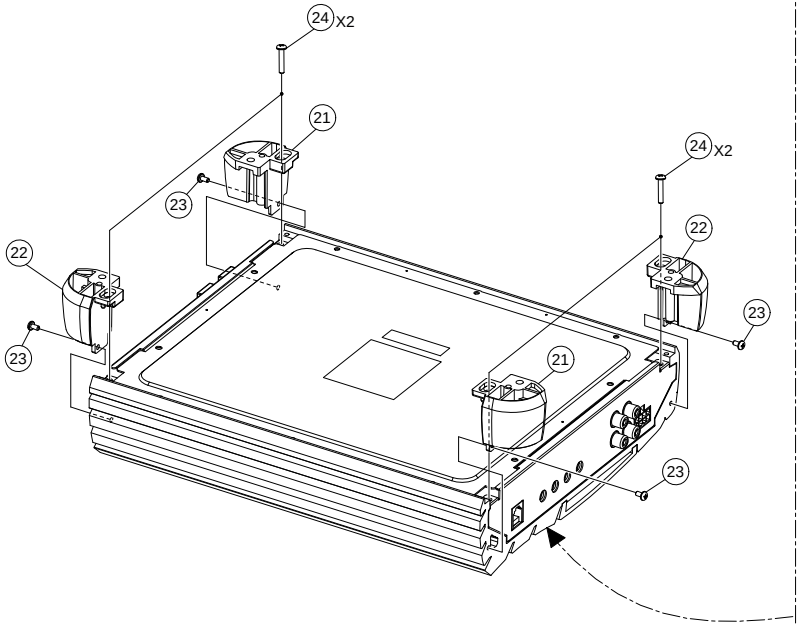

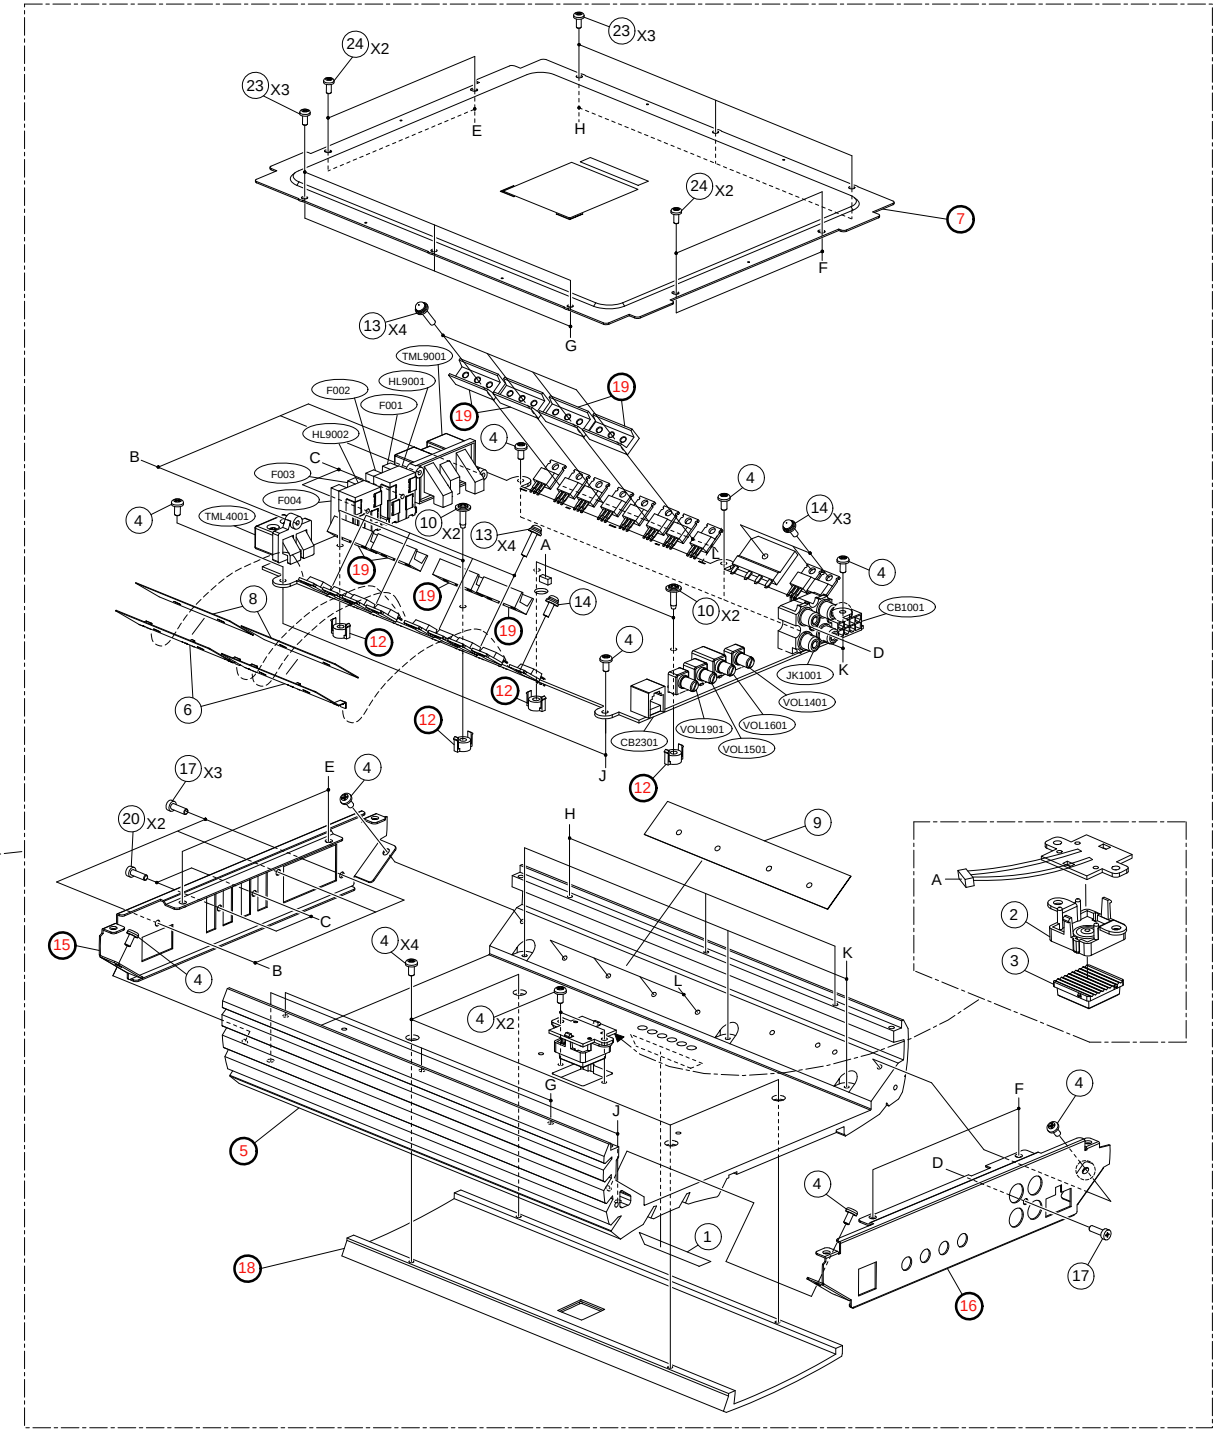

MODEL	Symbol No.	Parts No.	Description
	1	33E42163S01	PLATE,NAME
	2	34E42165S01	INDICATOR;HOLDER
	3	34E42164S01	INDICATOR,LENS
	4	03E38671S01	SCR,M3X6(B)(WHT)
	5	- - - - - - - - -	HEAT,SINK MAIN
	6	07E42215S01	BKT,SHIELD-A
	7	- - - - - - - - -	CHAS,BOTTOM
	8	14E42213S01	INSULATOR,SILPAD-D
	9	14E42214S01	INSULATOR,SILPAD-E
	10	03E39165S01	SCR,M3X11(WP)(WHT)
	12	- - - - - - - - -	SUPPORT,PWB
	13	03E38094S01	SCR,M3X15.5(WS)
	14	03E40789S01	SCR,M3X9 (WS)(WHT)
	15	- - - - - - - - -	CHAS,FRONT
	16	- - - - - - - - -	CHAS,REAR
	17	03E42130S01	SCR,M3X10(BLK)
	18	- - - - - - - - -	HEAT,SINK COVER
	19	- - - - - - - - -	HEAT,SINK BAR
	20	03E38095S01	SCR,M3X6(P)
	21	29E42161S01	LEG,MTG-A
	22	29E42162S01	LEG,MTG-B
	23	03E40131S01	SCR,M3X6(B)(CR3BK)
	24	03E40129S01	SCR,M2.6X6(B)(BLK)
	CB1001	09E42802S01	CONN,WAFER 8P
	CB2301	09E42970S01	CONN,JACK 6P
	F001	65E27881S01	FUSE AUTO 25A
	F002	65E27881S01	FUSE AUTO 25A
	F003	65E27881S01	FUSE AUTO 25A
	F004	65E27881S01	FUSE AUTO 25A
	HL9001	09E42149S01	HOLDER,FUSE
	HL9002	09E42149S01	HOLDER,FUSE
	JK1001	09E42147S01	CONN,RCA 4P
	TML4001	09E42199S01	CONN,TERMINAL 2P
	TML9001	09E42148S01	CONN,TERMINAL 3P
	VOL1401	18E41439S01	VOL,ROTARY 50KX1
	VOL1501	18E42155S01	VOL,ROTARY 20KX4
	VOL1601	18E42201S01	VOL,ROTARY 50KX2
	VOL1901	18E42212S01	VOL,ROTARY 5K

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

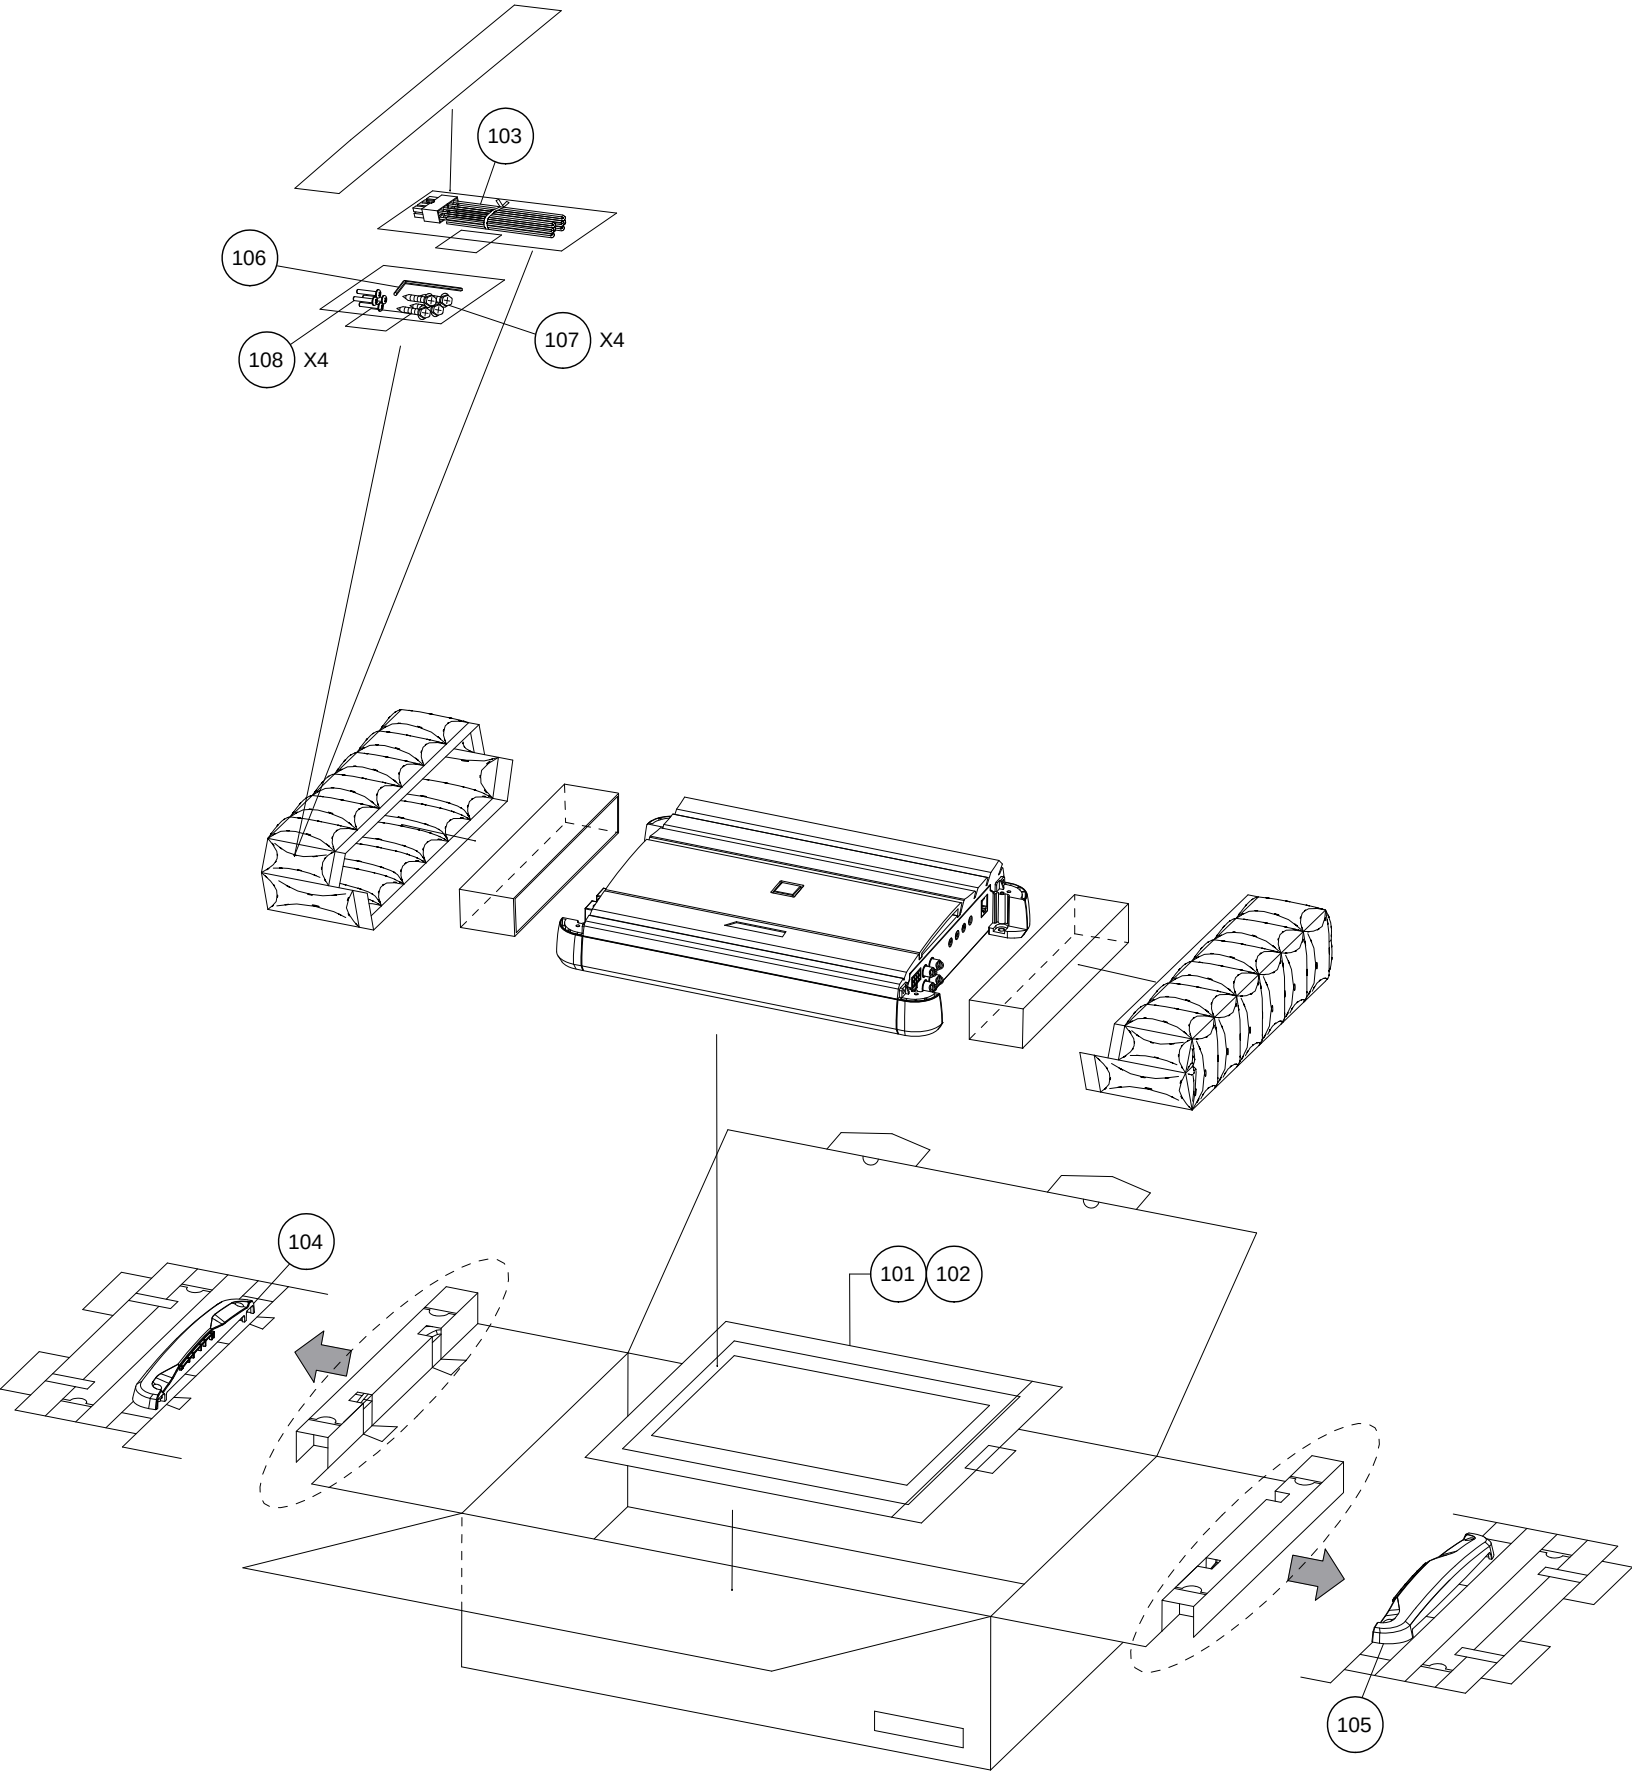

MODEL	Symbol No.	Parts No.	Description
	101	68-23120Z17	MANUAL,OWNER'S(E/F/S)
$1	102	68-23120Z18	MANUAL,OWNER'S(I/G/S)
	103	01E42129S01	CONN,ASSY 8P
	104	15E42152S01	COVER,TERMINAL-L
	105	15E42153S01	COVER,TERMINAL-R
	106	03E36690S01	WRENCH,HEX. 2.5X2.9
	107	03E40419S01	SCR,M4X20(BLK)
	108	03E39167S01	SCR,M3X12(P)(BLK)

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1001	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C1006	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1007	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1008	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1009	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1010	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1011	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1101	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1102	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1103	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1104	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1105	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1106	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1107	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1108	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1201	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1202	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1203	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1204	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1205	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1206	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1207	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1208	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1401	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1402	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1403	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1501	08E43010S01	CAP,FILM 56nF/63V
MAIN-P.W.Board			C1502	08E43011S01	CAP,FILM 120nF/63V
MAIN-P.W.Board			C1503	08E42120S01	CAP,FILM 220nF/63V
MAIN-P.W.Board			C1504	08E42118S01	CAP,FILM 150nF/63V
MAIN-P.W.Board			C1505	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1506	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1507	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1508	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1601	08E42192S01	CAP,FILM 0.68uF/63V
MAIN-P.W.Board			C1602	08E42193S01	CAP,FILM 0.47uF/63V
MAIN-P.W.Board			C1603	08E42193S01	CAP,FILM 0.47uF/63V
MAIN-P.W.Board			C1604	08E42192S01	CAP,FILM 0.68uF/63V
MAIN-P.W.Board			C1605	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1606	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1801	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1802	08E39649S01	CAP,CER. 47pF/50V

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1803	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1804	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1805	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1806	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1901	08E42142S01	CAP,FILM 22nF/63V
MAIN-P.W.Board			C1902	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1905	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C1906	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C2302	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C2303	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C3201	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3202	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3601	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3602	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3603	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3604	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3605	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3606	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3607	08E38596S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3608	08E38596S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3609	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3610	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3611	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3612	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3613	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3614	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3701	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3702	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3705	08E42187S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3706	08E42187S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3709	08E42190S01	CAP,CER. 22uF/16V
MAIN-P.W.Board			C3710	08E42190S01	CAP,CER. 22uF/16V
MAIN-P.W.Board			C3711	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3712	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3713	08E42187S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3714	08E42187S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3715	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3716	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3717	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3718	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3719	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3720	08E42141S01	CAP,CER. 2.2uF/50V

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3721	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3722	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3723	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3724	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3725	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3726	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3727	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3728	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3729	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3730	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3731	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3732	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3733	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3734	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3735	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3736	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3737	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3738	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3739	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board		%1	C3740	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3741	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3742	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3743	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3744	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3745	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3746	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		%1	C3747	08E39651S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3801	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C3802	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4001	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4002	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4003	08E42195S01	CAP,CER. 220pF/100V
MAIN-P.W.Board			C4004	08E42195S01	CAP,CER. 220pF/100V
MAIN-P.W.Board			C4005	08E42197S01	CAP,CER. 47pF/100V
MAIN-P.W.Board			C4006	08E42197S01	CAP,CER. 47pF/100V
MAIN-P.W.Board			C4007	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4008	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4009	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4010	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4011	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4012	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board		%1	C4014	08E38540S01	CAP,CER. 0.15uF/16V

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4015	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4016	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board		%1	C4017	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		%1	C4018	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C4501	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C4502	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C4701	08E37159S01	CAP,CER.CP 47nF/50V
MAIN-P.W.Board			C4702	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C4703	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4704	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C4705	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C4706	08E37159S01	CAP,CER.CP 47nF/50V
MAIN-P.W.Board			C4707	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4708	08E34594S01	CAP,CER 332-K-B1H-CP
MAIN-P.W.Board			C5001	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C5002	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5003	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C5005	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C5006	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5007	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C5008	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5009	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5010	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5011	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5012	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C5014	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5015	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5016	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5017	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C8901	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C8902	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9003	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9005	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9006	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9007	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9302	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9303	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9304	08E37122S01	CAP,CER.CP 0.1uF/25V

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9305	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C9701	08E42198S01	CAP,CER. 0.15uF/50V
MAIN-P.W.Board			C9702	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9703	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9704	08E42194S01	CAP,CER. 0.015uF/25V
MAIN-P.W.Board			C9705	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9706	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9707	08E36680S01	CAP,CER. CP 1nF
MAIN-P.W.Board			C9708	08E36680S01	CAP,CER. CP 1nF
MAIN-P.W.Board			C9902	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9903	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9904	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9905	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9910	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C9911	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9912	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9913	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9914	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9917	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			CB1001	09E42802S01	CONN,WAFER 8P
MAIN-P.W.Board			CB2301	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board			CB8901	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board			CL5001	91E39901S01	RESONATOR,7.7MHz
MAIN-P.W.Board			D1101	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D1102	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D1103	48E36633S01	DIODE,ARRAY DAP202K
MAIN-P.W.Board			D1104	48E36633S01	DIODE,ARRAY DAP202K
MAIN-P.W.Board			D2201	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2202	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2205	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2206	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3601	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3701	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3702	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3703	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3704	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3705	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3706	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3707	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3708	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3709	48E40918S01	DIODE,KDS160

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D3710	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3711	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3712	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4701	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D5002	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board			D5003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D8901	48E40860S01	DIO,RB160M
MAIN-P.W.Board			D9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D9301	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9302	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9303	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9304	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9501	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D9502	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1001	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1002	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1101	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1102	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1103	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1104	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E1701	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E1901	23E38001S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E2201	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E2202	23E38003S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E3201	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3202	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3601	23E43009S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E3602	23E43009S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E3701	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3702	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3703	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3704	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3705	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3706	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3707	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3708	23E42220S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E4901	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E4902	23E42206S01	CAP,ELY.220uF/25V
MAIN-P.W.Board			E4903	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E5001	23E40237S01	CAP,ELY. 33uF/16V

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E5002	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E8901	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E8902	23E43016S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9101	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9102	23E43009S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E9301	23E42204S01	CAP,ELY. 330uF/50V
MAIN-P.W.Board			E9302	23E42204S01	CAP,ELY. 330uF/50V
MAIN-P.W.Board			E9303	23E42206S01	CAP,ELY.220uF/25V
MAIN-P.W.Board			E9304	23E42206S01	CAP,ELY.220uF/25V
MAIN-P.W.Board			E9701	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9702	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E9703	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E9705	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9901	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9902	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9903	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9904	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9905	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9906	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9909	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			E9910	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			E9911	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			E9912	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			E9913	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			E9914	23E41477S01	CAP,ELY.2700uF/63V
MAIN-P.W.Board			F001	65E27881S01	FUSE AUTO 25A
MAIN-P.W.Board			F002	65E27881S01	FUSE AUTO 25A
MAIN-P.W.Board			F003	65E27881S01	FUSE AUTO 25A
MAIN-P.W.Board			F004	65E27881S01	FUSE AUTO 25A
MAIN-P.W.Board			F9901	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9902	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9903	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9904	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9913	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9914	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9915	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9916	65E41480S01	FUSE,20A
MAIN-P.W.Board			HL9001	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			HL9002	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			IC1001	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1101	51E39598S01	IC,BA4560RFVM

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC1102	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1201	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1401	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1501	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1601	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1801	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1901	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC3201	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC3202	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC3601	51E38055S01	IC,NJM4580M
MAIN-P.W.Board			IC3701	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3702	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC4501	51E40775S01	IC,BD5228G
MAIN-P.W.Board			IC4701	51E42208S01	IC,BA2903F
MAIN-P.W.Board			IC4702	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC4703	51E40343S01	IC,74VHC74MTCX
MAIN-P.W.Board			IC5001	51E36474S01	REG IC NJM78L05UA
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board			IC5004	51E42793S01	IC,TMP87C847UG -QT
MAIN-P.W.Board			IC5005	51E40773S01	IC,KIC7SH04FU
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9301	51E35123S01	IC,REG NJM7815FA
MAIN-P.W.Board			IC9302	51E35124S01	IC,REG NJM7915FA
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9702	51E34504S01	IC,MC33152D-CP
MAIN-P.W.Board			IC9703	51E34504S01	IC,MC33152D-CP
MAIN-P.W.Board			JK1001	09E42147S01	CONN,RCA 4P
MAIN-P.W.Board			L4001	24E42217S01	COIL,IND. 10uH
MAIN-P.W.Board			L4002	24E42217S01	COIL,IND. 10uH
MAIN-P.W.Board			L9001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1702	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q1703	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2201	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q2202	48E38062S01	TR,DTA114EK
MAIN-P.W.Board			Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3202	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3203	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3204	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3601	48E37157S01	TR,FMY1A
MAIN-P.W.Board			Q3602	48E41425S01	TR,IMX2

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3603	48E42207S01	TR,BC846
MAIN-P.W.Board			Q3604	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3605	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3606	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3607	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3701	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3702	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3703	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3704	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3705	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3706	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3707	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3708	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3709	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3710	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3711	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3712	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3713	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3714	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3715	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3716	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3717	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3718	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3719	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3720	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q4401	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4402	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4403	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4404	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q4501	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4502	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4503	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q4504	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4701	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4703	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q4901	48E42180S01	TR,KTC4370A
MAIN-P.W.Board			Q5001	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q9101	48E39125S01	TR,KTB1241
MAIN-P.W.Board			Q9102	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9501	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9502	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9503	48E36573S01	TR,CP DTC144EK

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9901	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9902	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9903	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9904	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9905	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9906	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9907	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9908	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			R1001	06E35361S01	RES,CF 331-J-1/4-CP
MAIN-P.W.Board			R1002	06E35361S01	RES,CF 331-J-1/4-CP
MAIN-P.W.Board			R1003	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1004	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1005	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1006	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1007	06E32284S01	RES.CF 104-J-1/4-CP
MAIN-P.W.Board			R1008	06E32284S01	RES.CF 104-J-1/4-CP
MAIN-P.W.Board			R1009	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1010	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1011	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1012	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R1013	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1014	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1015	06E31183S01	RES.CF.223-J-1/4-CP
MAIN-P.W.Board			R1016	06E31183S01	RES.CF.223-J-1/4-CP
MAIN-P.W.Board			R1017	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R1018	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R1019	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R1020	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R1021	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1022	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1023	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1024	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1025	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1101	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R1102	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R1103	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R1104	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R1105	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1106	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1107	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1108	06E37144S01	RES,CARBON 220K-1/16

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1109	06E40997S01	RES,CF 470-1/16-CP
MAIN-P.W.Board			R1110	06E40997S01	RES,CF 470-1/16-CP
MAIN-P.W.Board			R1111	06E40997S01	RES,CF 470-1/16-CP
MAIN-P.W.Board			R1112	06E40997S01	RES,CF 470-1/16-CP
MAIN-P.W.Board			R1201	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1202	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1203	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1204	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1205	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1206	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1207	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1208	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R1209	06E37143S01	RES,CARBON 24K-1/16W
MAIN-P.W.Board			R1210	06E37143S01	RES,CARBON 24K-1/16W
MAIN-P.W.Board			R1401	06E37113S01	RES,CARBON 47K-1/16W
MAIN-P.W.Board			R1402	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R1403	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R1404	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R1405	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R1406	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R1407	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1501	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1502	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1503	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1504	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1505	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1506	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1507	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1508	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1601	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R1602	06E39631S01	RES,CF. 11K-1/16W
MAIN-P.W.Board			R1604	06E39246S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R1605	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R1606	06E35244S01	RES,CF 153-F-1/16-CP
MAIN-P.W.Board			R1609	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R1701	06E41010S01	RES,CF 56K-1/16-CP
MAIN-P.W.Board			R1702	06E35236S01	RES,CF 152-J-1/4-CP
MAIN-P.W.Board			R1703	06E35236S01	RES,CF 152-J-1/4-CP
MAIN-P.W.Board			R1704	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1705	06E41007S01	RES,CF 22K-1/16-CP
MAIN-P.W.Board			R1803	06E41006S01	RES,CF 15K-1/16-CP
MAIN-P.W.Board			R1804	06E41006S01	RES,CF 15K-1/16-CP

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1805	06E37161S01	RES,CARBON 68K-1/16W
MAIN-P.W.Board			R1901	06E37260S01	RES,CARBON 150K-1/16
MAIN-P.W.Board			R1902	06E35261S01	RES,CF 273-J-1/16-CP
MAIN-P.W.Board			R1903	06E42184S01	RES,CF. 5.1K-1/10W
MAIN-P.W.Board			R1904	06E42184S01	RES,CF. 5.1K-1/10W
MAIN-P.W.Board			R1905	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R1906	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R1907	06E42184S01	RES,CF. 5.1K-1/10W
MAIN-P.W.Board			R1908	06E35382S01	RES,CF 152-J-1/16-CP
MAIN-P.W.Board			R1909	06E35261S01	RES,CF 273-J-1/16-CP
MAIN-P.W.Board			R2201	06E29451S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R2202	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R2203	06E41010S01	RES,CF 56K-1/16-CP
MAIN-P.W.Board			R2301	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R2302	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3201	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3202	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3203	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3204	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3205	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3206	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3601	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R3602	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R3603	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3604	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3605	06E37137S01	RES,CARBON 5.6K-1/16
MAIN-P.W.Board			R3606	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3607	06E37137S01	RES,CARBON 5.6K-1/16
MAIN-P.W.Board			R3608	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3609	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3610	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3611	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3612	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3613	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3614	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3615	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3616	06E37227S01	RES,CARBON 1K-1/16W
MAIN-P.W.Board			R3617	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3618	06E35373S01	RES,CF 331-J-1/16-CP
MAIN-P.W.Board			R3619	06E37257S01	RES,CARBON 2.4K-1/16
MAIN-P.W.Board			R3620	06E37196S01	RES,CARBON 3K-1/16W
MAIN-P.W.Board			R3621	06E35373S01	RES,CF 331-J-1/16-CP

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3622	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3623	06E35373S01	RES,CF 331-J-1/16-CP
MAIN-P.W.Board			R3624	06E35373S01	RES,CF 331-J-1/16-CP
MAIN-P.W.Board			R3625	06E37257S01	RES,CARBON 2.4K-1/16
MAIN-P.W.Board			R3626	06E37257S01	RES,CARBON 2.4K-1/16
MAIN-P.W.Board			R3627	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R3628	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R3629	06E35377S01	RES,CF 681-J-1/16-CP
MAIN-P.W.Board			R3630	06E41014S01	RES,CF 330K-1/16-CP
MAIN-P.W.Board			R3631	06E41014S01	RES,CF 330K-1/16-CP
MAIN-P.W.Board			R3701	06E37167S01	RES,CARBON 2.2K-1/16
MAIN-P.W.Board			R3702	06E37167S01	RES,CARBON 2.2K-1/16
MAIN-P.W.Board			R3703	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3704	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R3705	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3706	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R3708	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3710	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3711	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3712	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3713	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R3714	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3715	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R3716	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3717	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3718	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3719	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3720	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3721	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3722	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3723	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3724	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3725	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3726	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3727	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3728	06E42219S01	RES,CF. 20K-1/4W
MAIN-P.W.Board			R3729	06E42219S01	RES,CF. 20K-1/4W
MAIN-P.W.Board			R3730	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3731	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3732	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3733	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3734	06E22929S01	RES,CF. 3.3K-1/4W

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3735	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3736	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3737	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3738	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3739	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3740	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3741	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3742	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3743	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3744	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3745	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3746	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3747	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3748	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3749	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3750	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3751	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3752	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3753	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3754	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3755	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3756	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R3757	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3758	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3759	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3760	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3761	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3801	06E37142S01	RES,CARBON 12K-1/16W
MAIN-P.W.Board			R3802	06E37142S01	RES,CARBON 12K-1/16W
MAIN-P.W.Board			R3803	06E35242S01	RES,CF 432-F-1/16-CP
MAIN-P.W.Board			R3804	06E35242S01	RES,CF 432-F-1/16-CP
MAIN-P.W.Board			R4001	06E36582S01	RES,CARBON 47K-1/4
MAIN-P.W.Board			R4002	06E36582S01	RES,CARBON 47K-1/4
MAIN-P.W.Board		%1	R4004	06E43022S01	RES,CF. 2-1/16W
MAIN-P.W.Board			R4005	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4006	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4007	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4008	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4009	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4010	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4401	06E41007S01	RES,CF 22K-1/16-CP
MAIN-P.W.Board			R4402	06E41005S01	RES,CF 10K-1/16-CP

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4403	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R4404	06E35253S01	RES,CF 202-J-1/4-CP
MAIN-P.W.Board			R4501	06E41007S01	RES,CF 22K-1/16-CP
MAIN-P.W.Board			R4502	06E41007S01	RES,CF 22K-1/16-CP
MAIN-P.W.Board			R4503	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R4504	06E36651S01	RES,CARBON 3.9K-1/4
MAIN-P.W.Board			R4505	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4701	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R4702	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R4703	06E40976S01	RES,CF 10K-1/4-CP
MAIN-P.W.Board			R4704	06E41007S01	RES,CF 22K-1/16-CP
MAIN-P.W.Board			R4705	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4706	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R4707	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R4708	06E37143S01	RES,CARBON 24K-1/16W
MAIN-P.W.Board			R4709	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R4710	06E40976S01	RES,CF 10K-1/4-CP
MAIN-P.W.Board			R4711	06E37228S01	RES,CARBON 510-1/16W
MAIN-P.W.Board			R4712	06E40191S01	RES,CF. 11K-1/16
MAIN-P.W.Board			R4901	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R4902	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R4905	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R5001	06E37093S01	RES,CARBON 5.6K-1/16
MAIN-P.W.Board			R5002	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R5003	06E37226S01	RES,CARBON 1.2K-1/16
MAIN-P.W.Board			R5004	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5005	06E37220S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R5006	06E37093S01	RES,CARBON 5.6K-1/16
MAIN-P.W.Board			R5007	06E37110S01	RES,CARBON 10K-1/16W
MAIN-P.W.Board			R5008	06E37226S01	RES,CARBON 1.2K-1/16
MAIN-P.W.Board			R5009	06E37226S01	RES,CARBON 1.2K-1/16
MAIN-P.W.Board			R5010	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5011	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5013	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5014	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5015	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5016	06E35400S01	RES,CF 512-F-1/16-CP
MAIN-P.W.Board			R5017	06E40735S01	RES,CF. 620-1/16W
MAIN-P.W.Board			R5018	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5019	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5020	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R5021	06E37110S01	RES,CARBON 10K-1/16W

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5022	06E37111S01	RES,CARBON 27K-1/16W
MAIN-P.W.Board			R5023	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5024	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R5025	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R9101	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9102	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9103	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R9104	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9105	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9106	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9107	06E36102S01	RES,CF 303-J-CP
MAIN-P.W.Board			R9501	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9502	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9503	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R9504	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9505	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9506	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R9507	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9508	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R9701	06E37229S01	RES,CARBON 100-1/16W
MAIN-P.W.Board			R9702	06E35242S01	RES,CF 432-F-1/16-CP
MAIN-P.W.Board			R9703	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R9704	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R9705	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R9706	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R9707	06E37226S01	RES,CARBON 1.2K-1/16
MAIN-P.W.Board			R9708	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R9709	06E35407S01	RES,CF 364-F-1/16-CP
MAIN-P.W.Board			R9710	06E37252S01	RES,CARBON 22K-1/16
MAIN-P.W.Board			R9711	06E37167S01	RES,CARBON 2.2K-1/16
MAIN-P.W.Board			R9712	06E37169S01	RES,CARBON 1.8K-1/16
MAIN-P.W.Board			R9713	06E40998S01	RES,CF 820-1/16-CP
MAIN-P.W.Board			R9714	06E41003S01	RES,CF 4.7K-1/16-CP
MAIN-P.W.Board			R9715	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9716	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9901	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9902	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9903	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9904	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9905	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9906	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9907	06E41011S01	RES,CF 100K-1/16-CP

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9908	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9909	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9910	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9911	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9912	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9913	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9914	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9915	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9916	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R9917	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9918	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9919	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9920	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9921	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9922	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9923	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9924	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9925	06E35400S01	RES,CF 512-F-1/16-CP
MAIN-P.W.Board			R9926	06E42183S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R9927	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R9928	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R9931	06E37167S01	RES,CARBON 2.2K-1/16
MAIN-P.W.Board			RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			T9001	24E43015S01	COIL,CHOKE 10uH
MAIN-P.W.Board			T9901	25E42218S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			T9902	25E42218S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			TH3801	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH5001	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH9902	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TML4001	09E42199S01	CONN,TERMINAL 2P
MAIN-P.W.Board			TML9001	09E42148S01	CONN,TERMINAL 3P
MAIN-P.W.Board			VOL1401	18E41439S01	VOL,ROTARY 50KX1
MAIN-P.W.Board			VOL1501	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VOL1601	18E42201S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1901	18E42212S01	VOL,ROTARY 5K
MAIN-P.W.Board			ZD3601	48E42210S01	DIO,ZENER KDZ
MAIN-P.W.Board			ZD3602	48E42210S01	DIO,ZENER KDZ

Mark Model Code

#1 MRX-M110(North American) Only,

$1 MRX-M110(European) Only,

%1 MRX-M110(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD4001	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD4002	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD4901	48E39120S01	DIODE,ZENER HZK12A2L
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9001	48E41047S01	TR,Z5W27V
MAIN-P.W.Board			ZD9102	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
LED-P.W.Board			C8001	08E42196S01	CAP,CER. 1000pF/50V
LED-P.W.Board			LD8001	48E39343S01	LED,BLU UB1106W
LED-P.W.Board			R8001	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous			CH8901	01E41447S01	CONN,ASSY 2P

Mark Model Code
#1 MRX-M110(North American) Only,
$1 MRX-M110(European) Only,
%1 MRX-M110(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be supplied.